

UNCLASSIFIED

AD NUMBER
AD828903
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; JAN 1968. Other requests shall be referred to Office of Civil Defense, Washington, DC.
AUTHORITY
OCD, D/A ltr, 11 Jan 1972

THIS PAGE IS UNCLASSIFIED

RTI

RESEARCH TRIANGLE INSTITUTE

RTI Project OU-230-2

January 1968

AD828903

Operations Research and Economics Division

OCD Work Unit 4113E

# DETROIT CIVIL DEFENSE OPERATING SYSTEM SYNTHESIS

## VOLUME II TECHNICAL APPROACH

by

Robert N. Hendry

Prepared For

Office of Civil Defense  
United States Department of the Army  
Contract No. OCD-PS-64-56

Limited Distribution. This document may be further distributed by any holder  
only with specific prior approval of the Office of Civil Defense.

RESEARCH TRIANGLE PARK, NORTH CAROLINA 27709

PRELIMINARY REPORT  
OU-230-2

DETROIT CIVIL DEFENSE OPERATING SYSTEM SYNTHESIS

Volume II

Technical Approach

Prepared for

Office of Civil Defense  
United States Department of the Army  
under

Office of Civil Defense Contract No. OCD-PS-64-56  
OCD Work Unit 4113E  
RTI Project OU-230-2

by

Robert N. Hendry

RESEARCH TRIANGLE INSTITUTE  
Operations Research and Economics Division  
Post Office Box 12194  
Research Triangle Park, North Carolina 27709

OCD Review Notice

This report has been reviewed in the Office of Civil Defense and approved for publication. Approval does not signify that the contents necessarily reflect the views and policies of the Office of Civil Defense.

Limited Distribution. This document may be further distributed by any holder only with specific prior approval of the Office of Civil Defense.

Approved by:

*A. M. Hug for*

Edgar A. Parsons, Director

*Philip S. McMullan, Jr.*  
Philip S. McMullan, Jr.  
Group Leader

January 1968

## FOREWORD

The description and approach covering the synthesis of one or more total near-future civil defense systems was performed under the Office of Civil Defense Contract No. OCD-PS-64-56, Modification No. 15 dated 1 May 1967. Initially, work was assigned to Work Unit 4113E. This number has been changed to 4126A for the continuing effort.

Volume I offers a preliminary description of a total civil defense system at the local level. Detroit's CD system was selected as a specific case for study. It is intended that subsequent research will improve this initial description and provide a basis for describing competing system concepts. If system alternatives can be described in a manner comparable to the Detroit study, quantitative systems analysis can be expected to yield performance criteria that will make selection of the most effective alternative possible.

Volume II describes the technical approach to the system synthesis and indicates that it will be suited to the Five-City Study. Subsequent work will continue to develop this approach as a means for unifying research effort to achieve civil defense objectives.

The author expresses his indebtedness to Mr. Charles Kepple of the Research Directorate of the Office of Civil Defense for assistance in providing materials, arranging briefings and conferences, and in reviewing and making recommendations as the study progressed. The author also expresses his appreciation to Mr. Philip McMullan, Group Leader, and to others in the Research Triangle Institute who provided guidance and support during this system study.

TABLE OF CONTENTS

	<u>Page</u>
FOREWORD . . . . .	11
LIST OF FIGURES . . . . .	iv
LIST OF TABLES . . . . .	v
SUMMARY . . . . .	vi
I. INTRODUCTION . . . . .	1
A. General . . . . .	1
B. Scope . . . . .	2
C. Detroit Civil Defense Data . . . . .	4
D. The Synthesis Technique . . . . .	4
II. DETAILED APPROACH . . . . .	5
A. General . . . . .	5
B. Time-Phase Definition . . . . .	6
C. Operating Area Classifications . . . . .	8
D. Area Problem Definition . . . . .	14
E. Function and Control Specifications . . . . .	21
F. Component Identification and Organization . . . . .	22
III. DETROIT SYSTEM SYNTHESIS . . . . .	22
A. General . . . . .	22
B. Functional Description . . . . .	25
C. Resource Mobilization Description . . . . .	25
D. Schematic Description . . . . .	25
E. Total System Description . . . . .	30
IV. DISCUSSION . . . . .	30
V. CONCLUSIONS . . . . .	32
VI. RECOMMENDATIONS . . . . .	33
Appendix A - Study Plan . . . . .	A-1
Appendix B - Land-Use Classification . . . . .	B-1
Appendix C - Problem Definition Criteria . . . . .	C-1
Appendix D - Bibliography . . . . .	D-1

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Modified Five-City Study Plan . . . . .	1
2	System Synthesis Study Plan . . . . .	3
3	Emergency Time Phases . . . . .	7
4	Detroit Land-Use Classification . . . . .	9
5	Detroit SLA Population Density . . . . .	11
6	Detroit SLA Building Density . . . . .	12
7	Problem Definition and Countermeasures Relationship . . . . .	13
8	Problem Definition and Countermeasures Development Method . . . . .	15
9	Detroit Environmental Problem Definition . . . . .	18
10	Detroit Sheltered Population Density . . . . .	19
11	Detroit Casualty Problem Definition (Prompt Effects Only) . . . . .	20
12	Illustrative Countermeasure Operations for SLA 354A . . . . .	23
13	Detroit Civil Defense Organization . . . . .	24
14	Time-Phased Central Control Operations . . . . .	26
15	Typical Service Control Operation (Firefighting) . . . . .	27
16	Basic Operating Subsystem Schematic (SBD) . . . . .	29
17	Detroit Civil Defense System Diagram . . . . .	31

LIST OF TABLES

<u>Table</u>		<u>Page</u>
I	SLA Classification . . . . .	10
II	Typical SLA Responses to Weapon Effects . . . . .	16
III	Environmental Problem Definition Matrix . . . . .	17
IV	Countermeasures Operation Synthesis . . . . .	23
V	Resource Organization Assignment Matrix . . . . .	28
B-I	Land-Use Classification . . . . .	B-2
C-I	Response of Structures to Nuclear Detonation (5-MT Surface). . . . .	C-3
C-II	Percent Structural Distribution by Land-Use Class . . . . .	C-4
C-III	Probability of Significant Structural Fire (5-MT Surface) . . . . .	C-5
C-IV	Percent of Structures Damaged (Debris) - (5-MT Surface) . . . . .	C-6
C-V	Percent of Structures Damaged (Blast) - (5-MT Surface) . . . . .	C-7

RESEARCH TRIANGLE INSTITUTE  
Operations Research and Economics Division  
PRELIMINARY REPORT  
OU-230-2  
DETROIT CIVIL DEFENSE OPERATING SYSTEM SYNTHESIS  
Volume II  
Technical Approach  
by  
Robert N. Hendry

DETACHABLE SUMMARY

The Research Triangle Institute was given the task of synthesizing a local civil defense system. Volume I describes the system as it may be expected to exist in an emergency. Volume II describes the technical approach to systems synthesis.

The Detroit Civil Defense Operating System is an example of a local system synthesized as a basis for a systems analysis. A diagrammatic description, adopted in support of a narrative description to show the system's functional and physical aspects, can be referred to in greater levels of detail as more information is developed.

The principal sources of information were the civil defense plans developed by Mr. P. C. McGillivray, Director of the Detroit Office of Civil Defense. These plans were used together with other data both printed and verbal as the basis for the system description.

The primary tasks in developing the diagrams were to identify and classify the controls, functions, and components and to interrelate them to show the operation of the total system. First, the elements were identified and classified by time phases within the emergency period. Second, functions and components were reassembled into a time-phased set of operations to solve civil defense problems occurring in small areas of the city.

The system description takes the form of: (1) a set of time-phased functional flow block diagrams representing functions needed to minimize or solve defined problems, (2) a resource organization assignment matrix needed to assign functions to the various system components, and (3) a schematic block diagram showing the utilization of resources needed to solve the problems occurring in the individual operating areas. The system diagram developed during the study shows all three forms of the description and represents a basic civil defense operating subsystem. The total system should be visualized as many basic subsystems operating simultaneously.

In conclusion, a beginning has been made toward a description useful for systems analysis; functions, controls, and components have been interrelated to describe the Detroit Civil Defense System and how it operates. The functional flow and schematic block diagrams offer a concise description of civil defense operations, but these diagrams need to be expanded beyond the level of detail described in the report.

Research is recommended to establish a land-use classification system as a basis for a system-oriented problem definition. Studies in system synthesis should continue in greater detail and be supported by objective selection and systems analysis studies to insure that an appropriate interface exists between problem definition and system analysis.

Thus, further studies can be expected to expand this beginning into a comprehensive description which can be useful in systems analysis within the Five-City Study and, subsequently, within the Damage-Limiting Studies. Ultimately, system studies can be expected to maximize the probability of survival of civil defense resources and to minimize the effects of nuclear weapon attacks on population and property.

Detroit Civil Defense Operating System Synthesis

VOLUME II TECHNICAL APPROACH

I. INTRODUCTION

A. General

The Research Triangle Institute (RTI) was given the task of synthesizing a local civil defense system. Within the Five-City Study, the city of Detroit system was selected by the Office of Civil Defense (OCD) as the one for study. Posture and objective-selection constraints on the system description were imposed by OCD. Figure 1, Modified Five-City Study Plan was prepared showing the system synthesis task and its relationship to the other study tasks.

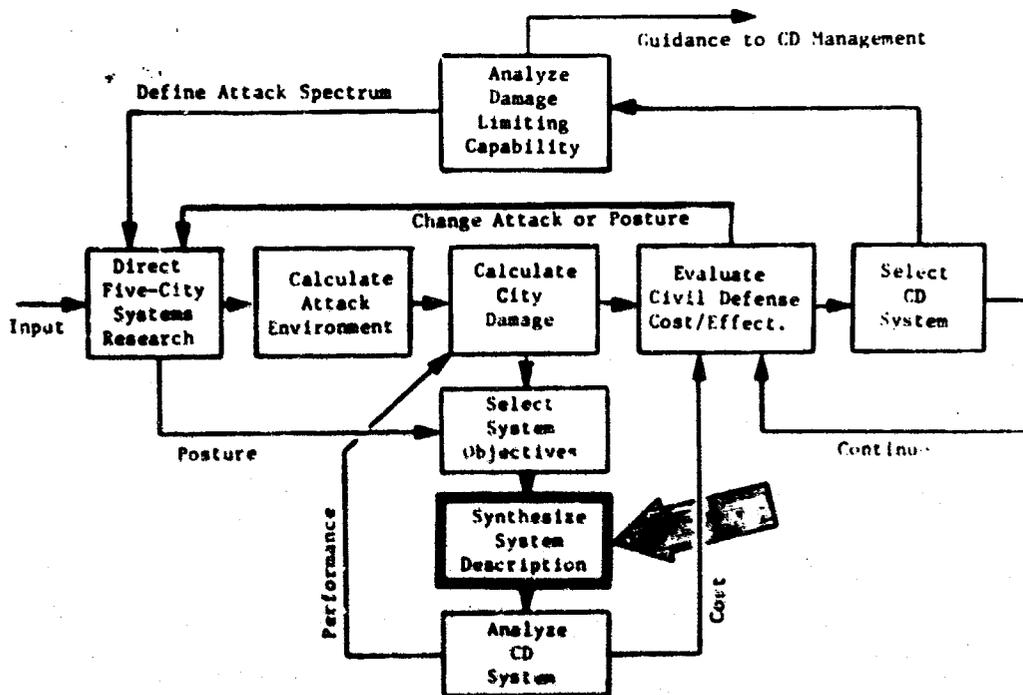


Fig. 1. Modified Five-City Study Plan.

The primary objective for the synthesis of the Detroit CD system is the identification, classification, and description of the entire system and how it operates under emergency conditions. This description does not include quantitative measures. Due to the short duration of the study, RTI has attempted only a simplified description of the system.

The output of this study will be used in subsequent systems analysis to compare quantitatively through damage calculation and cost estimation various civil defense alternatives. Continuing studies are expected to expand the description in detail to select objectives, and to quantify functional and physical interactions.

The description techniques discussed later in this section were adopted to represent Detroit's civil defense plans. The plans were analyzed to identify and classify emergency time phases; operating areas by land use; area problem as a function of weapon effects and distance to ground zero; functions and controls to solve the problems; and finally, components of the CD system. After analyzing the total Detroit system in terms of these elements, countermeasure (CM) operations were synthesized, resources were allocated, and functions were assigned to the component organizations; then the operating subsystems in time and space were developed for one Standard Location Area (SLA). The total system was described as the sum of all these operating subsystems in Detroit.

#### B. Scope

The contract language under this subtask of OCD Work Unit 4113E<sup>1/</sup> states: "Using the definitions, procedures, and Systems Analysis Matrix defined in 'Civil Defense Research Analysis,' J. Devaney, December 1966, synthesize one or more near-future CD systems."

The study was confined to Detroit and local near-future systems. These systems are total CD systems which can be synthesized (compiled or invented) within the constraints of near-neighbors to present policy.

Control over the process of synthesis was accomplished by describing the Detroit system in the framework of the Civil Defense Systems Analysis Matrix<sup>2/</sup> and by checking all interactions in the context of row and column definitions<sup>3/</sup>. Although definitions have been changed by OCD since 1963 (e.g., evacuation is no longer used) and there is need more detailed definitions, RTI used Systems Analysis in Civil Defense<sup>4/</sup>.

<sup>1/</sup> Contract No. OCD-PS-64-56, Modification No. 15.

<sup>2/</sup> J. F. Devaney. Civil Defense Research Analysis, Research Report No. 11. Research Directorate, Office of Civil Defense, December 15, 1966.

<sup>3/</sup> J. F. Devaney. Systems Analysis in Civil Defense, Parts I and II. Research Directorate, Office of Civil Defense, August 1963.

<sup>4/</sup> Ibid.

dictionary as frequently as possible. The terminology sometimes differs from that used in planning documents for Detroit; where this occurred, Detroit names were changed to fit the Devaney matrix definition.

The detailed study plan that RTI submitted to OCD is attached as appendix A. The planning phase was necessary to develop the approach to problem definition, objective selection, and detailed procedures that were employed in gathering data, synthesizing the system, and controlling the process. Figure 2 illustrates the general plan.

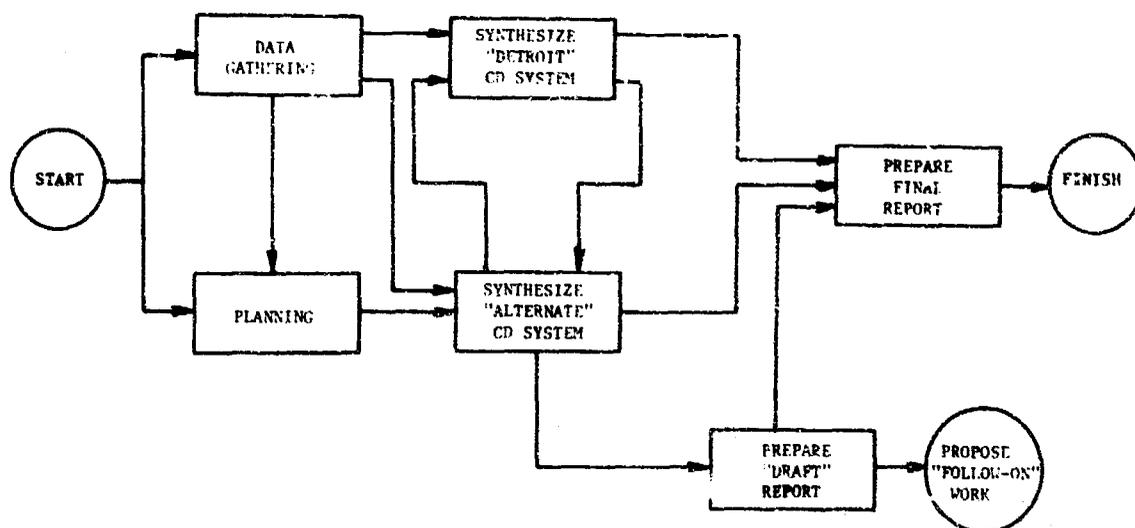


Fig. 2. System Synthesis Study Plan.

The planning and data gathering subtasks were initiated concurrently. Using available data, the plan was tested by synthesizing a preliminary alternate CD system. After this synthesis, a trip was made to Detroit to complete the data gathering phase. The Detroit system was synthesized by revising the preliminary alternate CD system to incorporate the detailed aspects. This report constitutes the product of the last subtask.

RTI's objective has been to complete a broad, rather than a deep, description of the total CD system. All eighteen civil defense functions have been included. Proposed follow-on work has been presented to OCD for consideration.

### C. Detroit Civil Defense Data

A data gathering program was started early in the study and will continue in subsequent studies. Appendix D contains a bibliography of data used in this study; this list will continue to be updated as the study progresses.

The principal source of data regarding the Detroit CD system was the civil defense plans developed by Mr. F. C. McGillivray, Director of the Detroit Office of Civil Defense. These plans, together with other information both printed and verbal, have been the basis for the system description contained herein.

The overall master plan is complete; however, many of the more detailed plans are incomplete. Where formal plans have not been prepared, the description was based on discussions with Mr. McGillivray. For example, the master plan indicates that a Warden Service is contemplated; yet, no definitive plan has been formulated. No statement of warden responsibilities or assignment of the planning task had been made to another city department. As another example, the Welfare Department of the city of Detroit merged with the county and later became an agency of the state. The Detroit Office of Civil Defense had no apparent arrangement with either the state or another city department for a plan that would define the operations of the Welfare Service. Similar examples can be cited to illustrate the fact that Mr. McGillivray has had considerable difficulty in preparing his total detailed civil defense plan. His accomplishments have been admirable in view of these difficulties.

### D. The Synthesis Technique

John F. Devaney's approach to systems analysis has been studied and applied to the Detroit CD system synthesis task. This study revealed that the matrix is a device for control of system studies and not a complete technique for system synthesis. The matrix and Devaney's systems analysis definitions directed the organization and reporting of interactions between integrators, inputs, and constraints. Shapero<sup>5/</sup> provides additional information about use of this type of matrix in systems research.

The technique adopted by RTI to define the system is based on the "black box" concept and uses the functional flow and schematic block diagrams to concisely represent the system. This approach may be summarized in the following way.

The system synthesis may be represented by figures, models, diagrams, words, or pictures which are intended to convey a mental image (real or imaginary) of a group of related things functioning together under some kind of control to protect people and to overcome the effects of nuclear weapon detonations. Thus, the first task of

---

<sup>5/</sup> A. Shapero and C. Bates, Jr., A Method for Performing Human Engineering Analysis of Weapons Systems, WADC Technical Report 59-784, Wright-Patterson Air Force Base, September 1959.

the analyst is to identify and classify the individual civil defense functions and controls in the emergency situation with particular attention to protecting people and overcoming weapon effects. These include all actions directed toward reducing damage before the weapon detonation as well as those after the burst to alleviate conditions resulting from it.

The functional flow block diagram (FFBD) uses rectangular blocks to synthesize a set of functions occurring in a parallel, series, series-parallel, and/or iterative manner. The FFBD allows the analyst to identify the appropriate operation needed to solve a problem without becoming entangled in physical detail. After the operation is synthesized, the individual functions are assigned to an organization which is mobilized from available resources. At this point, physical displacement must be considered to assure that the functions can be achieved with the available organization. A schematic block diagram (SBD) uses boxes representing components linked by lines of communication or transportation to depict the spatial characteristics of the organization. These two diagrams (FFBD and SBD) together with a resource organization assignment matrix (ROAM), which details the components, describe the basic operating subsystem with respect to a small area of the city. Summation of all operating subsystems describes the total civil defense system of the city during a particular time phase of an emergency.

The detailed approach discussed in Section II translates the CD data into a picture of the total dynamic CD system for Detroit to prepare the reader for the subsystem description in Section III.

## II. DETAILED APPROACH

### A. General

System synthesis was achieved by the following procedure. First, data were analyzed to identify and classify the various civil defense functions, controls, and components by time-phase, operating area, and problem definitions. Next, functions and controls and the components performing them were reassembled into an organized time-phased set of operations to solve CD problems occurring in small areas of the city. For this study a small area of the city is defined as the standard location area (SLA).

The system synthesis takes the form of:

- 1) A set of time-phased functional flow block diagrams (FFBD) representing functions needed to minimize or solve the defined SLA problem.

- 2) A resource organization assignment matrix (ROAM) assigning functions and allocating resources to components of the organization.
- 3) A schematic block diagram (SBD) showing the deployment of components with respect to the SLA and the transportation and communication links between them.

Although calculation of damage is not specifically a part of system synthesis, the assembled system must relate to these calculations; otherwise, assessment of system effectiveness (which is one of the main reasons for system synthesis) is not possible. During the preattack phase, operations are directed toward decreasing the vulnerability of SLA's to weapons effects; this is expressed in calculations of people and property damage by changes in applicable vulnerability indices. In the post-attack phase, operations are directed toward solving problems created by weapon effects on individual SLA's.

#### B. Time-Phase Definitions

Considerable complexities were overcome by dividing time into discrete periods separated by recognized events; this was especially true for civil defense functions. Figure 3, Emergency Time Phases, illustrates the various time-phase definitions used in civil defense documents; the five phases selected for use in this study are: strategic, tactical, attack, survival, and recovery.

The strategic phase commences with a covert warning to local authorities from the national level following some event, whether national or international, to indicate the need for civil defense action consistent with rising tensions. The public may or may not be informed through the news media of practical civil defense measures. No emergency situation is declared, and no cessation of normal activities is expected.

An event or series of events which indicates the imminence of attack introduces the tactical phase. A national warning is followed by a local public warning. People are informed through the Emergency Broadcast System (EBS) of civil defense action. Normal activity ceases. All civil defense measures are taken to improve survivability of the community.

The attack phase starts when warning is received that an actual attack has been observed; the people are informed by a warbled siren to go to shelter.

When the attack is over and no more threat is observed, an "all clear" is announced by radio and the survival phase begins. The survival phase continues in operating areas where hazards exist.

Finally, the recovery phase begins with a "hazard all clear" and continues until a state of normalcy is achieved.

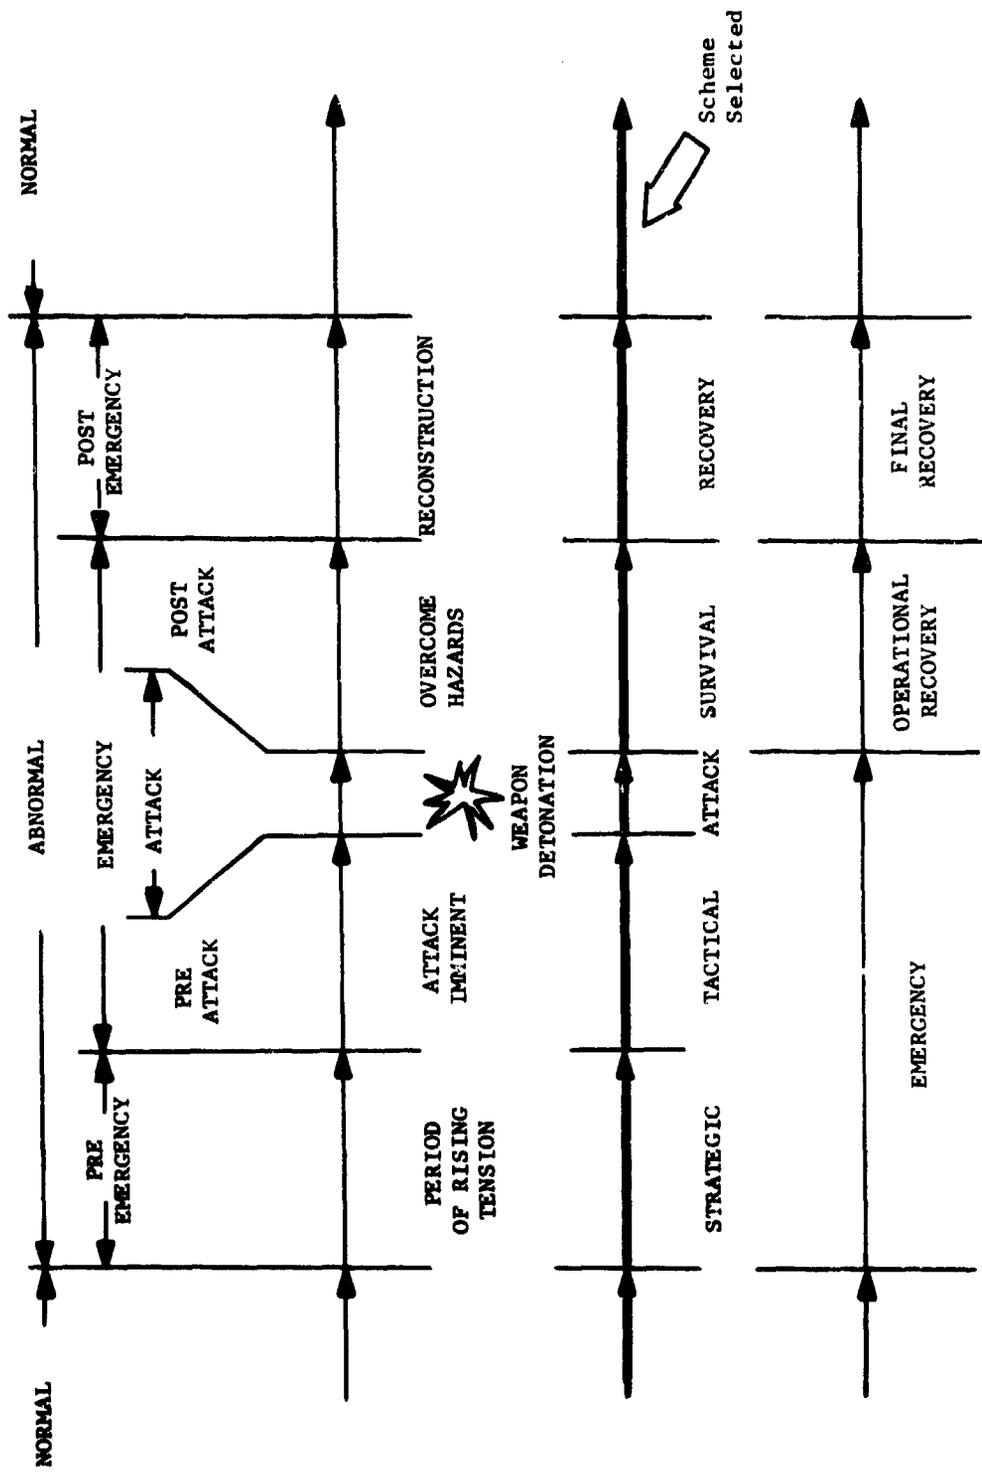


Fig. 3. Emergency Time Phases.

The five time phases selected do not necessarily coincide with Detroit or those in the Federal CD Guide terminology; rather, they are a compromise fitted to the system synthesis problem.

### C. Operating Area Classifications

During various time phases -- particularly, the attack and survival phases - areas within Detroit have different problems. Small land areas were defined in order to recognize these differences. SLA was chosen because data is available on area, building type, population, and shelter. Postal zones, zoning ordinance districts, telephone exchange districts, wards or other political or service areas could have been used; however, the SLA seems to be the most satisfactory operating area definition at this time.

Each SLA (or census tract) was studied and divided into classes having similar land-use characteristics, as determined by existing zoning data<sup>6/</sup>. Five first-level classes, representing 15 second-level classes and 33 third-level classes, were obtained by grouping areas with similar characteristics.

Figure 4, Detroit Land-Use Classification, shows Detroit at the first level of SLA definition. Table 1, SLA Classification, lists the SLA classes together with their land-use codes. The land-use codes were selected and grouped to correlate Dikewood<sup>7/</sup> building type with land use and to establish the feasibility of this approach to a definition of operating areas. Preliminary investigations of zoning data suggest that SLA's should be classed by the relative distribution of land-use types. Previous work has already related land-use types to building types. Appendix B includes SLA classification to the fourth level of detail. Figure 5, Detroit SLA Population Density, and Figure 6, Detroit SLA Building Density, show the relative distribution of city activity. Thus, land use, building type and density, population density, and highway and utility networks should be considered in deriving a proper operating area classification.

A more detailed study is needed to define adequately the response of typical operating areas to weapon effects. Classification must be determined by responses to weapon effects. These responses represent civil defense problems. Once defined, these problems, in turn, define to a large extent (as shown by Figure 7, Problem Definition and Countermeasures Relationship) the functions which the Detroit CD system must provide to achieve its objectives.

---

<sup>6/</sup> Official Zoning Ordinance of the City of Detroit. 1 February 1963.

<sup>7/</sup> L. W. Davis, F. J. Wall, D. L. Dammers, Development of "Typical" Urban Areas and Associated Casualty Curves, Albuquerque, New Mexico: The Dikewood Corporation, April 1965.

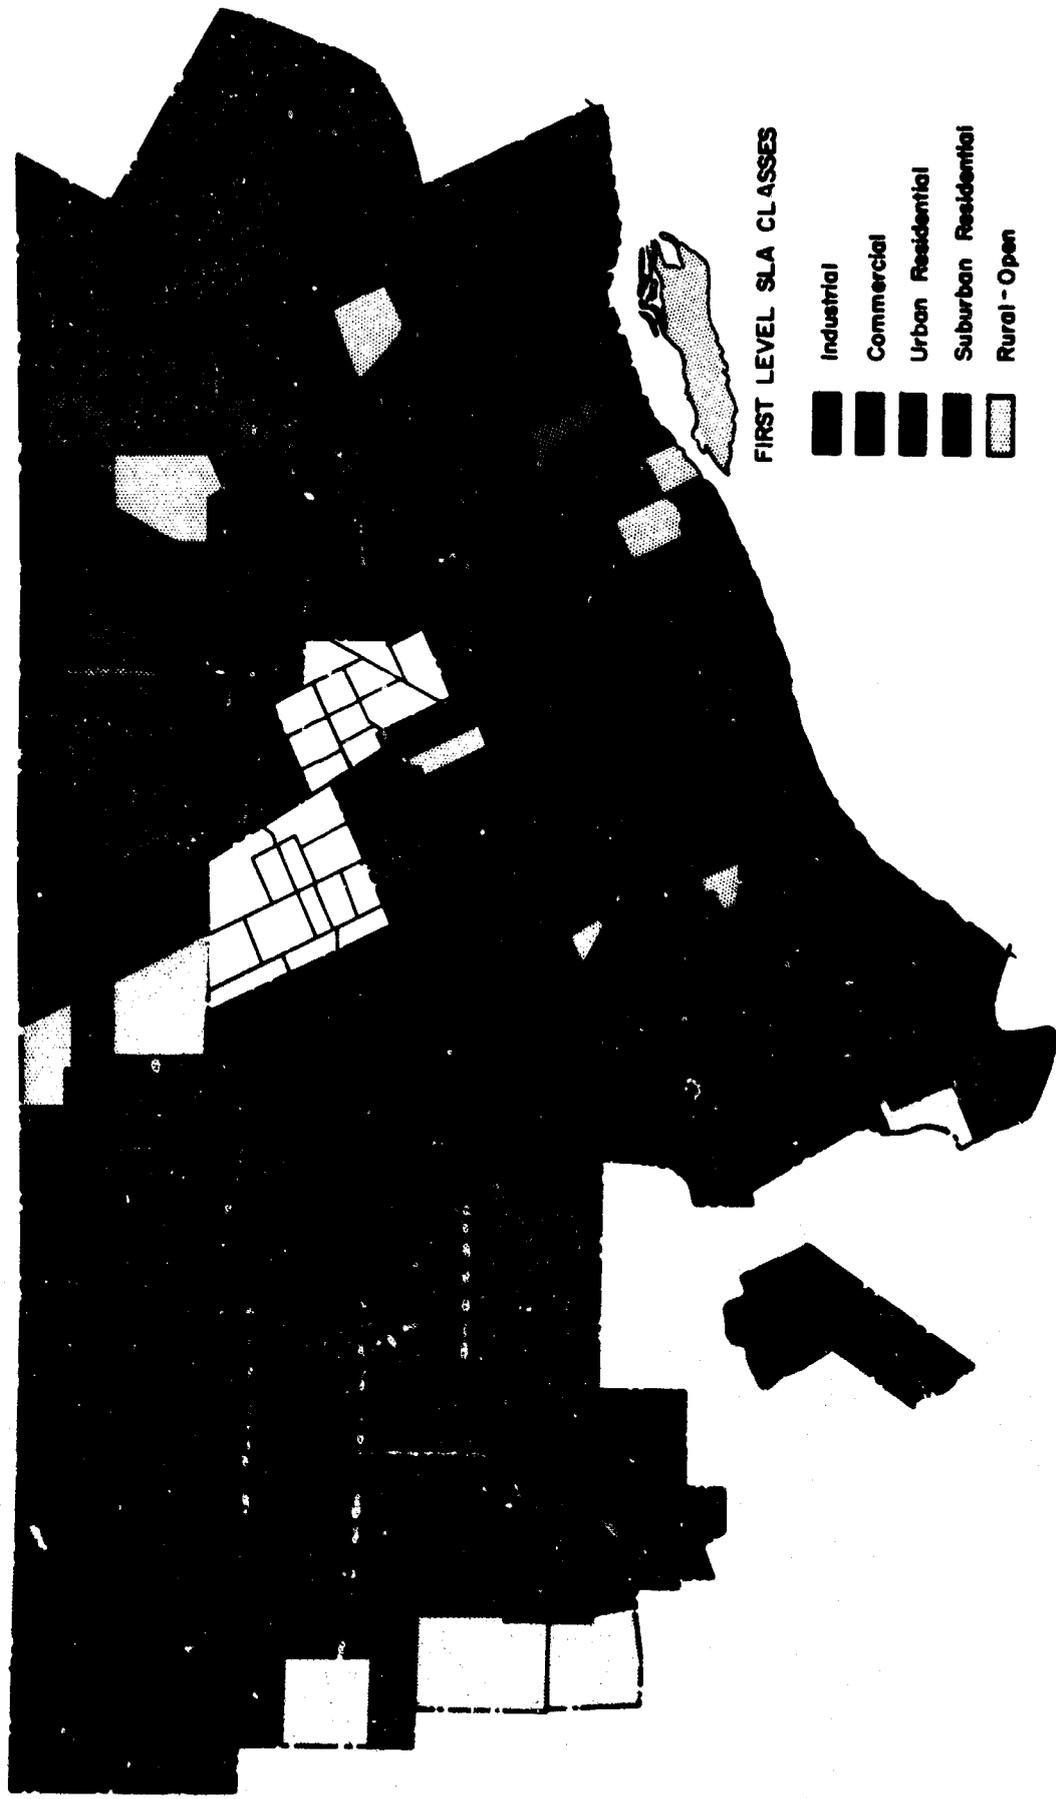


Fig. 4. Detroit Land-Use Classification.

Table I  
SLA CLASSIFICATION

SLA Type	Open	LAND-USE CATEGORIES*						Typical Ct. No.	Est. Ave. Density
		R1	R2	RM	B	BH	M		
<u>RURAL</u>		<u>50-100</u>							<u>3000</u>
I-1	75-100	0-25			0-25		0-25	354A	1584
II-2	50-75	0-25			0-25		0-25	666A	5050
II-3	50-75	25-50			0-25			353B	4430
<u>SUBURBAN RESIDENTIAL</u>		<u>50-100</u>							<u>8000</u>
III-4	25-50	50-75		0-25	0-25	0-25		454	4668
IV-5	0-25	75-100						351B	11118
IV-6		75-100	0-25					76	13130
IV-7		75-100			0-25	0-25		410B	5997
IV-8		75-100	0-25	0-25	0-25	0-25	0-25	204B	8105
IV-9		75-100			0-25	0-25	0-25	662	15694
IV-10		75-100	0-25		0-25		0-25	204A	8522
V-11		50-75	0-25		0-25	0-25		156	18223
V-12		50-75	0-25	0-25	0-25		0-25	355B	10543
<u>URBAN RESIDENTIAL</u>			<u>50-100</u>	<u>0-50</u>					<u>18000</u>
VI-13		50-75			0-25		25-50	604	11696
VI-14		25-50			0-25		25-50	561	13894
VI-15		25-50	0-25	0-25	0-25		25-50	661	4928
VII-16		50-75	25-50	0-25				185	19675
VII-17		25-50	25-50	0-25	0-25	0-25		161	20143
VIII-18			75-100		0-25	0-25		68	20053
VIII-19			75-100	0-25	0-25	0-25		523	22077
VIII-20			75-100		0-25	0-25	0-25	73	15288
IX-21			50-75	0-25	0-25	0-25		176D	26303
IX-22			50-75	0-25	0-25		0-25	11	21480
IX-23			50-75		0-25	0-25	0-25	115	20846
X-24			50-75	25-50				511	12431
XI-25			50-75		0-25	0-25	25-50	106	10953
XI-26			50-75				25-50	12	26321
XI-27		0-25	25-50	0-25	0-25	0-25	25-50	42	12270
XII-28			25-50	25-50	0-25	25-50		25	9470
XII-29			0-25	25-50	0-25	25-50		34	19111
XII-30	0-25			75-100	0-25	0-25	0-25	28	51252
XII-31		0-25	0-25	50-75	0-25	0-25	0-25	153	32887
<u>COMMERCIAL</u>						<u>50-100</u>			<u>13000</u>
XIII-32			0-25	0-25	0-50	50-100		31	25402
<u>INDUSTRIAL</u>						<u>25-100</u>			<u>5500</u>
XIV-33		25-50			0-25		50-75	402A	3485
XIV-34			25-50	0-25		0-25	50-75	503	10522
XV-35		0-25	0-25	0-25	0-25	0-25	75-100	3	5862

\* Source: Official Zoning Ordinance of the City of Detroit as amended to Feb. 1, 1963.

Definition of land-use categories:  
 Open - Areas without significant buildings  
 R1 - Single family dwelling  
 R2 - Two family dwelling  
 RM - Multifamily dwelling  
 B - Light business  
 BH - Heavy business  
 M - Manufacturing

Zoning Codes Used:  
 P1 - other  
 R1  
 R2  
 RM, RMA, RMA, RMV  
 B1, B1A, B2  
 B6, B1, BC, PC, PCA, C6  
 M<sup>1</sup>, ML6, MH

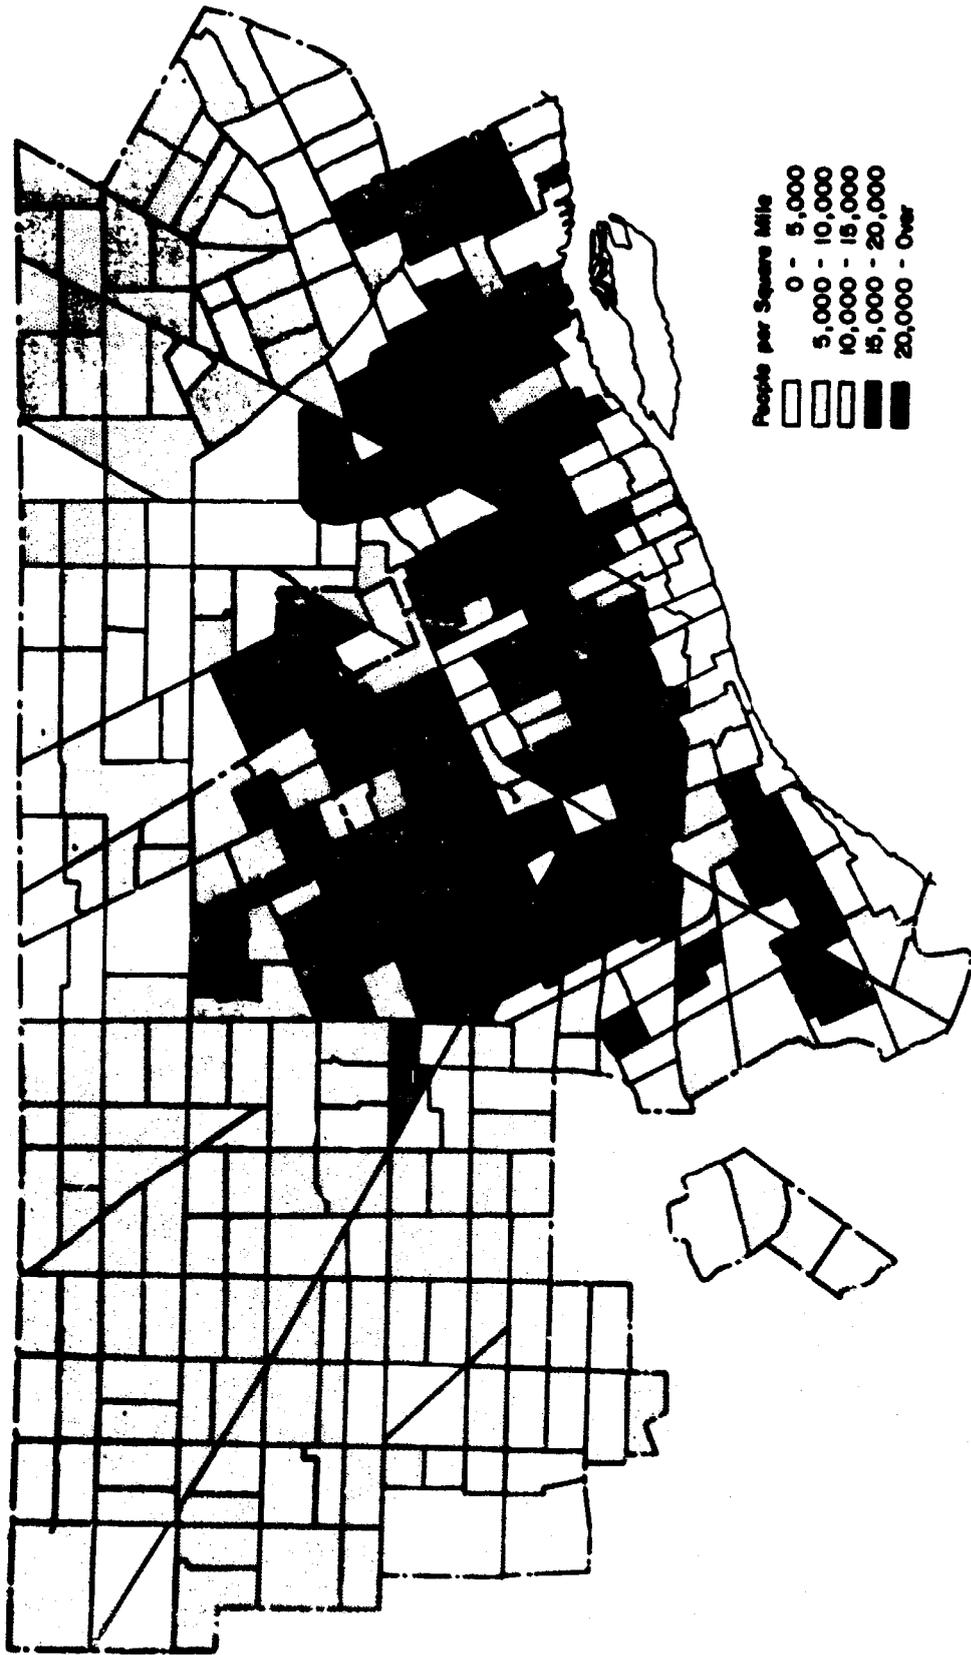


Fig. 5. Detroit SLA Population Density.

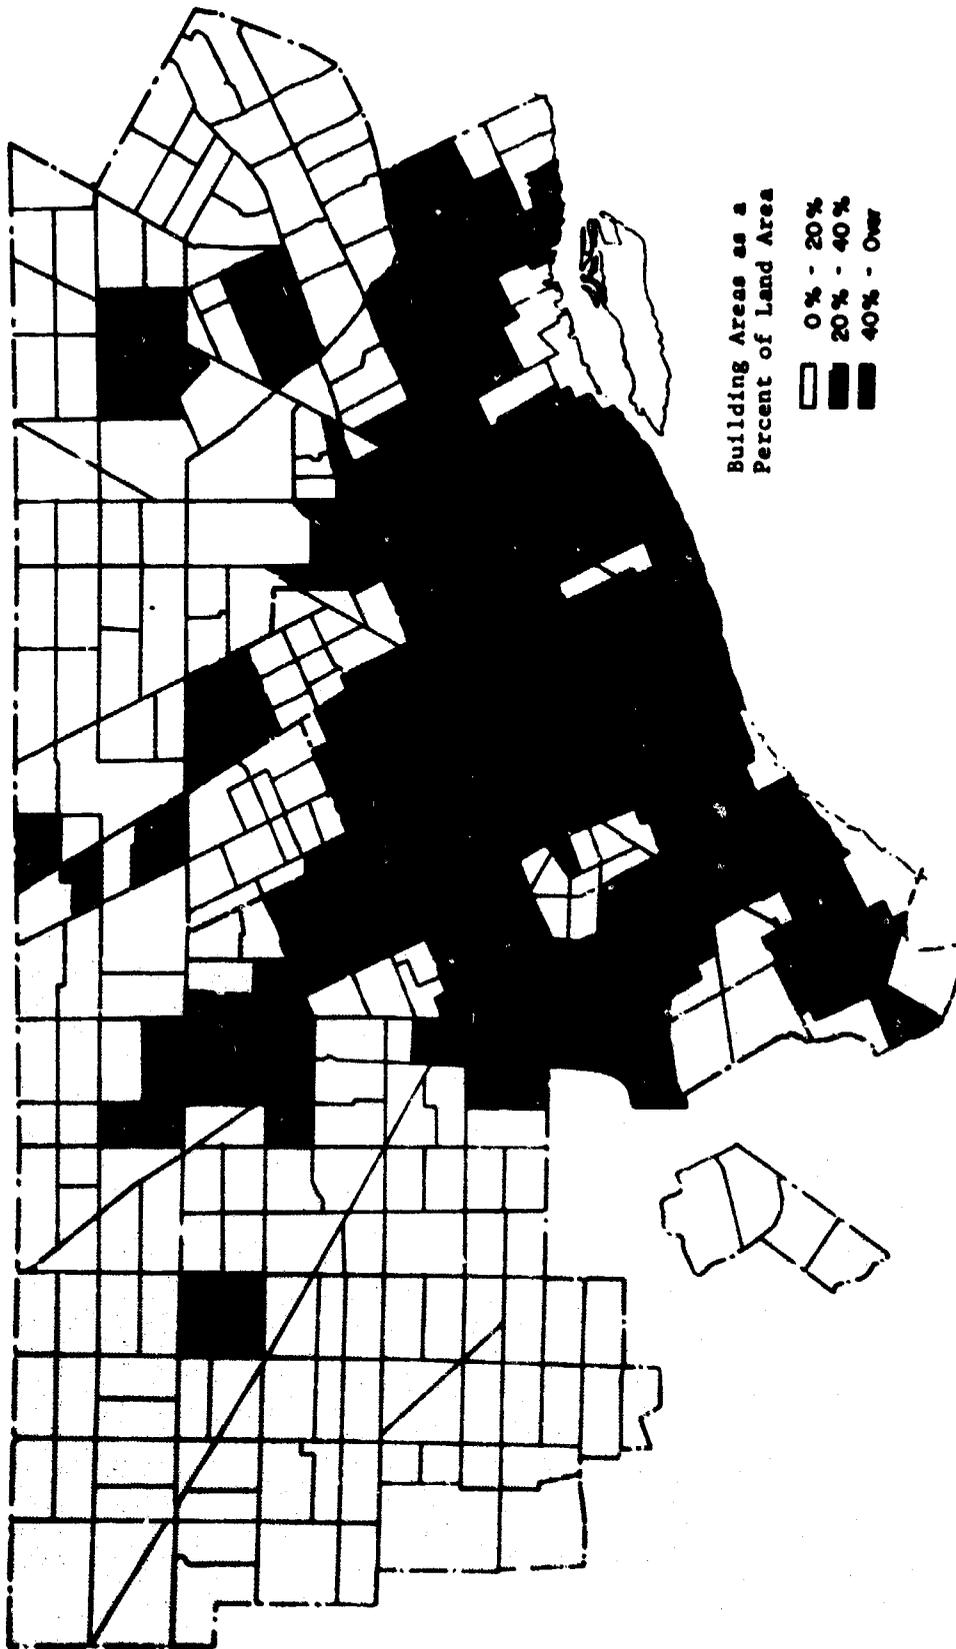


Fig. 6. Detroit SIA Building Density.

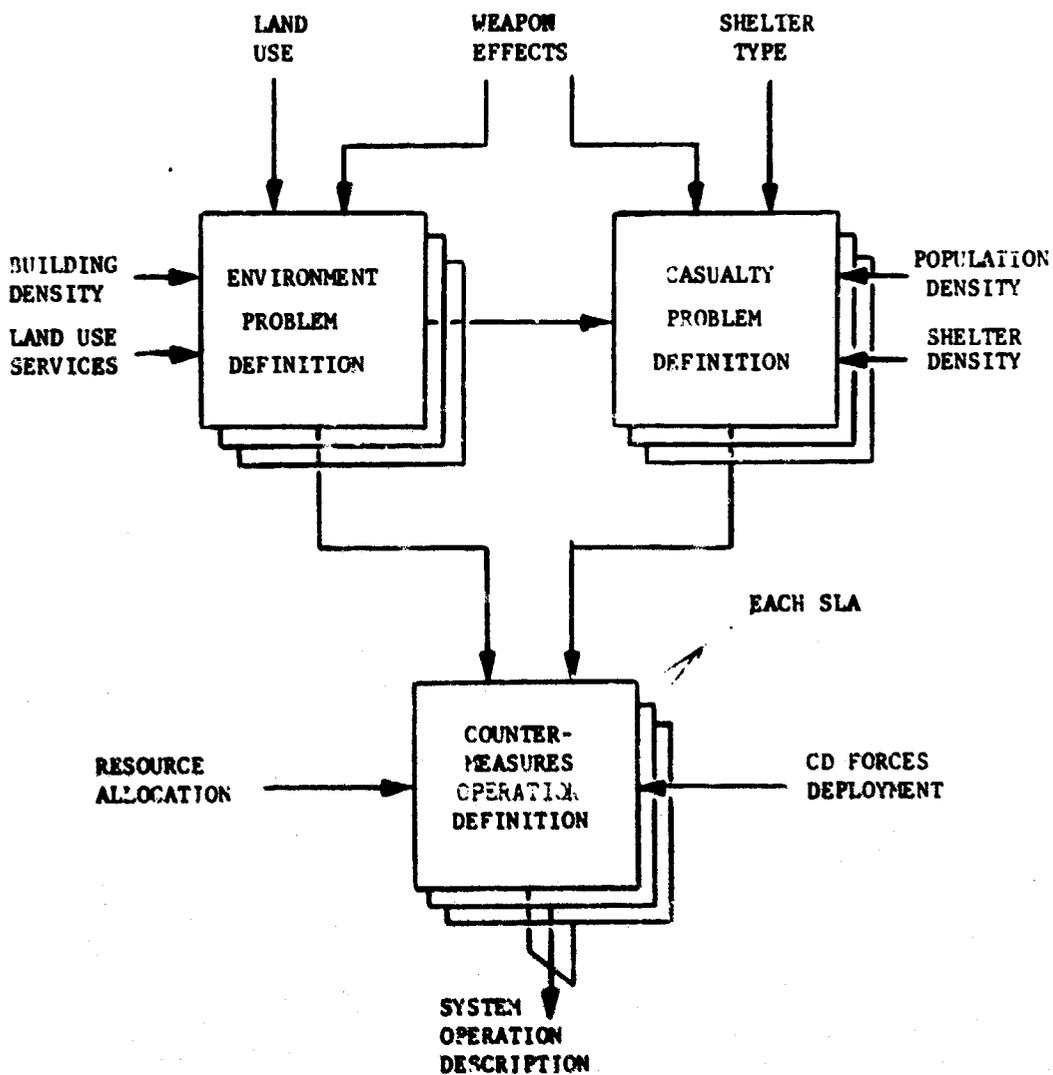


Fig. 7. Problem Definition and Countermeasures Relationship.

D. Area Problem Definition

In other problem definitions, cities were defined as areal distributions of people; however, for detailed damage calculations SLA's are more suitable to damage measurement and countermeasure solution. Thus, the postattack assessment of city damage is based on SLA's which have been distributed into one of the classes which exhibit similar responses.

The operating areas must be small enough to identify problem differences, and yet, large enough to permit manageability; however, classification of types by similarity of response must not obscure significant problem differences. Criteria of significance are difficult to define. Nevertheless, certain criteria (calculation of people and property damage stems directly from an understanding of these criteria) have been selected on which to base problem definitions: casualty assessment, operating problems, and damage severity.

Figure 8, Problem Definition and Countermeasures Development Method, evolves from Figure 7 and illustrates the relationship between operating area, land-use, weapon effects, and civil defense system actions. The basic operating situations in the figure determine the countermeasures operation to be undertaken, while the casualty assessment determines the priority of these actions.

Table II, Typical SLA Responses to Weapon Effects, describes the weapon effects blast damage (B), debris level (D), and fire damage (F) --at three severity levels for the five classes of SLA's at various distances from ground zero. If all SLA's are classified and located with respect to ground zero, a summation of the class-vs.-distance matrix represents the total damage problem. Appendix C contains a cursory analysis of several "typical" SLA responses to weapon effects.

Radiation from fallout is independent of land use. Nevertheless, if the problem of radiation is added to the fire and debris problem, a potential of 27 problem combinations are defined as shown in Table III, Environmental Problem Definition Matrix. Although theoretically possible, some of the combinations are not likely to occur.

Detroit is depicted in Figure 9, Detroit Environmental Problem Definition, as a set of problems defined by the method shown in Figure 8. Thus, the classification of all SLA environmental problems (either fire, debris, or radiation) requires that the CD system assign a set of functions to counteract the problem. These functions can be readily defined as the presence or absence of such countermeasures as sheltering, firefighting, debris removal, or decontamination.

Casualty functions are used to relate the people-damage to structure-damage. Figure 10, Detroit Sheltered Population Density, represents data used in determining people-damage; Figure 11, Detroit Casualty Problem Definition, shows injured survivors

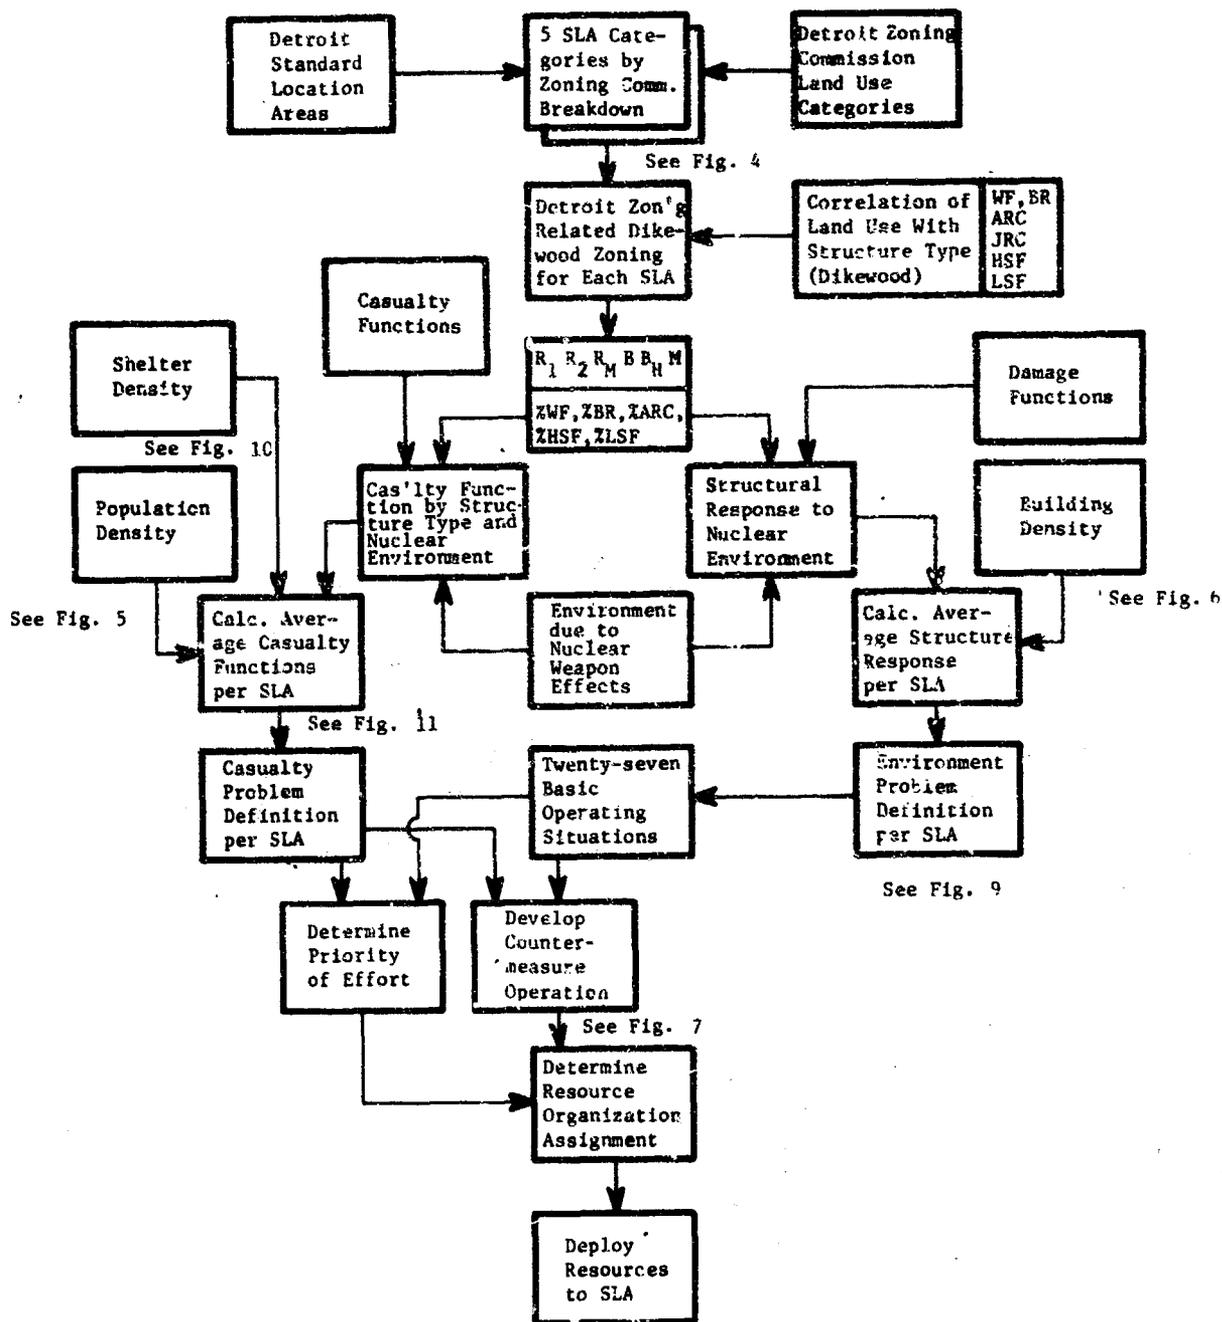


Fig. 8. Problem Definition and Countermeasures Development Method.

Table II  
TYPICAL SLA RESPONSES TO WEAPON EFFECTS \*

SLA** CLASS	WEAPON EFFECT	Distance from Ground Zero (5-MT surface burst) (Miles)																	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
I	B		H		H	M	M	L											
	D		H		H	M	M	L											
	F																		L
IV	B		H		H	M	M	L											
	D		H		H	M	M	L											
	F																		L
VI	B		H		H	M	M	L											
	D		H		H	M	M	L											
	F																		L
XIII	B		H		H	M	M	L											
	D		H		H	M	M	L											
	F																		L
XVI	B		H		H	M	M	L											
	D		H		H	M	M	L											
	F																		L

\* Fallout not included; it is independent of SLA type.  
 \*\* See Table I  
 \*\*\* Weapon Effect Severity: H - >.5 M - .2-.5 L - <.2  
 Debris (D) H - >12" M - 6-12" L - <6"  
 Fire (F) H - >.25 M - .10-.25 L - <.10

Table III

ENVIRONMENTAL PROBLEM DEFINITION MATRIX \*

	NEGLIGIBLE FIRE			MODERATE FIRE			SEVERE FIRE		
	DEBRIS			DEBRIS			DEBRIS		
	Neg.	Mod.	Sev.	Neg.	Mod.	Sev.	Neg.	Mod.	Sev.
NEGLIGIBLE FALLOUT	1			4			7		
	A	B	C	A	B	C	A	B	C
MODERATE FALLOUT	2			5			8		
	A	B	C	A	B	C	A	B	C
SEVERE FALLOUT	3			6			9		
	A	B	C	A	B	C	A	B	C

\* SOURCE: Command and Control Implications of the Concept of Operations Under Nuclear Attack, 2611C, System Development Corporation, TM-L-2595/013/00, June 1967 (In Publication).



ILLUSTRATION ONLY  
NOT FOR USE AS SOURCE MATERIAL

Fig. 9. Detroit Environmental Problem Definition.

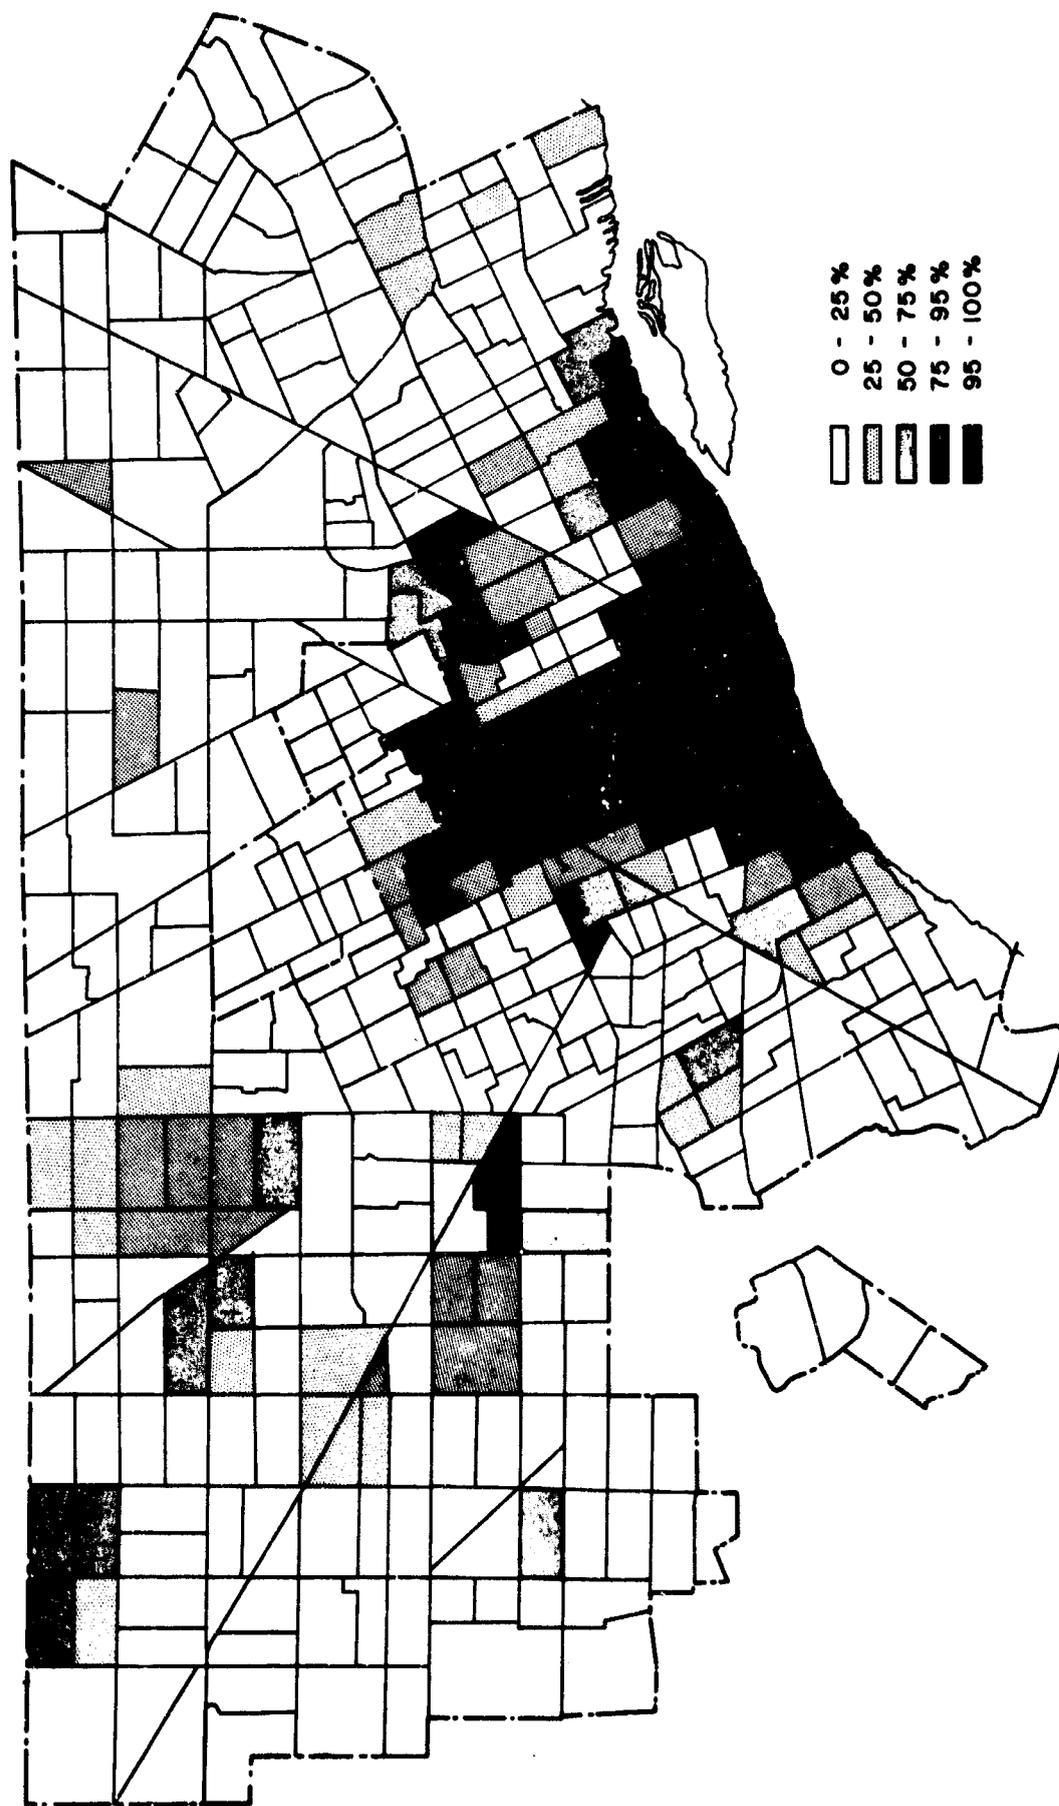


Fig. 10. Detroit Sheltered Population Density.



**Fig. 11. Detroit Casualty Problem Definition (Prompt Effects Only).**

or potential casualties derived by methods similar to those developed in OCD Work Unit Number 2511B<sup>8/</sup> used in conjunction with the Analytical Nuclear Casualty Estimation Technique (ANCET) computer model<sup>9/</sup>. A definition of casualties when applied to the operating area problem definition enables the addition of rescue, medical, welfare, and/or other functions.

A review of civil defense research documents was undertaken to establish continuity between problem definition, objective selection, and system synthesis. It is essential that the system description be linked qualitatively in system synthesis and quantitatively in systems analysis to problem definition. Otherwise, the description does not provide a useful approach to system evaluation in calculating the impact of civil defense in alleviating city damage. The problem definition illustrations are only approximations to indicate their relation to system synthesis and should not be used as source material.

Incorporation of the utility and highway networks into the description has not been accomplished at this time. A cursory analysis of potential utility damage indicates that a set of overlays may be derived which modify the SLA environment definitions in a manner similar to the radiation hazard overlay. Restoration of the networks is dependent not only on SLA damage but on damage to adjacent areas as well. Further study is necessary to determine the efficacy of this approach.

An adequate definition of the problem is needed to establish the required countermeasures and to determine the components, organization, resources, and operations of the CD system.

#### E. Function and Control Specifications

The Detroit civil defense functional responsibilities were identified and classified from the various available plans and were assembled into flow diagrams representing operational services. Four main functional subsystems were discernible: control, shelter, extra-shelter, or mobile and support. Only the shelter and extra-shelter subsystems act on people or property to overcome problems created by the detonation of one or more nuclear weapons. The control and support subsystems do not protect people or alleviate problems; they do enable the shelter and extra-shelter functions to perform services.

By definition, functions which are not under control are not considered part of the CD system; therefore, as a completeness criterion, all functions may be classified into one of the four subsystems.

---

<sup>8/</sup> "Supplemental Analysis - Civil Defense Rescue." Menlo Park, California: Stanford Research Institute, August 1965.

<sup>9/</sup> Alvin M. Cruze and P. S. McMullan, Extension of the General Sensitivity Analysis, Volume I, Methodology, Research Triangle Park, N. C.: Research Triangle Institute, 15 March 1967.

Since a generalized system with all functions enumerated does not necessarily fit the needs of the operating area, Table IV, Countermeasures Operation Synthesis, presents a method for describing a basic operation synthesized to meet a specific operating area's needs. (The control functions were omitted from the table since they were assumed to be ever-present.) Each SLA's environmental and casualty problem was evaluated to determine the appropriate set of countermeasures. Several SLA-CM operations are evaluated in the table. One SLA action at H+1 in the survival phase is described in Figure 12, Illustrative Countermeasure Operation for SLA 354A.

A set of similar subsystem syntheses are expected to evolve from detailed analyses of all probable operations needed to alleviate the many problems expected in a nuclear attack. Analyses of these operations, including the frequency of occurrence of the resource needs, should provide a basis for measuring the effectiveness of the local CD system.

#### F. Component Identification and Organization

Once the appropriate functions were identified they were assigned to subsystems of the organization. Any part of the system is considered a component; thus, a subsystem and a team are both components but at different levels.

The typical organizational structure of the system is presented in Figure 13, Detroit Civil Defense Organization. Five levels of organization were identified together with the degree of participation in the control function.

A few of the teams may not have been identified since not all of the detailed plans have been prepared; however, sufficient information is available to validate the control, shelter, extra-shelter, and support subsystems.

### III. DETROIT SYSTEM SYNTHESIS

#### A. General

The foregoing section in the detailed approach for describing operating subsystems discussed the synthesis procedure; however, it mentioned only the means for recording and displaying the description. As previously stated, system description is based on functional flow and schematic block diagrams which give a dynamic character to the resource organization and allocation matrix. These diagrams define the problem-solving operations identified with specific areas. The approach to the final aspect of system synthesis is presented in this section.

The Detroit CD system has been described by existing civil defense plans which state: the problem-solving mission of each element; the organization of its personnel,

Table IV  
COUNTERMEASURES OPERATION SYNTHESIS

		Survival Phase Functions, H+1 to H+2																	
SLA No.	Problem* Definition	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
		Provide Shelter	Provide Warning	Provide Remedial Movement of People	Rescue Those Trapped	Provide Protective Clothing	Maintain Health	Suppress Fires	Maintain Order	Shutdown for Attack	Disperse Survivors	Harden Shelters and Resources	Provide Aid and Medical Care	Provide Food and Water	Provide Housing	Inform Public of Situation	Restore Essential Facilities	Decontaminate Essential Areas	Provide Welfare Services
354A	5-B			X	X			X	X		X		X			X	X		
351B	6-C	X		X	X			X	X		X		X			X			
206	9-C	X		X	X				X		X		X			X			
456	5-A			X	X			X	X		X		X			X	X		
507	9-A	X		X	X				X		X		X			X	X		


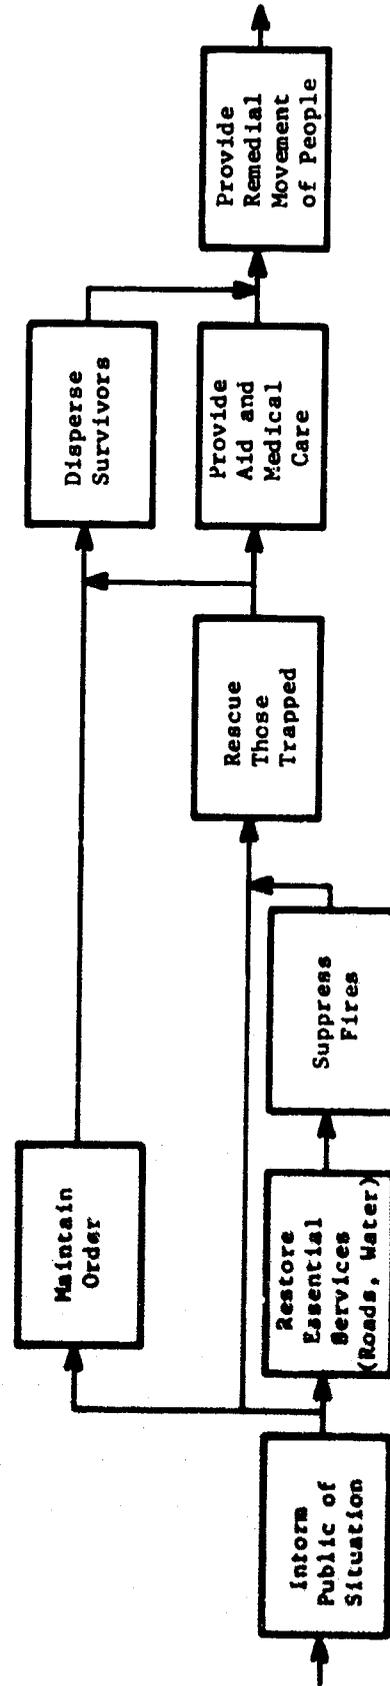



Fig. 12. Illustrative Countermeasure Operation for SLA 354A. (FFBD)

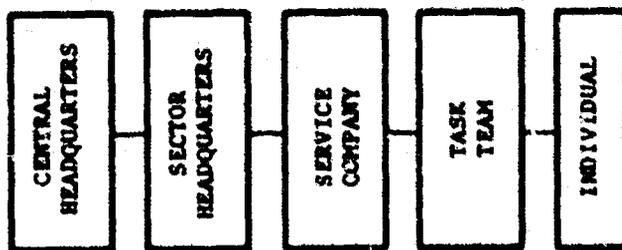

a. Elements

Planning	Organizing	Deciding	Commanding	Informing
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+

b. Control Functions

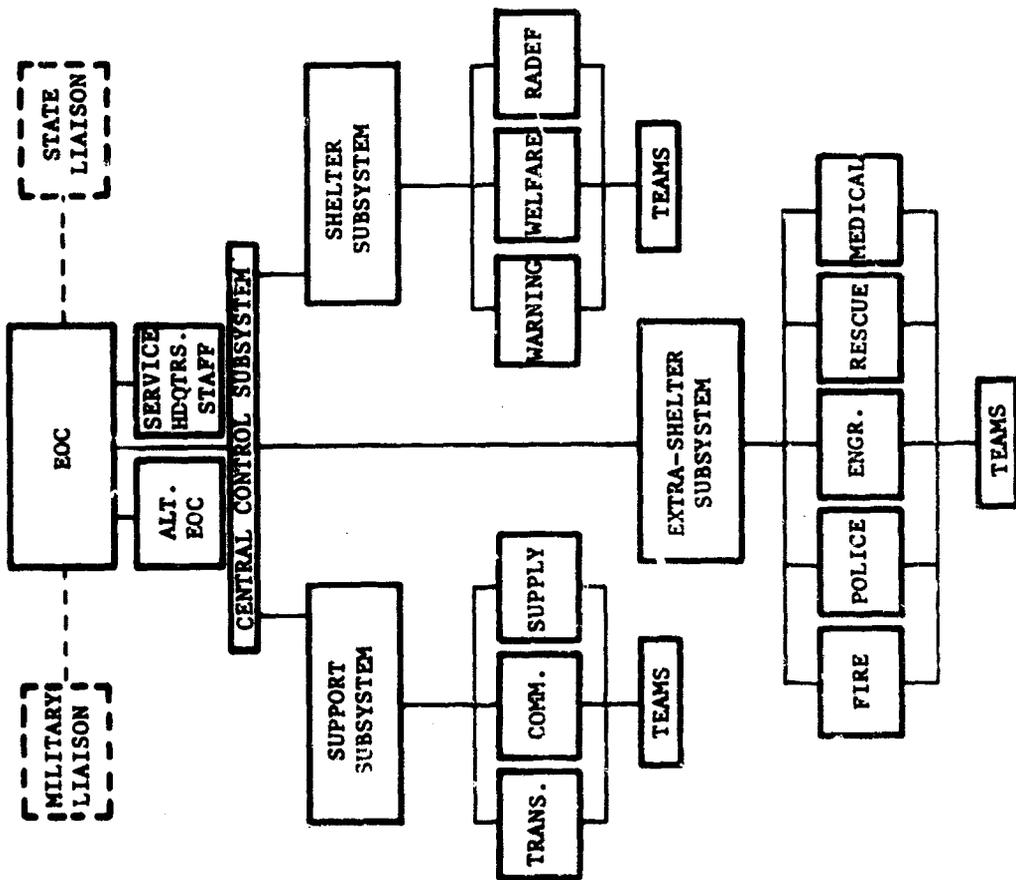

c. CD Organization

Fig. 13. Detroit Civil Defense Organization.

equipment, and facilities; the duties to be performed; and a description of the operational situation. However, existing plans are not complete. Moreover, these plans are voluminous and tend to obscure the sequence, time, and distance relationships that are critical to the overall description. For this reason, the adopted system description is based on concise diagrams as well as a matrix which integrates components, resources, and operations. The total system synthesis represents a summation of the basic operating subsystems.

The Detroit CD system description model is by no means detailed in depth; however, all major aspects are incorporated. The model is complete in the sense that a provision has been made for all functions, controls, and components; it is incomplete with respect to the desired level of detail. Continued effort is expected to add necessary details. In general, the model should be envisioned as a time-phased control subsystem with two types of CM functions being performed by the shelter and extra-shelter subsystems with the help of support subsystem. The following basic subsystem description has three aspects: function, resource mobilization, and schematic.

#### B. Functional Description

Figure 14, Time-Phased Central Control Operation (FFBD), represents the time-phased control functions which tie together all CM and support functions. In this figure, each block has (wherever possible) a number and page reference to Detroit civil defense plans; the feedback loops permit time interactions to accommodate the CM program. Overall completeness was emphasized rather than depth of detail; subsequent effort will be directed toward refinement in detail and accuracy.

Figure 15, Typical Service Control Operation (Firefighting), illustrates a deployment control operation. The Medical Care, Police, RADEF, Welfare, Engineering, and Rescue Services have been treated in a similar manner. The diagram in Figure 12 illustrates a composite of civil defense services joined in a program to counter SLA problems.

Thus, the three FFBD's (Figures 12, 14, and 15) represent the functional description of the Detroit CD system with respect to a typical SLA.

#### C. Resource Mobilization Description

Table V, Resource Organization Assignment Matrix, is a matrix showing the origin and allocation of resources and functional assignments to organizational components for the CM operation defining the survival phase (shown in Table IV). This concept can be expanded readily to cover all operations during all time phases.

#### D. Schematic Description

The subsystems are depicted in Figure 16, Basic Operating Subsystem Schematic (SBD), as units are deployed with respect to a specific operating area. These units, linked







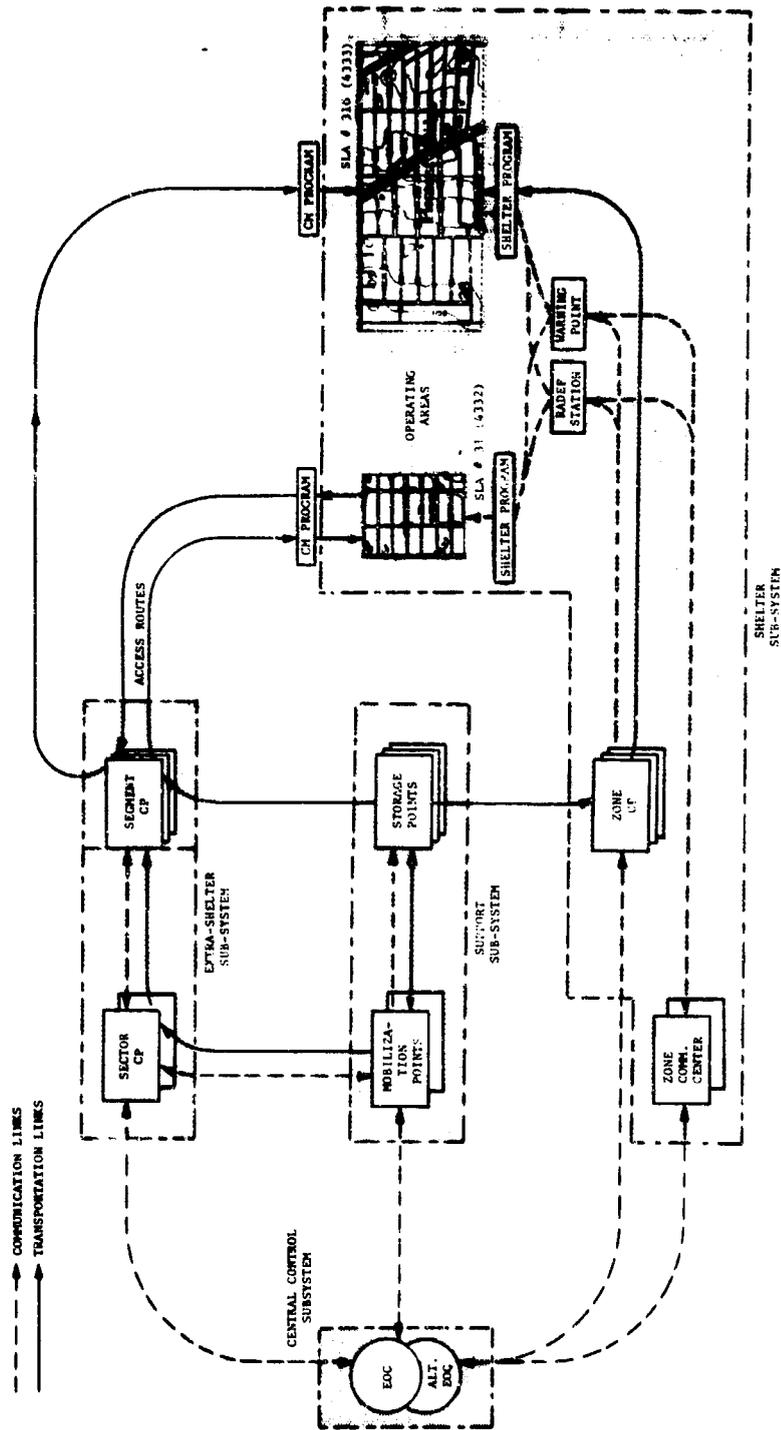


Fig. 16. Basic Operating Subsystem Schematic (SBD).

by information and transportation routes, form a network capable of sustaining CM operations at the designated SLA.

#### E. Total System Description

The total system is made up of many basic subsystems operating simultaneously. The CM operations may differ from area to area depending on environment, priority, and available resources. Priority is based on the expected number of survivors added by alternative operations. Figure 17, Detroit Civil Defense System Diagram, illustrates countermeasures united in a controlled operation to solve the problem in a specific SLA.

Finally, in the local Emergency Operations Center (EOC), the total system may be viewed as a set of status boards which display the state of operations in each operating area. Thus, the EOC (or its alternate) handles all SLA's; the zone (or sector) handles 10 to 50; the complex (or segment) only a few or perhaps only one. At each level, functions are assigned and resources are allocated to achieve the civil defense objectives. The schematic shows one SLA as a source and another as a recipient for survivors; such a situation would alter the civil defense program in the SLA.

### IV. DISCUSSION

The Detroit CD system, in all its complexity, is difficult to represent in a simplified manner. Several weak points need further development before the description is thoroughly validated. For example, correlating land use with structure type appears to be a key factor in coupling problem definition with CD operations. Considerable effort is needed to develop this approach within the system concept.

As another example, unless problem definition is in equivalent terms with problem solution, the system developed to solve the problem will be unrelated to it. Thus, problem definition forms the basis for system synthesis; feedback from the synthesis is necessary to insure compatibility in problem definition. In the course of preparing the basis for system synthesis and calculating damage, several additional facts became apparent and may be considered as feedback. First, structural-type classification and weapon effects appear to be the controlling parameters for both casualty estimation and property damage calculations (See Figure 8). Second, structure-type distributions vary with land use. For example, wood frame may dominate single family residences; brick, multi-family dwellings; reinforced concrete, commercial and institutional; and steel frame, industrial. Damage calculation studies should (but do not) emphasize these two central points.

A third apparent fact is that density-of-structure by land use, as it affects depth of debris, should receive more attention. A fourth is that firespread as a function of structure type, density, and land use should be further investigated.

Attack Phase

Survival Phase

DISPLAY  
SHELTER  
STATUS

ANNOUNCE  
ATTACK  
"ALL CLEAR"

PLAN  
OPERATIONS

DIRECT  
OPERATIONS

Central Control Operation (FFBD)

Deployment Control Operation (FFBD)

ESTABLISH  
HQTRS. CONTROL


DEPLOY  
GROUP FORCES


ESTABLISH  
SECTOR CONTROL

DEPLOY  
SECTOR FORCES

ESTABLISH  
TEAM CONTROL

BASIC  
OPERATING  
SUBSYSTEM  
SCHEMATIC

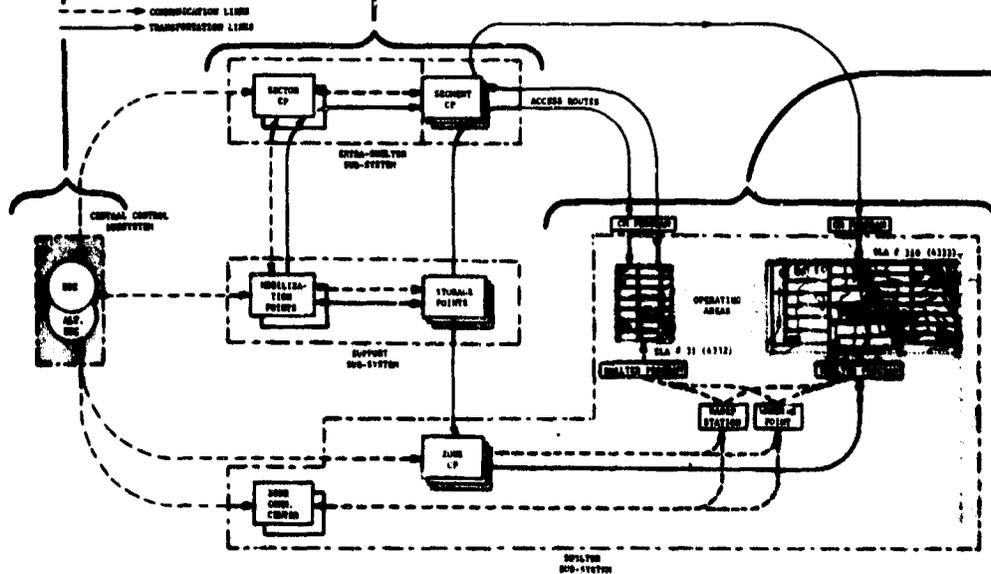

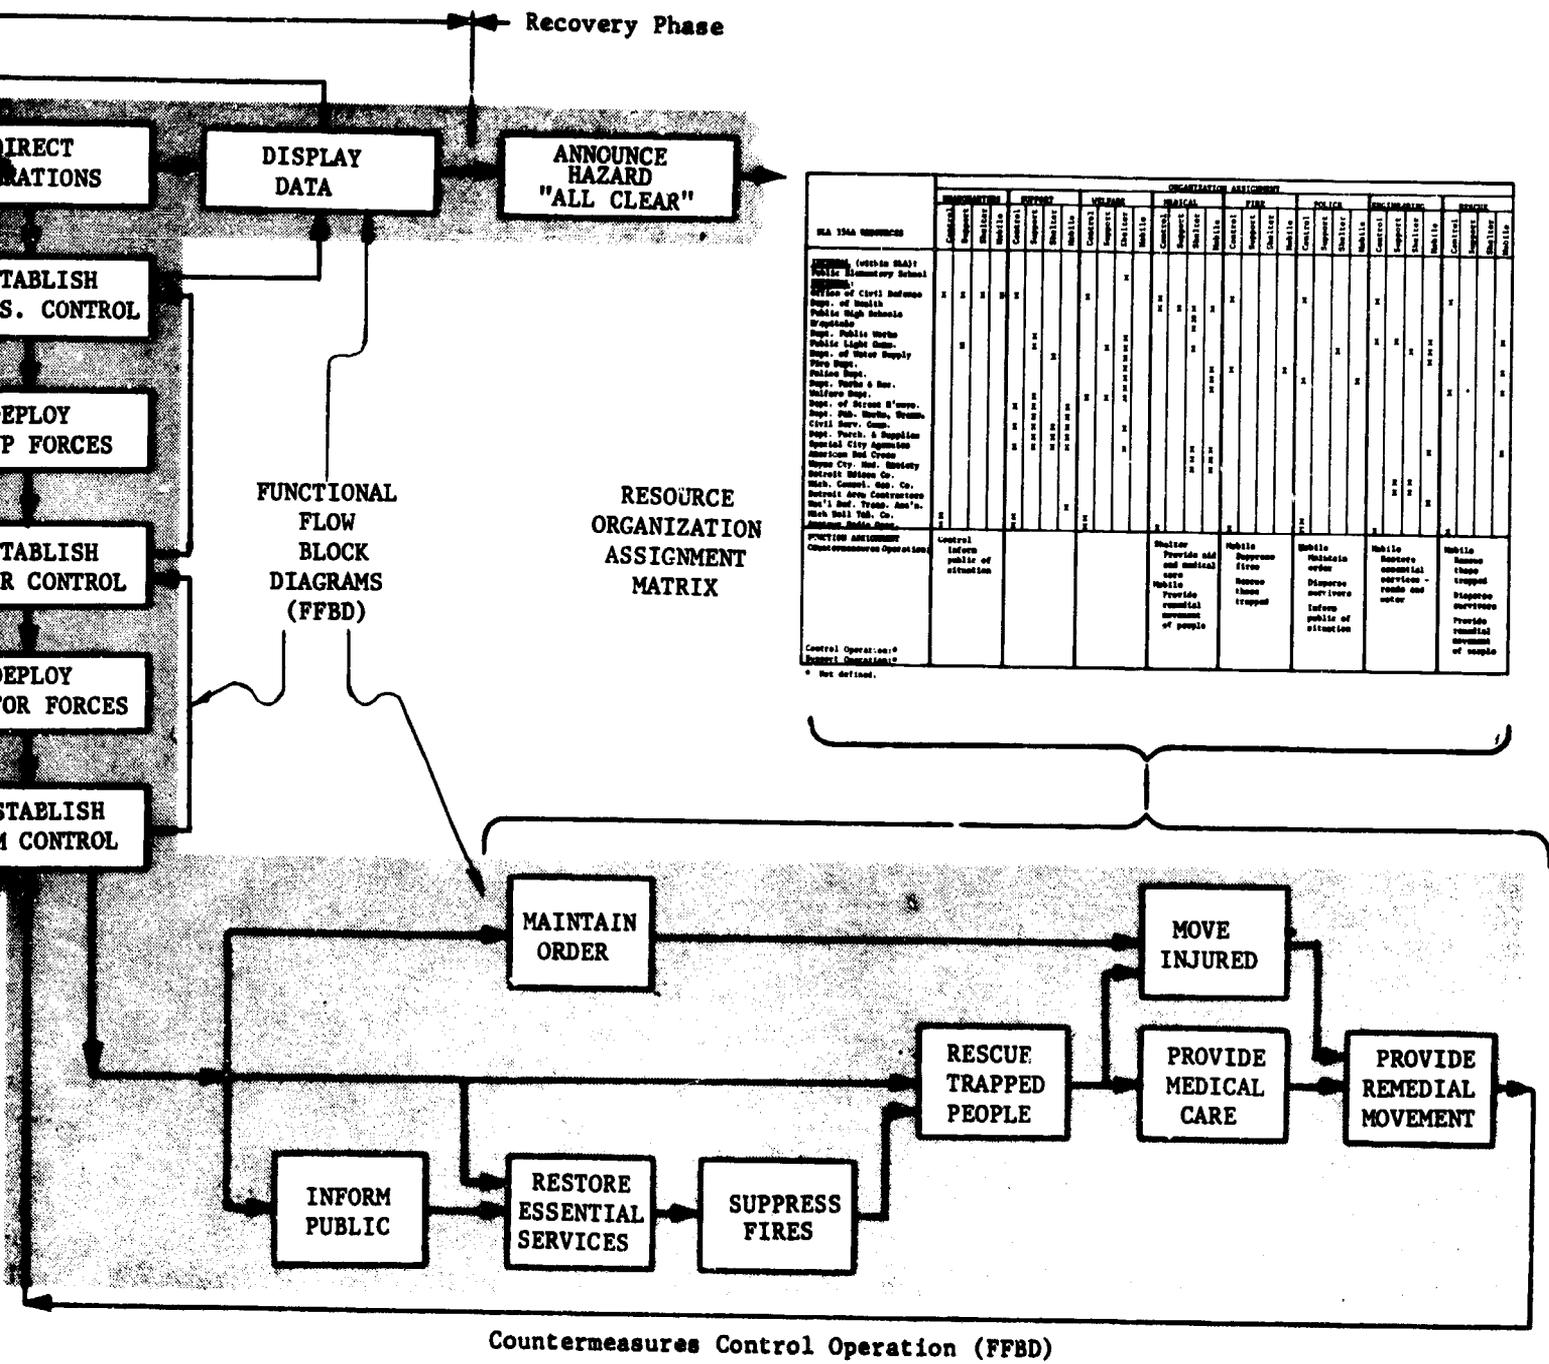

There are differences in emphasis on fire-effect parameters among investigators. Present fire-effect studies imply that the fireball remains on the ground (surface burst) until almost all thermal energy has been radiated; 80 percent of the energy from a 5-MT burst is emitted in the first 20 seconds. A rapidly rising fireball (e.g., one that rises 5 miles/minute) could present a significantly different fire picture. As another example, available casualty functions are not easily correlated with the off-set distance, overpressure, etc., of the nuclear environment.

Finally, the level of detail continues to be a major problem; some areas are thoroughly described, while others are vaguely referenced. It is tempting to follow a well-defined path to the lowest level; it is also tempting to add definition where there is none. An attempt has been made to establish a uniform level of definition across the entire system rather than to achieve greater depth; however, some service functions have been detailed to a lower level only to gain assurance that the higher level is adequate. Therefore, the current level of description represents a useful beginning for system synthesis, but continued effort can be expected to yield more detail and to develop the dynamic aspects of the system.

#### V. CONCLUSIONS

A beginning has been made toward a useful system description. Functions, controls, and components have been interrelated into a composite whole to describe the Detroit CD system and how it operates.

The functional flow and schematic block diagrams do offer a concise description of CD operations; however, improvement is needed in the Resource Organization Assignment Matrix (Table V). All three descriptions need development in detail.

A land-use classification scheme and the casualty functions related to building type and land use need to be developed and standardized for SLA's and need to be more closely related to the system description. Basic concepts, presented herein, form the foundation for an analytical system model for evaluating system alternatives.

Problem definition studies suggest the following needs:

- 1) A more refined method for assessment of depth of debris including a density-of-structure study by land use;
- 2) A more practical firespread model than existing statistical models;
- 3) A better relationship between vulnerability indices and casualty curves and a consistent set of casualty curves based on structure and land use;
- 4) An improved model of megaton-weapon fireball parameters including effect of rate of rise of the fireball.

## VI. RECOMMENDATIONS

Results of this research task suggest the following recommendations:

- 1) A study of a land-use classification system that relates damage calculations to operating areas should be initiated immediately.
- 2) A study of density of structure should be a part of the land-use system study and should influence type classification.
- 3) Depth of debris criteria that recognizes both access (mobility) and entrapment problems should be developed by land use.
- 4) Firespread models should be developed as a function of structure type, building density, and firebreaks for typical SLA's and land uses.
- 5) A consistent set of casualty curves or means for generating them must be standardized.
- 6) Time phases suited to the system operation and evaluation scheme should be standardized.
- 7) All civil defense system alternatives should be described in the context of control, shelter, extra-shelter, or support operations.
- 8) All system operations should be defined by functional flow and schematic block diagrams.
- 9) Studies in system synthesis should continue to greater levels of detail and should be supported by objective selection and systems analysis studies to insure that an appropriate interface exists between problem definition and system evaluation.

**Appendix A**

**Study Plan**

## Appendix A

### Study Plan

(Work Unit 4113E - Description of the Detroit CD Operating System)

#### I. INTRODUCTION

This paper contains a work plan for the description of the Detroit civil defense operating system under Work Unit 4113E. The objective is to describe the Detroit system for incorporation in the Five-City Study and to perform the description within the civil defense system analysis matrix framework. The synthesis of alternative near-future CD operating systems will be initiated by this activity.

#### II. WORK PLAN

##### A. General

Figure 1, which is in the Introduction, is a schedule for the completion of the tasks described in Section B, below. This work plan is based upon a literature search within four categories: (1) methodology for system studies; (2) reports and hearings related to problem definition, objective selection, and system synthesis; (3) Five-City Study guidance material and reports of progress; and (4) Five-City Data Bank material on Detroit's social systems and civil defense system.

##### B. Description of Tasks

###### 1. Planning and Preparation of Work Plan

This task, including the following subtasks, is completed with the acceptance of this work plan.

- a) Review of OCD systems evaluation approach.
- b) Development of system synthesis methodology.
- c) Review of municipal civil defense components and integrators (especially Detroit).

###### 2. Data Gathering

This task represents that effort necessary to collate data concerning the planning, system synthesis, and reporting tasks. Results of this work will be evident in the report bibliography. It will continue throughout the synthesis period.

3. Synthesize Alternate Detroit CD System

This is the major task under the contract. By a study of collated data, a Detroit CD system will be synthesized as a part of the Five-City Study. A description will be prepared of an "alternate" Detroit CD system based on an objective study of the matrix and the Detroit social system. The alternate will closely approximate the "in-place" Detroit CD system but will be functionally complete.

- a) Assume and prepare problem definitions and objective selections for components and integrators of the operating system.
- b) Synthesize subfunctions, subcomponents, and controls for the Detroit (alternate) system based on all available offsite data.

4. Draft Report

A draft description of the CD system for Detroit will be prepared by 1 July for technical monitor review and comment.

5. Synthesize the Detroit System

Modify the alternate CD system to fit the present CD system as planned for Detroit and as determined by onsite investigation.

- a) Refine problems and objectives as necessary.
- b) Redescribe the components and integrators as necessary.

A visit will be made to Detroit as soon after the technical monitor review as is practical.

6. Final Report

Prepare a final report consistent with the accepted plan; include the Detroit CD system, an alternate (objectively complete) Detroit system, and data bibliography. Deliver by 31 August 1967.

Appendix B

Land-Use Classification

Appendix B

Table B-I

**LAND-USE CLASSIFICATION**

SLA Class	Land-Use Classification							Typical C/T No.	Estimated Average Density
	Open	R1	R2	RM	B	BH	M		
I-1	75-100	0-25			0-25		0-25	354A	1584
I-1 A	75-100		0-25	0-25	0-25	0-25			
B	75-100		0-25	0-25		0-25		17	4322
C	75-100		0-25				0-25	58	9
D	75-100	0-25		0-25		0-25		301A	2821
E	75-100		0-25	0-25	0-25		0-25	558	20209
F	75-100	0-25	0-25	0-25	0-25			788	9080
G	75-100			0-25	0-25	0-25	0-25	501	1505
II-2	50-75	0-25			0-25		0-25		
II-2 A	50-75	0-25	0-25	0-25	0-25			307A	4840
B	50-75	0-25	0-25	0-25	0-25		0-25	666A	5050
II-3	50-75	25-50			0-25			353B	4430
II-3 A	50-75	25-50		0-25	0-25			404B	6009
III-4	25-50	50-75		0-25	0-25	0-25		454	4668
III-4 A	25-50	50-75	0-25	0-25	0-25		0-25	404A	6683
B	25-50	50-75	0-25	0-25	0-25	0-25		455	4798
C	25-50	50-75	0-25		0-25				
IV-5	0-25	75-100							
IV-5 A	0-25	75-100		0-25	0-25			351B	11118
B	0-25	75-100	0-25			0-25		406	7945
IV-6		75-100	0-25						
IV-6 A	0-25	75-100	0-25		0-25			75	12268
B		75-100	0-25		0-25			76	13130
IV-7		75-100			0-25	0-25		410B	5997
IV-7 A		75-100		0-25	0-25	0-25		186	16353
B	0-25	75-100	0-25		0-25	0-25		407	9128
C		75-100			0-25			410A	8646
D		75-100	0-25		0-25	0-25		412	11734
E	0-25	75-100		0-25	0-25	0-25		414	7753
F		75-100		0-25	0-25			603B	11456
IV-8		75-100	0-25	0-25	0-25	0-25	0-25		
IV-8 A		75-100	0-25	0-25	0-25			158	19065
B		75-100		0-25		0-25		190	7432
C	0-25	75-100	0-25	0-25	0-25			203B	9598
D		75-100		0-25	0-25	0-25	0-25	204B	8105
E	0-25	75-100	0-25	0-25	0-25		0-25	207A	9028
F		75-100	0-25		0-25	0-25	0-25	253	11591
G		75-100	0-25	0-25	0-25	0-25		256B	9041
H		75-100		0-25	0-25		0-25	615A	11181
I	0-25	75-100	0-25	0-25	0-25	0-25		660	12178

Table B-I (Continued)

SLA Class	Open	Land-Use Classification						Typical C/T No.	Estimated Average Density
		R1	R2	RM	B	BH	M		
IV-9		75-100			0-25	0-25	0-25	662	15694
IV-9 A		75-100					0-25	664	17207
IV-10		75-100	0-25		0-25		0-25	204A	8522
IV-10A	0-25	75-100			0-25		0-25	205B	9849
B	0-25	75-100	0-25		0-25		0-25	207B	7597
C		75-100			0-25		0-25	256A	11671
V-11		50-75	0-25		0-25	0-25			
V-11A		50-75	0-25			0-25		156	18223
B	0-25	50-75			25-50			357B	6527
V-12		50-75	0-25	0-25	0-25		0-25	355B	10543
V-12A		50-75	0-25	0-25	0-25	0-25		208	12285
B	0-25	50-75	0-25	0-25	0-25		0-25	210	10225
C	0-25	50-75	0-25	0-25	0-25			302C	8429
D	0-25	50-75	0-25	0-25	0-25	0-25		413	8614
E		50-75	0-25		0-25		0-25	354D	8734
VI-13		50-75			0-25		25-50	604	11696
VI-13A	0-25	50-75			0-25		25-50	206	6389
B		50-75	0-25	0-25	0-25		25-50	601B	7106
VI-14		25-50			0-25		25-50		
VI-14A	25-50	25-50			0-25		25-50	202	9357
B		25-50	25-50		0-25		25-50	561	13894
VI-15		25-50	0-25	0-25	0-25		25-50		
VI-15A	25-50	25-50	0-25	0-25	0-25		25-50	159	14700
B		25-50		0-25	0-25		25-50	205A	6135
C		25-50	0-25		0-25		25-50	355A	3149
D	25-50	25-50	0-25		0-25		25-50	615B	4484
E	0-25	25-50	0-25	0-25	0-25		25-50	661	4928
VII-16		50-75	25-50	0-25					
VII-16A		50-75	25-50	0-25	0-25	0-25		154	20634
B		50-75	0-25	25-50		0-25		181	15271
C		50-75	25-50	0-25		0-25		185	19675
D	0-25	50-75	25-50	0-25	0-25	0-25	0-25	209	15024
E	0-25	50-75	25-50	0-25	0-25			262B	11070
F		50-75	25-50		0-25			302B	14256
VII-17		25-50	25-50	0-25	0-25	0-25		161	20143
VII-17A		25-50	25-50	0-25		0-25		157	20187
B		25-50	25-50	0-25				160	26189
C	0-25	25-50	25-50	0-25	0-25			171	16670
D		25-50	0-25	25-50		0-25		183	24099
E	0-25	25-50	25-50	0-25	0-25		0-25	203A	10157
F		25-50	25-50	0-25	0-25		25-50	251	9672
G		25-50	25-50	0-25	0-25	0-25	25-50	254	8440
H	0-25	25-50	25-50		0-25		25-50	261	12195
I	0-25	25-50	25-50	0-25	0-25	0-25		608	12974
J		25-50	25-50		0-25	0-25	0-25	609	11418
K	0-25	25-50	25-50		0-25	0-25		663	20018
L		25-50	25-50		0-25			713	13020
M	0-25	25-50	25-50	0-25				751	10296
N		25-50	25-50	0-25	0-25		0-25	780	21789

Table B-I (Continued)

SLA Class	Open	Land-Use Classification						Typical C/T No.	Estimated Average Density
		R1	R2	RM	B	BH	M		
VIII-18			75-100		0-25	0-25		68	20053
VIII-18A	0-25		75-100			0-25		14	23738
B			75-100			0-25		70	20878
C			75-100		0-25			119	21670
D	0-25	0-25	75-100		0-25			652	12096
E		0-25	75-100		0-25			653	12543
F	0-25		75-100		0-25			767	24339
G	0-25		75-100		0-25	0-25		116	19720
H	0-25	0-25	75-100		0-25	0-25		793	17895
VIII-19			75-100	0-25	0-25	0-25		523	22077
VIII-19A			75-100	0-25	0-25			15	19553
B		0-25	75-100	0-25	0-25	0-25	0-25	19	25639
C			75-100	0-25	0-25	0-25	0-25	59	17899
D			75-100	0-25	0-25		0-25	109	17147
E	0-25		75-100	0-25	0-25			122	16432
F			75-100	0-25				155	25506
G		0-25	75-100	0-25	0-25	0-25		162	26403
H	0-25		75-100	0-25	0-25	0-25		567	15514
I	0-25		75-100	0-25	0-25		0-25	781	14559
J	0-25	0-25	75-100	0-25	0-25			786	15540
K		0-25	75-100	0-25	0-25			787	13874
L			75-100	0-25		0-25		794	19795
VIII-20			75-100		0-25	0-25	0-25	73	15288
VIII-20A	0-25		75-100		0-25		0-25	13	19640
B			75-100		0-25		0-25	62	19193
C	0-25		75-100	0-25		0-25	0-25	108	13981
D	0-25		75-100		0-25	0-25	0-25	571	16824
IX-21			50-75	0-25	0-25	0-25		176D	26303
IX-21A	0-25		50-75	0-25	0-25	0-25		18	20806
B			50-75	0-25	0-25			38	23059
C		0-25	50-75	0-25	0-25	0-25		39	25791
D		0-25	50-75	0-25	0-25	0-25	0-25	176C	15958
E		0-25	50-75	0-25		0-25		180	30850
F	0-25	0-25	50-75	0-25	0-25			263	13068
G	0-25	0-25	50-75	0-25	0-25	0-25		357C	8901
H	25-50		50-75	0-25	0-25			540	19636
I		25-50	50-75	0-25	0-25	0-25		656	12613
J		25-50	50-75		0-25	0-25			
IX-22			50-75	0-25	0-25		0-25		
IX-22A	0-25		50-75	0-25	0-25		0-25	11	21480
B		25-50	50-75	0-25	0-25			172	16349
C		0-25	50-75	0-25	0-25		0-25	562	12595
IX-23			50-75		0-25	0-25	0-25	115	20846
IX-23A	25-50		50-75		0-25	0-25	0-25	117	11455
B		25-50	50-75		0-25			657	12650
X-24			50-75	25-50					
X-24A		0-25	50-75	25-50	0-25	0-25		16	21400
B		0-25	50-75	25-50	0-25			166	19464
C			50-75	25-50	0-25			511	12431

Table B-I (Continued)

SLA Class	Land-Use Classification							Typical C/T No.	Estimated Average Density
	Open	R1	R2	RM	B	BH	M		
XI-25			50-75		0-25	0-25	25-50	106	10953
XI-25A			50-75		0-25		25-50	12	26321
B			50-75	0-25	0-25		25-50	113	10698
C	0-25		50-75	0-25	0-25	0-25	25-50	114	11984
D	0-25		50-75	0-25	0-25		25-50	174	11793
E			50-75	0-25	0-25	0-25	25-50	520	16416
F	0-25		50-75		0-25		25-50	572	12786
G	0-25		50-75	0-25		0-25	25-50	756	19107
XI-26			50-75				25-50		
XI-27		0-25	25-50	0-25	0-25	0-25	25-50	42	12270
XI-27A	25-50		25-50		0-25	0-25	25-50	10	16383
B			25-50	0-25		0-25	25-50	21	14996
C		0-25	0-25	0-25	0-25	25-50	25-50	22	6121
D	0-25		25-50	0-25	0-25		25-50	26	16785
E	0-25		25-50		0-25		25-50	61	7293
F			25-50		0-25		25-50	65	14120
G	0-25		25-50	0-25		0-25	25-50	74	12846
H	0-25		25-50	0-25	0-25	0-25	25-50	101	12057
I			25-50			0-25	25-50	104	13231
J	0-25		25-50		0-25	0-25	25-50	105	7605
K	0-25	0-25	25-50	0-25	0-25		0-25	170	10876
L		0-25	25-50		0-25	0-25	25-50	211	9994
M			25-50	25-50	0-25	0-25	25-50	504	11255
N	25-50			0-25	0-25		25-50	538	18979
O			25-50	0-25	0-25	0-25	25-50	548	15805
P	25-50		0-25	0-25	0-25		25-50	556	24595
Q	25-50		25-50		0-25		25-50	566	13822
R	25-50		25-50	0-25	0-25		25-50	570	18172
S	25-50	0-25	0-25		0-25	0-25	25-50	611	4492
T	25-50	0-25	0-25	25-50	0-25	0-25	25-50	757	15399
XII-28			25-50	25-50	0-25	25-50			
XII-28A	0-25		25-50	25-50	0-25			7	17191
B	0-25		25-50	25-50	0-25	25-50		25	9470
C			25-50	25-50	0-25	0-25		27	20847
D	0-25		25-50	25-50		25-50		29	28879
E	0-25		25-50	25-50	0-25	25-50	0-25	37	15007
F		0-25	25-50	25-50	0-25	0-25		40	21481
G			25-50	25-50	0-25		0-25	43	20761
H	25-50		25-50	25-50	0-25	0-25		67	18809
I	0-25		25-50	25-50	25-50			175	17722
J	0-25		25-50	25-50	0-25	0-25	0-25	212	12947
K	25-50		25-50	25-50	0-25	0-25	0-25	510	19648
L		0-25	25-50	25-50	0-25			759	29896
XII-29			0-25	25-50	0-25	25-50			
XII-29A	0-25			25-50		25-50		24	7718
B				25-50	0-25	25-50	0-25	34	19111
C	0-25	0-25	0-25	25-50	25-50	25-50	0-25	35	15053
D		0-25	0-25	25-50	0-25	0-25	0-25	169	15783

Table B-I (Continued)

SLA Class	Open	Land-Use Classification						Typical C/T No.	Estimated Average Density
		R1	R2	RM	B	BH	M		
E	0-25	0-25	0-25	25-50	0-25	0-25		182	16441
F				25-50		0-25	25-50	505	6573
G				0-25		25-50	25-50	506	2833
H				25-50		25-50	0-25	528	10150
I				25-50	0-25		25-50	541	23469
XII-30	0-25			75-100	0-25	0-25	0-25	28	51252
XII-30A	0-25	0-25	0-25	75-100		0-25		152	22196
B			0-25	75-100		0-25		165	17500
C		0-25		75-100	0-25	0-25		189	20996
D				75-100	0-25	0-25		509	3487
E				75-100	0-25			534	22117
F	0-25			75-100	0-25				
XII-31		0-25	0-25	50-75	0-25	0-25	0-25		
XII-31A	0-25		0-25	50-75	0-25	25-50		30	38355
B				50-75	0-25	25-50		151	15504
C		0-25	0-25	50-75	0-25	0-25		153	32887
D		0-25	25-50	50-75		0-25		184	30487
E	25-50		0-25	50-75		0-25		187	51353
F	0-25	0-25	25-50	50-75	0-25	0-25		188	21082
G	0-25	0-25	0-25	50-75	0-25		25-50	213	16081
H		0-25		50-75	0-25	0-25	0-25	357A	14517
I			0-25	50-75	0-25		25-50	539	23551
J	0-25			50-75	0-25	0-25	25-50	543	18017
K		25-50	0-25	50-75	0-25	0-25		553	17859
L	25-50	0-25	0-25	50-75	0-25	0-25		758	10098
XIII-32			0-25	0-25	0-50	50-100			
XIII-32A						75-100	0-25	1	4257
B				0-25		75-100		31	25402
C				50-75		50-75		32	34910
D	0-25				0-25	75-100		33	12935
E	0-25			0-25	0-25	50-75	0-25	508	8755
F						100		530	3984
XIV-33		25-50			0-25		50-75	402A	3485
XIV-33A		25-50	0-25		0-25	0-25	50-75	57B	6325
B			0-25		0-25		50-75	554	15245
C		25-50	0-25		0-25		50-75	601A	4293
D	0-25	25-50			0-25		50-75	622	4168
E	0-25	25-50	0-25	0-25	0-25		50-75	667A	3600
XIV-34			25-50	0-25		0-25	50-75		
XIV-34A			0-25		0-25	0-25	50-75	4	5866
B			0-25	0-25	0-25		50-75	5	11331
C			0-25			0-25	50-75	20	4771
D			25-50		0-25		50-75	54	7879
E	0-25		25-50		0-25		50-75	55	7287
F			0-25	0-25	0-25	0-25	50-75	66	10559
G		0-25	25-50			0-25	50-75	255	5630
H			25-50	0-25	0-25	0-25	50-75	503	10522
I						25-50	50-75	527	5366

Table B-I (Continued)

SLA Class	Open	Land-Use Classification						Typical C/T No.	Estimated Average Density
		R1	R2	RM	B	BH	M		
J	0-25			0-25	0-25	0-25	50-75	546	6739
K	0-25	0-25	25-50	0-25	0-25		50-75	565	2539
L			25-50	0-25	0-25		50-75	519	15804
M			25-50	0-25	0-25	0-25	50-75	774	14371
XV-35		0-25	0-25	0-25	0-25	0-25	75-100		
XV-35A				0-25	0-25	0-25	75-100	2	4461
B			0-25	0-25	0-25	0-25	75-100	3	5862
C	0-25		0-25	0-25	0-25		75-100	6	3708
D	0-25		0-25	0-25		0-25	75-100	23	1486
E							100	51	5773
F	0-25		0-25	0-25			75-100	52	6459
G	0-25		0-25				75-100	53	5835
H			0-25	0-25	0-25		75-100	63	3037
I			0-25	0-25		0-25	75-100	502	5118
J			0-25		0-25		75-100	517	12511
K	0-25			0-25			75-100	547	3844
L			0-25	0-25			75-100	555	15739
M	0-25		0-25			0-25	75-100	655	6943
N	0-25	0-25	0-25			0-25	75-100	755	8876
O			0-25		0-25	0-25	75-100	789	4274

Appendix C

Problem Definition Criteria



Table C-I

## RESPONSE OF STRUCTURES TO NUCLEAR DETONATION (5-MT SURFACE)

SLA Class	Damage Criteria*	Distance from Ground Zero (Miles)													
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
I	Blast, Severe (S)	100	100	100	80	48	28	8	4	0	0	0	0	0	0
	Light (L)	100	100	100	100	88	58	40	20	8	8	8	8	0	0
	Debris	100	100	100	85	50	40	10	1	0	0	0	0	0	0
	Ignition	.1	.1	.1	.1	.1	.1	.1	.1	.1	.098	.08	.06	.04	.013
IV	Blast, S	100	92	90	82	65	33	15	0	0	0	0	0	0	0
	L	100	92	92	92	85	70	52	30	15	8	0	0	0	0
	Debris	100	91	85	79	36	24	14	4	2	0	0	0	0	0
	Ignition	.198	.198	.198	.198	.198	.198	.198	.198	.198	.197	.191	.160	.133	.046
VI	Blast, S	100	100	86	74	47	15	7	0	0	0	0	0	0	0
	L	100	100	92	89	71	47	30	15	0	0	0	0	0	0
	Debris	100	92	81	67	54	5	0	0	0	0	0	0	0	0
	Ignition	.276	.276	.276	.276	.276	.276	.276	.276	.276	.276	.24	.24	.144	.044
XIII	Blast, S	100	100	68	48	32	10	5	0	0	0	0	0	0	0
	L	100	100	100	68	48	32	20	10	5	0	0	0	0	0
	Debris	100	100	79	67	55	24	12	8	4	0	0	0	0	0
	Ignition	.239	.239	.239	.239	.239	.239	.239	.239	.239	.233	.194	.194	.100	.044
XV	Blast, S	100	100	59	30	16	9	5	0	0	0	0	0	0	0
	L	100	100	78	59	30	16	12	9	6	3	0	0	0	0
	Debris	100	69	65	48	28	11	8	5	0	0	0	0	0	0
	Ignition	.735	.735	.735	.735	.735	.735	.735	.735	.735	.733	.68	.68	.425	.068
	Expected Damage: %														
	Comm. (Mod.)	1.00	.98	.80	.30	.04	.01	0							
	Bridges (Sev.)	1.00	.80	.13	.07	0	0	0							
	Vehicles (Sev.)	1.00	.97	.67	.14	.01	0	0							
	Water and Gas Lines	Sev.	Moderate		Light										
	Tel. Poles	Moderate													
	Minimum entry time # to get <100R dose for 1 hr. stay time	--	--	24	22	20	19	17	15	12	12	9	9	6	4

\* Blast and debris expressed as the percent of the structures damaged; ignition as the probability of fires started.

% Probability or degree of stated damage.

# Time in minutes.

Table C-II

## PERCENT STRUCTURAL DISTRIBUTION BY LAND-USE CLASS

SLA Class	LAND-USE CLASS						
	Open	Single Family	Two Family	Multiple Family	Small Business	High Business	Manufacturing
I	75	8	--	--	8	--	8
II	50	25	--	--	13	--	12
III	25	50	--	6	6	6	6
IV	4	75	4	4	4	4	4
V	--	50	10	10	10	10	10
VI	--	25	8	8	8	--	25
VII	--	25	25	17	17	17	--
VIII	--	--	75	6	6	6	6
IX	--	--	50	12	12	12	12
X	--	--	62	38	--	--	--
XI	--	--	25	16	16	17	25
XII	--	--	32	25	17	25	--
XIII	--	--	--	25	25	50	--
XIV	--	14	14	7	7	7	50
XV	--	5	5	5	5	5	75

Source: Developed from Table I.

Table C-III

PROBABILITY OF SIGNIFICANT STRUCTURAL FIRE (5-MT SURFACE)

LAND USE	Distance from ground zero (miles)							
	>22	22	16	13	12	10	9	8
	Thermal exposure (CAL/cm <sup>2</sup> )							
	-	5	10	15	20	25	30	40
Single family residential, R <sub>1</sub>	0	0	.02	.05	.14	.20	.21	.21
Two family residential, R <sub>2</sub>	0	.02	.05	.07	.12	.15	.16	.16
Multifamily residential, R <sub>m</sub>	0	0	.05	.12	.26	.37	.39	.39
Small business, B	0	0	0	.07	.30	.47	.54	.56
High business, BH	0	0	0	.03	.25	.50	.53	.54
Manufacturing, M	0	0	0	.01	.025	.03	.03	.03

Source: "Evaluation of Nuclear War on Thermal Threat," SRI.

"Nuclear War and the Urban Fire Problem," Dikewood Corporation.

Table C-IV

PERCENT OF STRUCTURES DAMAGED (DEBRIS) - (5-MT SURFACE)

LAND USE	Distance from ground zero (miles)										2.0
	9.5	8.0	6.0	5.2	4.7	4.2	3.7	3.2	2.7		
	Overpressure (PSI)										
	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	15.0	20.0	25.0
Single family residential, R <sub>1</sub>	0	0	1.5	15	40	44	70.5	98	98		98
Two family residential, R <sub>2</sub>	0	0	1.5	15	39	44	69	98	98		98
Multifamily residential, R <sub>m</sub>	0	0	1	8	23	26	51	78	85		97
Small business, B	0	23	50	52	56	57	60	74	76		100
High business, BH	0	9	22	22	23	26	44	65	80		97
Manufacturing, M	0	14	31	31	32	33	45	59	82		97

Source: "Formation of Debris from Buildings and Their Contents by Blast and Fire Effects of Nuclear Weapons," URS Corporation.

"Structural Debris Caused by Nuclear Blast," URS Corporation

Table C-V

## PERCENT OF STRUCTURES DAMAGED (BLAST) - (5-MT SURFACE)

LAND USE	PV CATEGORY				
	A	B	C	D	E
	PSI				
	1.1-2	2.1-3	3.1-5	5.1-7	7.1-10
Single family residential, R <sub>1</sub>	38	50	10	--	--
Two family residential, R <sub>2</sub>	36	26	26	10	--
Multifamily residential, R <sub>m</sub>	21	13	30	5	29
Small business, B	--	12	78	5	5
High business, BH	--	2	33	44	18
Manufacturing, M	--	19	27	30	21

Appendix D

Bibliography

## Bibliography

1. Devaney, John F., Systems Analysis in Civil Defense, Parts I and II, OCD Research Memorandum, Washington, D. C.: 1963
2. Devaney, John F., Civil Defense Research Analysis. Research Report No. 11. Washington, D. C.: Office of Civil Defense, Research Directorate. December 15, 1966.
3. OCD Research and Technology Resumes. DD 1498. Washington, D. C.: Office of Civil Defense. 15 June 1966.
4. Shapero, Albert, Stanford Research Institute and Charles Bates, Jr., Aerospace Medical Laboratory. A Method for Performing Human Engineering Analysis of Weapon Systems. Wright Air Development Center, Air Research and Development Command, United States Air Force, Wright-Patterson Air Force Base, Ohio. May 5, 1960.
5. Hall, Arthur D., A Methodology for Systems Engineering. Bell Telephone Laboratories. 1962
6. A Provisional Concept of Emergency Operations Under Nuclear Attack. Washington, D. C.: Office of Civil Defense. 10 November 1966.
7. Strobe, W. E., Radiological Defense Measures as a Countermeasure System. Research and Development Technical Report USNRDL-TR-74, NS083001. San Francisco, California: U. S. Naval Radiological Defense Laboratory. February 15, 1956.
8. Brooks, E. R., Functions and Responsibilities in Civil Defense. RM-134-1. Research Triangle Park, North Carolina: Research Triangle Institute, Operations Research and Economics Division. 16 August 1963.
9. Federal Civil Defense Guide, Parts A-E, Washington, D. C.: Department of Defense, Office of Civil Defense. 1963-1966.
10. Five-City Study. Guide for Participants. 5x-xxxxx-4000-1. Washington, D. C.: Systems Evaluation Division, Research Directorate, Office of Civil Defense. 1 May 1965. (For Official Use Only)
11. Five-City Study. Process Description and Flow Diagram. 5x-xxxxx-4000-5, Washington, D. C.: Department of the Army, Office of Civil Defense. March 3, 1966.
12. Five-City Study. Progress Report. 5x-11101-4000-5. Washington, D. C.: Department of the Army, Office of Civil Defense. November 1, 1965.

13. Five-City Study. Specifications for Damaged Target Model. 5x-11101-4000-5. Washington, D. C.: Department of the Army, Office of Civil Defense. November 15, 1965. (For Official Use Only)
14. Five-City Study. Specifications for Generalized Attack Environment. Working Draft. Washington, D. C.: Department of the Army, Office of Civil Defense. (For Official Use Only)
15. Kepple, Charles, and Charles Anderson. Detroit Prestudy. First Draft. Washington, D. C.: Office of Civil Defense. February 1, 1966.
16. Harker, Robert A., City of Detroit Attack Preparation Scenario. 5D-11101-4123B-04. Menlo Park, California: Stanford Research Institute. February 1966. (For Official Use Only)
17. Detroit Civil Defense Plan. Plan No. 0.0. Detroit, Michigan: City of Detroit, Office of Civil Defense. Revised March 1964. DB 65-0246.
18. Detroit Civil Defense Plan (partial). No. 1.0 to 1.3 (3). Detroit, Michigan: City of Detroit, Office of Civil Defense. DB 65-0247.
19. Detroit Civil Defense Plan (SOP) annex IV. DB 65-0241.
20. Detroit Civil Defense Plan, Appendix VII. DB 65-0240.
21. Detroit Manpower Review - 4 issues, January thru May 1966. DB 65-0173.
22. The Real Detroit. DB 65-0163.
23. Land Use in the Detroit Region. August 1959. DB 65-0165.
24. Bibliography of Reports Published by the Regional Planning Commission. May 1965. DB 65-0168.
25. Detroit and Southeastern Michigan (map). DB 65-0179.
26. Operating Report (69th) Public Lighting Commission, Detroit, Mich.: 30 June 1964. DB 65-0190.
27. Organization Chart - Detroit. DB 65-0199.
28. Travel Survey Conducted for TALUS. DB 65-0204.
29. Information Manual for Use at Detroit Control Center. September 1964. DB 65-0205.
30. Civil Defense - Alert Assignment Procedures. DB 65-0208.
31. Grocery Store Report. June 1964. DB 65-0209.
32. Radio Scripts for the Emergency Broadcast System. DB 65-0211.

33. Selection of Managers in the Public Fallout Shelter Program. DB 65-0242.
34. Civil Defense in Detroit. Public relations information. DB 65-0248.
35. Civil Defense Planning Guide. DB 65-0250.
36. Executives' Handbook Facts & Figures About the Greater Detroit Area 1964-1965. DB 65-0169.
37. Organizational Charts - City of Detroit. DB 65-0198.
38. Organization Charts - City of Detroit. DB 65-0200.
39. Plan for the Emergency Broadcast System in Michigan. 3 May 1965. DB 65-0210.
40. Population Projections in the Detroit Region 1970 - 1980. DB 65-0220.
41. Bibliography of Reports (by State and the Detroit Metropolitan Area). DB 65-0224.
42. Official Zoning Ordinance of the City of Detroit. February 1963.
43. Land Use Generalized Plan; City of Detroit Master Plan, City Plan Commission.
44. Community Shelter Plan, City of Detroit. August 1966.
45. "Evaluation of Nuclear Weapon Thermal Threat," Stanford Research Institute.
46. "Formation of Debris From Buildings and Their Contents by Blast and Fire Effects of Nuclear Weapons," URS.
47. National Fallout Shelter Survey, OCD.
48. "Effects of Nuclear Weapons," Glasstone.
49. "Development of 'Typical' Urban Area and Associated Casualty Curves," Dikewood Corporation.
50. "Nuclear War and The Urban Fire Problem," Dikewood Corporation.
51. "Analysis of Japanese Nuclear Casualty Data," Dikewood Corporation.
52. "Significant Primary Fires From Nuclear Detonations," Stanford Research Institute.

53. "Structural Debris Caused by Nuclear Blast," URS Corporation.
54. "National Community Shelter Planning Programs," Part D, Chapter 3 Appendix 1, Federal Civil Defense Guide.
55. "Effects of Fire or Structural Debris Produced by Nuclear Blast," Research Report, URS Corporation.
56. "Prediction of Casualties From Land Surface Nuclear Detonations," Research and Development Technical Report, USNRDL-TR-109.
57. "Survey of Thermal Threat of Nuclear Weapons", Stanford Research Institute, Project No. 1MU-4021.

THE RESEARCH TRIANGLE INSTITUTE, Research Triangle Park, North Carolina  
OCD Work Unit 4113E - Preliminary Report R-OU-230-2

Detroit Civil Defense Operating System Synthesis - Volume II Technical Approach.  
Preliminary Report.  
Robert N. Hendry. January 1968. (UNCLASSIFIED)

The technical approach to the description of the Detroit Civil Defense Operating System is described in this volume; a preliminary system description is presented in the first volume.

The Detroit Civil Defense Operating System is an example of a local system synthesized as a basis for a systems analysis. A diagrammatic description, adopted in support of a narrative description to show the system's functional and physical aspects, can be developed in greater levels of detail as more information is developed.

The primary tasks in developing the diagrams were to identify and classify the controls, functions, and components and to interrelate them to show the operation of the total system. First, the elements were identified and classified by time phases within the emergency period. Second, functions and components were reassembled into a time-phased set of operations to solve civil defense problems occurring in small areas of the city.

The system description takes the form of: (1) a set of time-phased functional flow block diagrams representing functions needed to minimize or solve defined problems; (2) a resource organization assignment matrix needed to assign functions to the various system components; and (3) a schematic block diagram showing the utilization of resources needed to solve the problems occurring in the individual operating areas. The system diagram developed during the study shows all three forms of the description and represents a basic civil defense operating subsystem. The total system should be visualized as many basic subsystems operating simultaneously.

CIVIL DEFENSE SYSTEMS, SYSTEMS SYNTHESIS, SYSTEMS ANALYSIS, COMPONENTS, MISSIONS, OPERATIONS, DIAGRAMS

THE RESEARCH TRIANGLE INSTITUTE, Research Triangle Park, North Carolina  
OCD Work Unit 4113E - Preliminary Report R-OU-230-2

Detroit Civil Defense Operating System Synthesis - Volume II Technical Approach.  
Preliminary Report.  
Robert N. Hendry. January 1968. (UNCLASSIFIED)

The technical approach to the description of the Detroit Civil Defense Operating System is described in this volume; a preliminary system description is presented in the first volume.

The Detroit Civil Defense Operating System is an example of a local system synthesized as a basis for a systems analysis. A diagrammatic description, adopted in support of a narrative description to show the system's functional and physical aspects, can be developed in greater levels of detail as more information is developed.

The primary tasks in developing the diagrams were to identify and classify the controls, functions, and components and to interrelate them to show the operation of the total system. First, the elements were identified and classified by time phases within the emergency period. Second, functions and components were reassembled into a time-phased set of operations to solve civil defense problems occurring in small areas of the city.

The system description takes the form of: (1) a set of time-phased functional flow block diagrams representing functions needed to minimize or solve defined problems; (2) a resource organization assignment matrix needed to assign functions to the various system components; and (3) a schematic block diagram showing the utilization of resources needed to solve the problems occurring in the individual operating areas. The system diagram developed during the study shows all three forms of the description and represents a basic civil defense operating subsystem. The total system should be visualized as many basic subsystems operating simultaneously.

CIVIL DEFENSE SYSTEMS, SYSTEMS SYNTHESIS, SYSTEMS ANALYSIS, COMPONENTS, MISSIONS, OPERATIONS, DIAGRAMS

THE RESEARCH TRIANGLE INSTITUTE, Research Triangle Park, North Carolina  
OCD Work Unit 4113E - Preliminary Report R-OU-230-2

Detroit Civil Defense Operating System Synthesis - Volume II Technical Approach.  
Preliminary Report.  
Robert N. Hendry. January 1968. (UNCLASSIFIED)

The technical approach to the description of the Detroit Civil Defense Operating System is described in this volume; a preliminary system description is presented in the first volume.

The Detroit Civil Defense Operating System is an example of a local system synthesized as a basis for a systems analysis. A diagrammatic description, adopted in support of a narrative description to show the system's functional and physical aspects, can be developed in greater levels of detail as more information is developed.

The primary tasks in developing the diagrams were to identify and classify the controls, functions, and components and to interrelate them to show the operation of the total system. First, the elements were identified and classified by time phases within the emergency period. Second, functions and components were reassembled into a time-phased set of operations to solve civil defense problems occurring in small areas of the city.

The system description takes the form of: (1) a set of time-phased functional flow block diagrams representing functions needed to minimize or solve defined problems; (2) a resource organization assignment matrix needed to assign functions to the various system components; and (3) a schematic block diagram showing the utilization of resources needed to solve the problems occurring in the individual operating areas. The system diagram developed during the study shows all three forms of the description and represents a basic civil defense operating subsystem. The total system should be visualized as many basic subsystems operating simultaneously.

CIVIL DEFENSE SYSTEMS, SYSTEMS SYNTHESIS, SYSTEMS ANALYSIS, COMPONENTS, MISSIONS, OPERATIONS, DIAGRAMS

THE RESEARCH TRIANGLE INSTITUTE, Research Triangle Park, North Carolina  
OCD Work Unit 4113E - Preliminary Report R-OU-230-2

Detroit Civil Defense Operating System Synthesis - Volume II Technical Approach.  
Preliminary Report.  
Robert N. Hendry. January 1968. (UNCLASSIFIED)

The technical approach to the description of the Detroit Civil Defense Operating System is described in this volume; a preliminary system description is presented in the first volume.

The Detroit Civil Defense Operating System is an example of a local system synthesized as a basis for a systems analysis. A diagrammatic description, adopted in support of a narrative description to show the system's functional and physical aspects, can be developed in greater levels of detail as more information is developed.

The primary tasks in developing the diagrams were to identify and classify the controls, functions, and components and to interrelate them to show the operation of the total system. First, the elements were identified and classified by time phases within the emergency period. Second, functions and components were reassembled into a time-phased set of operations to solve civil defense problems occurring in small areas of the city.

The system description takes the form of: (1) a set of time-phased functional flow block diagrams representing functions needed to minimize or solve defined problems; (2) a resource organization assignment matrix needed to assign functions to the various system components; and (3) a schematic block diagram showing the utilization of resources needed to solve the problems occurring in the individual operating areas. The system diagram developed during the study shows all three forms of the description and represents a basic civil defense operating subsystem. The total system should be visualized as many basic subsystems operating simultaneously.

CIVIL DEFENSE SYSTEMS, SYSTEMS SYNTHESIS, SYSTEMS ANALYSIS, COMPONENTS, MISSIONS, OPERATIONS, DIAGRAMS

UNCLASSIFIED

Security Classification

**DOCUMENT CONTROL DATA - R&D**

*(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)*

<b>1. ORIGINATING ACTIVITY (Corporate author)</b> Research Triangle Institute Post Office Box 12194 Research Triangle Park, North Carolina 27709		<b>2a. REPORT SECURITY CLASSIFICATION</b> Unclassified	
		<b>2b. GROUP</b>	
<b>3. REPORT TITLE</b>  Detroit Civil Defense Operating System Synthesis, Volume II			
<b>4. DESCRIPTIVE NOTES (Type of report and inclusive dates)</b> Preliminary Report			
<b>5. AUTHOR(S) (Last name, first name, (initial))</b> Hendry, Robert N.			
<b>6. REPORT DATE</b> January 1968		<b>7a. TOTAL NO. OF PAGES</b>	<b>7b. NO. OF REFS</b> 8
<b>8a. CONTRACT OR GRANT NO.</b> OCD-PS-64-56		<b>8b. ORIGINATOR'S REPORT NUMBER(S)</b> R-OU-230-2	
<b>b. PROJECT NO.</b> Work Unit 4113E			
<b>c. Systems Evaluation Division</b>			
<b>d. OCD Research Directorate</b>		<b>9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)</b>	
<b>10. AVAILABILITY/LIMITATION NOTICES</b>  Limited Distribution. This document may be further distributed by any holder only with specific prior approval of the Office of Civil Defense.			
<b>11. SUPPLEMENTARY NOTES</b>		<b>12. SPONSORING MILITARY ACTIVITY</b> Office of Civil Defense (OCD) Department of the Army Washington, D. C. 20310	
<b>13. ABSTRACT</b> The technical approach to the description of the Detroit Civil Defense Operating System is described in this volume; a preliminary system description is presented in the first volume.  The Detroit Civil Defense Operating System is an example of a local system synthesized as a basis for a systems analysis. A diagrammatic description, adopted in support of a narrative description to show the system's functional and physical aspects, can be developed in greater levels of detail as more information is developed.  The primary tasks in developing the diagrams were to identify and classify the controls, functions, and components and to interrelate them to show the operation of the total system. First, the elements were identified and classified by time phases within the emergency period. Second, functions and components were reassembled into a time-phased set of operations to solve civil defense problems occurring in small areas of the city.  The system description takes the form of: (1) a set of time-phased functional flow block diagrams representing functions needed to minimize or solve defined problems, (2) a resource organization assignment matrix needed to assign functions to the various system components, and (3) a schematic block diagram showing the utilization of resources needed to solve the problems occurring in the individual operating areas. The system diagram developed during the study shows all three forms of the description and represents a basic civil defense operating subsystem. The total system should be visualized as many basic subsystems operating simultaneously.			

DD FORM 1473  
1 JAN 64

UNCLASSIFIED

Security Classification

KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
CIVIL DEFENSE SYSTEMS SYSTEMS SYNTHESIS SYSTEMS ANALYSIS COMPONENTS MISSIONS DIAGRAMS OPERATIONS						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive date: when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures. I.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.