UNCLASSIFIED

AD NUMBER
ADA800299
CLASSIFICATION CHANGES
TO: **unclassified**
FROM: **restricted**
LIMITATION CHANGES
TO: **Approved for public release; distribution is unlimited.**
FROM: **Distribution authorized to DoD only; Administrative/Operational Use; 15 JAN 1952. Other requests shall be referred to Aeronautical systems Division, Wright-Patterson AFB, OH 45433. Pre-dates formal DoD distribution statements. Treat as DoD only.**
AUTHORITY
ASD ltr dtd 16 Jul 1970; ASD ltr dtd 16 Jul 1970

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

A.T.I 131218

Armed Services Technical Information Agency

ARLINGTON HALL STATION
ARLINGTON 12 VIRGINIA

"NOTICE: When Government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the U.S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto."

CLASSIFICATION CHANGED TO UNCLASSIFIED

BY AUTHORITY OF ASTIA RECLASS. BULLETIN

Date: June 24, 1958. Signed Richard L. Reedy
OFFICE SECURITY ADVISOR

RESTRICTED

[illegible] (COPIES OBTAINABLE FROM ASTIA-DSC)

[illegible] INSTITUTE OF TECHNOLOGY, ARMOUR RESEARCH FOUNDATION, CHICAGO (REPORT NO. 90-783A-12)

FINAL ENGINEERING REPORT ON RESEARCH AND DEVELOPMENT OF COUNTERMEASURES RECORDING EQUIPMENT, MODELS, TEST EQUIPMENT, AND REPORTS - AND APPENDIX A - VOL. I - MAGNETIC RECORDING - [illegible] THRU 31 DEC 1951

[illegible], W.R.; TOBEY, A.R.; MILLER, H.C. (SUBMITTERS)
[illegible] DEPT PHOTOS, DIAGRS, GRAPHS

USAF CONTR. NO. AF-33(038)-8921

RECORDERS, MAGNETIC
RECORDING AND PLAYBACK EQUIPMENT
COUNTERMEASURES, ELECTRONIC

ELECTRONICS (3)
COMMUNICATIONS (1)

RESTRICTED

RESTRICTED

Report No. 90-783A-12

RESEARCH AND DEVELOPMENT OF COUNTER MEASURES RECORDING EQUIPMENT, MODELS TEST EQUIPMENT, AND REPORTS

Final Engineering Report

Volume I. Magnetic Recording

ARMOUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

Armour Research Foundation
of
Illinois Institute of Technology
Technology Center
Chicago 16, Illinois

Report No. 90-783A-12
FINAL ENGINEERING REPORT
on

RESEARCH AND DEVELOPMENT OF COUNTER MEASURES RECORDING EQUIPMENT, MODELS, TEST EQUIPMENT, AND REPORTS

Volume I. Magnetic Recording

Period Covered: 1 December 1949 through 31 December 1951
Date of Report: 15 January 1952
Contract No.: AF 33(038)-8921
Expenditure Order No.: 57 x 4600 06-1700 P829-07 533-038

ABSTRACT

The results of efforts to increase the bandwidth of a single magnetic recording channel to include 20 to 5×10^6 cps are reported. This program consisted of experimental work aimed directly at the problem and both experimental and theoretical studies aimed at furthering basic knowledge of magnetic recording.

The ultimate goal was not realized although the upper frequency limit of magnetic recording was significantly raised, and the problems involved were more clearly defined.

Present efforts have resulted in marginal record and playback of 1.4 mc using a Ferroxcube III head and plastic tape moving at 1,000 inches per second. The present bar to a substantial increase in the maximum frequency is the mechanical problem of maintaining good contact between head and tape at high tape speeds. In view of these limitations emphasis was shifted to other recording methods in July 1950.

RESTRICTED

THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE ACT, U.S.C. 59: 31 AND 32. THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.

Copy No. 66

TABLE OF CONTENTS

	Page
Part I	
A. Purpose	1
B. General Factual Data	1
1. References	1
2. Formulae	2
3. Symbols	3
C. Detail Factual Data	5
1. Present State of Magnetic Recording	5
a. General	5
b. Previous Work Accomplished at Armour Research Foundation	7
2. Work Accomplished During This Contract	9
a. Extension of Fundamental Magnetic Knowledge	9
b. Extension of the Frequency Limits of Magnetic Recording	18
D. Conclusions	35
Part II	
A. Recommendations	37
B. Contributing Personnel	37
Part III	
Figure 1. Hysteresis Loops for Magnetic Models	
Figure 2. Circuit for 60 Cycle Measurements on Ferroxcube III Core	
Figure 3. Normal Induction and Permeability Curves for Ferroxcube III	
Figure 4. Cathode-Ray Oscillograph Hysteresis Traces	

Figure 5. Frequency Response with 10 mil Playback Head

Figure 6. Frequency Response with 20 mil Playback Head

Figure 7. Frequency Response with 36 mil Recording Head

Figure 8. Frequency Response with 2 mil Recording Head

Figure 9. Plot of Field Near Recording Head Gap

Figure 10. Single Edge Head

Figure 11. Frequency Response with Single Edge Record Head

Figure 12. Sketch of Zero Gap Heads

Figure 13. Wide Gap and Zero Gap Heads

Figure 14. Frequency Response, Zero Gap Head, +10 mil

Figure 15. Frequency Response, Zero Gap Head, -10 mil

Figure 16. Frequency Response, Zero Gap Head, +2 mil

Figure 17. Frequency Response, Zero Gap Head, -2 mil

Figure 18. Frequency Response, Zero Gap Head, Very Small Negligible Gap

Figure 19. High Speed Drive

Figure 20. Damaged Tape

Figure 21. Deposits on Head

Figure 22. Ferroxcube III Head

Figure 23. Frequency Characteristics of Heads

Figure 24. Inductance and Q of Ferroxcube III Head

Figure 25. Playback Gap Effects of Heads

Figure 26. Frequency Test Circuit

Figure 27. Record-Playback System Circuit

Figure 28. Frequency Response at High Speeds

Appendix A. Bibliography of Magnetic Recording.

COUNTER MEASURES RECORDING EQUIPMENT

Part I

A. Purpose

It is desired that the art of recording be advanced far beyond its present state, so as to ultimately permit the construction of equipment having the characteristics described in Exhibit MCREE-565. A basic aim is the continuous recording of signals having component frequencies of 20 to 5×10^6 cps. This work has been done for the Air Force under Contract AF 33 (038)-6921.

The first method to be investigated, and the one to which this volume of the Final Report is devoted, was magnetic recording. The problem was to investigate, both experimentally and theoretically, means by which the bandwidth of magnetic recording could be expanded. An investigation of fundamental magnetic processes was carried forward at the same time since these processes are fundamental to magnetic recording.

B. General Factual Data

1. References

A bibliography of magnetic recording is given in Appendix A. In addition the following references are pertinent.

"Magnetic Recording Tapes", M. Camras, A.I.E.E. Trans., 66, 597, 1947.

"Graphical Analysis of Linear Magnetic Recording Using High Frequency Excitation", M. Camras, Proc. I.R.E., 37, 569, 1949.

"Magnetic Recording with AC Bias", R. E. Zenner, Proc. I.R.E., 39, February 1951.

H. Ekstein and T. L. Gilbert - Report on ARF Project No. 90-648A, Contract N171 s-85154.

Armour Research Foundation Licensee Bulletins.

2. Formulas

Below are listed formulas specifically used in this report; for details of derivation and other associated formulas and equations the reader is referred to the detailed interim reports Nos. 90-783A-1 through 4.

$$\bar{\nu} = \nu_x + j\nu_r \text{ and } \bar{\mu} = \mu_x + j\mu_r \tag{1}$$

$$\mu_x = \frac{\nu_x}{\nu_x^2 + \nu_r^2} \; ; \quad \mu_r = \frac{\nu_r}{\nu_x^2 + \nu_r^2} \tag{2}$$

$$\bar{Y} = \frac{\ell(\nu_r - j\nu_x)}{4\pi N^2 \omega a} \times 10^9 \text{ mhos} \tag{3}$$

$$\bar{Z} = \frac{4\pi \omega N^2 a}{\ell} (\mu_r + j\mu_x) \times 10^{-9} \text{ ohms} \tag{4}$$

$$M(T) = f\left[H(t)\right], \; 0 \leq t \leq T \tag{5}$$

$$m_1(T) = f\left[H(t)\right] = 1/h \int_0^T H(t)\, \delta(t-t_o)\, dt \tag{6}$$

$$m_2(T) = m_1(T) \left\{ 1 - F\left[h + m(T)\, H(T) \right] \right\} \tag{7}$$

$$M_3(T) = \int_0^{Hs} m_1(h, T)\, n(h)\, dh \tag{8}$$

$$M_4(T) = \int_0^{Hs} m_2(h, T)\, n(h)\, dh \tag{9}$$

$$V_1 = \sqrt{2}\,\pi f\, M I_m \tag{10}$$

$$H_m = \frac{0.4\,\pi\, N_1\, I_m}{\ell} \tag{11}$$

$$V_2 = \sqrt{2}\,\pi\, f\, \Phi_m\, N_2\, 10^{-8} \tag{12}$$

$$B_m = \frac{\Phi_m}{A} \tag{13}$$

3. Symbols:

μ - permeability of the core material, cgs units.

ν - reluctivity of the core material, cgs units.

$\bar{\mu}$ - complex permeability

$\bar{\nu}$ - complex reluctivity

a - cross-section of a ring of core material, cm^2

ℓ - mean length of ring core, cm

$\bar{I}$ - complex current, rms cgs units.

$\bar{B}$ - complex average flux density, rms cgs units.

$\bar{V}$ - complex current, rms cgs units.

ν_x - magnitude of real part of $\bar{\nu}$

ν_r - magnitude of imaginary part of $\bar{\nu}$

μ_x - magnitude of real part of $\bar{\mu}$

μ_r - magnitude of imaginary part of $\bar{\mu}$

$\bar{Y}$ - admittance of coil terminals, mhos.

$\bar{Z}$ - impedance at coil terminals, ohms.

j - $\sqrt{-1}$

M(T) - magnetization in material at time T, cgs units.

H(t) - magnetizing field, cgs units.

H_s - field required to saturate material.

T - time, seconds.

t - time variable measured from t_o.

t_o - last time H exceeded H_s, seconds.

$f[H(t)]$ - functional of $H(t)$

n - integers 1, 2, 3, 4, - - - -

h, - h - critical values of H at which particles "flip".

$m_1(T)$ - functional for first model.

$\delta(t-t_o)$ - Dirac delta function.

m - magnetization of single particle, cgs units.

$m_2(T)$ - functional for second model.

$F(x)$ - an unspecified function representing the curve along which m approaches the asymptote $\pm$ 1.

$M_3(T)$ - magnetization functional for third model.

$n(h)$ - relative volume of particles which have critical fields lying between h and h + dh

$M_4(T)$ - functional for fourth model.

H_m - peak magnetizing field, oersteds.

f - frequency, cps.

L - inductance, henries

I_n - peak current in sample primary, amperes.

N_1 - number of primary turns.

B_m - peak induction in sample, gausses

Φ_m - peak flux in sample

V_1, V_2 - Voltages measured as shown in Fig. 2

G - gap length of head

λ - recorded wave length in same units as gap length

K - empirical constant.

C. Detail Factual Data

1. Present State of Magnetic Recording

a. General

Magnetic recording as a method of importance is a relative newcomer to the recording field. It has seen the greatest development and use in the audio range (including most instrumentation applications), but there have been some special applications, such as computer memory devices and delay units, which have exceeded the audio range in upper frequency requirements, if not in pulse repetition rate. In general, the audio applications have the common characteristic that the head and record medium are in physical contact. On the other hand, in special applications both heads in contact and spaced heads have been used. The attempts to make use of spaced heads have been in connection with magnetic storage systems which have short access times.

Magnetic media fall into three categories; magnetic powders, magnetic platings, and solid magnetic materials. The powders and platings must be supported by some rigid or non-rigid material which is usually non-magnetic, while the solid magnetic materials are self-supporting. The magnetic powders are considered to have the highest resolution (best short wavelength response) but have a lower energy storage. The powders are usually coated on paper or plastic tape using a non-magnetic binder.

The heads used for most present day applications are the "open type", so named because the head structure does not surround the medium. Almost all magnetic recording is "longitudinal", therefore, the plane of the gap in the head is transverse to the direction of movement of the medium. In "longitudinal" recording the average field due to the head travels from one gap edge to the other in a direction which is parallel (or anti-parallel) to the direction of motion of the medium. This is to be contrasted with transverse recording in which the two sides of the gap are on opposite sides of the medium and the recording field passes through the medium essentially perpendicular to the direction of motion of the medium. The head structure is usually a single lamination bent into a "C" with the edges forming the gap, or a lamination (or stack of laminations), the plane of which is perpendicular to the plane of the gap. These heads are satisfactory for use at audio frequencies but at higher frequencies eddy current losses become important.

A large number of mechanical drives for magnetic recording have been built, ranging from low quality systems to more complicated systems with excellent speed characteristics. There has not been much work on high speed drives except for rotating drums using spaced heads and perhaps isolated special applications.

Very important to the field of magnetic recording have been investigations of the more general and fundamental aspects of magnetism. Theories of the fundamental mechanisms of magnetism are still not firmly established, although a number of empirically derived rules are used to practical advantage. These rules do not permit theoretical extension into new regions with any certainty.

b. Previous Work Accomplished at Armour Research Foundation

(1) High Frequency Magnetic Testers

Design considerations and some construction for an investigation of core material properties at high frequencies started prior to this project. In this work, which was Foundation sponsored, it was planned to investigate properties in the range of 20 to 80 KC (normal bias and erase frequencies for magnetic recording). Provision was to be made for testing materials at high inductions approaching saturation and to make measurements using sinusoidal flux waves, from which it would be possible to determine parameters relating effective permeability and loss per unit volume to the frequency and induction.

(2) 60 Cycle Hysteresis Loop Tracer

A hysteresis loop tracer, designed and built by D. E. Wiegand and W. W. Hansen (A.I.E.E. Trans., 66, 1947), has been used for determining the magnetic properties of small samples such as magnetic recording wires and tapes. The instrument operates at the power frequency (60 cps); and, therefore, does not give information which can be applied without question to operation at much higher frequencies. A paper describing this instrument may be found in Appendix C of Report No. 90-783-3 of this project. As a result of work with this instrument the Foundation was able to develop a number of correlations between B_r-H curves and performance factors (ease of erase, transfer, proper bias level, linearity, and frequency response), and to develop improved magnetic recording mediums (magnetic powders, 18-8 alloy for wires, plated nickel-cobalt).

(3) Theoretical Works

Theoretical analyses of demagnetization effects in magnetic recording have been made for wire by Camras (A.I.E.E. Trans., 66, 597, 1947) and for tapes by Ekstein and Gilbert (Project No. 90-648A, Contract N171 s-85154). These analyses involve idealizations which are not valid at very short wavelengths and therefore are not reliable for short wavelength prediction.

Harmonic analyses carried out by Camras (Proc. I.R.E., 37, 569, 1949) and Zenner (Proc. I.R.E., 39, No. 2, 1951) have been specifically directed towards explaining the effect of bias used in magnetic reocrding. The latter paper is more general and, hence, is more adaptable to further development.

The theory of playback phenomena is, in contrast to record phenomena, more completely known; the differential equation and boundary conditions which relate the distribution of magnetization in the record and the flux distribution in the pick-up coil are known. This differential equation has been solved for a specialized set of boundary conditions. The solution appears as a single integral relating the output voltage to the magnetization in the record. This solution was obtained by Ekstein and Gilbert in the work mentioned previously. The solution is capable of application or extension to somewhat more general situations than those for which it was derived. Mr. Camras has performed a similar analysis for closed type wire heads (Proc. I.R.E. 37, 567, 1949).

(4) Experimental Work with Nickel-Cobalt Plating

Nickel-cobalt plating on wire, tape and rigid backings has been investigated as a magnetic recording medium in the audio range and for special instrumentation applications at somewhat higher frequencies. At the Foundation some work was done under contract (NObsr-42251) using a nickel-cobalt alloy electro-plated on the edge of a brass disk six inches in diameter driven at speeds as great as 7500 rpm. Using ring type low impedance heads and 15 milliwatts of recording power, detectable signals as high as 200 KC were recorded and played back. In a later test, an audio signal was recorded with the disk rotating at a low speed and played back at very high speeds. The signal was detectable at speeds which gave playback frequencies up to 800 kc.

2. Work Accomplished During this Contract

a. Extension of Fundamental Magnetic Knowledge

(1) Theoretical Analysis

(a) Complex Parameters for Magnetic Materials

Various methods of expressing the a-c properties of core materials have been used. The most common system has been the use of "effective a-c permeability" and "watts per pound" units. In this project a system of parameters of a more basic nature and more convenient to use in apparatus design were derived.

The permeability (μ) and reluctivity (ν) of core materials, ordinarily real quantities, are made complex quantities. By this means, equations for magnetic circuits can be written in complex form, and the phase angle actually existing between fluxes, voltages, and currents will be properly indicated by the equations.

The complex quantities $\bar{\mu}$ and $\bar{\nu}$ are defined by considering a ring of magnetic material having a uniform cross section, a, mean length, ℓ. This is linked by a toroidal winding of N turns having negligible resistance, excited by alternating current of $\omega/2\pi$ cycles per second. The core parameters are required to satisfy the following conditions: If the core material is a loss-less material such as free space, the current, $\bar{I}$, and flux, $\bar{B}a$, are in phase, and both lag the terminal voltage, $\bar{V}$, by 90 degrees. Under this condition $\bar{\mu}$ and $\bar{\nu}$ must degenerate to real values. If losses are present in the core, the current lags the voltage by an angle less than 90 degrees, but an exact quadrature relation exists between the flux and voltage, as before.

The parameters have the following complex form,

$$\bar{\nu} = \nu_x + j\nu_r \quad \text{and} \quad \bar{\mu} = \mu_x + j\mu_r \tag{1}$$

where

ν_x, ν_r, μ_x and μ_r are real numbers.

Using the fundamental reciprocal relation between μ and ν yields the following conversion equations.

$$\mu_x = \frac{\nu_x}{\nu_x^2 + \nu_r^2} \; ; \quad \mu_r = \frac{\nu_r}{\nu_x^2 + \nu_r^2} \tag{2}$$

The admittance at the coil terminals is given by,

$$\bar{Y} = \frac{\ell(\nu_r - j\nu_x)}{4\pi N^2 \omega a} 10^9 \quad \text{mhos} \tag{3}$$

The impedance can be expressed in terms of $\bar{\mu}$ as,

$$\bar{Z} = \frac{4\pi\omega N^2 a}{\ell} (\mu_r + j\mu_x) 10^{-9} \text{ ohms.} \tag{4}$$

The components of $\bar{\mu}$ and $\bar{\nu}$ can be determined by measuring the complex admittance or impedance of the coil. An a-c bridge, used to measure the coil impedance, is subject to special requirements due to the high flux densities and sinusoidal exciting voltage required. The impedance of the bridge arm inserted between the generator and the sample must be low compared to the sample, and the bridge components must withstand relatively high voltages and currents. A number of bridge configurations are possible and each has its own pecularities and shortcomings; experimental evidence would be necessary to determine the best configuration in this application.

(b) Relation Between the Magnetization of a Ferromagnet and the Applied Field

An attempt has been made to determine a general relation between the magnetization of a ferromagnet and the applied field for a uniform field of arbitrary time dependence, since this relation is fundamental to magnetic recording. The relation between the magnetization M at time T may depend upon all of the values which H has assumed in the time interval $0 \leq t \leq T$ where $t = 0$ at the last time H exceeded the saturation field H_s. This fact is expressed mathematically by saying that M is a functional of H(t), or,

$$M(T) = f\left[H(t)\right], \quad 0 \leq t \leq T \tag{5}$$

The object of the theoretical analysis is to reduce the general expression above to a more specific and useful form. The desired functional will obviously be non-linear. To obtain an insight into the character of this functional, five models, based on ferromagnetic materials which consist of

dispersions of single domain ferromagnetic particles in a nonmagnetic matrix, were considered. The dispersed particles were assumed to have two stable orientations of magnetization which are anti-parallel to each other when no field is present. The models chosen were as follows:

1. Single particle - oriented parallel to field.
2. Single particle - arbitrarily oriented.
3. Dilute dispersion (noninteracting particles) with axes of stability of the individual particles parallel to the field.
4. Dilute dispersion - arbitrarily oriented particles.
5. Dispersion with interacting particles.

The behavior of the first model generates a square hysteresis loop as follows: Before the field is applied, the magnetic moment of the particle will be in one of two stable positions. When a field is applied anti-parallel to the moment, no change will occur until the field exceeds some critical magnitude, h, at which the anti-parallel position ceases to be a stable one. At this time the moment of the particle will rotate rapidly to the parallel position and no further change will occur with increased field. If the field is now reversed, the position of the moment will remain unchanged until the field has exceeded the value, -h, at which time it will again rotate rapidly to be parallel with the field, thus returning to the starting position. A functional which will describe this behavior is,

$$m_1(T) = f\left[H(t)\right] = 1/h \int_0^T H(t)\,\delta(t-t_0)\,dt \qquad (6)$$

where $\delta(t-t_0)$ is the Dirac delta function and t_0 is the last time that H passed through a critical value, h or -h.

In the second model the axis of the two stable positions is at an angle with respect to the direction of the external

field. As the field is increased in value, the stable position furthest from the field direction will rotate towards the field and then disappear (i.e., cease to be stable). When it disappears, the moment will "jump" to the remaining stable position, which will be more nearly parallel to the field direction. As the field increases, the remaining stable position will rotate towards the field but will not disappear. The magnetization, m, of the particle will then approach asymptotically a value of +1 as the field is increased further (Fig. 1). A similar process occurs when the field is reversed and raised to large negative values. In this case m approaches the value -1 asymptotically. The functional for this model may be expressed in terms of the functional for the first model.

$$m_2(T) = m_1(T)\left\{ 1-F\left[h + m(T)\ H\ (T)\right]\right\} \qquad (7)$$

where: F(x) is an unspecified function representing the curve along which m approaches the asymptote $\pm$ 1.

The magnetic properties of the third model are obtained by averaging over the magnetic properties of the individual single domain particles making up the model. These particles differ only in the value of the critical field, h, at which the moment flips from an antiparallel position to a parallel position. Because of the different values of h required, the moments will not all flip at once, and the average effect will be a deviation from the square hysteresis loop of the single particle (Model No. 1). The hysteresis loop for the third model is shown in Fig. 1. The functional for this model is obtained by considering the magnetization functional of an individual particle as a function of the parameter, h, as well as of T and averaging over the contributions of particles with different h.

$$M_3(T) = \int_0^{H_s} m_1(h,T)\, n(h)\, dh \qquad (8)$$

where: $M_3(T)$ is the magnetization functional, $n(h)$ is the relative volume of particles which have critical fields lying between h and h + dh, $m_1(h,T)$ is a functional of $H(t)$ for a single particle, and H_s is the saturation field.

This model gives hysteresis properties which, in certain respects, resemble those of ordinary materials; but it still falls short of describing magnetic phenomena in general.

The fourth model is similar to the third except that the basic particles correspond to the second model rather than the first. In carrying out the averaging for this model it should be noted that the different single particles which "flip" for a given h value may not have the same reversible magnetic properties. The function $F(x)$ in this case is assumed to represent the average reversible contribution of the particles which "flip" at some value of h. The hysteresis loop for this model is shown in Fig. 1. This model, although general enough to describe some of the hysteresis properties of actual materials, is not sufficiently general. The magnetization functional for this model is,

$$M_4(T) = \int_0^{H_s} m_2(h,T)\, n(h)\, dh \qquad (9)$$

Where $M_4(T)$ is the functional for model 4 and the other symbols are as defined previously.

The analysis based on the above models is empirical in the sense that only a general form of the functional is obtained. The functions and constants must be evaluated by using

experimental data such as the saturation hysteresis loop; however, these data are not sufficient to determine the behavior of a ferromagnet for all possible choices of the time dependence of the magnetizing field. Many functionals will fit given data but there is no guarantee that any one of them will properly predict the behavior for all combinations. The problem is to determine one of these functionals which will predict correctly the behavior of ferromagnetic materials for a large (if not an all inclusive) useful class of magnetizing field functions. The four models described above do not achieve this result. The fifth model appears to show greater potentialities; however, the shift in emphasis on this program away from magnetic recording prevented further investigations of this type.

(2) Experimental Work

(a) Ferroxcube III Head Material

Samples of Ferroxcube III magnetic core material were obtained and the magnetic properties were examined by a-c and d-c methods. The normal magnetization curve of a core material can be obtained with fair accuracy by 60 cycle ac measurements. The circuit used for the 60 cycle measurements is shown in Figure 2. The voltmeter was a Ballantine Model 300 which responds to the average value of the applied voltage. The peak magnetizing force, H_m, in the sample is computed from V_1 (See Fig. 2) using equations,

$$V_1 = \sqrt{2}\,\pi\, f\, M\, I_m \tag{10}$$

$$H_m = \frac{0.4\pi N_1 I_m}{\ell} \tag{11}$$

where: f is the frequency, cps.

M is the mutual inductance, henries

I_m is the peak current in sample primary, amperes

H_m is the peak magnetizing field, oersteds

N_1 is the number of primary turns

ℓ is the mean length of flux path, cm

The peak induction in the sample, B_m, is calculated from V_2 (Fig. 2) using the equations

$$V_2 = \sqrt{2}\pi f \Phi_m N_2 10^{-8} \tag{12}$$

$$B_m = \frac{\Phi_m}{a} \tag{13}$$

where: Φ_m is the peak flux in the sample

N_2 is the number of sample secondary turns

B_m is the peak induction, gauss

a is the area of sample, cm^2

A ring sample of Ferroxcube III with a rectangular cross-section was used for these measurements; the sample dimensions were 1.4" I.D. and 1.768" O.D. with a height of 0.631". Other parameters were; N_1 = 178 turns, N_2 = 30 turns, ℓ = 12.63 cm, M = 1.83 x 10^{-4} henries. The results of the 60 cycle measurements are plotted in Figure 3.

A short cylindrical sample of Ferroxcube III was tested at high magnetizing forces in a Sanford-Bennett high-H permeameter. In this test method, the sample is placed between the poles of a powerful electromagnet with the parallel end surfaces of the specimen abutting the pole faces; thus, the magnetizing field is applied parallel to the axis of the sample. Because of the variable and unknown effect of

the two joints in the magnetic circuit, this method is useful only for materials of relatively low permeability. For magnetically soft materials the chief use of this method is the determination of characteristics near saturation. The results of the DC measurements are also plotted in Figure 3.

The design and construction of a high frequency magnetic tester for core materials was carried forward during this project, but with the cessation of the magnetic recording investigation, further work on this tester was discontinued. At the time work was stopped, the general plan of operation had been determined; and the power supply, power oscillator and power amplifier had been designed. Construction of the unit, using Foundation funds, had been started.

(b) Tests on a Wire Sample

To provide experimental data which would be helpful in the establishment of a basic ferromagnetic model, a series of tests on a long wire sample were performed. The sample used for these tests consisted of 100 strands of medium carbon steel magnetic recording wire with nominal diameters of 0.004 inch. The length of the sample was 21 inches. The sample was used straight, without a yoke or return path, which allowed the measurement of flux by rapid removal of the sample from the coil. The end effect errors due to the use of a straight sample were minimized by proper design of sample and equipment. The details on the design of the equipment are given in Report No. 90-783A-3.

The data for hysteresis loop, initial and residual induction curves were obtained with this equipment, since it was considered that these data were the most important starting points in the development of a ferromagnetic model. The equipment was also used to

determine the residual flux in the sample after oscillatory magnetizing pulses had been applied. The exponentially decaying current in an oscillatory RLC circuit was used as the source of the magnetizing pulses. After exposure to the oscillatory pulse the residual flux in the sample was determined with a fluxmeter. An oscillographic record was obtained for the Φ - H relation as the sample was subjected to the decaying, oscillatory pulse. These traces show in detail the devious route by which the final value of residual flux is reached (Fig. 4).

b. Extension of the Frequency Limits of Magnetic Recording

(1) Theoretical Analyses

(a) General

Theoretical investigations of magnetic recording phenomena can be divided into two natural and clearly defined classifications: (1) investigations of recording phenomena, and (2) investigations of playback phenomena. Although a study of playback phenomena proceeds from a knowledge of the distribution of magnetization in the recording medium and hence cannot be carried through exactly until this distribution is known from a study of recording phenomena, it appears that the most important characteristics of playback phenomena can be deduced by making reasonable assumptions regarding the distribution of magnetization in a recorded medium. It is possible, therefore, to investigate playback and recording phenomena independently. It should be recognized that the use of multiple channels would allow the recording of any bandwidth within reason; however, the number of channels required will be determined by the bandwidth of each channel. It is, therefore, reasonable to concentrate on the expansion of the channel bandwidth and leave the multiple channels

determine the residual flux in the sample after oscillatory magnetizing pulses had been applied. The exponentially decaying current in an oscillatory RLC circuit was used as the source of the magnetizing pulses. After exposure to the oscillatory pulse the residual flux in the sample was determined with a fluxmeter. An oscillographic record was obtained for the Φ - H relation as the sample was subjected to the decaying, oscillatory pulse. These traces show in detail the devious route by which the final value of residual flux is reached (Fig. 4).

b. Extension of the Frequency Limits of Magnetic Recording

(1) Theoretical Analyses

(a) General

Theoretical investigations of magnetic recording phenomena can be divided into two natural and clearly defined classifications: (1) investigations of recording phenomena, and (2) investigations of playback phenomena. Although a study of playback phenomena proceeds from a knowledge of the distribution of magnetization in the recording medium and hence cannot be carried through exactly until this distribution is known from a study of recording phenomena, it appears that the most important characteristics of playback phenomena can be deduced by making reasonable assumptions regarding the distribution of magnetization in a recorded medium. It is possible, therefore, to investigate playback and recording phenomena independently. It should be recognized that the use of multiple channels would allow the recording of any bandwidth within reason; however, the number of channels required will be determined by the bandwidth of each channel. It is, therefore, reasonable to concentrate on the expansion of the channel bandwidth and leave the multiple channels

to be applied only after the single channel bandwidth has been increased as far as possible. It should not be inferred that the use of multiple channels is a simple extension; on the contrary, the problem of maintaining proper phase and synchronization of the components of the signal is very severe.

The bandwidth of magnetic recording can be expanded by redesign and improvement of the component parts of present magnetic recording systems and/or by developing new techniques. Since a suitable basic theory of magnetics is lacking, it follows that improvement in either of the two directions given above must be by either an empirical or fundamental analytical approach. In the previous section, efforts to increase the basic knowledge of magnetics in general were discussed; this section will deal specifically with magnetic recording.

(b) Comparison of Recording Media

Experimental work on this project was for the most part concerned with tape recording, but it is not to be inferred from this that tape is the most suitable medium on all counts. Tape does have two distinct advantages: approximate synchronization of channels is provided by recording all channels on the same tape; tape is much easier to handle.

Wire has the advantage over tape from the standpoint of volume per cycle recorded; it also has a smaller change in spool diameter for a given length recording. Both steel wire and steel tapes have a longer shelf life than do paper or plastic tapes. The relative importance of wire rotation effects, tape skew and head contact variations have not been evaluated.

In Appendix A of Report No. 90-783A-3 a comparison of the various media for a two hour recording is made. In this study the following points of comparison are considered: typical dimensions, physical stacking factor, signal packing factor, spool and reel sizes and speeds, ultimate speeds based on stress in medium, eddy-current effects. The results of this comparison are as follows: Wire is capable of approximately twice the speed of plastic tape, but its minimum wavelength is approximately three times as long as that for tape. Wire will store approximately fifteen times the amount of information per unit volume. Because of its superior short wavelength response and self synchronizing characteristics, tape is indicated for multiple channel uses while wire, except for the high linear speeds required, appears best for a single channel application.

(c) Recording Processes

The recording processes in magnetic recording can be divided into two groups for the purpose of analysis; (1) recording head processes, by which the input current in the recording head produces a time and space varying magnetic field, (2) recording processes by which the time and space varying field produces a fixed distribution of magnetization that remains on the medium after it leaves the recording head.

One of the factors which limits the highest frequency which can be recorded is the shielding effect of eddy currents in a metallic medium. The eddy currents prevent the magnetizing field from penetrating into the interior of the recording medium. This shielding effect depends upon the geometry of the magnetizing field as well as upon the signal frequency and wire magnetic and electrical properties. Thus,

In Appendix A of Report No. 90-783A-3 a comparison of the various media for a two hour recording is made. In this study the following points of comparison are considered: typical dimensions, physical stacking factor, signal packing factor, spool and reel sizes and speeds, ultimate speeds based on stress in medium, eddy-current effects. The results of this comparison are as follows: Wire is capable of approximately twice the speed of plastic tape, but its minimum wavelength is approximately three times as long as that for tape. Wire will store approximately fifteen times the amount of information per unit volume. Because of its superior short wavelength response and self synchronizing characteristics, tape is indicated for multiple channel uses while wire, except for the high linear speeds required, appears best for a single channel application.

(c) Recording Processes

The recording processes in magnetic recording can be divided into two groups for the purpose of analysis; (1) recording head processes, by which the input current in the recording head produces a time and space varying magnetic field, (2) recording processes, by which the time and space varying field produces a fixed distribution of magnetization that remains on the medium after it leaves the recording head.

One of the factors which limits the highest frequency which can be recorded is the shielding effect of eddy currents in a metallic medium. The eddy currents prevent the magnetizing field from penetrating into the interior of the recording medium. This shielding effect depends upon the geometry of the magnetizing field as well as upon the signal frequency and wire magnetic and electrical properties. Thus,

it is not independent of the "gap effect", which refers to the limited penetration of the magnetizing field due to the rapid decrease in the field intensity as the distance from the recording gap increases. An analysis of these effects for recording wire which gives a reasonably accurate estimate of the shielding effect for a given gap width, and allows a qualitative estimate of the smallest useable gap width, has been carried out in Appendix B of Report 90-783A-3. The results of this analysis indicate that for gap widths under 10 mils the shielding effect of eddy currents in standard recording wire is entirely negligible up to 10 megacycles.

The further analysis required to formulate a useful theory of the recording process was not finished due to the change of emphasis away from magnetic recording.

(d) Playback Processes

The theory of playback phenomena is in a better state than that of recording, in that the differential equation relating the distribution of magnetization in the record and the flux distribution in the pick-up coil is known. The problem is one of solving a differential equation with boundary conditions corresponding to the shape of the head. During a previous project, this differential equation was solved for boundary conditions corresponding to an idealized head model. The solution appears as a single integral relating output voltage to the magnetization in the record. This integral was reduced to a form suitable for numerical evaluation for the case of a sinusoidal signal, on an infinitely thin tape with a wavelength which is small compared to the over-all head dimensions. Extension of this work would involve:

(a) further calculations to obtain numerical results for tapes of arbitrary thickness and for wavelengths which are not small compared to head dimensions, (b) modifications of the analysis directed toward obtaining a solution for less idealized head models.

(2) Experimental Work

(a) General

Experimental work on magnetic recording was aimed at obtaining fundamental data on recording and playback processes and attempting to increase the upper frequency limit of magnetic recording. In general, the fundamental processes of magnetic recording are expected to be independent of frequency, and for this reason, the investigation of these fundamental processes can be taken at low tape speeds and audio frequencies. The extension of the upper frequency limit necessarily involves high tape speeds, or at least high writing rates, in addition to an investigation of the frequency characteristics of components, heads in particular, at the higher frequencies.

(b) Low Speed Experiments

Two Speed Data: To verify the prediction of simple theory that the playback voltage is proportional to the speed, a commercial Magnecord tape recorder was used to playback recordings at two different speeds. Recordings of various wavelengths were made by recording different frequencies at 15 inches per second; these recordings were played back at 7.5 and 15 inches per second. Standard Magnecord heads were used in these tests, and the results are shown in Table I below.

Table I

db above 10 mv

Wavelength	15 in/sec	7.5 in/sec	db Difference
.150 inch	25	18	7
.050	32	25	7
.025	37	31	6
.015	39	33	6
.0075	40	36	4
.00375	37.5	33	4.5
.002	31	27	4
.0015	29	25	4
.001	23	18.5	4.5

In the absence of other effects the difference should be constant and equal to 6 db. The difference between the measured value and 6 db at the longer wavelengths is probably due to better head-tape contact at 15 inches per second caused by increased tape tension. The difference at the shorter wavelength is believed to be due to high frequency losses in the playback head.

Wide Gap Experiments: Recording and playing back of high frequencies will ultimately be limited by the short wavelength characteristics of the recorder. The short wavelength characteristics of a system are dependent upon the resolution capabilities of the medium and the effective size of the scanning gap. The limit imposed by the record medium is absolute, in that it cannot be altered by design or refinement in construction techniques. The short wavelength limit

imposed by the playback scanning gap is relative to the width of the scanning gap and, with the exception of head contact, effects of gap phenomena can be studied as well with wide gaps as with small ones. This is a distinct advantage, since it is much easier to construct a 10 mil gap to a given per cent. tolerance than it is to construct a one mil gap. Data were taken for 10, 20, and 36 mil gaps in the playback head; recordings being made with a commercial recording head. In figures 5 and 6 are shown typical response curves for 10 and 20 mil gaps. A number of observations based on the wide gap data can be made.

(1) Zero output occurs at approximately those frequencies for which the gap length is equal to an integral multiple of the wavelength.

(2) The output level at frequencies higher than that for which the gap length equals the wavelength is less than is observed when the same frequencies are played back with a smaller playback gap head. This is true even at peaks of response.

(3) Some of the heads show a more regular and extended pattern of peaks and zeros than others. Visual examination indicates a correlation between regularity of the response pattern and both sharpness and parallelism of the gap edges.

The above information on gap effects of playback heads might well prompt the question as to whether similar effects are noted in recording heads. General experience had indicated that good recordings could be accomplished with wide or narrow recording gaps so long as the final gap edge was well defined and made good contact with

the record medium. To investigate this problem in more detail, recordings were made with wide gap heads and played back on a commercial small gap playback head. Fig. 7 shows the response curve obtained with a recording head which had a 36 mil gap. It will be noted that the points $n\lambda = G$ are consistently slightly to the left of the response peaks and that in $n\lambda = KG$, where $K<1$, there is some value of K which will cause the points to fall directly on the response peaks. This may be interpreted as indicating that the effective gap width (KG) is slightly smaller than the nominal head gap width (G). The effect is also evident for a 2 mil recording gap (Fig. 8), but it occurs at such a short wavelength that it would probably be obscured by other effects in normal recordings.

To explain this observed recording phenomenon, consider Fig. 9, which is a plot of field strength in the vicinity of the gap experienced by an infinitely thin tape close to but not touching the pole pieces. It will be noted that there are two positions of maximum intensity and that these positions are less than the gap length apart. If it is assumed that the recording field is both bias and audio and that the tape is passing across the head, then all possible phase relations will occur between the recording made on the tape by the first peak field value and the recording attempted by the second peak value of the recording field. When the two peak recording fields are in phase a maximum level recorded signal should remain on the tape; and when they are not in phase a partial erasure and re-recording by the second peak field value should result. This seems satisfactorily to explain the observed phenomenon when using wide gap recording heads. It was found that with satura-

tion values of bias and/or audio recording currents the response curve became smooth. It is believed that in this case the second peak field is strong enough to obliterate the recording of the first peak field.

Single Edge Gap: A logical step from the wide gap heads is the production of a recording head in which the double peaked field is not present. The single edge gap head constructed to eliminate the second peak is shown in Fig. 10. The gap spacer is laid over one pole piece so that the tape cannot contact this pole piece and so that the copper overlay will constitute an eddy-current shield to weaken the peak field associated with the covered pole. The results of recordings made with this head and played back on a conventional head are shown in Fig. 11. Although the head had a nominal 20 mil gap, the curves are quite smooth. The two curves are for different directions of tape travel relative to the head; the short wavelength recordings are better when the tape contacts the exposed pole tip last.

As a matter of interest, this head was also tested as a playback head for recordings made with conventional head. The curve is smooth, free of gap-effect zeros of output, low in level at all frequencies and poor in short wavelength output.

Zero-Gap Playback Head: In Fig. 13 is shown a picture of a so-called "Zero-Gap" head. The intended principle of operation is shown schematically in Fig. 12. Recordings were made over the full width of the tape with a conventional recording head and played back with the zero-gap head. In conventional playback heads the short wavelength response improves as the gap length is reduced, so long as the reluctance across

the gap is significantly greater than that of the path threading the coil. Practical difficulties become great as the gap is reduced below 1.0 mil although commerical heads have been produced with less than .0005 inch gaps. The zero-gap head was designed in an effort to overcome some of these difficulties by allowing the gap edges to be any distance apart in the direction of the tape travel. This is accomplished by having each gap edge traverse a different path on the tape; however, both edges scan a recording made at the same time by the recording head. One of the zero-gap heads constructed was adjustable by means of a screw while the other was adjustable only by reassembly. In the sense given above, the heads could be adjusted to a negative gap.

Figures 14 through 18 are representative of data obtained on the zero gap playback heads. The following observations are noteworthy.

(1) For the curve of Fig. 14 the gap was adjusted to a positive 10 mils. The dips at wavelengths of 12 and 5.4 mils are in approximate accord with theory.

(2) For the curve of Fig. 15 the gap was adjusted to a negative 10 mils; that is, 10 mils of the tape length touched the iron of the head at two positions of the tape width (Fig. 12). It will be noted that the response maxima and minima are reversed for the positive and negative gap data. A possible explanation is as follows. Elements of the tape length which contact both ends of the iron circuit contributed no flux through the coil, since equal surface pole strength is applied to each end of the iron circuit. When an integral number of wavelengths

is included in the length of tape touching both pole pieces, the ends of the pole pieces are presented to the adjacent recorded sections of the tape in the same relation as the ends of the pole pieces in a conventional head, the gap of which is small compared to the wavelength. In this case a higher output results.

When an odd number of half wavelengths are included in the length of tape touching both pole pieces, the adjacent recorded half-waves, which touch only one head pole piece, find low reluctance paths through the contacting pole pieces without threading the coil in a useful manner; low output results.

(3) In no case was the short wavelength response of the zero gap head as good as that of a conventional small gap head. This may be due in part to the difficulty in adjusting the gap, since it can no longer be set by pressing the edges against a non-magnetic spacer as in the conventional construction.

The improved relative low frequency response is due to attenuation of the mid-frequencies and not due to low frequency boost. It is believed that this effect is due to the peculiar flux path across the tape, giving in effect a number of different gap widths simultaneously. This is not considered a useful form of equalization.

(c) High Speed Experiments

High Speed Loop Drive: In order to attempt test recordings at high tape speeds, the loop tape drive of Fig. 19 was constructed. A variable speed d-c motor drives the large capstan drum through a stage of speed up pulleys. The tape is driven by the capstan

and passes over the head and the guide posts which keep it aligned with the head. Provision is made to key the recording circuit in order that a single recording will be made on the tape loop. This is accomplished by having a low speed cam driven from the capstan shaft through a belt and gear reducer. The length of the cam lobe is such that a microswitch is actuated for a time equal to the period of one passage of the loop of tape over the head. In order that the microswitch will not be actuated the next time the cam lobe passes the microswitch, a second cam pushes the assembly clear of the cam wheel immediately after the recording has been made. By various combinations of pulleys and motor speeds, tape speeds up to 2100 inches per second can be attained.

The loop of tape for use on this drive is made by splicing a length of 1/4 inch tape with a short piece of scotch tape. Unfortunately this does not provide a loop with constant mass per unit length; the splice causes serious mechanical disturbances. At high tape speeds, the tape vibrates as the splice passes over the successive sections of the drive; the effect of this vibration is to cause uneven wear on the tape (particularly severe near the splice). The damage to the tape progresses from an initial light abrasion to a rapid stripping of the magnetic material from the tape. The increase in the rate of tape damage as the tape is run continuously is apparently due to the increase of temperature caused by friction between head and tape. As the tape damage proceeds, the magnetic material with its binder is deposited on the head, which further increases the friction and accelerates the rate of damage. The use of tapes with higher melting point binders did not significantly

alter the results. Photographs of damaged tapes and a head with magnetic material deposited on it are shown in Figures 20 and 21.

The mechanical difficulties encountered point to the desirability of obtaining a suitable lubricant for the tape. The primary purpose of such a lubricant is to minimize abrasion of both tape and head. In addition, it is desirable that the lubricant prevent the loading of the head with dirt, and it should also have a damping influence on vibrations. Attempts to impregnate the Ferroxcube III material with wax were unsuccessful. Some success was achieved by using a thick soap solution applied to the guides over which the tape runs. The technique of operation was to lubricate the guide with soap, bring the tape up to speed and record, stop the tape and relubricate, and then bring the tape up to speed for playback. The average time at high speed was ten seconds. Some plastic tapes were operated in this manner at a tape speed of 1000 inches per second for as many as 150 cycles of operation without noticeable wear except at the splice. In general failure was due to splice separation. It is believed that continuous lubrication would result in practical tape life at speeds of 1000 inches per second or higher in a continuous (contrasted to loop) recording system.

Frequency Characteristics of Heads: The playback performance of a head, assuming a constant peak magnetomotive force from the tape at all frequencies, may be approximated by wrapping a few turns of wire around the head pole pieces at the gap, passing a current of constant amplitude through the coil at various frequencies; and measuring the voltage across the head winding coils (Fig. 26). In a head

having zero losses the output should rise at a 6 db per octave rate.

In the design of a head to be operated at high frequencies, it is desirable to raise the self resonant frequency (usually by reduction in turns) and decrease the core losses at high frequencies. Also very important, but not concerned closely with the frequency characteristics of the head itself, is the construction of a head with a very small gap to aid the short wavelength resolution. A head was designed using Ferroxcube III core material, which has desirable low loss characteristics. This head was fabricated by grinding, since the mechanical properties of Ferroxcube III approach those of a ceramic. The head (Fig. 22) was wound with 50 turns on each leg of the core. The frequency characteristics of this head were compared to those of a standard Ampex head and an Ampex head which had been modified to have only 100 turns. The results are plotted in Figure 23. It will be noted that both of the heads with only 100 turns have self resonant frequencies which are much higher than the standard head. It is also to be noted that the losses of the Ferroxcube III head are significantly less than those of the modified Ampex head, as attested by the higher output at the resonant frequency. The Ampex head uses a stack of mu-metal laminations.

In addition to the frequency characteristics, as determined using the coupling turn, the inductance and Q were determined at various frequencies using data obtained from a Z-angle Meter at frequencies below 20 KC and from a resonated impedance test at higher frequencies. The results are plotted in Fig. 24; the rather peculiar shape of the curves is apparently due to the effect of the gap spacer acting as

a shorted secondary. This was verified qualitatively by calculating the inductance and Q of a mutual inductor with a shorted turn; it has a similar shape.

The gap spacer used in the first Ferroxcube III head was .0005 inch while a .0003 inch spacer was used in the second head. To check the effective gap, recordings were made and played back at a tape speed of 6 inches per second. The results, plotted in Figure 25, show that neither of the Ferroxcube heads is as good as the Ampex head in short wavelength performance, and that the effective gap width is approximately 2-1/2 times the thickness of the gap spacer. An examination under a microscope showed the gap edge of the Ferroxcube heads to be rough due to the porosity of the material. This appears to be a bar to the achievement of very short wavelengths with this type of core material.

The use of Ferroxcube III or similar material appears to be advantageous for high frequency heads but the heads at present are not completely satisfactory for very short wavelength and frequencies of 5 mc.

Record-Playback Experiments: Record-playback experiments at tape speeds in the range of 1000 inches per second were conducted to establish the total frequency charcteristics of a system using the Ferroxcube III head and various tapes. The recording and playback were done with the same head using no bias for recording. Both permanent magnet and bulk type 60 cps erase were used; the ac erase producing a somewhat lower erased noise level. The record-playback system circuit is shown in Fig. 27. It will be noted that the total current

measured with the series resistor and voltmeter is not necessarily the actual recording current. As the frequency passes through resonance, an increasing portion of the total current will be shunted past the head winding by the stray capacitance of the head and wiring. For this reason the frequency response data cannot be taken as constant current curves, and are probably pessimistic. Approximately 0.27 millivolt-amperes were supplied to the head at 1.0 to 1.5 megacycles.

The data are plotted in Fig. 28. Curves A and B, both obtained with the Ferroxcube III head, show a definite improvement in signal to noise ratio and probably in relative response when using plastic tape. The metal tape curve is inconclusive as far as relative response is concerned because the signal to noise ratio is very poor. The relatively poor response with metal tape is probably due to the inability of the tape to conform to the head contours as does the plastic tape.

Curves B and C compare the performance of the modified Ampex head and the Ferroxcube III head when used on plastic tape. On the basis of the original gap width, the short wavelength characteristics of the Ampex head should have been better; unfortunately the head must be disassembled to modify it and apparently this destroyed its original good mechanical characteristics. It apparently suffers from poor contact with the tape and an imperfect gap.

In the case of the Ferroxcube III head on plastic tape there was evidence of record up to 1.6 mc. This was deduced from the fact that, although there was no detectable 1.6 mc signal when

played back at 1000 inches per second, there was a detectable signal at a playback speed of 570 inches per second. This situation is not unreasonable, since the recording process is less sensitive to gap effects, and there is better contact between playback head and tape at the lower speed.

Taking a signal to noise ratio of 5 db as a criterion, the highest frequencies which have been successfully recorded and played back at the same speed are 1.18 mc, 1.29 mc, and 1.14 mc, respectively, for Ferroxcube head on metal tape, Ferroxcube head on plastic tape and modified Ampex head on plastic tape. The corresponding wavelengths are 0.85, 0.78 and 0.87 mils. By increasing the tape tension considerably, it was possible to record and play back 1.4 mc using the Ferroxcube III head and plastic tape; the corresponding wavelength was 0.72 mils, which is the shortest wavelength thus far obtained at high tape speeds. Curve B in Figure 28 can reasonably be extrapolated to give an estimate of the effective head gap. By this procedure the effective gap, under the conditions of the test, for the Ferroxcube III head was 0.74 mil. Because of the low signal to noise ratio, such an extrapolation for the other curves is very much in doubt.

Since tape speeds up to 2000 inches per second were available, it should have been possible to increase the upper frequency limit by increasing the tape speed above 1000 inches per second. A frequency of 1.5 megacycles was recorded and played back (discernible above the noise) at 1400 inches per second tape speed. This corresponds to a wavelength of .92 mil, which indicates that the effective gap was

increased. This increase in effective gap at high speeds is due to progressively poorer head-tape contact. The tape appears to bounce away from the head for greater and greater distances along the tape as the speed is increased. An observation which confirms this was performed by recording and playing back 1.0 mc at progressively higher tape speeds. Instead of increasing in amplitude, the signal decreased in average amplitude (meter reading), and the amplitude was noted on the oscilloscope to be modulated in a periodic fashion. Further increase in speed resulted in an increasingly severe amplitude modulation until the length of the recorded section was less than one-twentieth of the total tape length. The mechanical positioning of the head, and the wrap of the tape around the head were found to be extremely critical. The above observations indicate a traveling wave vibration phenomenon in the tape. The problem of increasing the upper frequency limit appears to be primarily concerned with controlling this vibration.

D. CONCLUSIONS

1. If the practical problem of handling the magnetic medium at tape speeds of 800 inches per second can be solved, recording and playback of frequencies up to 1.0 mc with a signal to noise ratio of at least 30 db appears quite feasible.

2. Usefully good contact between the tape and head at 800 inches per second can be maintained. The problem is therefore one of tape supply, storage and take-up in this speed range.

3. Above 1000 inches per second very serious mechanical vibrations destroy proper head-tape contact. These vibrations may be somewhat

reduced using continuous tape feed instead of the experimental loop.

4. Some form of lubrication between head and tape is desirable at speeds above 500 inches per second. Soap solution has been used with some success.

5. Heads can be constructed with satisfactory frequency characteristics at 1 mc and probably higher. A head of Ferroxcube III or other low loss core material has significant advantages.

6. The attainment of effective head scanning gaps less than 0.75 mil is extremely difficult at these speeds.

7. The requirement that the head contact the tape gives rise to serious practical problems; a high resolution method in which this is not necessary would be very desirable.

8. A useful analytic expression, founded on other than empirical considerations, is very much needed for the fundamental theoretical study of magnetic recording phenomena.

9. The goal of 5 mc recording by magnetic means appears unattainable at this time by other than multiple channel means.

Part II

A. RECOMMENDATIONS

On the basis of the observations and conclusions discussed earlier, it appears that magnetic recording is limited by severe practical difficulties to frequencies much below 5 mc. Direct attempts to obtain a solution within the framework of present and immediately foreseeable developments in magnetic recording appear to offer little chance of producing a useable solution. New techniques of magnetic recording, at present unknown, may eventually solve the problem in a satisfactory manner, but it is not felt that these new techniques will be efficiently produced by a single concentrated effort. For this reason, emphasis was shifted in July 1950 to an investigation of other possible recording techniques, such as the recording by a modulated light beam upon film. The results of these investigations are reported in Volume II of this Final Engineering Report.

B. CONTRIBUTING PERSONNEL

The theoretical analyses were made by Dr. D. E. Wiegand and Mr. T. L. Gilbert, and the experimental work was done by Messrs. D. E. Wiegand, W. R. Chynoweth and C. W. Claras. Others contributing substantially to the program were Mr. F. G. Rest and Mr. Raymond E. Zenner who was the project engineer during this phase of the program.

Respectfully submitted,
ARMOUR RESEARCH FOUNDATION

W. R. Chynoweth
W. R. Chynoweth, Project Engineer

H. C. Miller
H. C. Miller, Assistant Chairman
Physics Research

A. R. Tobey
A. R. Tobey, Supervisor
Electricity and Magnetism Section

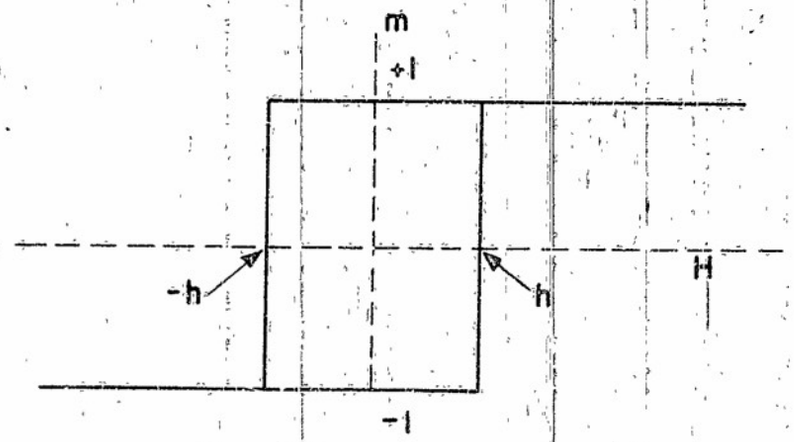

FIG. 1a – HYSTERESIS LOOP FOR FIRST MODEL (SINGLE DOMAIN PARTICLE WITH AXIS OF STABILITY PARALLEL TO FIELD)

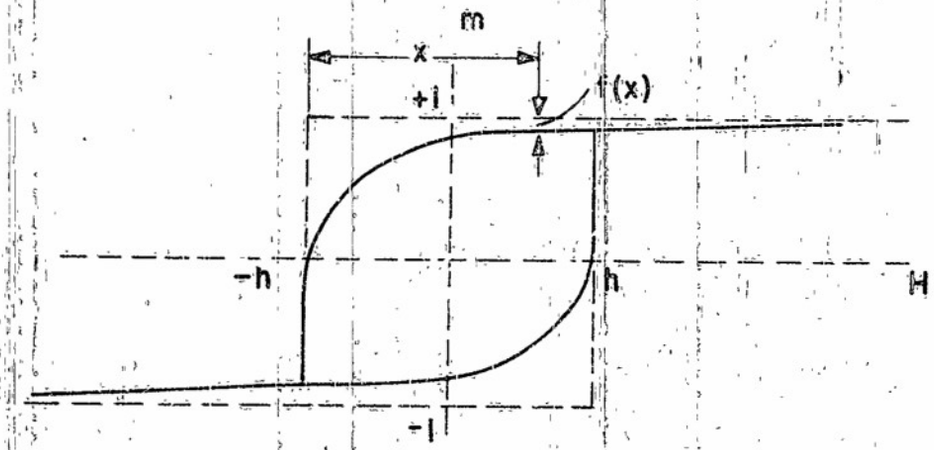

FIG. 1b – HYSTERESIS LOOP FOR SECOND MODEL (SINGLE DOMAIN PARTICLE WITH ARBITRARY ORIENTATION OF INITIAL AXIS OF STABILITY)

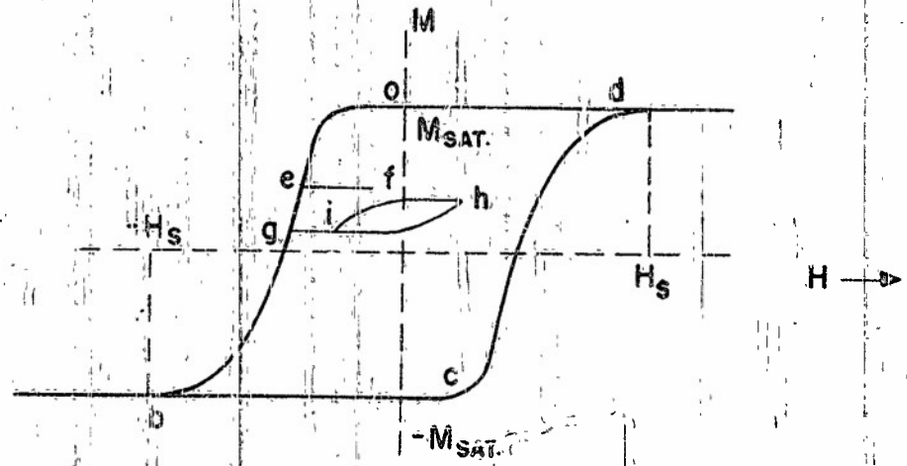

FIG. 1c – HYSTERESIS LOOP FOR THIRD MODEL (DILUTE DISPERSION OF PARTICLES TREATED IN FIRST MODEL)

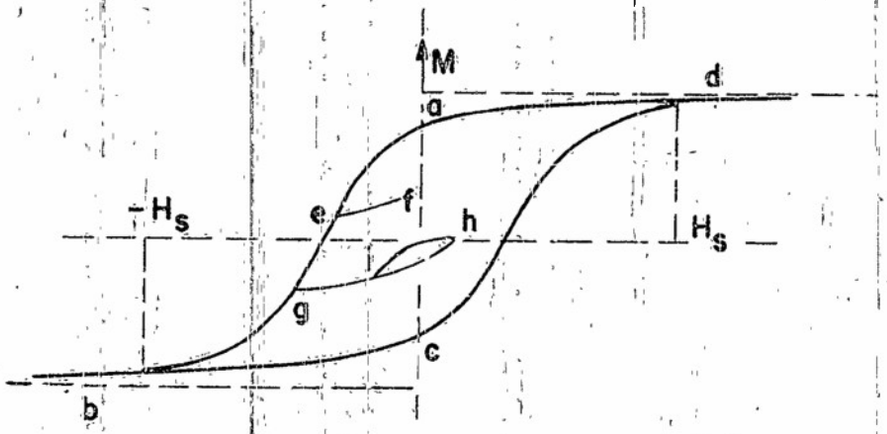

FIG. 1d – HYSTERESIS LOOP FOR FOURTH MODEL (DILUTE DISPERSION OF PARTICLES TREATED IN SECOND MODEL)

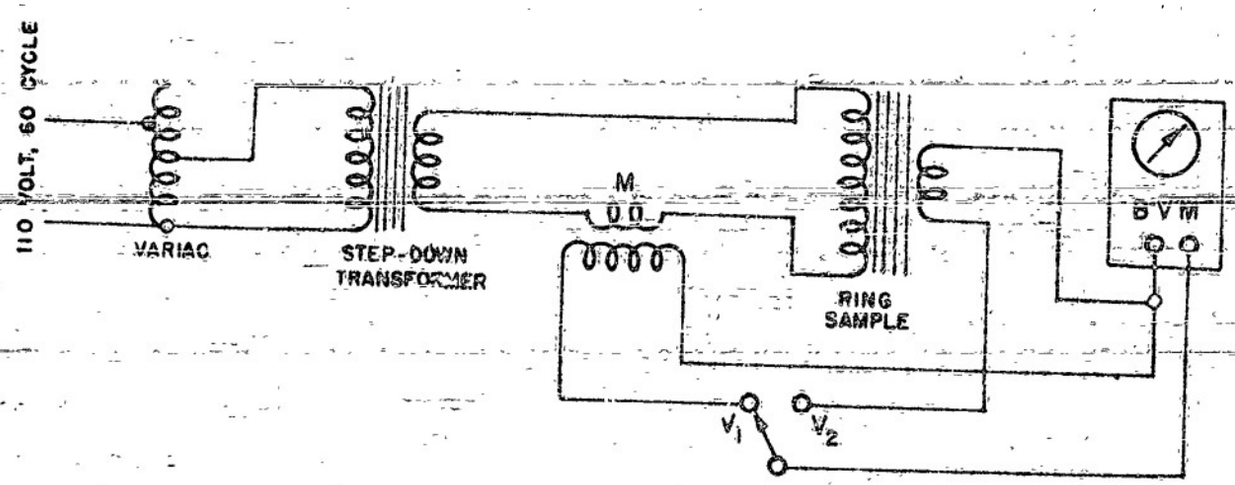

FIGURE 2

CIRCUIT FOR 60 CYCLE MEASUREMENTS ON
FERROXCUBE III CORE.

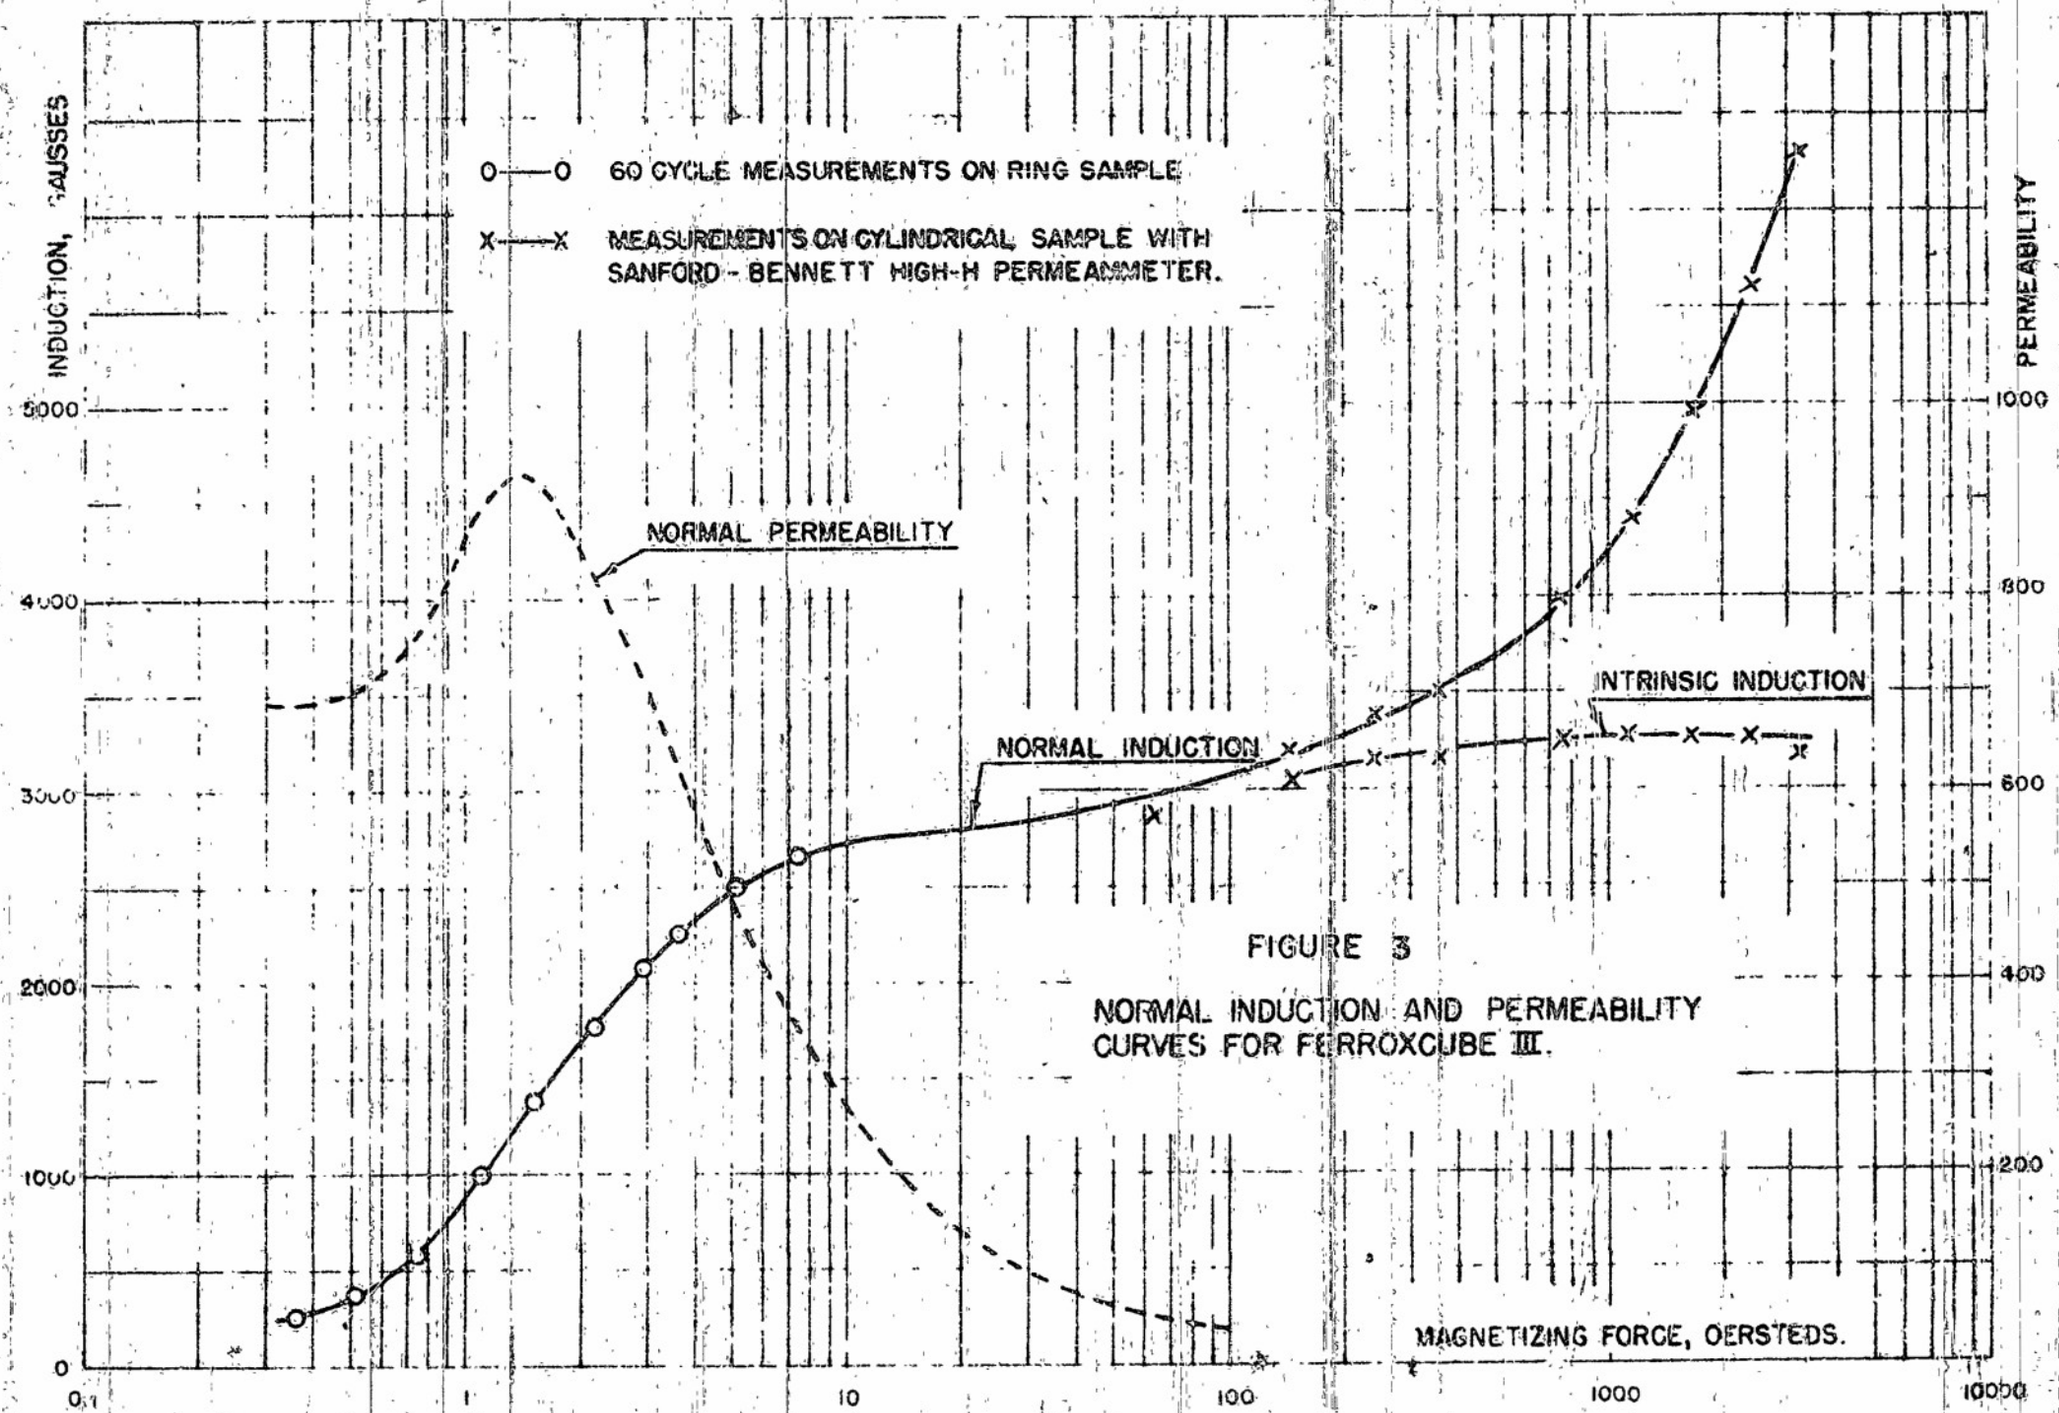

FIGURE 3

NORMAL INDUCTION AND PERMEABILITY CURVES FOR FERROXCUBE III.

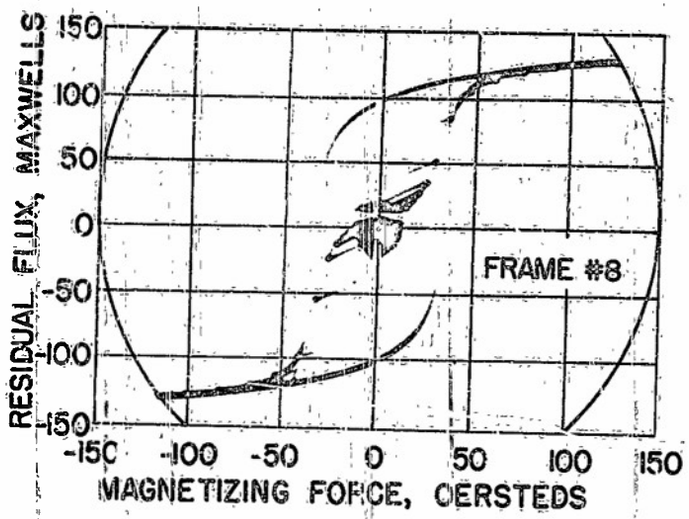

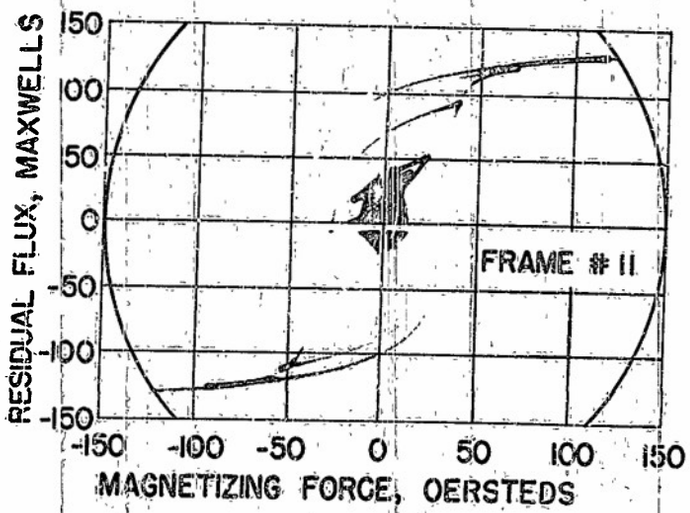

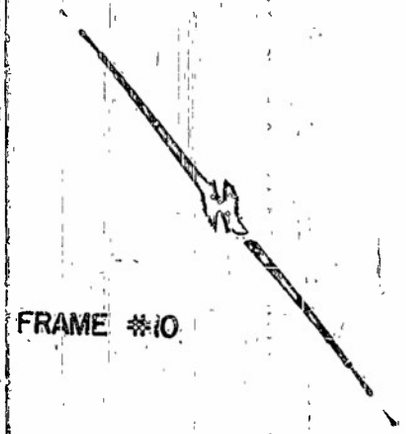

FIG. 4
CATHODE-RAY OSCILLOGRAPH
HYSTERESIS TRACES
FRAMES 8,10,11

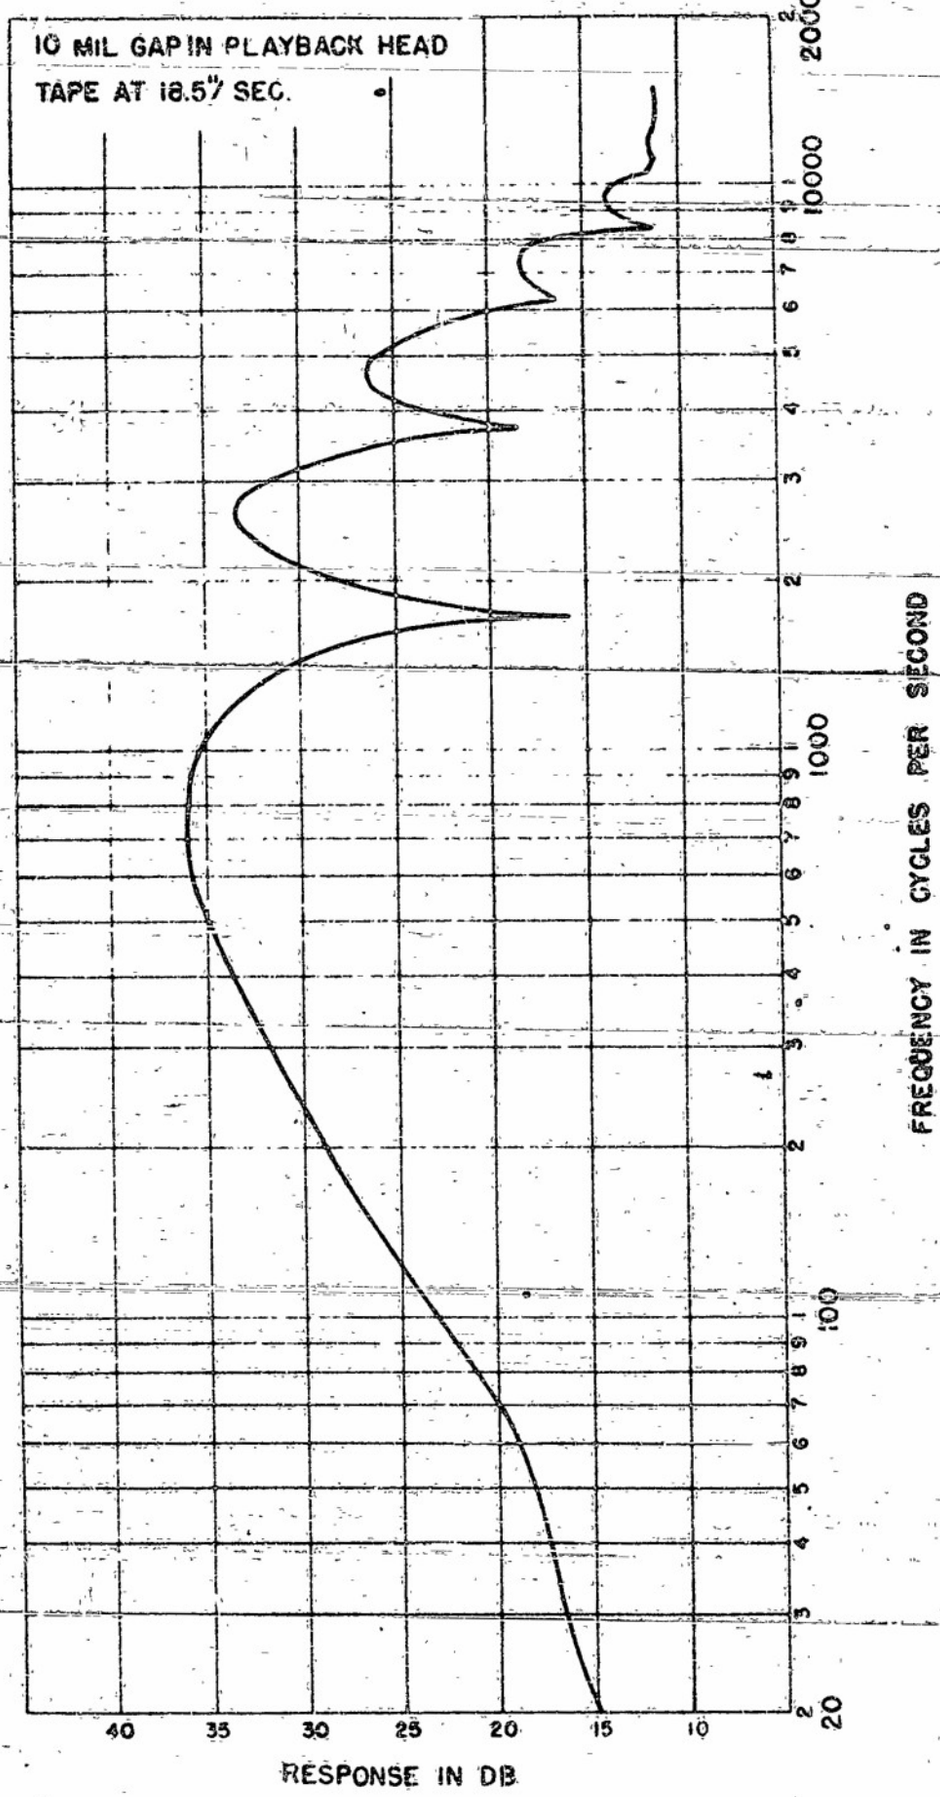
10 MIL GAP IN PLAYBACK HEAD
TAPE AT 18.5" SEC.
FREQUENCY IN CYCLES PER SECOND
20
100
1000
10000
20000
RESPONSE IN DB
40
35
30
25
20
15
10
0 DB = 10 MICROVOLTS

FIG. 5

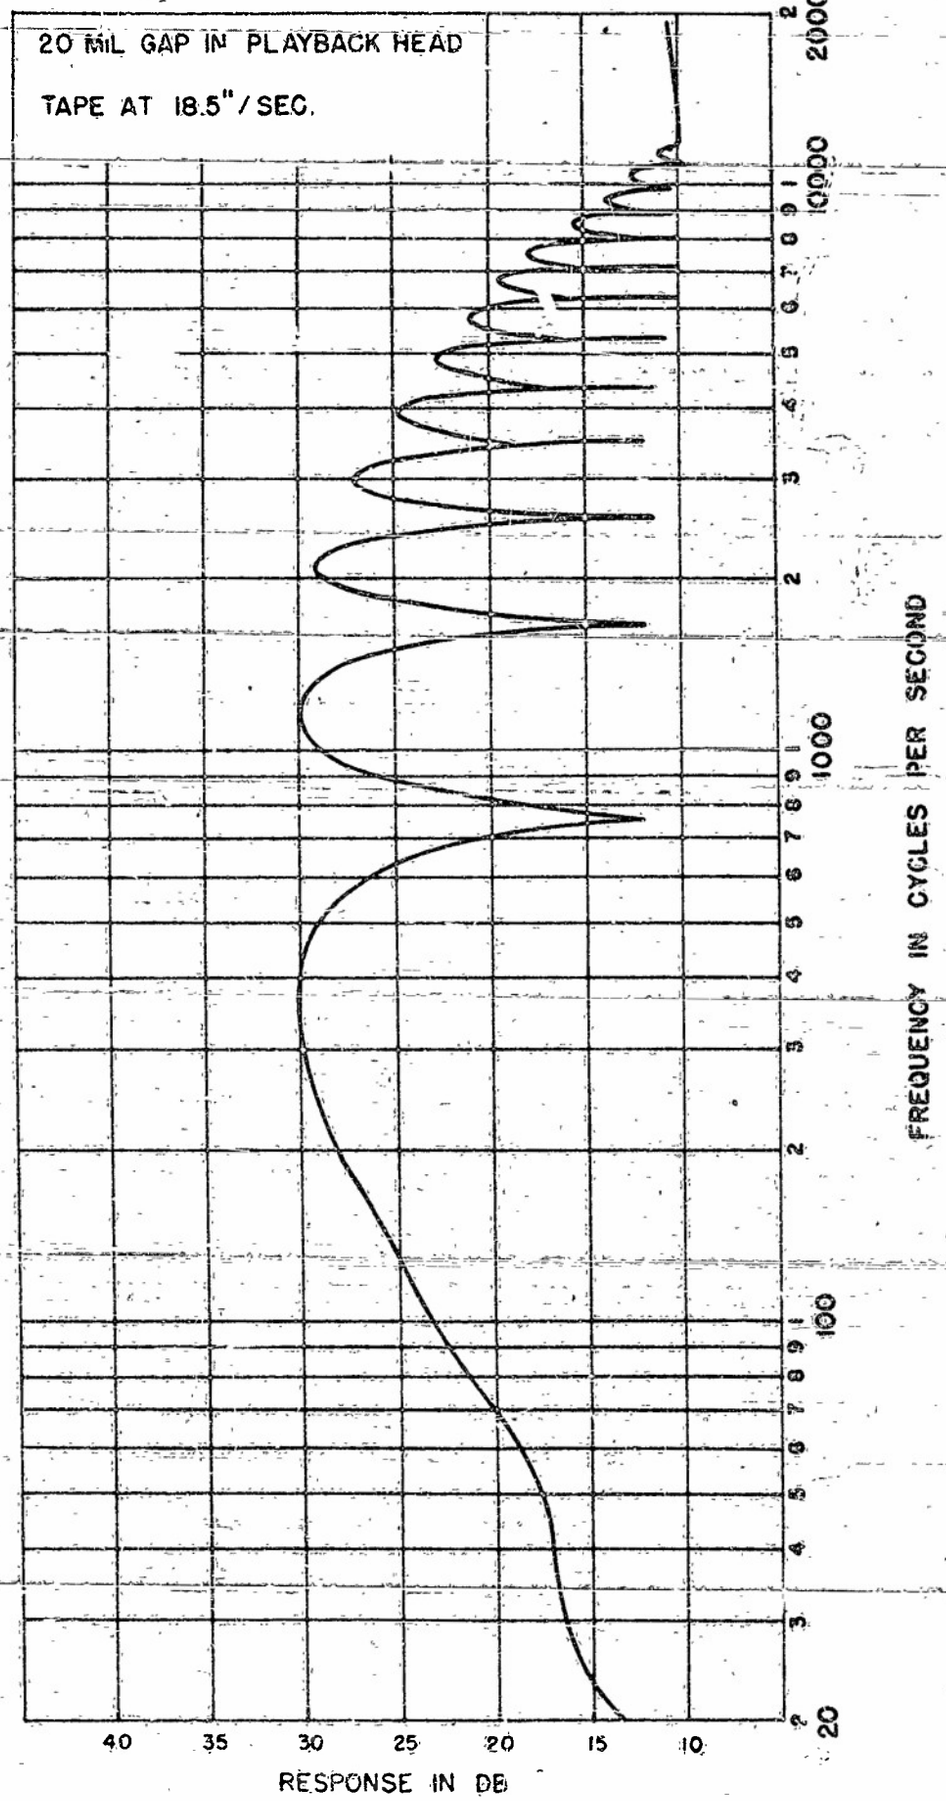

0 DB = 10 MICROVOLTS

FIG. 6

RESTRICTED

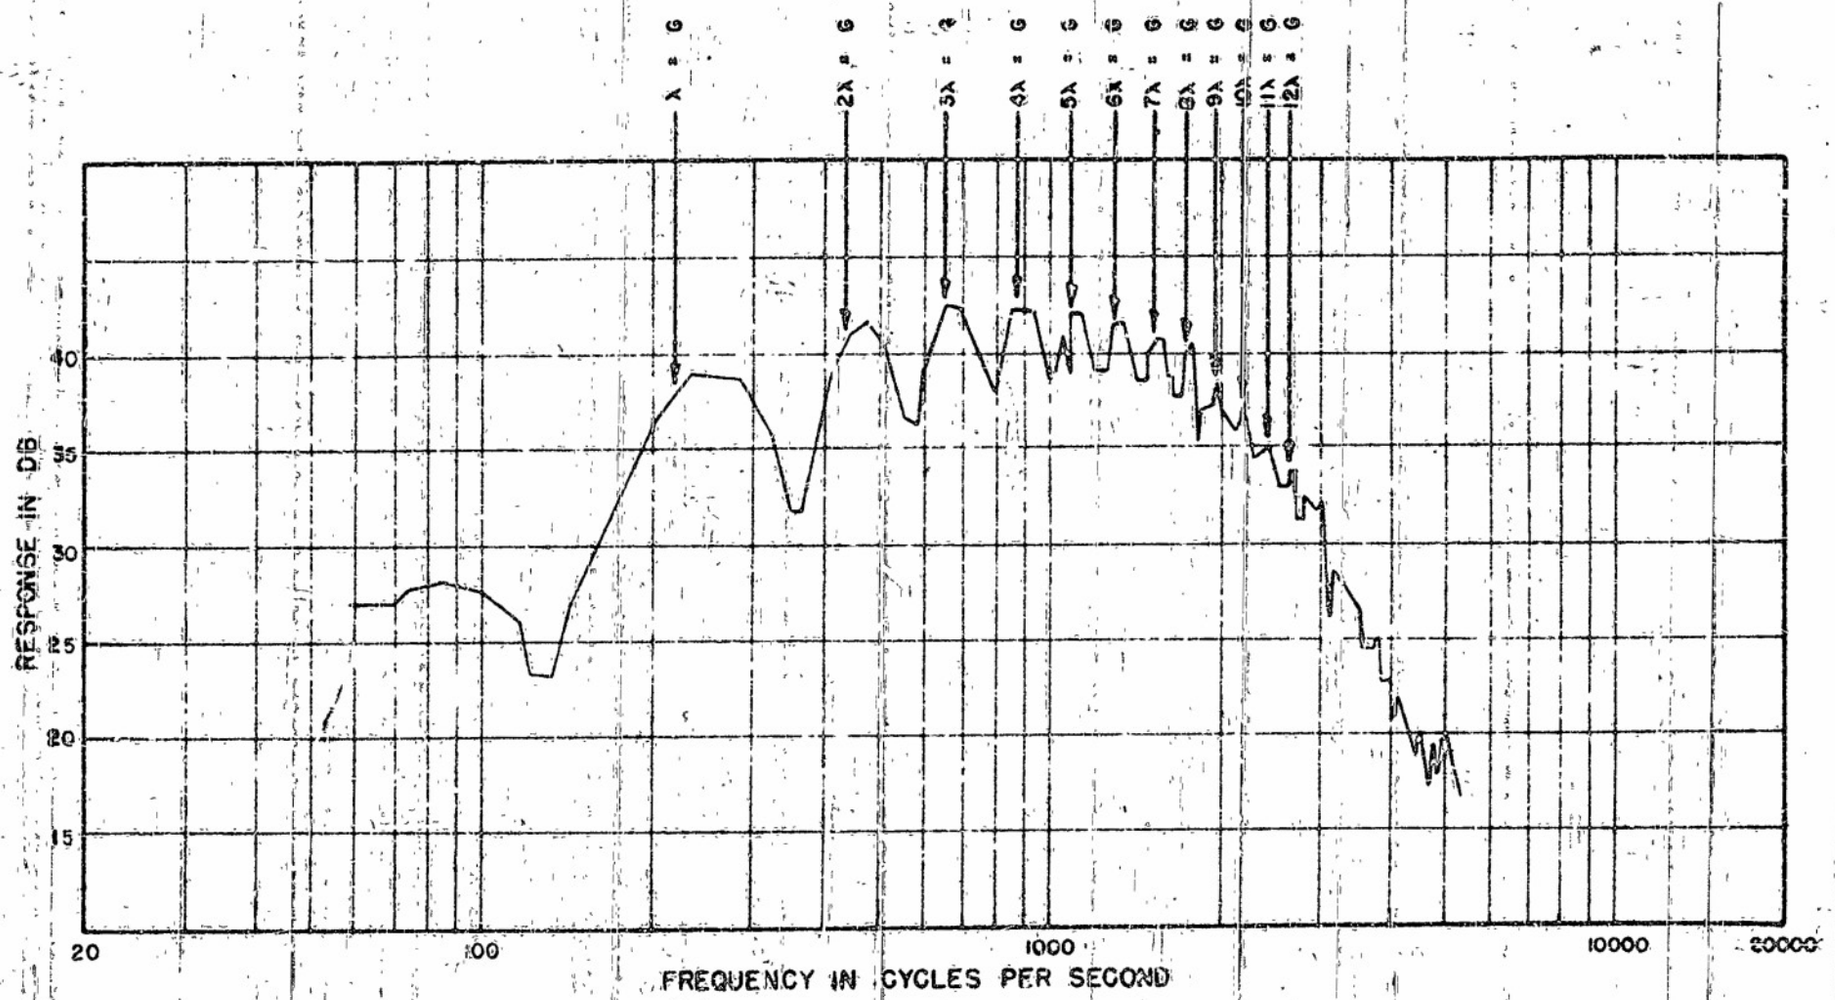

FIGURE 7

PLAYBACK RESPONSE USING CONVENTIONAL PLAYBACK HEAD — RECORDING HEAD HAD .038" GAP. TAPE SPEED 7.9"/SEC.

RESTRICTED

RESTRICTED

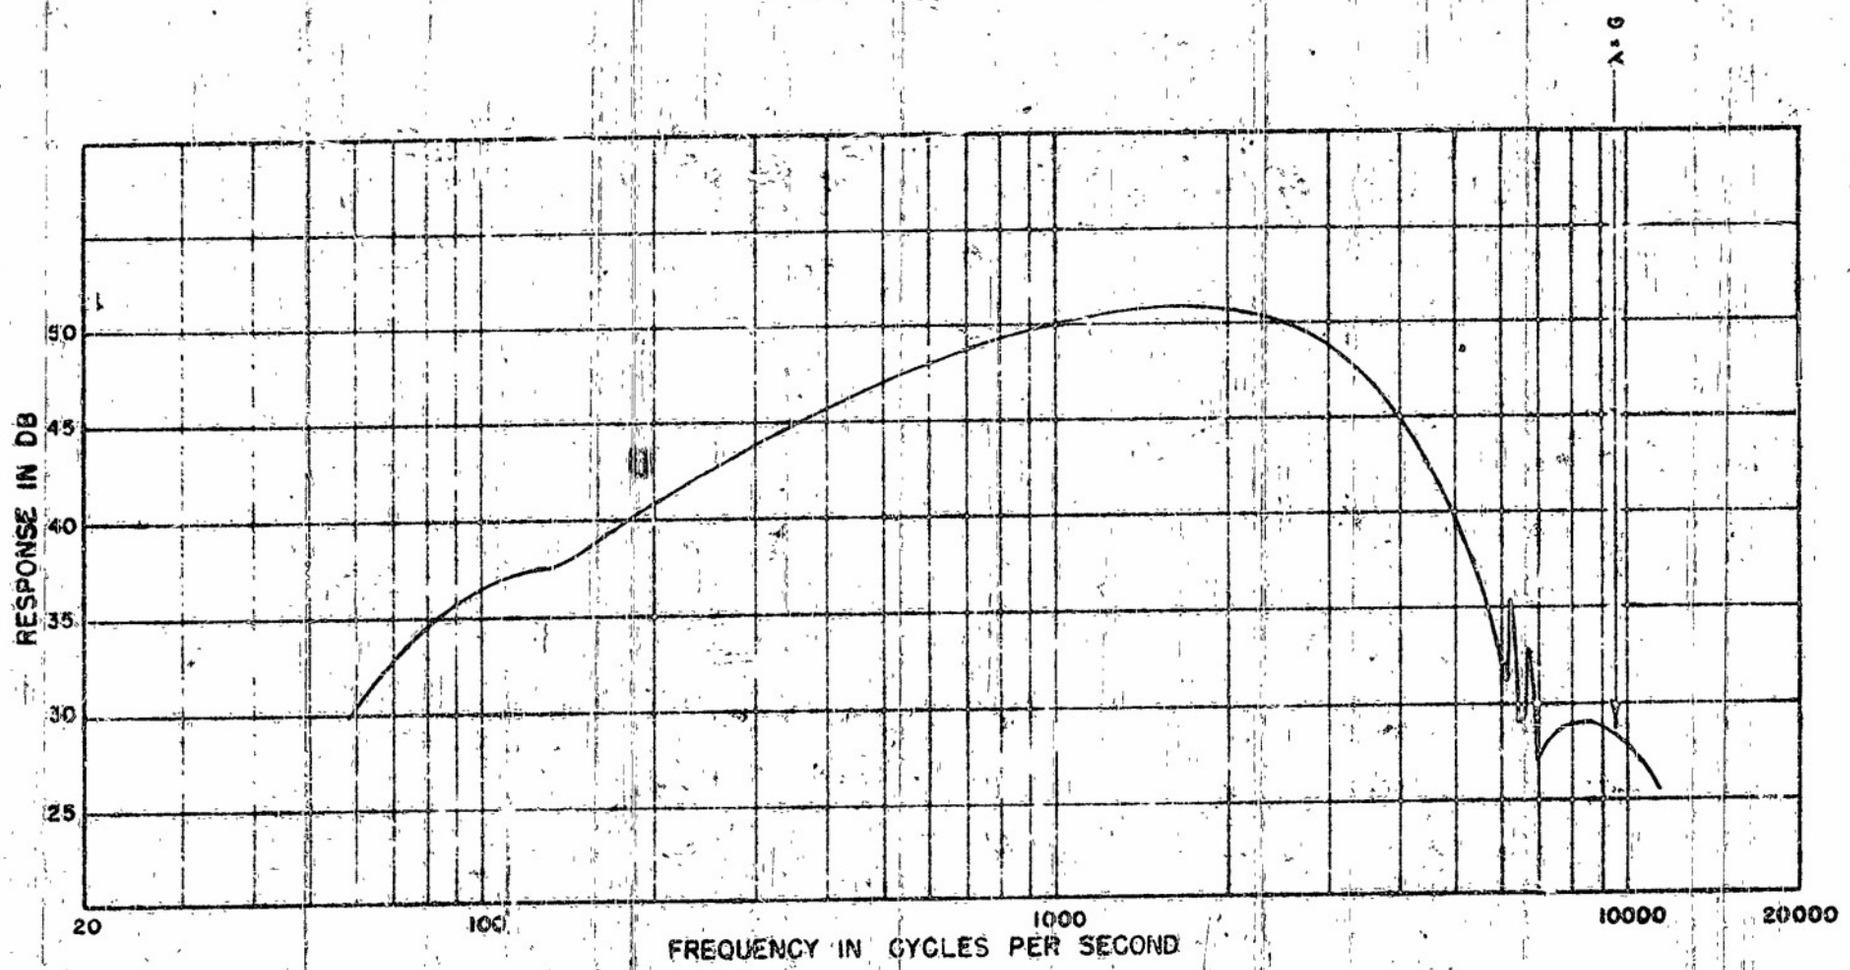

FIGURE 8

PLAYBACK RESPONSE USING CONVENTIONAL PLAYBACK HEAD - RECORDING HEAD HAD APPROX. .002" GAP - TAPE SPEED 19"/SEC.

RESTRICTED

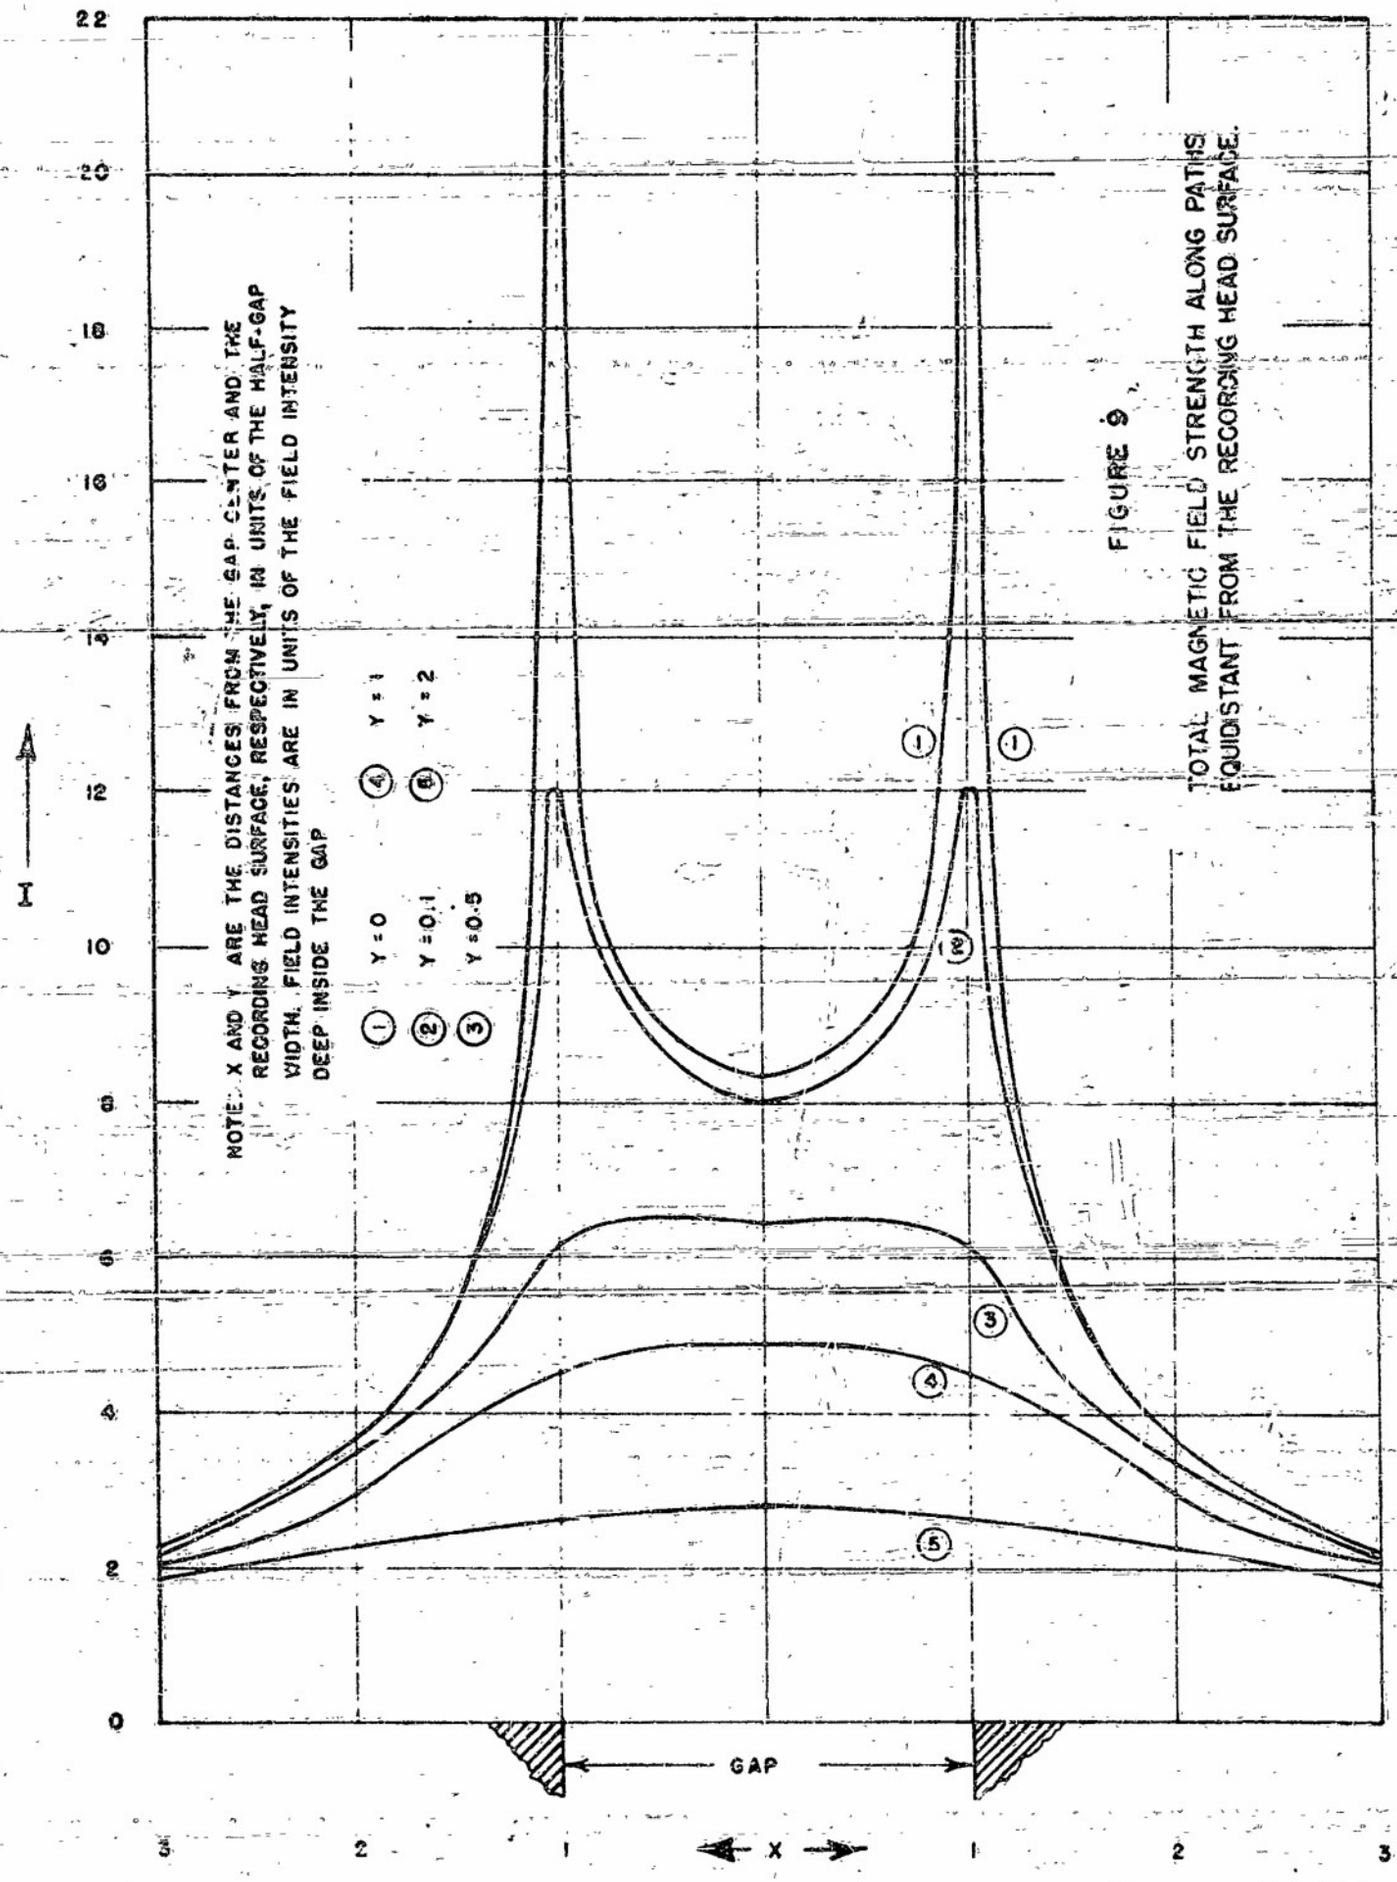

FIGURE 9

TOTAL MAGNETIC FIELD STRENGTH ALONG PATHS EQUIDISTANT FROM THE RECORDING HEAD SURFACE.

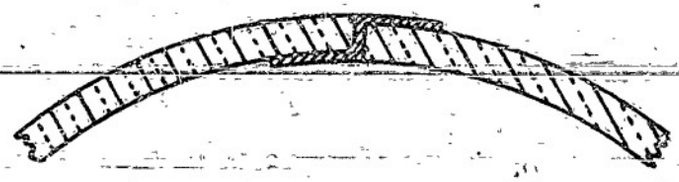

FIGURE 10

"SINGLE EDGE" HEAD-GAP SPACER FOLDED OVER ONE POLE TIP.

RESTRICTED

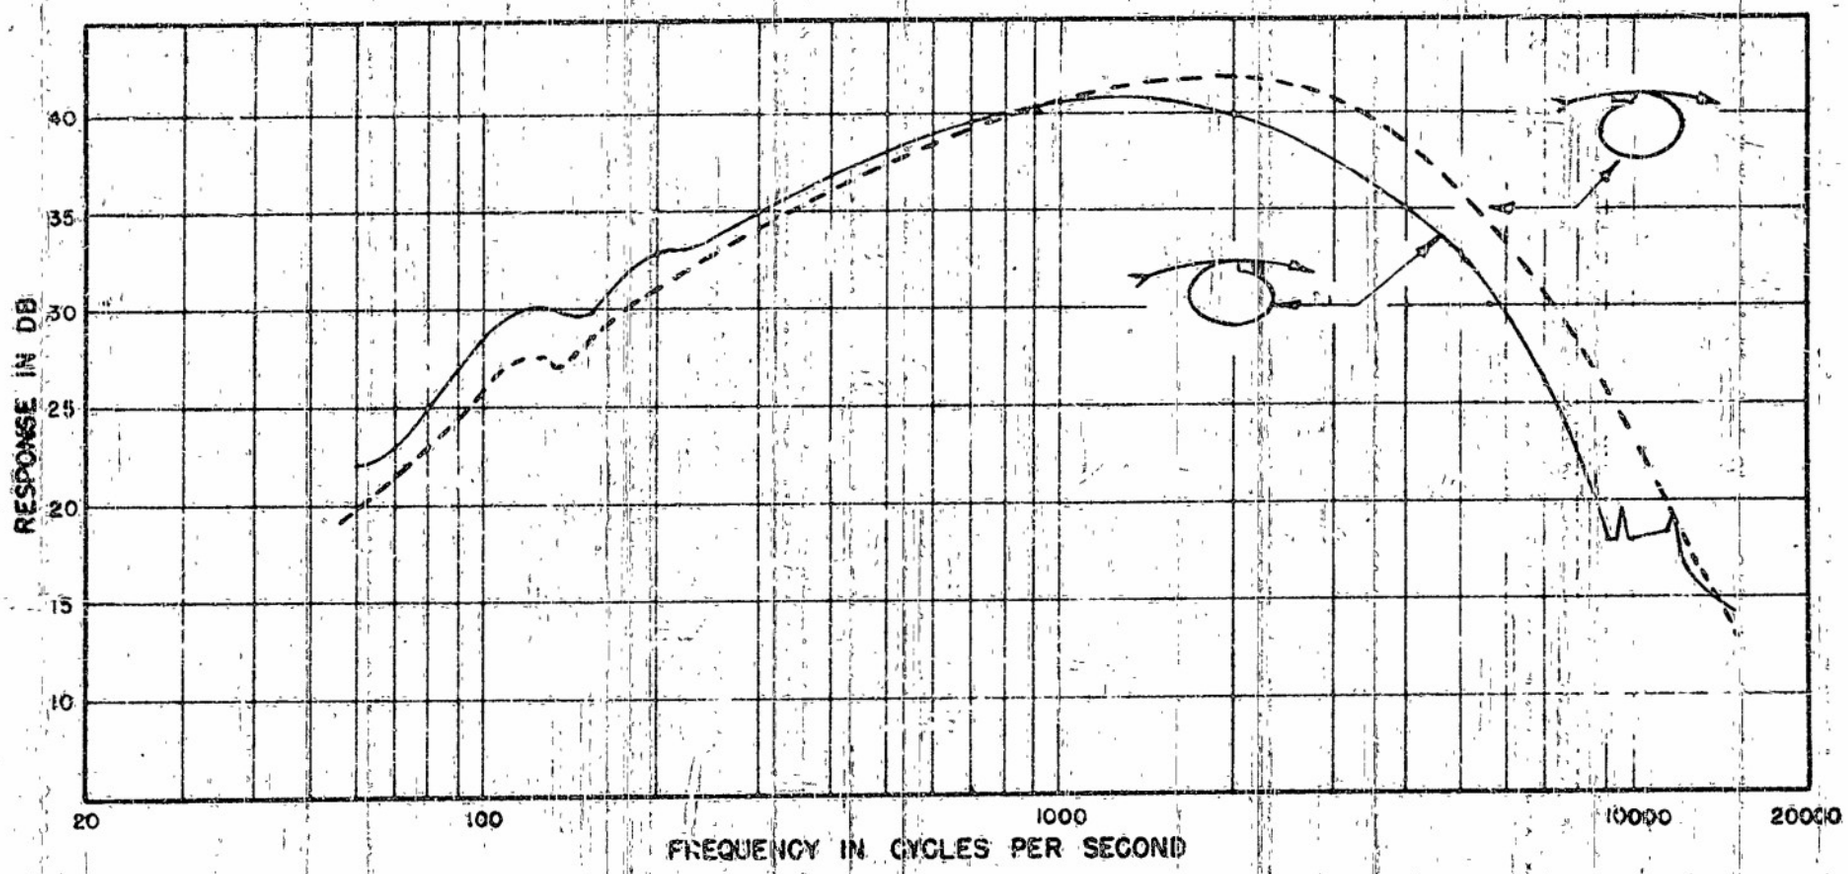

FIGURE 11

PLAYBACK RESPONSE--CONVENTIONAL PLAYBACK HEAD PLAYING BACK RECORDINGS MADE BY "SINGLE EDGE" RECORDING HEAD. TWO TAPE DIRECTIONS RELATIVE TO RECORDING HEAD.

RESTRICTED

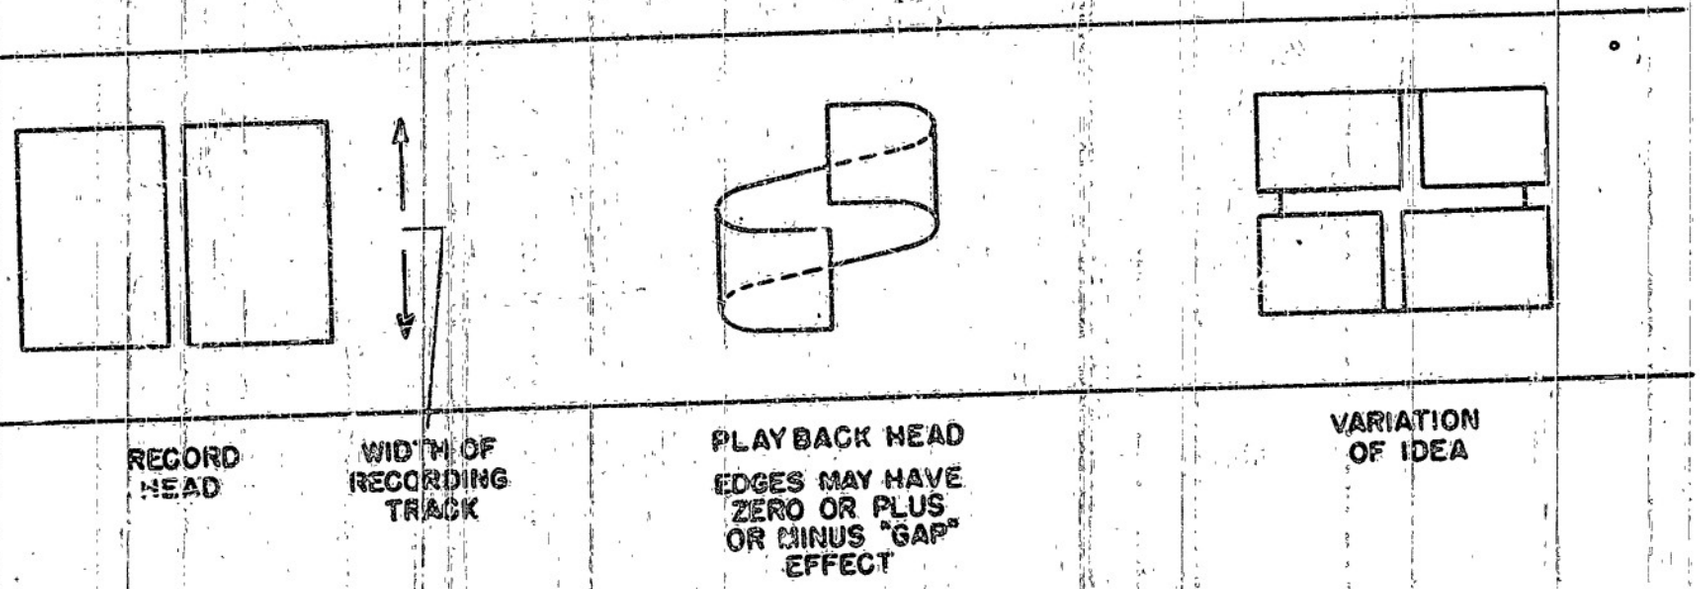

ZERO GAP PLAYBACK HEAD

FIG. 12

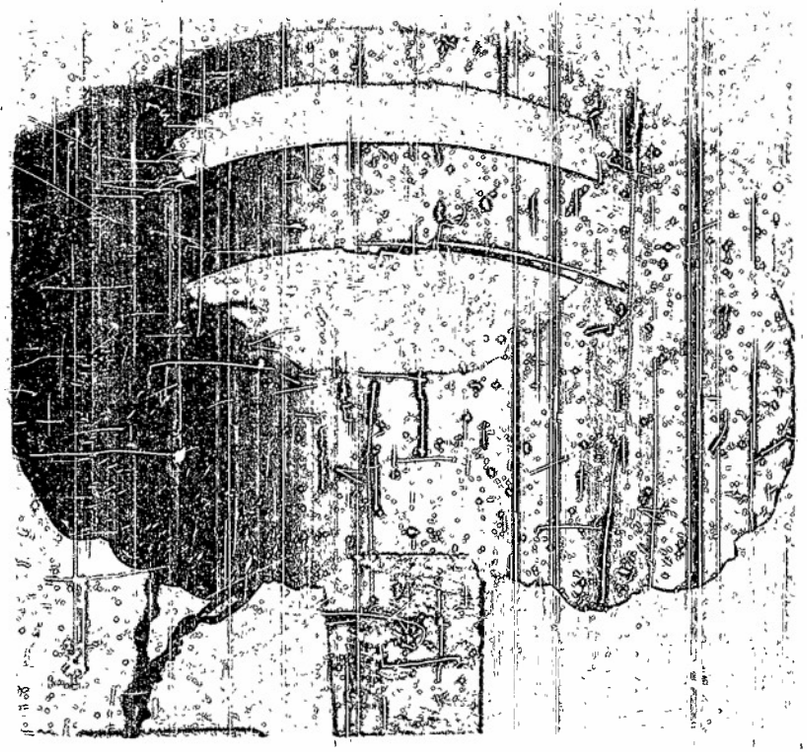

Fig. 13a WIDE GAP HEAD

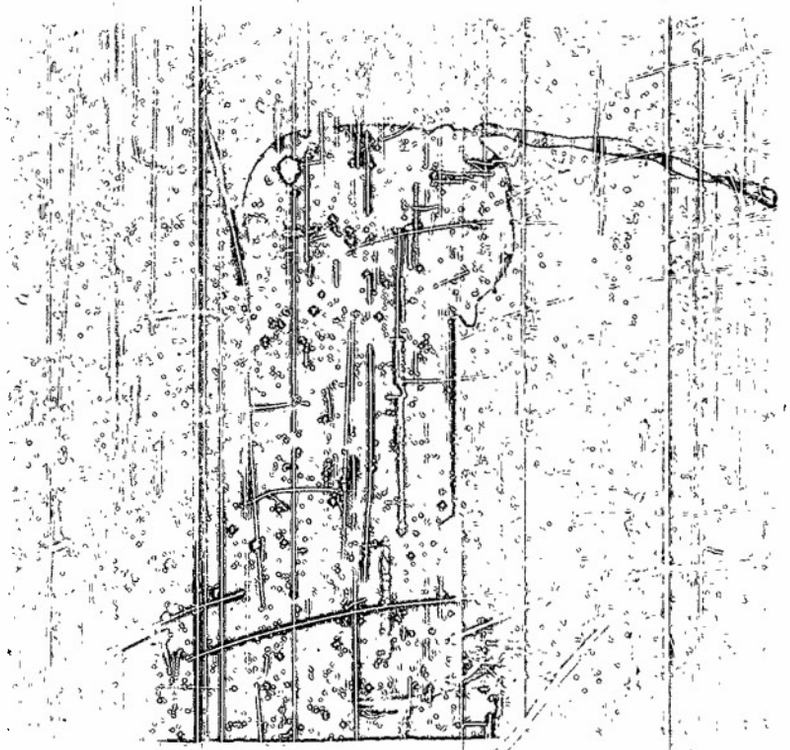

Fig. 13b ZERO GAP HEAD

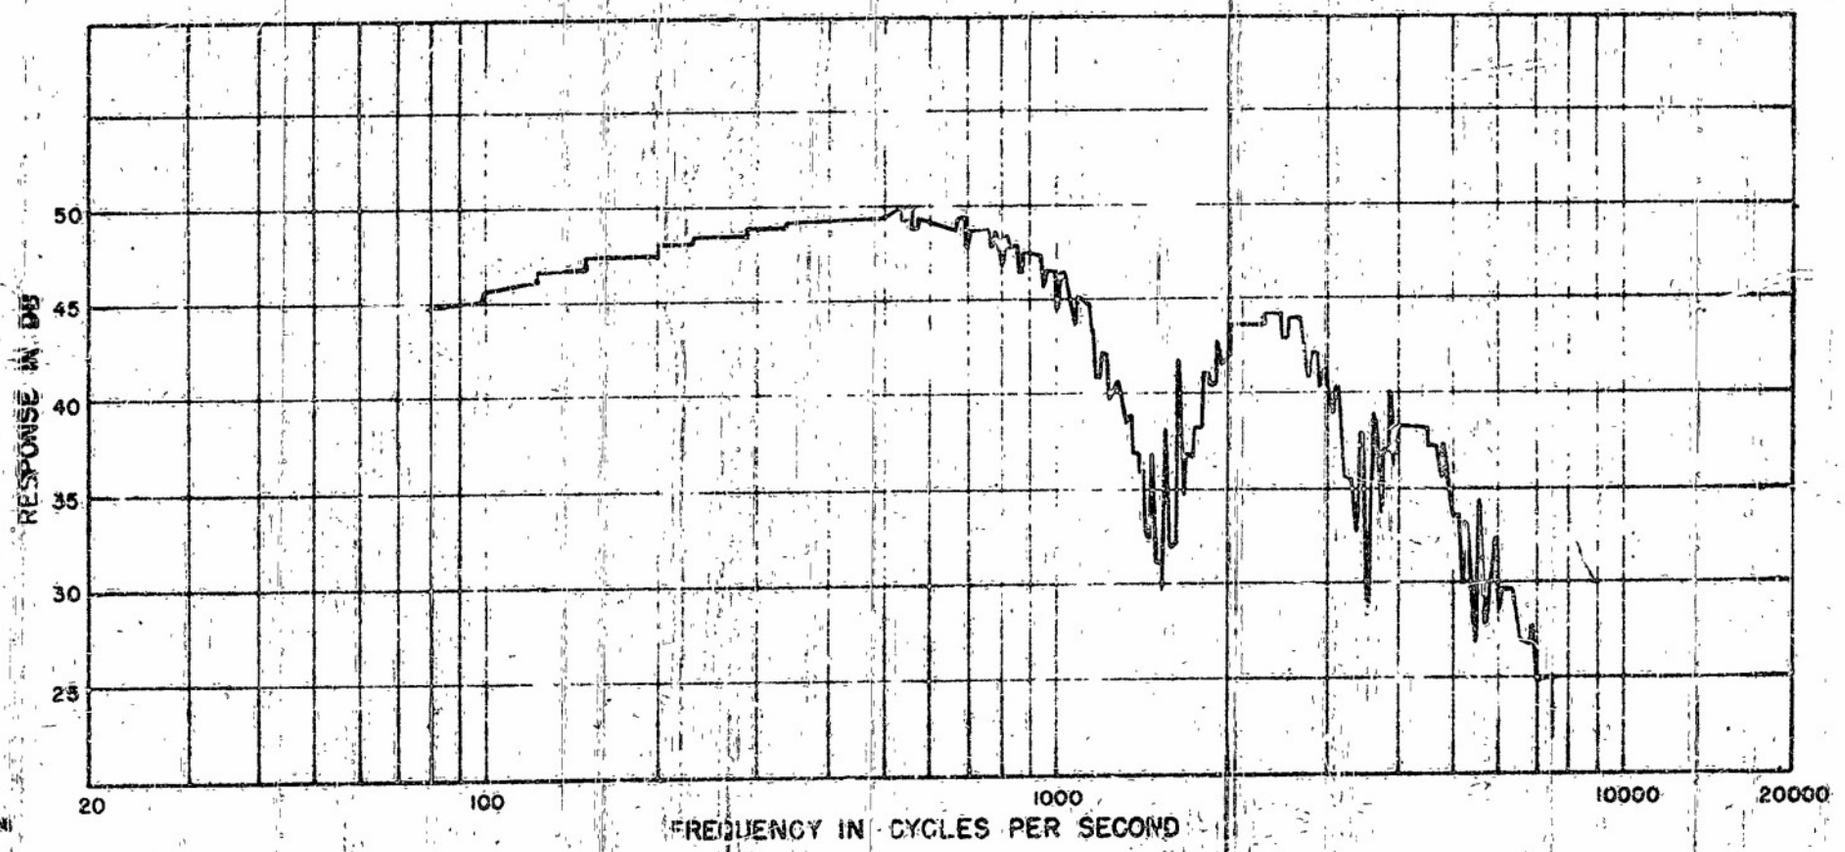

FIGURE 14

PLAYBACK RESPONSE - "NEGATIVE GAP" HEAD ADJUSTED FOR POSITIVE .010 GAP. RECORDING MADE BY CONVENTIONAL HEAD COVERING ENTIRE TAPE WIDTH – TAPE SPEED 18 3"/ SEC.

RESTRICTED

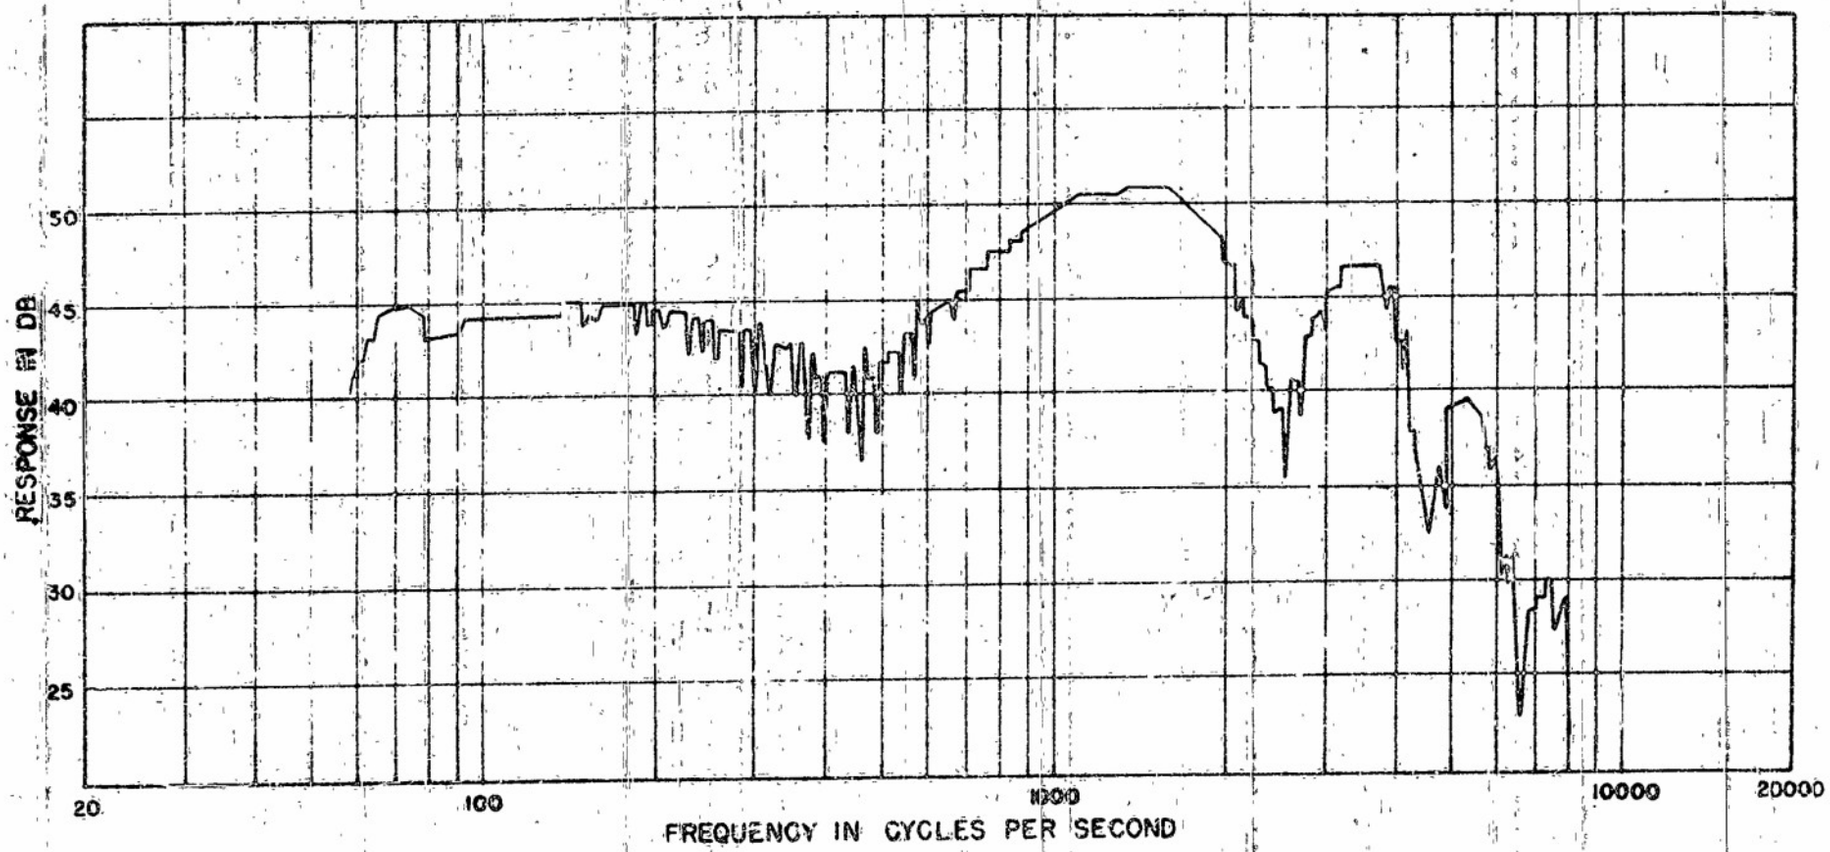

FIGURE 15

PLAYBACK RESPONSE - "NEGATIVE GAP" HEAD ADJUSTED FOR NEGATIVE .010 GAP. RECORDING MADE BY CONVENTIONAL HEAD COVERING ENTIRE TAPE WIDTH - TAPE SPEED 18.3"/SEC.

REPORT NO. 90-783A-12

RESTRICTED

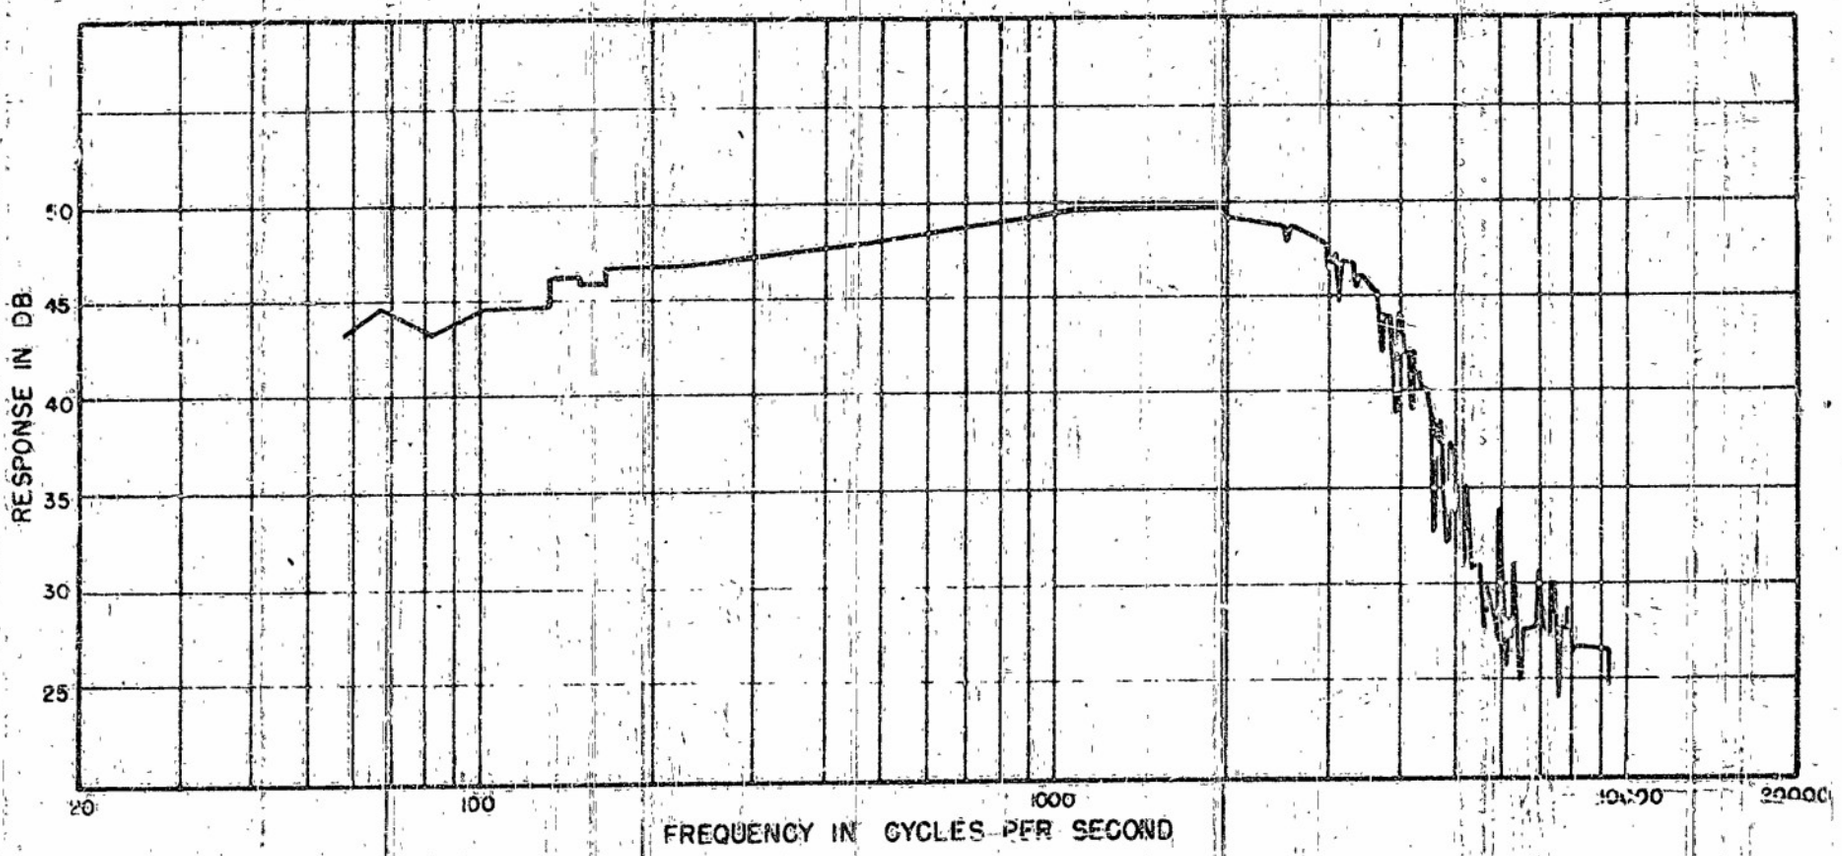

FIGURE 16

PLAYBACK RESPONSE - "NEGATIVE GAP" HEAD ADJUSTED FOR POSITIVE .002 GAP
RECORDING MADE BY CONVENTIONAL HEAD COVERING ENTIRE TAPE WIDTH - TAPE
SPEED 18.3"/SEC.

RESTRICTED

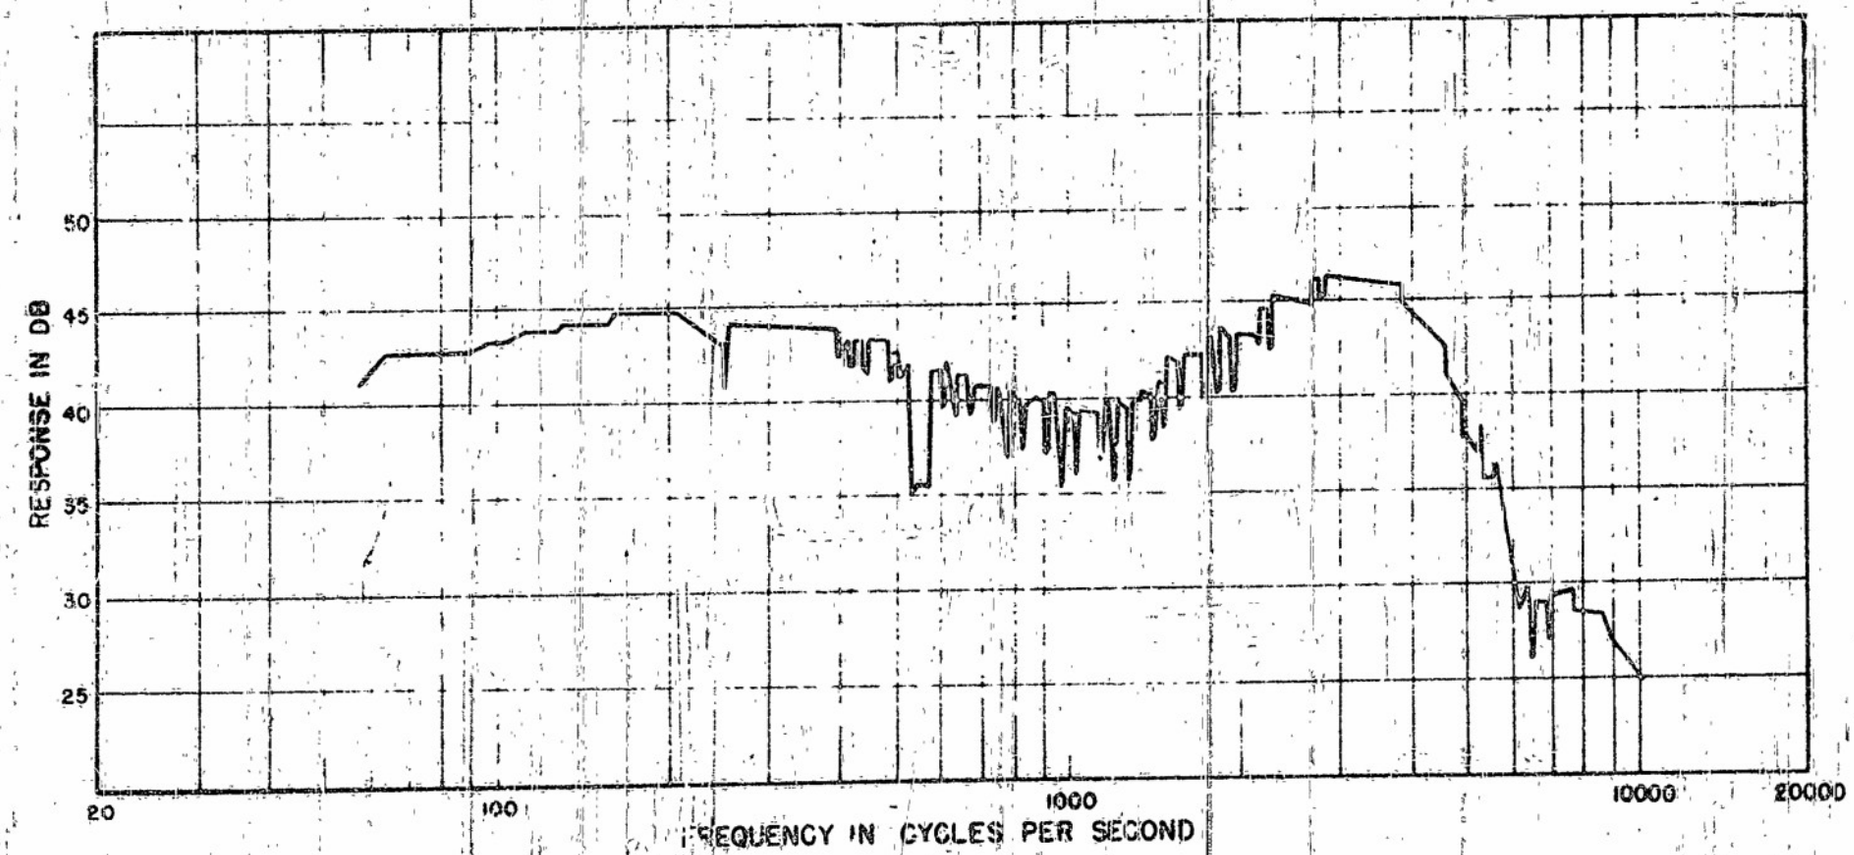

FIGURE 17

PLAYBACK RESPONSE - "NEGATIVE GAP" HEAD ADJUSTED FOR NEGATIVE .002 GAP. RECORDING MADE BY CONVENTIONAL HEAD COVERING ENTIRE TAPE WIDTH — TAPE SPEED 18.3"/SEC.

REPORT NO. 90-7[illegible]A-12

RESTRICTED

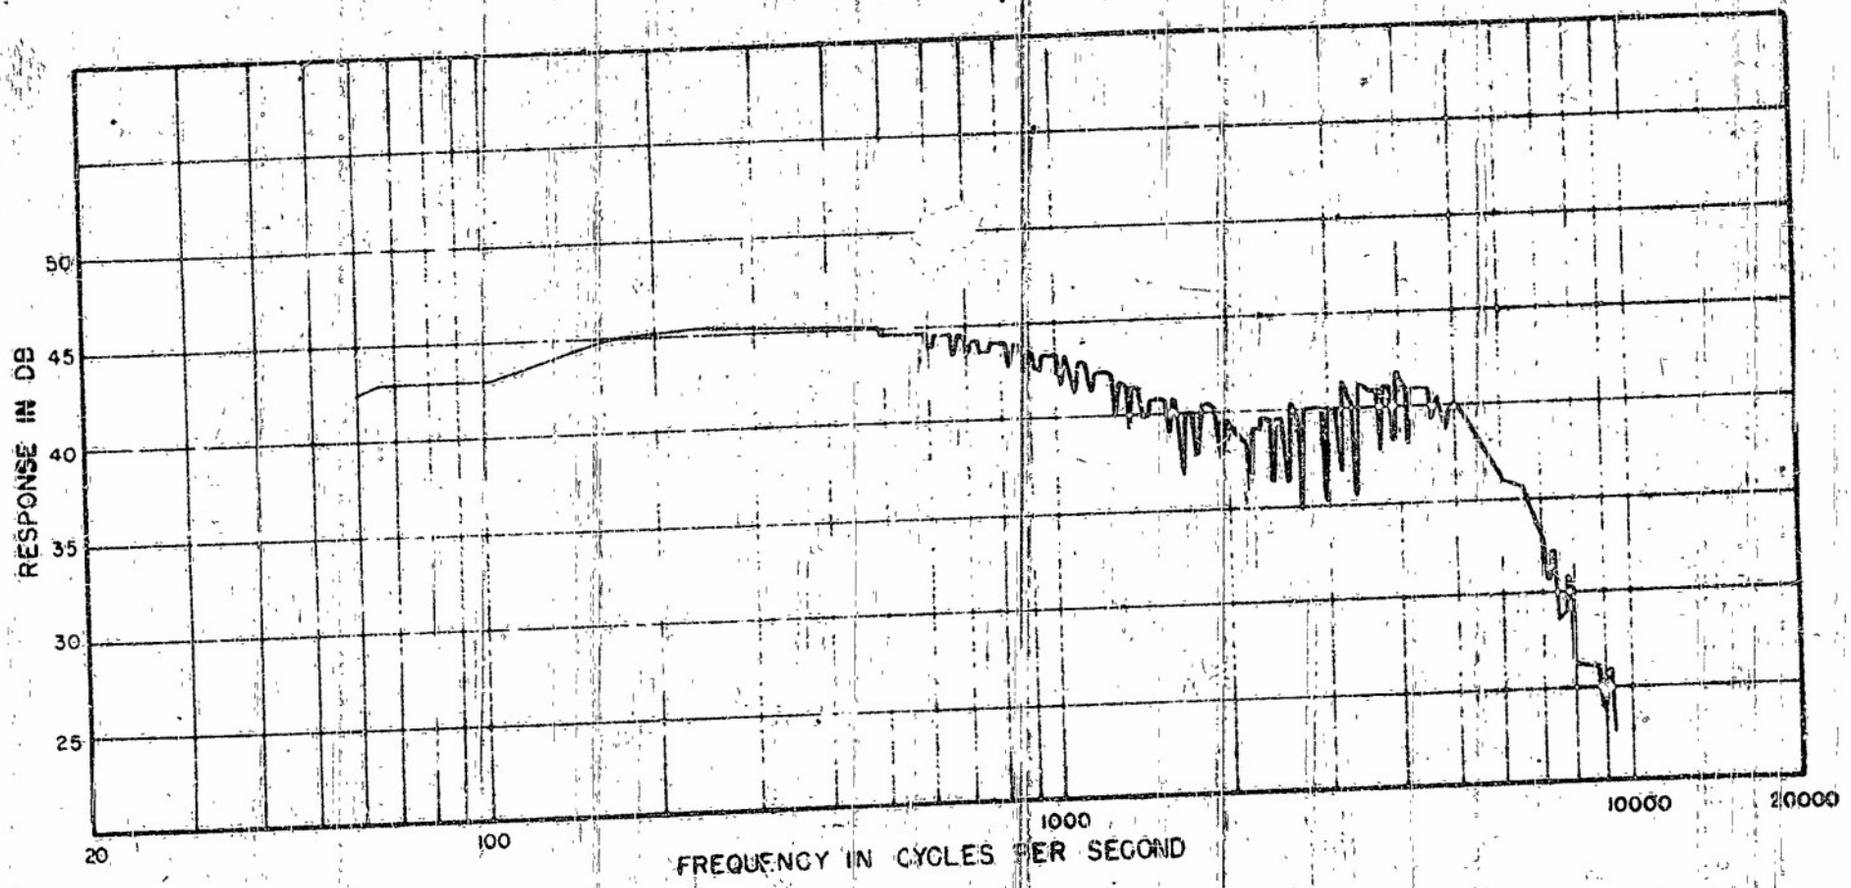

FIGURE 10

PLAYBACK RESPONSE - "NEGATIVE GAP" HEAD ADJUSTED FOR VERY SMALL NEGATIVE GAP. RECORDING MADE BY CONVENTIONAL HEAD COVERING ENTIRE TAPE WIDTH - TAPE SPEED 18.3"/SEC.

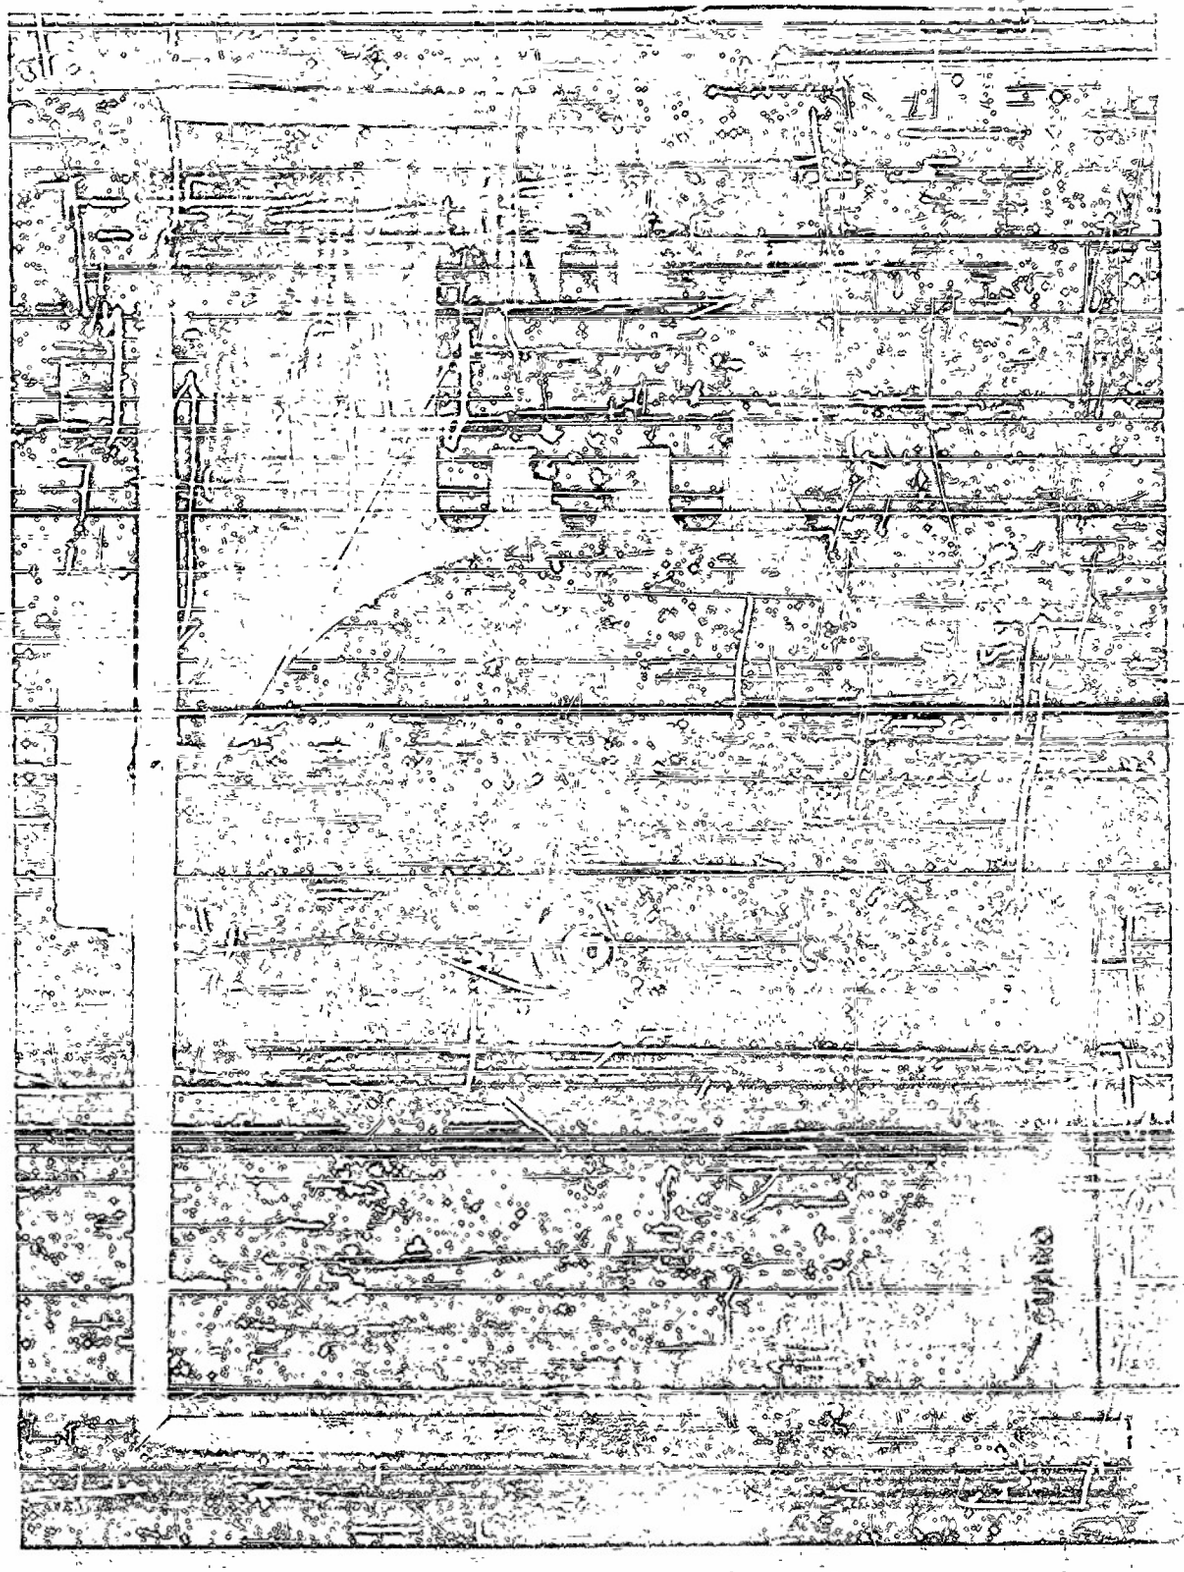

FIG 11 - HIGH SPEED DRIVE FOR TAPE LOOP

FIGURE 20

PLASTIC AND PAPER BASE TAPES. COATINGS DAMAGED BY HIGH SPEED OPERATION.

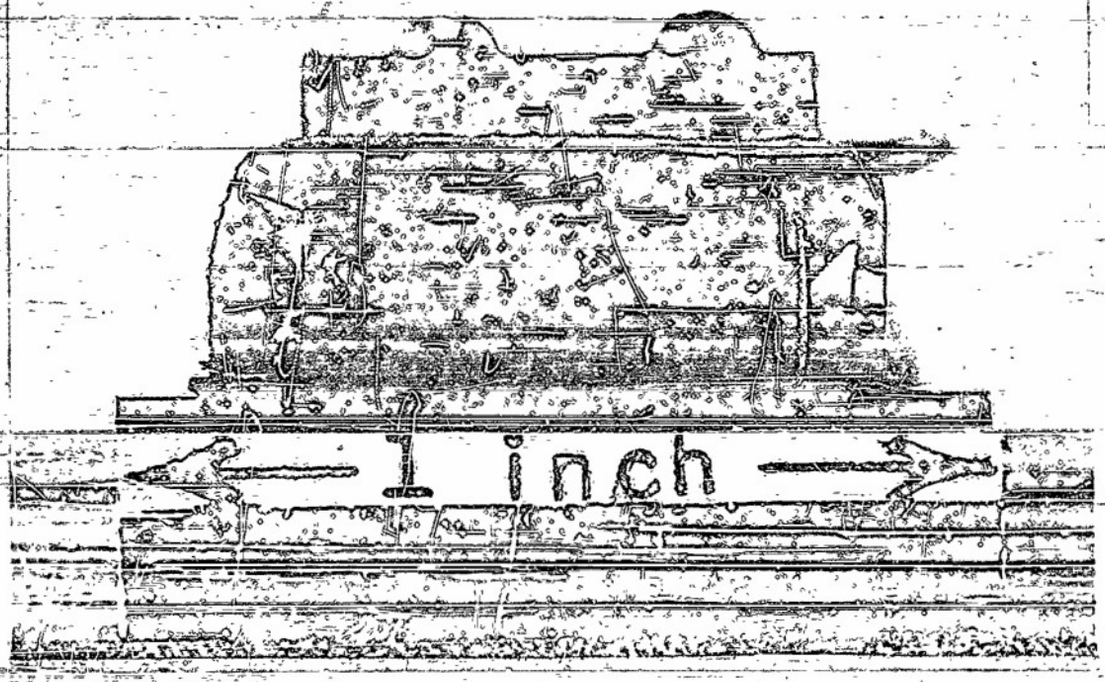

FIGURE 21

COATING DEPOSITS ON FERROXCUBE III HEAD

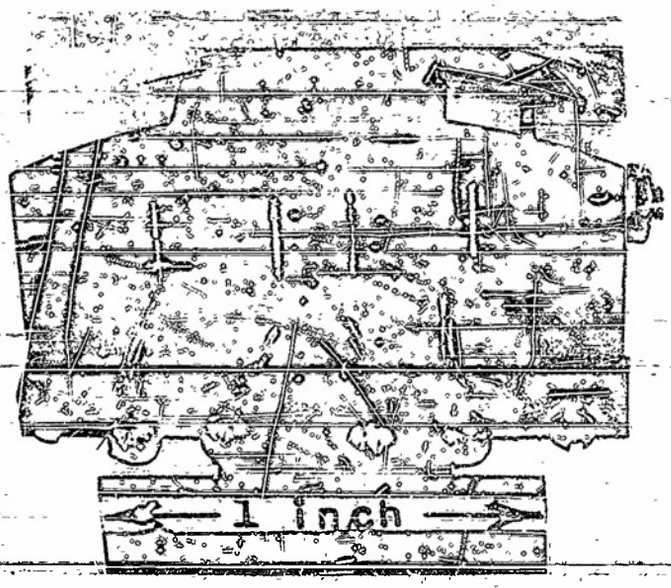

FIGURE 22

PHOTOGRAPH OF SECOND MODEL OF FERROXCUBE III HEAD

KEUFFEL & ESSER CO., N. Y. NO. 359-91
Semi-Logarithmic, 5 Cycles × 10 to the inch, 5th lines accented.
MADE IN U.S.A.

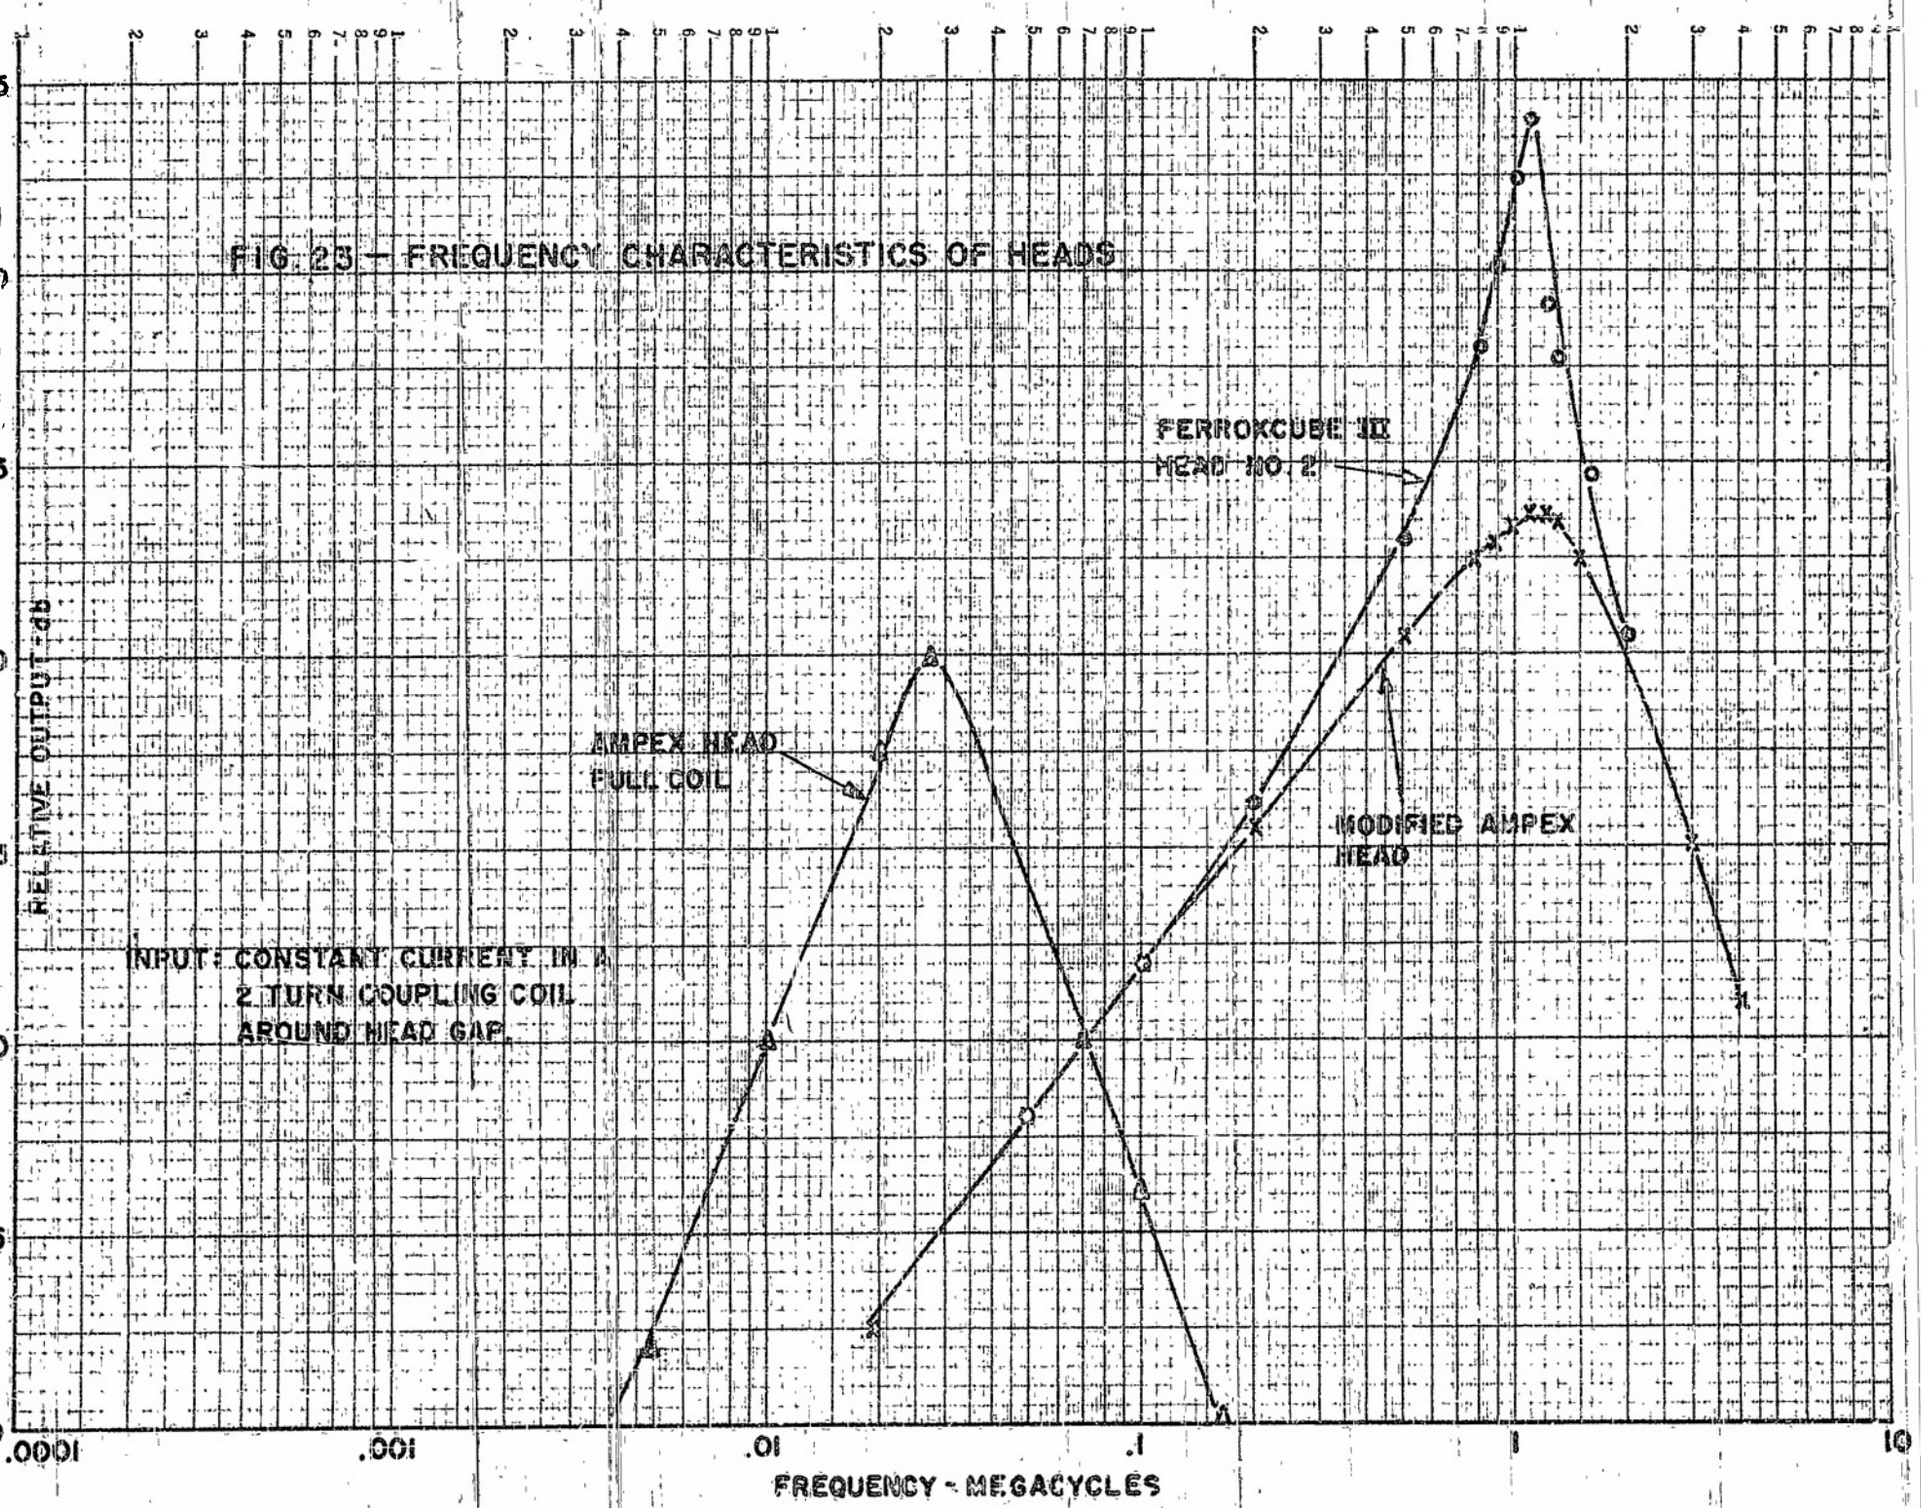

FIG. 23 — FREQUENCY CHARACTERISTICS OF HEADS

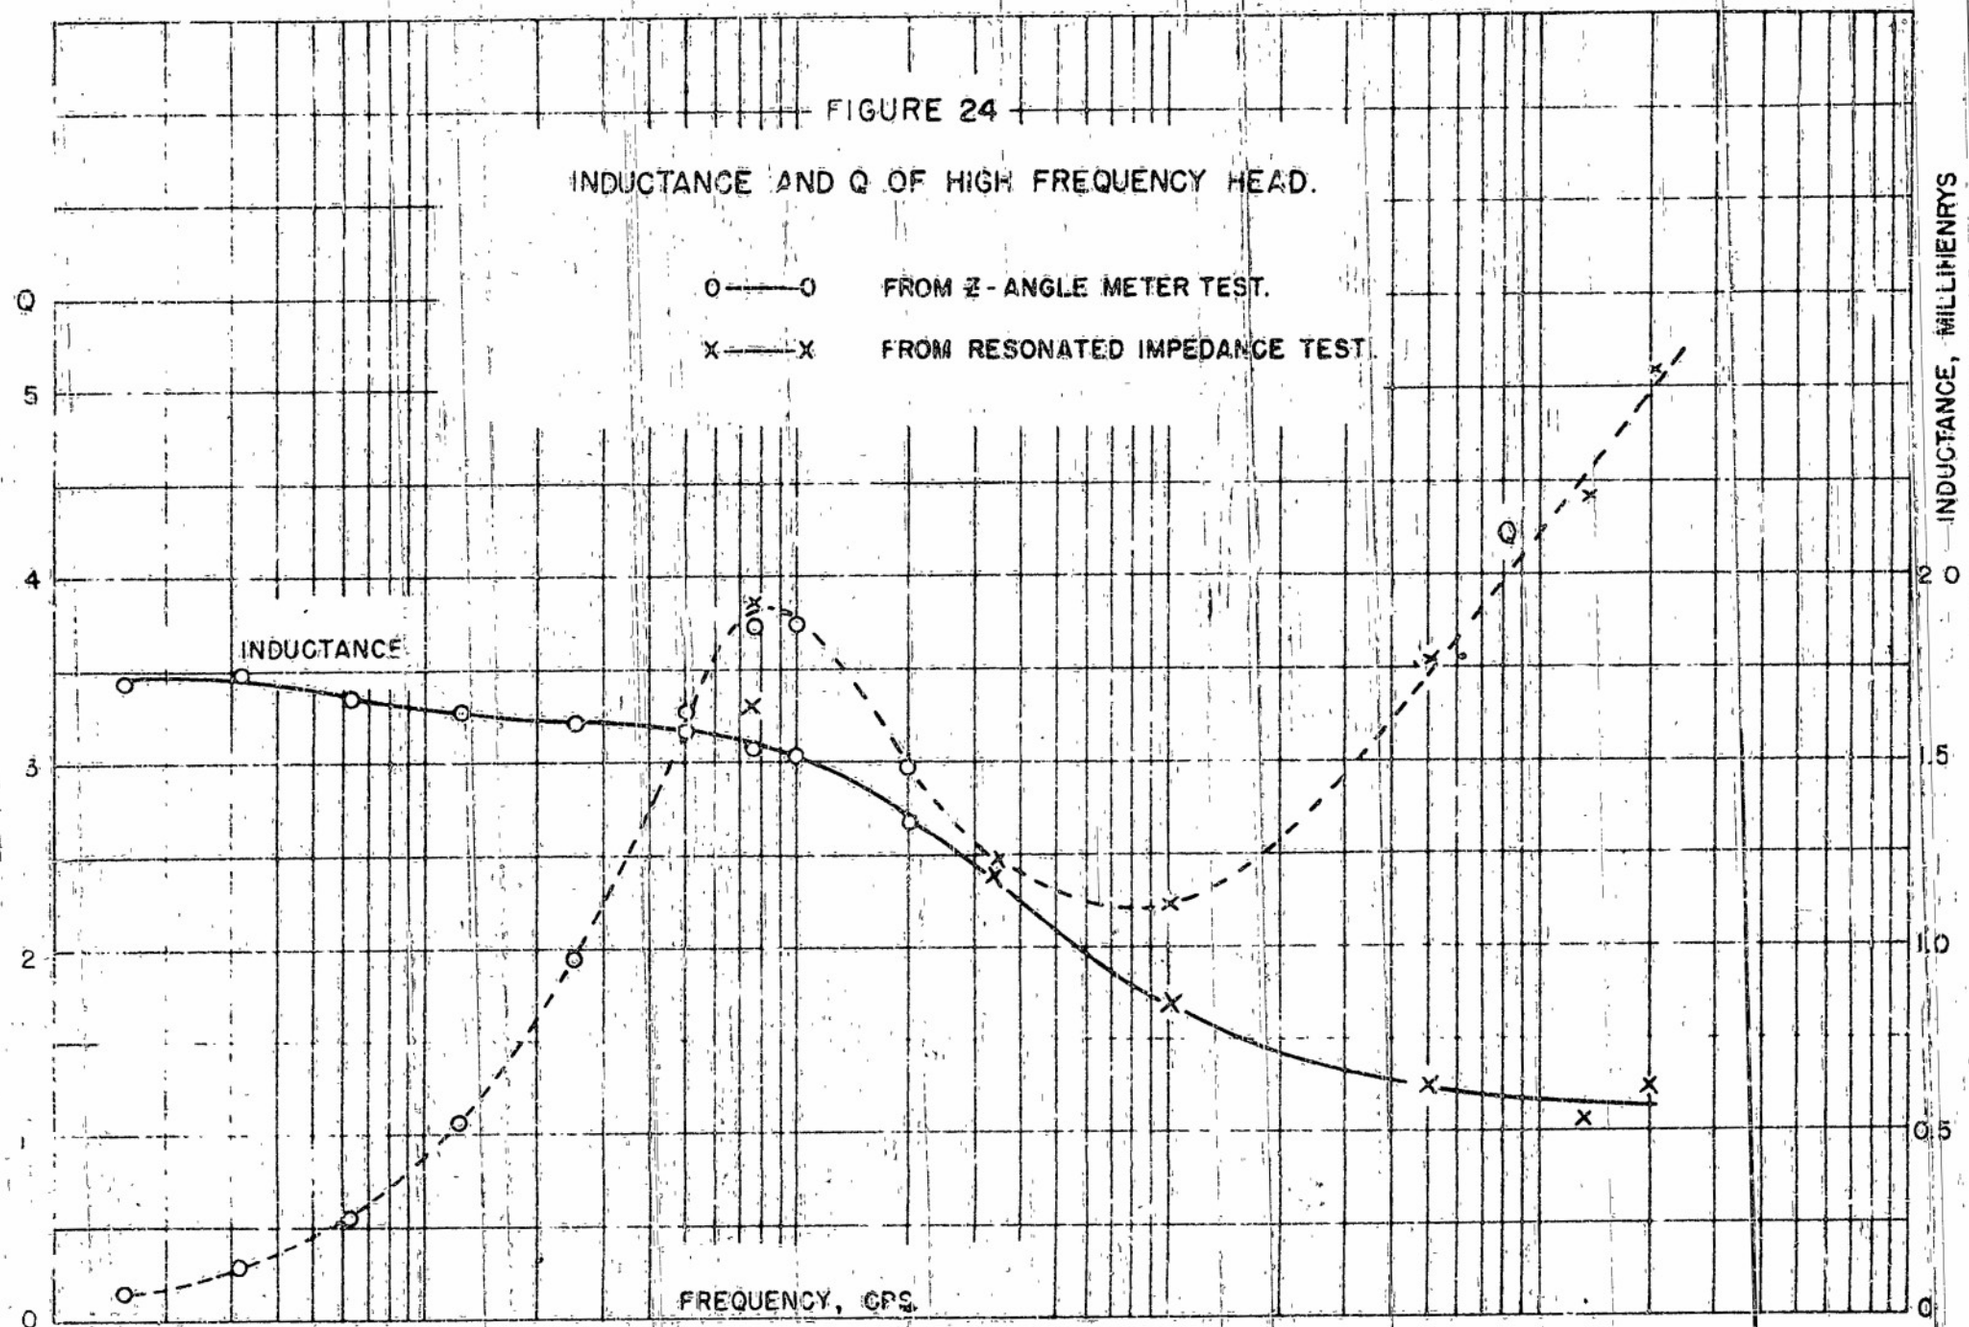

FIGURE 24

INDUCTANCE AND Q OF HIGH FREQUENCY HEAD.

O——O FROM Z - ANGLE METER TEST.

X——X FROM RESONATED IMPEDANCE TEST.

RESTRICTED

FIG. 25 PLAYBACK GAP EFFECTS IN AMPEX HEAD AND TWO FERROXCUBE III HEADS.

RECORDINGS MADE AND PLAYED BACK AT 6"/SECOND.

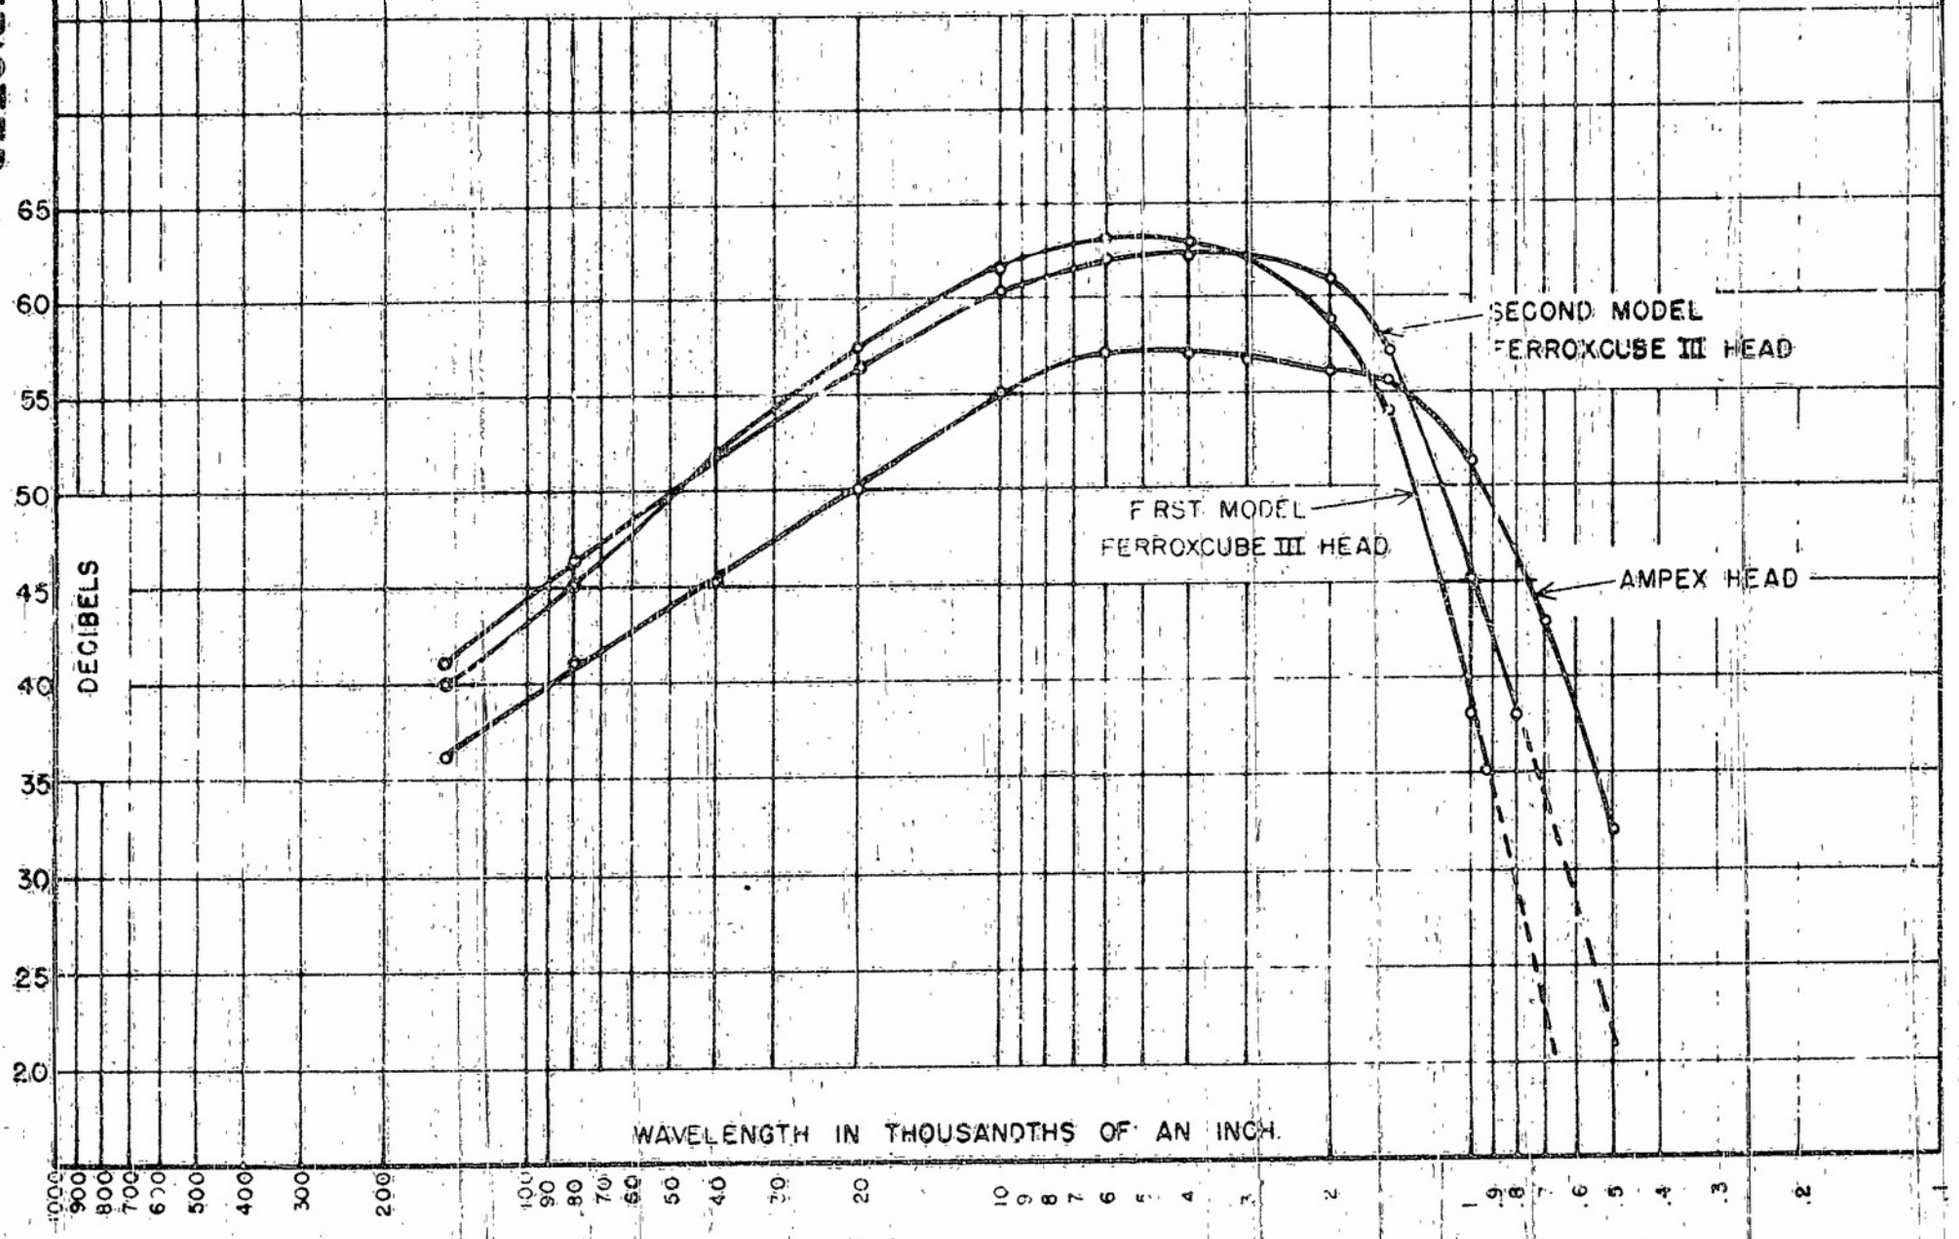

RESTRICTED

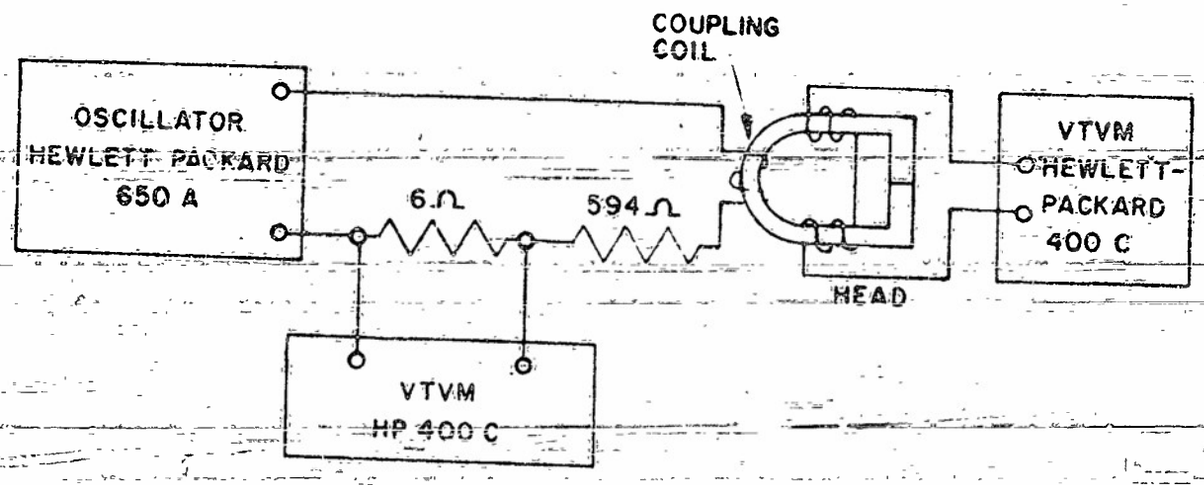

FIG. 26 - FREQUENCY TEST CIRCUIT

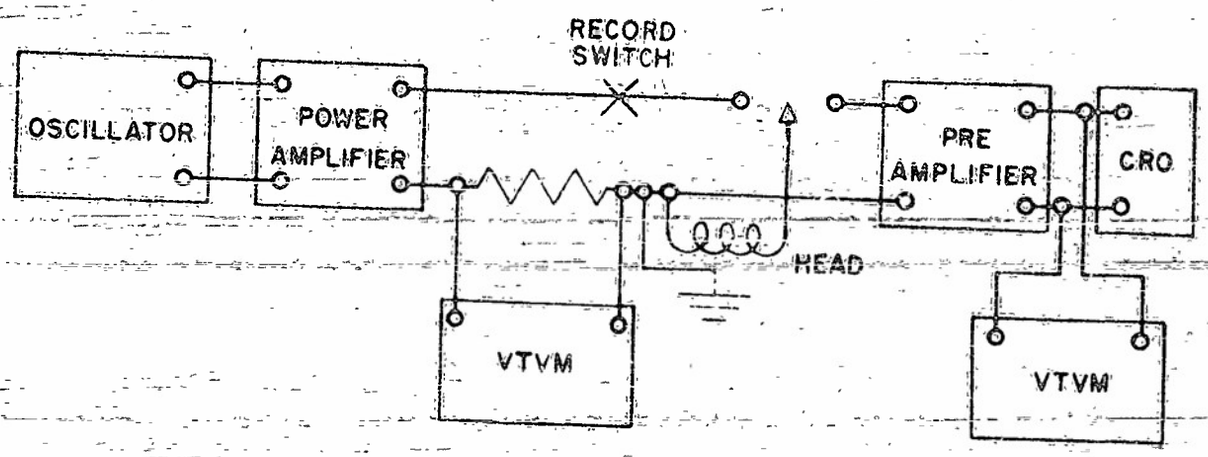

FIG. 27 - RECORD-PLAYBACK SYSTEM CIRCUIT

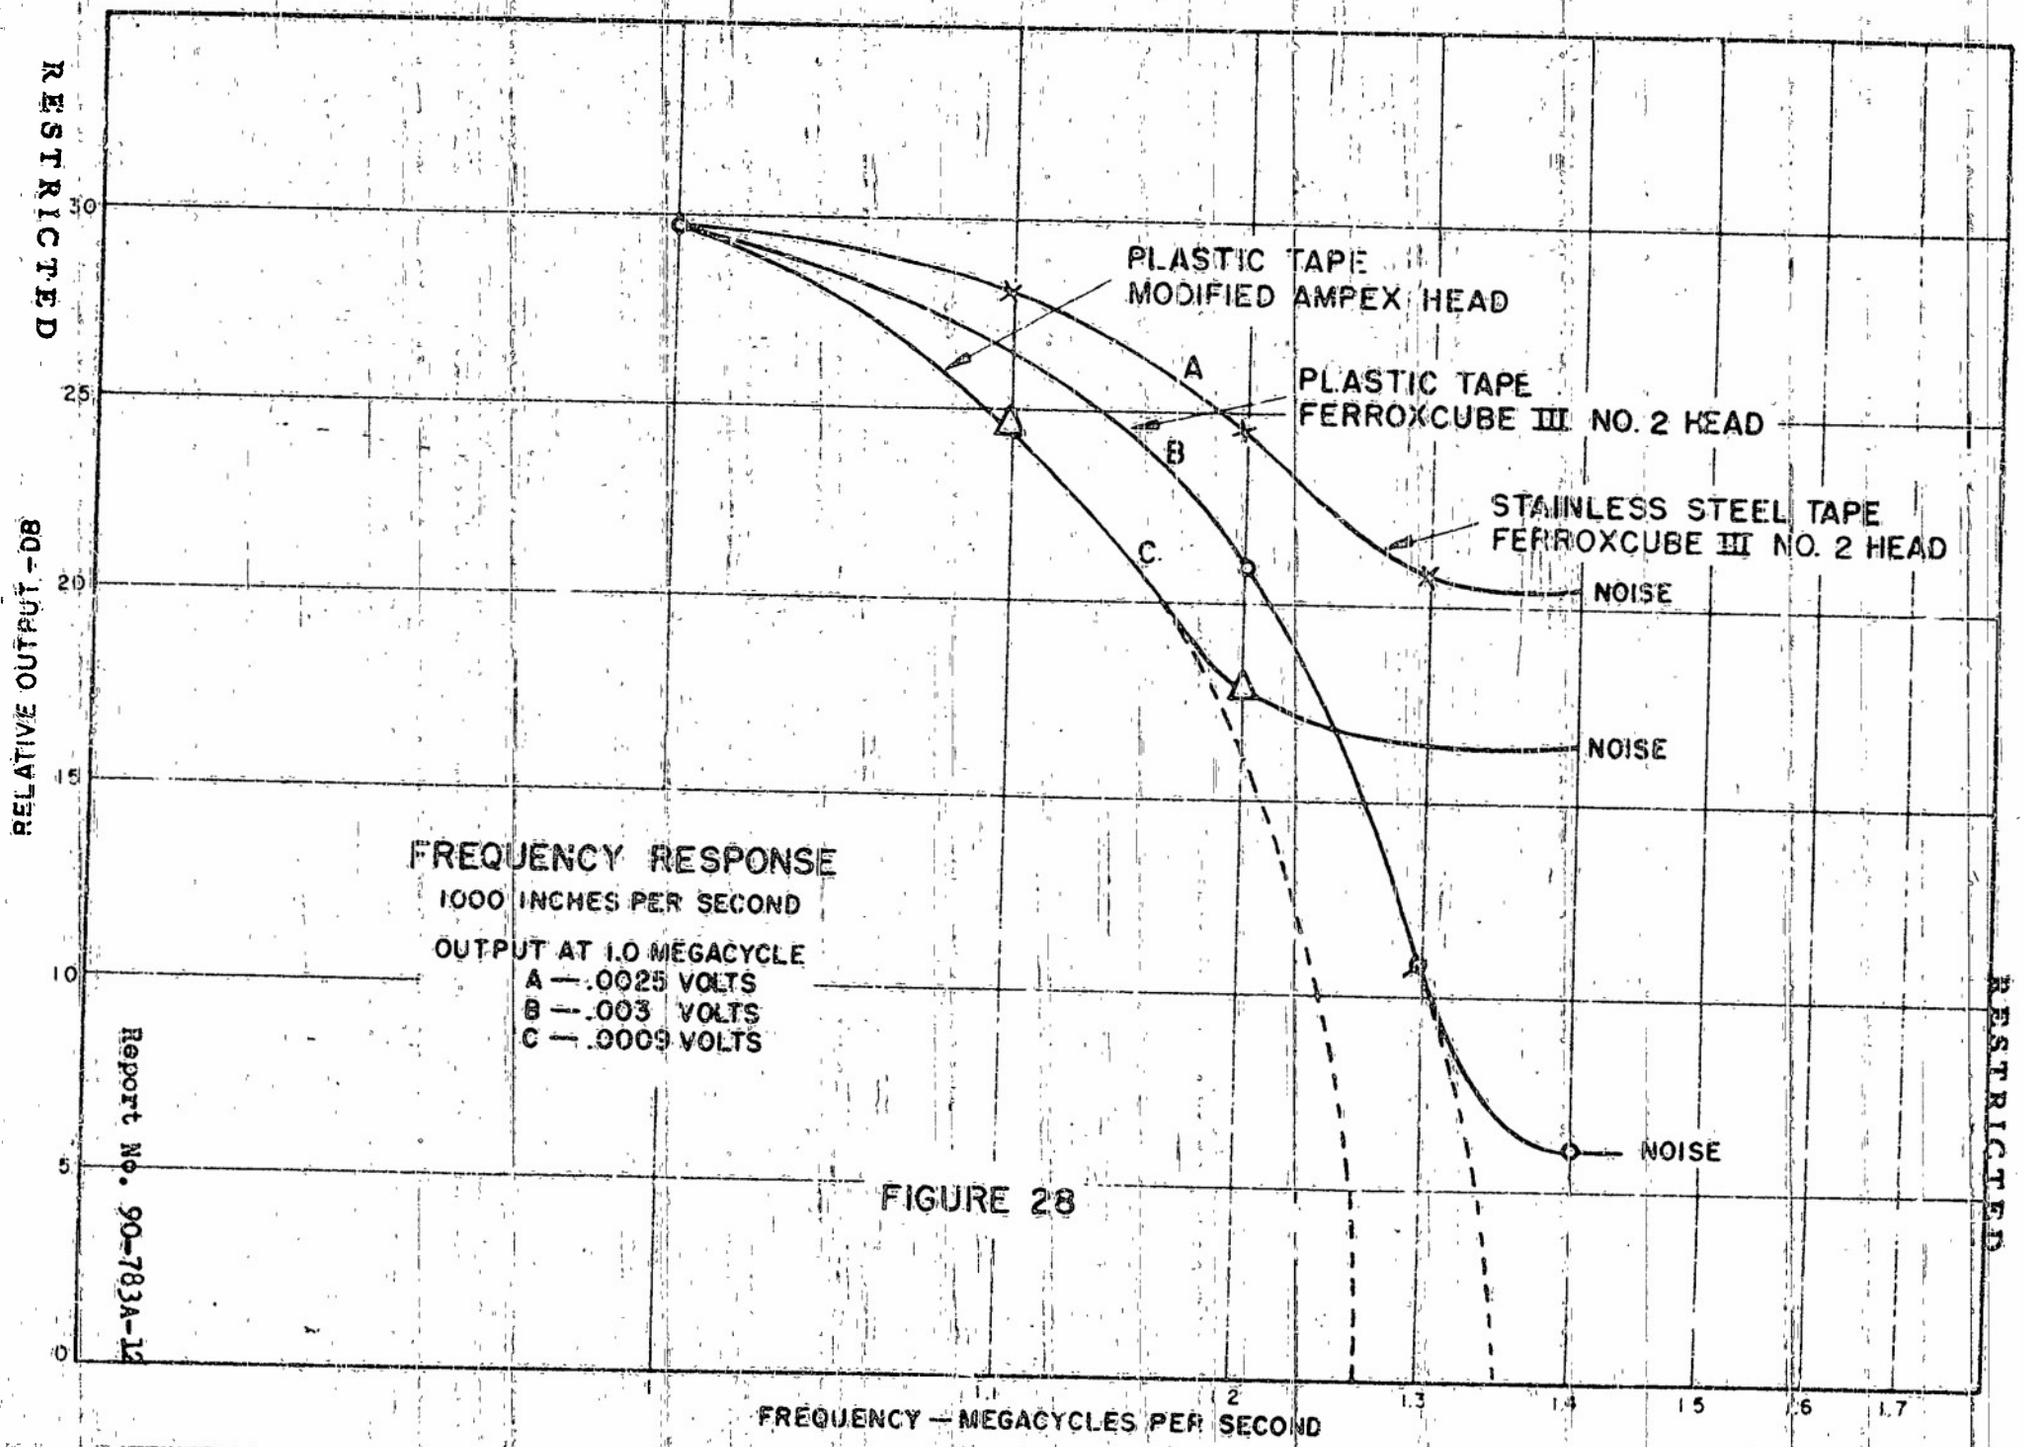
PLASTIC TAPE
MODIFIED AMPEX HEAD
A
PLASTIC TAPE
FERROXCUBE III NO. 2 HEAD
B
STAINLESS STEEL TAPE
FERROXCUBE III NO. 2 HEAD
C
NOISE
NOISE
NOISE
FREQUENCY RESPONSE
1000 INCHES PER SECOND
OUTPUT AT 1.0 MEGACYCLE
A — .0025 VOLTS
B — .003 VOLTS
C — .0009 VOLTS
RELATIVE OUTPUT - DB
30
25
20
15
10
5
0
1
1.1
1.2
1.3
1.4
1.5
1.6
1.7
FREQUENCY — MEGACYCLES PER SECOND

FIGURE 28

APPENDIX A

Bibliography of Magnetic Recording

ARF Licensee Bulletin No. 64

MAGNETIC RECORDER LICENSEE SERVICE

BULLETIN NO. 64

BIBLIOGRAPHY ON MAGNETIC RECORDING

From

ARMOUR RESEARCH FOUNDATION
OF ILLINOIS INSTITUTE OF TECHNOLOGY

35 West 33rd Street

Chicago 16, Illinois

over or close to the joint are well supported, and after the insertion of the discs the two parts of the supporting cylinder are drawn together by the bolts shown, and the outside of the flanges is insulated by wooden rings. There are four sets of brushes, two positive and two negative, diametrically opposite brushes being coupled together.

The electro-magnetic inertia in a circuit conveying 250 h. p. is necessarily very large, and on this account it would be dangerous to break the whole current suddenly. It would therefore be inadmissible to insert a fuse or other form of cut-out into the circuit, as might be done with smaller machinery, in order to save the generator from the effects of an accidental short circuit or heavy leak on the line. Any type of cut-out interrupts the current

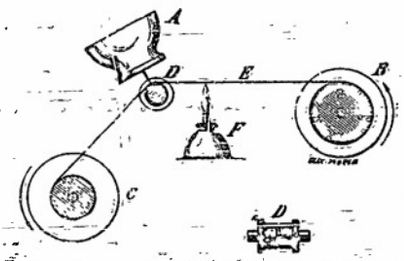

FIGS. 1 AND 2.—SOME POSSIBLE FORMS OF PHONOGRAPH.

suddenly, and must therefore not be used where the self-induction of the circuit is at all considerable. To overcome this difficulty, and yet protect his generator effectively, Mr. Brown in all his transmission plants employs an automatic arrangement by which the field of the generator is demagnetized as soon as the line current exceeds a certain value. This apparatus, which is shown in Fig. 2, is an automatic circuit closer, the contacts *C C* of which are coupled to the terminals of the exciting circuit of the field magnets of the generator. The main current, before it is sent into the line, is caused to flow through the exciting coil of an electro-magnet *M* with poles *P P*, below which is pivoted an armature *A*. With the normal strength of current, the excitation of the magnet *M* is insufficient to cause attraction of the armature; but if a certain strength of current be exceeded, the armature is lifted, and liberates a catch by which the weight *W* is ordinarily held up. The weight then swings round on its arm, and with the force of a hammer jams itself between the spring contacts *C C*, thus short circuiting the field coils on the generator, which has the effect of at once lowering the E. M. F. to the very small amount due to residual magnetism. In a transmission plant, where an overhead line is used, care must be taken to protect the machinery against lightning. Both generator and motor should be insulated from earth and, in addition, some lightning protectors should be fitted. In the installation we are describing, lightning protectors are fitted at each end of the positive and negative line, but not at any intermediate point. The protector consists of a pair of metal plates with serrated edges facing each other, one plate being connected to the line and the other with an earth plate. That the electric transmission of energy has now become a most important branch of work in Switzerland and other countries where water power is abundant, will be seen from the following list of installations which have been erected, or are in course of erection, by the Oerlikon Maschinenfabrik.

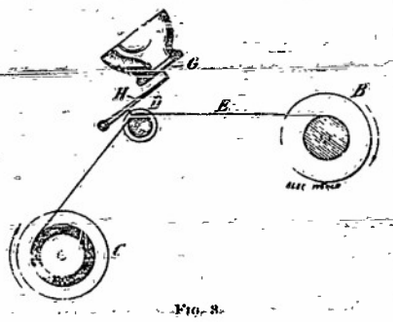

FIG. 3.

Name of Installation.	Horse-power.	Distance Metres.
J. Müller-Hagber, Solothurn	50	2,000
Gaetano Rossi, Piovene, Italy	250	450
The Worsted Yarn Mill of Derendingen, Switzerland	280	1,300
J. Ammon & Wepfer, Pordenone, Italy	80	1,000
Troller Bros. & Co., Lucerne	120	3,000
R. & M. Frei, Aarau	15	1,000
J. & M. Legler, Dietikon, Switzerland	120	600
Paper Mills, Steyermühl-Alzberg, Austria	100	600
C. F. Pally, Schaffhausen, Switzerland (combined with electric lighting)	12	500
Bay & Co., Steinbach-Barne	15	1,300
J. Rauch, Mühlau, near Innsbruck	50	600

Some Possible Forms of Phonograph.

BY OBERLIN SMITH.

There being nowadays throughout the scientific world great activity of thought regarding listening and talking machines, the readers of THE ELECTRICAL WORLD may be interested in a description of two or three possible methods of work, a phonograph which the writer contrived some years ago, but which were laid aside and never brought to completion on account of press of other work.

One of these methods is rudely shown in Figs. 1, 2 and 3, the construction and operation being as follows: *A* is a mouth piece and diaphragm, with spring and indenting needle, as in the Edison machine. *B* is a reel, carrying a thin ribbon *E* of iron, steel or other substance capable of being temporarily softened by heat. This ribbon is unwound from *B* and wound on to another reel *C*, which is revolved slowly by clock work or other means. *D* is a supporting roller (or stationary bar) with a flat groove the width of the ribbon *E*, and having a V-groove in the bottom of it for the needle to descend into, as seen in Fig. 2. *F* is a heating lamp, which, of course, must be protected from draughts, etc. All this is the recording apparatus or transmitter. The ribbon *E* being short at the point where, for the time being, it is hot, receives the indentations as easily as the tin-foil, or more so. It cools by the time it gets to reel *C*, and is then much harder and more durable than tin foil. The same apparatus can be used for the "talker," as in Edison's machine, but advantage may be taken of having the indented ribbon made of a hard substance by using a special talking-diaphragm *G*, Fig. 3, which will magnify the vibrations in amplitude by means of a lever *H*, the ribbon *E* being hard enough not to lose its form by the increased pressure due to the leverage, as tin-foil would do.

The probable advantages of this form of apparatus are: 1. The loudness of voice produced by the increased amplitude of vibration. 2. The simplicity and cheapness of the whole machine—requiring no accuracy in "registering" devices beyond having the groove in roller *D* to about fit the width of ribbon *E*. 3. The cheap material of which the ribbon may be made. 4. Durability of ribbon, even with oft-repeated use. 5. Convenience and freedom from injury in handling and transporting the ribbon record when wound upon spools like a thread. This ribbon would, if of iron or steel, probably be about $\frac{1}{16}$ inch wide and $\frac{1}{100}$ inch thick.

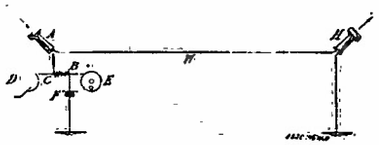

FIG. 6.

Its disadvantages, possibly fatal ones, would be the difficulty of evenly heating the metal ribbon and the probable rasping noise which would occur in the diaphragm when the sound was reproduced. A modified and somewhat simpler form of the above process might be employed by using an ordinary wire instead of the ribbon *E*, and allowing a chisel-shaped needle to indent it into a flattened and somewhat widened form, wherever it was struck.

The above two methods are, of course, wholly mechanical as in the ordinary phonograph. The following proposed apparatus is, however, *purely electrical*, and is, as far as known to the writer, the only one fulfilling such conditions that has been suggested. Fig. 4 is the recording part of an electrical phonograph. Fig. 5 is the talking part of the same. Many of the pieces, as *D, E, B, C*, etc., can be the same ones as are used in Fig. 4. Fig. 6 shows the same ideas applied to a telephone line wire, so as to speak at a distance and at the same time record what is said, thus making a *recording telephone*. The sketches show only the essential parts, without the supporting framework, etc.

In Fig. 4 the voice or other sound is delivered into an ordinary telephone *A*. Preferably, this should be a carbon transmitter so as to have a battery *F* in the circuit, and thus use as strong a current as practicable. Possibly, however, a Bell telephone without a battery would answer the purpose. In either case the current, broken into waves of varying lengths and intensities corresponding with the vibrations of the diaphragm in the telephone, passes in its circuit through the helix *B*, converting into a permanent magnet any piece of hardened steel which may be at the time within the helix. Through the helix *B* passes a cord, string, thread, ribbon, chain or wire *C*, made wholly or partly of hardened steel, and kept in motion by being wound on to the reel *E* from off the reel *D*, *E* being revolved by hand, clock-work or other means. *J* is a tension spring or brake pressing against *D* to keep the cord *C* taut.

When in operation with the phonograph current from the telephone *A* passing through the helix, the cord *C* becomes, so to speak, a series of short magnets grouped into alternate swellings and attenuations of magnetism. The actual lengths of these groups depends upon the speed of their motion, but their *relative lengths* depend upon the *relative lengths* of the sound wave; and their *relative intensities* depend upon the *relative amplitudes* of these waves. The cord *C* therefore contains a perfect record of the sound, far more delicate than the indentations in the tin-foil of the mechanical phonograph. The probable construction of *C* would be a cotton, silk or other thread, among whose fibres would be spun (or otherwise mixed) *hard steel* dust, or short clippings of very fine steel wire, hardened. Each piece would, of course, become a complete magnet. Other forms of *C* might be a brass, lead or other wire or ribbon through which the steel dust was mixed in melting—being hardened afterwards in the case of brass or any metal with a high

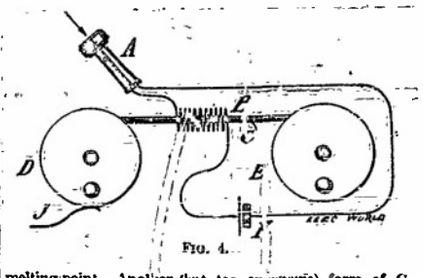

FIG. 4.

melting point. Another (but too expensive) form of *C* would be a chain with each link a magnet; or, if the magnets affected each other too much when in contact, each alternate link could be of non-magnetic material. This chain would not be as delicate as the dust magnets, because the effects of a given vibration might extend but part way along a link. Another imaginable form of *C* would be simply a hard steel wire, but it is scarcely possible that it would divide itself up properly into a number of short magnets. The magnetic influence would probably be distributed along the wire in a most totally depraved way, with nodal points just where they were not wanted. If it could be made to work it would obviously be the simplest thing yet suggested.

The cotton thread above mentioned would seem to be preferable to anything else on account of its cheapness, lightness and flexibility. The Lord's Prayer could be written upon a few feet of thread or string, while a young lady receiving a small spool of cotton from her lover would think herself abominably neglected if it was not "warranted 200 yards long."

In Fig. 6 the arrangement is precisely the same as in Fig. 4, except that the circuit is made through the telegraph wire *W* and the receiving telephone *H* in Boston or some other distant place. Of course the record might be made at the receiving instead of the transmitting end of the line, and thus our hypothetical young lady might, while listening to the impassioned pleadings of her chosen young man, be preparing the evidence for a future breach-of-promise suit.

To make the thread or cord *C* "talk" back it is, after having been rewound on to reel *D* again drawn through a helix *B*, Fig. 5, in whose circuit is the "talking" telephone *A*, probably a Bell receiver. Of course it is drawn through at approximately the same speed as before. In passing, the small permanent magnets in the cord *C* induce currents of electricity in their enveloping helix analogous to the currents in the field of a magneto-electric machine, or a dynamo with permanent magnets in its

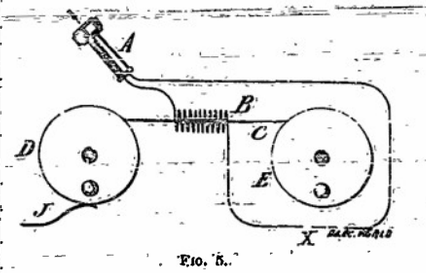

FIG. 5.

armature. A more exact analogy would, however be the currents in the helix of a solenoid if its ordinary action were reversed, and its core made a permanent magnet. These waves of current will correspond in length and relative intensity with the original wave currents, and will therefore reproduce the vibrations of the original sound in the diaphragm of the telephone at any time in the future. If such induced currents are not strong enough to produce sufficiently loud sounds it may be possible to insert at *X*, Fig 5, some intensifying apparatus, such as a battery, but which has not yet been thought out.

Like the two mechanical methods first mentioned, this electrical method has never been worked out to completion. The writer went far enough with it to build a temporary apparatus and to develop a successful machine for spinning metallic dust into a cotton cord, but was

obliged to lay aside the whole thing before arriving at any *tonic* results. His experiments showed that it was difficult, with ordinary tools, to harden steel filings on account of excessive oxidation. Experiments with hardened steel wire, broken in a special machine into very short pieces, showed that they must not be too short—say not less than three or four times their diameter—or they could not be saturated with magnetism to any appreciable degree. Possibly this is because the poles or points of maximum polarity of a magnet lie at some distance from the ends of the bar, and consequently neutralize each other when the bar is too short. If this theory is correct it would prevent making magnets of steel dust, the grains of which are supposed to be about as broad as they are long.

Digressing a little, it may be remarked that such a theory does not seem to agree with the fact of a magnetic polarity in approximately spherical or cubical bodies, like the earth, or a chunk of loadstone. Possibly, however, they would be much stronger magnets if elongated; and the tiny pieces of wire above referred to, may possess as much strength in proportion, though it be scarcely perceptible on account of their smallness.

The writer confesses to a good deal of ignorance upon the subject, but he was somewhat surprised to find an equal amount in several well known electricians whom he consulted; and also to find that none of the books he had at hand gave any definite data regarding the best proportions for permanent magnets or their actual strength (when saturated) in pulling power. Surely, there is in this department of electrical science a good sized magnetic field for a number of lines of force—mental ones—to work in, in the way of careful experimenting.

To return to our unmagnetized cord as a "phonogram," it is possible that an insuperable objection to it would be found in the great diameter and length which would be required in that magnets of sufficient strength and quantity. This, however, can be determined by experiment only. Of course if this cord approached a clothes line rather than a piece of sewing silk in its general proportions it would be utterly useless as a practical recording medium. Regarding the general convenience of a record in a cord or ribbon-like form compared with one indented upon a cylinder or a flat circular tablet, there are probably advantages on both sides. One disadvantage of the cord is that if some small portion of the record near the middle has to be repeated there is a good deal of unwinding to do to get at it. The same objection, if it be one, applies to the first-mentioned methods, as well as the magnetic cord. In practice, however, it might prove that this unwinding was a small matter, if a rapidly-working automatic winder were used.

Another general principle which may perhaps be adapted for a phonograph is that of *variable conductivity*. Possibly a cord or ribbon may be made of a poor conductor (perhaps a flexible substance impregnated with carbon), and may then be made better, and worse in certain spots by the action of the "transmitting" instrument, either by making spots of the cord denser or thinner, in some way, at the inward stroke of the diaphragm. This recording action would probably be entirely mechanical. The reproducing, on the contrary, would be wholly electrical, and would consist of passing a current through a conductor which was broken by a space filled by the cross-section of the moving record. This current would pass through a receiving telephone and would, obviously, be thrown into the proper undulations of strength by the varying conductivity of the cord, as it passed along by the action of its reels.

The writer has not worked out the details of this latter scheme as completely as in the others mentioned—even upon paper. He has not the time, to say nothing of a properly equipped laboratory, to carry the ideas suggested to their logical conclusion of success or failure, and, therefore, makes them public, hoping that some of the numerous experimenters now working in this field may find in them a germ of good from which something useful may grow. Should this be the case, he will doubtless get due credit for his share in the matter; but if, on the other hand, these suggestions prove worthless, they will still have served a purpose, on the principle that a demonstration of what *can't* be done is often a pertinent hint as to what can be.

The Edison Patents in England.—A notice has been issued by the Edison and Swan United Electric Light Companies of London, to the effect that the late decision invalidating Mr. Edison's patent has been appealed from, and that the appeal will probably be heard before Christmas.

Reporting Electrical Executions.—Elbridge T. Gerry says that the New York newspapers will have no accounts of the first execution of a criminal by electricity in this State. Though Mr. Gerry is an authority on this subject, the managing editors of New York ridicule his statement in question, as well as his threat that any editor who, contrary to the statutes, publishes such an account, will be imprisoned for a misdemeanor. The editors agree with Chester S. Lord, of the *Sun*, that considerable imprisonment would be necessary to break up their habit of printing the news. Julius Chambers, of the *Herald*, says that a paper which had sent to the Polar Sea for news wouldn't mind the trivial danger of imprisonment. Another editor said: "There would be a struggle for the distinction of such an imprisonment."

THE ELECTRIC LIGHT CONVENTION.

The pages immediately following this will be found to contain a very full and complete report of the Convention of the National Electric Light Association just closed in this city. We believe that the promptitude with which the report is issued, and the care taken in its preparation, will be generally appreciated, the more especially when it is borne in mind that during the session we have issued no fewer than four editions of our bulletin, now so familiar to all frequenters of these meetings. As to the paper itself, we may "point with pride" to its size, not less than to its contents. It is four pages larger than any previous issue. At the August Convention last year we printed a paper of 56 pages. For the convention in February at Pittsburgh we printed 64 pages. Our number this week contains no fewer than 68 pages. We may point out too, that while the paper is so large, it is not late; but on the contrary is actually issued eight days ahead of date, and one day after the close of the Convention. This special effort has necessitated a little departure, it will be observed, from our usual method of making up the paper.

The growth of the electric light and power industry was admirably brought out by President Duncan in his brief but pithy opening address. The figures have, we are glad to see, arrested general attention, and the direct outcome of the publicity thus given to these facts will be a development of new work.

Perhaps the leading question before the Convention was that of overhead and underground wires. Mayor Hewitt was not slow in winning the applause of the meeting with his address of welcome, in which he vindicated his line of policy as to the overhead wires, and it must be said that a better address in form and matter than the Mayor's has not been made before the body. At the same time, what we may call the progressive element had its inning in the papers presented by Dr. S. S. Wheeler and Mr. Chenoweth. The paper of Dr. Wheeler will be found worthy of study, based as it is upon an intelligent comprehension of the subject as a whole and a full knowledge of the work being done in this city. Supplementing all this is the excellent paper by Mr. Acheson on disruptive discharges in cables, and the various discussions. Any one who reads that part of the report will certainly be abreast of the latest information of the day on the underground wire problem.

We have no doubt that when Mr. Leonard reads of the cordial reception given to his unpretentious but valuable little paper detailing his experience in Minneapolis with petroleum fuel he will be somewhat surprised. Like some other members, he appears to be afraid of boring the Convention, but the fact is that such papers, with their facts and details on vital questions of management, are the best that can be brought before the Association, which does not meet to discuss scientific theories, but to arrive at all the facts that concern the practical operation of light and power plants.

While we do not consider the choice of the Hotel Brunswick as the meeting place to have been at all a happy one, it is the opinion of all that the coming to New York has been a good thing, and that the Convention has been one of the best, and thoroughly enjoyable. New York is the capital of the country in every sense of the word, and will remain so, and it is also a convenient point of rendezvous for all who are interested in electrical matters. Moreover, it was three years since the Association visited the city, and the time was fitting to make a new impression on the metropolitan consciousness. The reputation of our city for hospitality, also, has been well maintained; and not a delegate can go home without feeling that everything possible was done to render his sojourn here pleasant and profitable.

In speaking above of the impression made by the Convention on the metropolitan consciousness, we have reference more particularly to the manner in which the press has dealt with the proceedings. Having attended all the conventions, we make bold to say that never before have the reports as a whole been so full, so fair and so accurate. In fact, it is hard to pick out the best, where all have been so good. The evening papers have greatly gratified the officers and members by the excellence of their reports. On Thursday night, for example, the *Evening Post* published two full columns, the *Commercial Advertiser* had a column and a half excellently done; and the *Mail and Express* supplemented a column of good report with another column of elegant and philosophic editorial. The New York *Graphic* made first-class portraits of the officers, and the *World* also came out with its neat thumbnail sketches of prominent speakers, while the *Sun*, *Herald*, *Tribune*, *Times* and others gave the convention an unusually large amount of editorial notice and reportorial care. If we may venture to do it, we would heartily congratulate our brethren of the daily press on their good work. They have certainly done the Association good, and we think that hereafter the electrical questions that come up will receive better treatment at their hands than has sometimes been the case hitherto.

It is natural that the electric power question should occupy part of the time of the Association, and the hour devoted to Mr. Laffin's able paper was well spent. It will be noticed that the paper is an able effort to determine the average running of motors in the different classes of employment, so as to have data from which to deduce the right schedule of charges. This is a highly important part of the motor question; and affects very closely the prosperity of the business. It will be seen also that Mr. Laffin dwelt upon the interesting question of small motors versus large motors. There is evidently something to be said on both sides, and it is likely that the matter will long be one provocative of differences of opinion in motor circles.

The various presentations made during the Convention were, after all, but a small recognition of services rendered the Association. The Association, as it stands to-day, is largely Mr. Morrison's handiwork, and it is only appropriate that his zeal and the wise use made by him of his marked executive ability should be rewarded in substantial shape. The testimonial to the Westinghouse Electric Company was not less graceful and fitting. The company added a liberal contribution to the funds of the Association enabled it to catch up in the publication of its proceedings, and to present a healthy balance sheet.

It was a good idea to secure a photograph of the delegates before leaving, with the Electric Club as a background. An interesting memento is thus obtained of a pleasant gathering and of the hospitality that found its centre at the Club House.

Allegheny City, Pa.—Specifications have been approved by the sub-committee on gas for 45 electric-light towers with 3 to 5 lights on each; 85 single pole lights and 1,500 incandescents for the city hall, engine houses, etc.

Brush Carbons.—The Brush Electric Company, Cleveland, O., report that their carbon business is larger than ever before. They have shipped within the last month or two, eight-seven solid carloads of carbons to different portions of the country.

Buffalo, N. Y.—The Brush Electric Light Company of Buffalo, N. Y., are increasing their electric light plant. They have recently ordered from the parent company two 65-light 2,000 c. p. dynamos with lamps. This company is now burning, including the above dynamos, 1,300 arc lamps and a large number of incandescence.

The Graphophone in the West.—A company of Western men, with Hamilton S. Wicks, of Kansas City, at their head, has secured a contract with the syndicate controlling the Edison-Bell graphophone for all rights within the territory west of the Mississippi and east of the Rocky Mountains. Offices are to be established and the instruments introduced into the leading cities of that district by Oct. 1.

Electricity for Writers' Paralysis.—In one of the broad windows of the recording department of the office of James Boull, clerk of the superior court, is a small electric battery. It is used by the recorders for the relief of the cramp of the muscles of the hand which follows long continued and steady use of the pen. The relief is instantaneous, and the clerks who formerly were compelled at times to stop work for several days on account of swelling and contraction of the muscles of the hand now take a few gentle shocks of the electric current on the slightest approach of stiffness. They return to work at once, entirely relieved, and continue without inconvenience. Nearly every one of the score of clerks receives benefit from the electric current, and the battery is regarded as an indispensable fixture of the office.—*Baltimore Sun.*

Bell Telephone Output.—The instrument account shows gains in the output and a reduction in the instruments returned. For seven months there was an increase of 1,211 in instruments held by licensees. The income gains faster than the output of instruments. The latter is as stated below:

Month to Aug. 20.	1888.	1887.	Increase.
Gross output	5,694	5,533	161
Returned	1,760	3,353	*1,593
Net output	4,034	2,180	1,754
Since Dec. 20.	1887-8.	1886-7.	
Gross output	37,710	36,511	1,199
Returned	11,596	17,663	*6,067
Net output	26,114	18,848	7,266

*Decrease.

Smith, Oberlin. Some Possible Form of Phonograph. Electrical World 12:116-7. Sept. 8, 1888.

Der Telegraphon Oder Magneto-Telephonograph. Elektrotechnische Zeitschrift 21:385-6. May 17, 1900.

Aliamet, M. Le Telegraphone de M. Poulsen. Electricien 19:337-8. June 2, 1900.

The Telegraphone. Physikalische Zeitschrift 1:413-4. June 16, 1900.

Der Telephonograph Von Poulsen. Elektrizitat 9:293-4. June 23, 1900.

Das Telegraphon. Verien Deutscher Ingenieure Zeitschrift 44:841-2. June 30, 1900.

Ruhmer, E. The Telephonograph. Physikalische Zeitschrift 1:470-2. July 28, 1900. 1:554-6. Sept. 1, 1900.

Zopke, Hans. Die Weltausstellung in Paris 1900. Der Telephonograph. Glaser's Annalen 46:55-7. Aug. 1, 1900.

Recording Telephones. Nature 62:371-3. Aug. 16, 1900.

The Telegraphone. Scientific American Supplement 50:20616. Aug. 25, 1900.

Poulsen Telegraphone. Scientific American 83:131. Sept. 22, 1900.

Briad, G. Le Telegraphone Poulsen. Genie Civil 37:399-400. Sept. 29, 1900.

Ruhmer, E. Pedersen's Multiplex Telephony. Physikalische Zeitschrift 2:28-30. Oct. 13, 1900.

Poulsen, Valdemar. The Telegraphone: A Magnetic Speech Recorder. Electrician 46:208-10. Nov. 30, 1900.

Poulsen, Valdemar. Sur le Telegraphone. Academie des Sciences Comptes Rendus 130:1754-5. 1900.

Poulsen, Valdemar. Das Telegraphon. Annalen der Physik 3:754-60. 1900.

Rellstab, L. Der Telephonograph. Elektrotechnische Zeitschrift 22:57-9. Jan 17, 1901.

West, J. H. Uber den Telephonographen von Poulsen. Elektrotechnische Zeitschrift 22:181-5. Feb. 21, 1901.

The Telegraphone. Electrician 47:5-7. April 26, 1901.

Fyfe, H. C. The Telegraphone and the British Post Office. Scientific American 88:317-8. April 25, 1903.

Telegraphone. Electrician 51:611-2. July 31, 1903.

Das Telegraphone. Elektrotechnische Zeitschrift 24:752-3. Sept. 10, 1903.

The New Telegraphone. Scientific American 89:237-8. Oct. 3, 1903.

Strecker, K. The Telegraphone. Elektrotechnische Zeitschrift 25:14-5. Jan. 7, 1904.

Hytten, E. The Latest Forms of the Telegraphone. Elektrotechnische Zeitschrift 28:870-2. Sept. 5, 1907.

Frankhauser, C. K. The Telegraphone. Journal of the Franklin Institute 167:37-47. Jan 1909.

Uses of the Telegraphone. Springfield Republican. (Sept. 15, 1912.

Thompson, S. P. The Magnetism of Permanent Magnets. Institution of Electrical Engineers Journal (London) 50:92. 1913.

The Telegraphone. Machinery 23:408-9. 1917.

Der Telephonograph im Eisenbahnbetrieb. Elektrotechnische Zeitschrift 41:513. July 1, 1920.

Nasarischwily, A. Neue Versuche mit dem Telegraphon. Elektrotechnische Zeitschrift 42:1068. Sept. 22. 1921.

Bishop, H. Electro-Magnetic Sound Recording Machines. Electrical Review 97.45-7. July 10, 1925.

Frederick, H. A. Recording and Reproducing Sound. Review of Scientific Instruments 5:177-82. 1926.

Electromagnetic Sound Recording. Engineering 128:496. Oct. 18, 1929. Electrician 103:472. Oct. 18, 1929.

Stille, C. Die Elektromagnetische Schallaufzeichnung. Elektrotechnische Zeitschrift 51:449-51. March 27, 1930.

Besson, P. Electric Recording and Reproduction of Music. Revue Industrielle 60:545-54. Sept. 1930.

Begun, S. J. Telephone Recording Machines for the Reception of Rapid Telegraphy. Telegraphen - Praxis, No. 5. 1931.

Hearings Before the Committee on Patents, United States Senate., 72nd Congress. A Bill to Renew and Extend Certain Letters Patent. (S 1301). (Pertaining to the American Telegraphone Company). Supt. of Documents. March 1932.

Hormann, Ernst: Zur Theorie der Magnetischen Tonaufzeichnung. Elektrische Nachrichtentechnik 9:388-403. 1932.

Begun, S. J.: Die Diktiermaschine im Grossbetrieb. Elektrotechnische Zeitschrift 53:204. March 1932.

Meyer, Erwin and Eduard Schuller. Magnetische Schallaufzeichnung auf Stahlbander. Zeitschrift fur Technische Physik 13:593-9. 1932.

Hickman, C. N.: Delayed Speech. Bell Laboratories Record 11:308-10. June 1933.

Begun, S. J.: Contribution to the Theory of Electromagnetic Sound Recording on Steel Tape. Dissertation, Sonderdruck Studentenhaus Charlottenburg. 1933.

Magnetic Recording and Reproducing, the Marconi-Stille Apparatus Described. Wireless World 34:8-10. Jan. 5, 1934.

Rust, N. M.: Marconi-Stille Recording and Reproducing Equipment. Marconi Review no. 46, p. 1-11. Jan.-Feb. 1934.

Talking Paper Tape Keeps Sound Records. Popular Mechanics 61:165. Feb. 1934.

Frederick, H. A.: Recording and Reproducing Sound. Review of Scientific Instruments 5:177-82. May 1934.

Braunmuhl, H. J. von.: Magnetic Sound Recording in Broadcasting Service. Funktechnische Monatshefte no. 12, p. 483-6. Dec. 1934.

Mallina, R. F.: A Mirror for the Voice. Bell Laboratories Record 13:200-2. March 1935.

Schrage, W. E.: Playback Recording Methods for Broadcasting. Electronics 8:179. June 1935.

Volk, T.: A.E.G. Magnetophone. Allgemeine Elektricitats-Gesellschaft Mitteilungen, No. 9, p. 299-301. Sept. 1935.

Volk, T.: Magnetophone - A New Sound Recording Apparatus. Filmtechnik 11:229-31. Oct. 1935.

Schuller, E.: Magnetische Shallaufzeichnung. Elektrotechnische Zeitschrift 56:1219-21. Nov. 7, 1935.

Hansen, W.H.: Das Magnetophon. Elektrotechnische Zeitschrift 56:1232. Nov. 7, 1935.

Hamilton, H.E.: The Blattnerphone, Its Operation and Use. Electrical Digest. Dec. 1935 p. 347.

Wiegand, D. E.: A Study of Magnetic Recording. Doctorate Thesis, Electrical Engineering Department, University of Illinois, 1935.

Begun, S. J.: Die Neue Stahlton-Bandmaschine. Lorenz Berichte, no. 1, Jan. 1936, p. 3.

Nagai, K. and others: Delay Apparatus Using Magnetic Recording. Nippon Electrical Communication Engineering, no. 2. Feb. 1936, p. 143-9.

Magnetic Recording of Sound: Lorenz Steel Band Recorders. Wireless Engineer 13:175-8. April 1936.

Okuno, H. and others: On Magnetic Recording. (in Japanese). Institute of Electrical Engineers of Japan Journal 56:416-7. May 1936.

Begun, S. J.: New Steel Tone Tape Machine. Electrical Communication 15:62-9. July 1936.

Hickman, C.N.: Sound Recording on Magnetic Tape. Bell System Technical Journal 16:165-7. April 1937.

Begun, S.J.: Recent Developments in Magnetic Sound Recording. Society of Motion Picture Engineers Journal 28:464-72. May 1937.

Nagai, K. and others: Studies of Noise and Recording Materials for Magnetic Recording. (In English) Nippon Electrical Communications Engineer, no. 7, Aug. 1937, p. 218-24.

Begun, S.J.: Magnetic Recording-Reproducing Machine for Objective Speech Study. Society of Motion Picture Engineers Journal 29:216-8. Aug. 1937.

Hickman, C.N.: Magnetic Recording and Reproducing. Bell Laboratories Record 16:2-7. Sept. 1937.

Lubeck, H. von: Magnetic Recording with Films and Ring Heads. Akustische Zeitschrift 2:273. Nov. 1937.

Steel-Wire Recording of Sound As a General Commercial Possibility: the "Textophone." Electrician 121:795. 1938.

Schuller, E.: Magnetophone. Verein Deutscher Elektrotechniker Fachberichte, 1937, p. 175-7.

Malloy, T.J.: Magnetic Recorder for Recording Sound on Steel Wire. Electronics 11:30-2. Jan. 1938.

Barrett, A.E. and C.J.F. Tweed: Some Aspects of Magnetic Recording and its Application to Broadcasting. Institution of Electrical Engineers Journal (London) 82:265-288. March 1938.

Nagai, K. and others: Experimental Consideration Upon the A-C Erasing on the Magnetic Recording and Proposition of the New Recording Method. Denki Gakkwai (Tokyo), no. 180, March 1938.

Weber, H. von: High Frequency Technique and Radio Communications - Magnetic Tone Recording. Assoc. Suisse Elect. Bull. (Schweiz. Elektrotechnische Ver. Bull.) 29:148-51. April 1, 1938.

Adams, Ralph G. Jr. : Magnetic Recording of Sound. Submitted in partial fulfillment of the requirements for the degree of Bachelor of Science, Massachusetts Institute of Technology, May 21, 1938.

Begun, S. J. and S. K. Wolf: On Synthetic Reverberation. Communications 18:8-9, Aug. 1938.

Begun, S. J. : Magnetic Recording. Electronics 11:3--2. Sept. 1938.

Lubeck, H. : The Principles of the Magnetophone Method. A. E. G. Mitteilungen, no. 9, Sept. 1938 p. 453-9.

Nagai, K. and others: Experimental Consideration Upon the A-C Erasing on the Magnetic Recording and Proposition of the New Recording Method. Nippon Electrical Communication Engineering. Nov. 1938 p. 445-7.

Hillyer, Curtis Jr. : The Development of a Magnetic Tape Recorder. Bachelor of Science and Master of Science Degrees, Massachusetts Institute of Technology, 1938.

Adams, Joseph C. : The Development of a Magnetic Tape Recorder. Bachelor of Science Degree, Massachusetts Institute of Technology, 1938.

B. B. C. Recording Service. Electrician 122:303-4, March 10, 1939.
Electrician Review (London) 124:385-6, March 17, 1939.

Aldous, D. W. : Steel Tape Recording - the Textophone. Wireless World 44:611-2. June 29, 1939.

Recording on Steel Tape. Wireless World 44:611-2. June 29, 1939.

Begun, S. J. : A New Magnetic Recorder and Its Adaptions. Society Motion Picture Engineers Journal 33:538-46. Nov. 1939.

Mansi, R. L. : Construction of Apparatus for Recording Sound on Steel Wire. Electronics and Television and Short Wave World Jan. 1940, p. 4-10; Feb. p. 69-74; March. p. 142-4.

Telegraphone. English Mechanics April 5, 1940. p. 411.

Darragh, J. B. : Flight Test Data Mechanically Recorded; Pilots Oral Report During Test Is Recorded on Steel Tape; Planetest Magnograph. Aero Digest 37:964. Sept. 1940.

Nagie, K. and T. Nishima: Magnetic Sound Recording Materials. Nihon Nickel Joho (Japan Nickel Review) 8:256-64. Oct. 1940.

Wolf, S. K. : Synthetic Production and Control of Acoustic Phenomena by a Magnetic Recording System. Institute of Radio Engineers Proceedings 29:365-71. July 1941.

Begun, S. J. : Magnetic Recording and Some of its Applications in Broadcast Field. Institute of Radio Engineers Proceedings 29:423-33. Aug. 1941.

Stephens, O. : Der Frequenzumfang Bei Der Schallaufnahme Auf Folien. Funk no. 15, p. 225, 1941.

Braunmuhl, H. J. von and W. Weber: An Improved 'Magnetton' Process. Z. Ver. Deut. Ing. 85:628. July 1941.

Heidenwolf, H. : Method for the Microscopic Viewing of Magnetic Sound Recording. Lorenz-Berichte no. 3/4 p. 119. Dec. 1941.

Mirrophone. Wireless World 48:42-3. Feb. 1942.

Magnetic Recording on Steel. Radio News 28:42. Sept. 1942.

Wildbolz, H. : Das Textophon. Schweizer Archiv. 9:9-12. Oct. 1942.

Camras, Marvin: Magnetic Recording on Steel Wire. Master of Science Degree, Illinois Institute of Technology. 1942.

Wethlo, F. : Lautforschung am Magnetophon. Arch. Vergl. Phonotick 6:87 (Abt 1) 1942.

Wire Recorders for Army. Electronics 16:234. Oct. 1943.

Camras, Marvin: A New Magnetic Wire Recorder. Radio News (Radionics Section 1) 30:3-5. Nov. 1943.

Recordings on Hair-Like Wire. Science Digest 14:94-5. Nov. 1943.

Voice Recorded on Hair-Like Wire. General Electric Review 46:694. Dec. 1943.

Pugsley, D. W. : Engineering Details of Magnetic Wire Recorder, Electronic Industries 3:116-8. Jan. 1944.

Opperman, R. H. : Record Voice on Hair-Like Wire. Franklin Institute Journal 237:160. Feb. 1944.

Selby, M. C. : Investigations of Magnetic Tape Recorders. Electronics 17:133-5. May 1944.

B. B. C. Mobile Recording Equipment. Wireless World 50:33-5. May 1944.

Blain, R. : Sound Recording. Telephony 126:20-1. June 10, 1944.

Invasion Recorder: Magnetic Wire Recorder, Used By Marines in Producing Permanent Record of Landing Operation on Bougainville. General Electric Review 47:44. July 1944.

Corddry, C. : Aerial Eavesdropper; Magnetic Wire Recorder Has Brought back Records of Air Battles, Has Many Other Uses in Aviation. Flying 35:67-8. Aug. 1944.

Aldous, D. W. : Magnetic Recording. Electrician 133:138-40. Aug. 18, 1944.

Toomin, H. and D. Wildfeuer: Mechanism of Supersonic Frequencies As Applied to Magnetic Recording. Institute of Radio Engineers Proceedings 32:664-8. Nov. 1944.

Graham, A. Recording the Saipan Fight on Wire. Popular Science 145:201. Dec. 1944.

Perdiue, H. L. : The Magnetic Wire Recorder. G. E. Co., N. Y. R. R. Club Proc. 55:140-4. April 19, 1945.

Standardization of the Design and Construction of Wire Recording Equipment. Electronic Industries 4:122. May 1945.

Stromberg Engineers Show New Wire Recorder. Telephony 128:80. April 28, 1945.

Pocket Model Wire Recorder Designed. (Armour Research Foundation). Electronic Industries 4:254. May 1945.

Magnetic Wire Sound Recorder and Reproducer. Electronics 18:360. June 1945. Architectural Forum 82:190, June 1945.

Winter, C. E. : Magnetic Tape Recording. Radio News 55:32-4. June 1945.

Holmes, L. C. and D. L. Clark: Supersonic Bias for Magnetic Recording. Electronics 18:126-36. July 1945.

Pocket Wire Recorder. (Armour Research Foundation.) Popular Science 147:194. July 1945.

It Pays to Listen. Scientific American 173:18-20. July 1945.

Pocket Model Wire Recorder. Popular Mechanics 84:144. July 1945.

Manchester, H. : Wire That Talks and Sings. Readers Digest 47:37-9. Aug. 1945.

German's Tape Recorder, "Magnetophone" Is Termed Superior To Other Methods. Broadcasting 29:24. Sept. 3, 1945.

Holmes, L. C. : High Quality Sound Recording on Magnetic Wire. Electronic Industries 4:77. Dec. 1945. Communications 25:44,46, Dec. 1945.

Tinkham, R. J. : Multiple Wire Recording. Communications 25:99. Dec. 1945.

Sound Inscribed on Paper Tape; Brush Magnetic Recorders. Business Week p. 50. Jan. 26, 1946.

Industrial Research Progress at Armour Research Foundation. Chemical Engineering News 24:167-70. Jan. 25, 1946.

Holmes, L. C. : High Quality Sound Recording on Magnetic Wire. Electronics 19:236. Jan. 1946.

Rolling Magnetic Tape. Bell Laboratories Record 24:21. Jan. 1946.

German Tape-Recording Equipment. Electronic Engineering 18:54. Feb. 1946.

Engineering Features of Recording Equipment. Electronic Industries 5:70-1. March 1946.

Long, T. H. and G. D. McMullen: B-H Curve Tracer for Magnetic-Recording Wire. Electrical Engineering 65:146-9. March 1946.

Begun, S. J. : Magnetic Recording. Communications 26:31, 33. April 1946.

Long, T. H. : New Wire Recorder Head Design. Electrical Engineering 65:216-20. April 1946.

Magnetic Wire Recorder Tensioning Mechanism. Product Engineering 17:372. May 1946.

Holman, R. L. : Sound Trapped By Wire. American Mercury 62:654-7. June 1946.

Javitz, A. E. : Appraisal of Design Trends in Magnetic Sound Recorders. Electrical Manufacturing 37:107-11. June 1946.

Power, R. A. : German Magnetophon. Wireless World 52:195-8. June 1946.

Wooldridge, D. E. : Signal and Noise Levels in Magnetic Tape Recording. Electrical Engineering 65:343-52. June 1946.

Power, R. A. : The German Magnetophone. Wireless World 52:195-8. June 1946.

Pugsley, C. W. : Wire Recording. Electrical Engineering 65:316-21. July 1946.

Camras, Marvin: Theoretical Response from Magnetic-Wire Record. Institute of Radio Engineers Proceedings 34:597-602. Aug. 1946.

Pocket Wire Recorder Designed to Furnish a Half Hour of Recording or Playback. (Raytheon Mfg. Co.) Electronics 19:210, Sept. 1946.

Continuous Wire Record; Plays Back Display Message Without Re-Wind. Scientific American 175:131. Sept. 1946.

Vaile, R.B. Jr. : Recent Developments in Magnetic Recording of Sound. Published in the Proceedings of the National Electronics Conference, Volume 2, 1946.

Rosentein, A.B. : Principles and Methods of Magnetic Recording. Radio News 7:3-6, 29-30. Dec. 1946.

Chase, Herbert: Designing Wire Recorder Unit for Low-Cost Quantity Production. Electrical Manufacturing 39:122-5. Jan. 1947.

Camras, Marvin: Magnetic Sound for Motion Pictures. Society of Motion Picture Engineers Journal 48:14-28. Jan. 1947.

Sear, A.W. : Wire Recorder Wow. Acoustical Society of America Journal 19:17-8. Jan. 1947.

Miller, W.C. : Magnetic Recording for Motion Picture Studios. Society of Motion Picture Engineers Journal 48:57-62. Jan. 1947.

Research Council Basic Sound Committee: Discussion of Magnetic Recording. Society of Motion Picture Engineers 48:50-6. Jan. 1947.

Roys, H.E. : Magnetic Recording. International Projectionist 22:7-8. Jan. 1947.

Tinkham, R.J. and J.S. Boyers: Magnetic Sound Recorder of Advanced Design. Society of Motion Picture Engineers 48:29-35. Jan. 1947.

Begun, S.J. : Recent Developments in the Field of Magnetic Recording. Society of Motion Picture Engineers Journal 48:1-13. Jan. 1947.

Paper Tape Magnetic Recorder-Hyflux. Tele-Tech 6:88-9. Jan. 1947.

Howell, H.A. : Magnetic Sound Recording on Coated Paper Tape. Society of Motion Picture Engineers Journal 48:36-46. Jan. 1947.

Sound Recorder Employing Microphone and Magnetic Wire. Peirce Wire Recorder Corp., Industrial Equipment News 15:74. Feb. 1947.

New Wire Recorder. Brown-Crane. Tel. Engineer 51:45. March 1947

Zeluff, V. : Magnetic Sound for Amateur Movies. Electronics 20:140. Mar. 1947.

Magnetic Recording Symposium. International Projectionist 22:9, 28-30. March 1947.

James, J.H. : Magnetic Playback-Recorder Using Paper Discs. Communications 27:32, 56-8. April 1947.

Magnetophon Recorders. Wireless World 53:128. April 1947.

Developments in Field of Recording and Mechanical Reproduction; Soundmirror Magnetic Ribbon Recorder-Reproducer and Hyflux. Musician 52:19. April 1947.

Hobson, P.T. : Wire Recording. Electrician 138:935-6. April 11, 1947.

Camras, M. : Magnetic Sound for Motion Pictures. Radio News 8:12-4, 23. April 1947.

Magnetic Recording of Sound. Nature 159:735. May 31, 1947.

Wi-Recorder Unit. R.C. Powell & Co. Electronics 20:146. May 1947.

Holmes, Lynn C.: Some Factors Influencing Choice of Medium for Magnetic Recording. Acoustical Society of America Journal 19:395-403. May 1947.

An Adaption of the German Magnetophone. (Rangertone) Broadcasting 32:34. May 26, 1947.

Chinn, Howard A.: Magnetic Tape Recorders in Broadcasting. Audio Engineering 31:10. May 1947.

High Fidelity Wire Recorder. Magnecord. Radio News 8:22. May 1947.

Gelatt, Roland: Magnetic Recording. Musical Digest p. 12. June 1947.

O'Brien, R.S.: Adapting Paper Tape Recorders for Broadcasting. Audio Engineering 31:10. June 1947.

Shaney, A.C.: Elements of Magnetic Tape Recording -- and 999 Applications. Amplifier Corp. of America, 396 Broadway, New York 13, N.Y. June 1947.

Magnetic Tape Sound Recording. American Cinematographer 28:199, 218. June 1947.

New High Fidelity Wire Recorder. Magnecord. Telephony Engineer 51:64. July 1947.

Ranger, R.H.: Design of Magnetic Tape Recorders. Tele-Tech 6:56-7, 99-100. August 1947.

Kornei, Otto: Frequency Response of Magnetic Recording. Electronics 20:124-28. August 1947.

Haynes, N.M.: Bibliography of Magnetic Recording. Audio Engineering 31:30. Oct. 1947.

Ranger, R.H.: Magnetic Tape Recorder for Movies and Radio. Electronics 20:99. Oct. 1947.

Camras, Marvin: Magnetic Sound for 8-mm Projection. Society of Motion Picture Engineers Journal 49:348. Oct. 1947.

Shaney, A.C: Advantages of Magnetic Tape over Magnetic Wire Recording. Article No. 4821, Oct. 1947, Amplifier Corp. of America, 396 Broadway, New York 13, N.Y.

Drenner, Don V. R.: The Magnetophon. Audio Engineering 31:7-11, 35. Oct. 1947.

Howell, H.A.: Hyflux Magnetic Recording Tape. Engineering Bulletin No. EBT103, Nov. 1947, Indiana Steel Products Co., Chicago 2, Ill.

Coombs, J.M.: Storage of Numbers on Magnetic Tape. Proceedings National Electronics Conference 3:201. Nov. 1947.

Wetzel, W.W.: Review of Present Status of Magnetic Recording Theory, Part 1. Audio Engineering 41:14-17, 39. Nov. 1947.

Haynes, N.M.: The Case for Magnetic Tape Recording. Radio and App. Journal 64:25. Nov. 1947.

Aldous, D.W.: Bibliography of Magnetic Recording. Electronic Engineering 19:390-1. Dec. 1947.

A British Made Wire Recorder. Electronic Engineering 19:376. Dec. 1947.

Allegheny Ludlum Steel Corp.: Magnetic Materials. Dec. 1947.
Allegheny Ludlum Steel Corp., Brackenridge, Penn.

Hobson, P.T.: Developments in Magnetic Recording. Electronic Engineering 19:377. Dec. 1947.

Wetzel, W. W.: Review of Present Status of Magnetic Recording Theory, Part 2, Audio Engineering 21:12-16, 37. Dec. 1947.

Chinn, H. A.: Magnetic Tape Recorders in Broadcasting. Electronic Engineering 19:393. Dec. 1947.

Schonberg, Harold C.; Engineering Improvements for Music in the Home. Musical Digest. Dec. 1947 p. 29.

Hobson, P. T.: Developments in Magnetic Recording. Electronic Engineering 19:83. Dec. 1947.

Hobson, P. T.: Measurement of the Magnetic Properties of Fine Wire. Electronic Engineering 19:383. Dec. 1947.

Electronic Engineering: Standardization of Magnetic Recording. Electronic Engineering 19:396 Electronic Engineering 19:396. Dec. 1947.

Shaney, A. C.: Magnetic Recording (Dealing with Recorder Design). Radio Craft. Dec. 1947, p. 36.

High Fidelity Wire Recorder. Electronic Sound Engineering Co. Electronic News, Dec. 1947 p. 8.

Clark, D. L. and L. L. Merrill: Field Measurements on Magnetic Recording Heads. Proceeding of the Institute of Radio Engineers 35:1575. Dec. 1947.

Magnesonic. Sound Recorder and Reproducer Corp (Tape). Business Week Oct. 18, 1947, p. 76, 78. Electronics 20:150, 206, Dec. 1947.

Wiegand, D. E. and W. W. Hansen: A 60-Cycle Hysterisis Loop Tracer for Small Samples of Low Permeability Material. Transactions American Institute Electrical Engineers Vol. 66, July 2, 1947.

Camras, Marvin: Recent Developments in Magnetic Recording for Motion Picture Film. Journal of the Acoustical Society of America 19:322-25. March 1947.

Wire Recorder. RCA. Scientific American 178:34 Jan. 1948.
Radio and Television Weekly 64:8 Nov. 12, 1947.

Sachtleben, R.: Das Isophon. (The Isophone.) Das Elektron 1:166. 1947.

Scotch Sound Tape. Review of Scientific Instruments 19:61. Jan 1948.

Wetzel, W. W.: Review of Present Status of Magnetic Recording Theory, Part 3. Audio Engineering 32:26. Jan. 1948.

Jackson, Clark E.: Magnetic Tape Systems. Radio News 39:46. Feb. 1948.

Tonstellen-Suchgerat fur Magnetofonbander. (Device for finding a desired point in the record on Magnetophone strips.) Funk Technik 3:87. Feb. 2, 1948.

Cricks, R. H.: Magnetic Sound Recording and Reproduction. Ideal Kinema 14:19. March 11, 1948.

Lightweight Wire Recorder. (RCA) Electronics 21:142. Feb. 1948.

Camras, Marvin: Magnetic Sound on Film. Electrical Engineering 67:136-141. Feb. 1948.

Magnetape Recorders. Amplifier Corp. Radio News 39:130. Feb. 1948.

Shaney, A. C.: Magnetic Recording - Construction of the Recording-Erase Heads and Tape-Puller. Radio Craft. March 1948.

Sound Recorder and Playback Machine Which Uses Magnetic Tape. (Amplifier Corp. of America.) Industrial Equipment News 16:101. April 1948.

Killian, L.G.: Data Recording on Magnetic Tape. Electronic Industries 2:3-5,31. April 1948

Schueller, E.: Das Magnetophon. V.D.I. Zeitschrift 90:120-124. April 1948.

Zenner, R.E. and R.B. Vaille Jr.: Two-Channel Two-Way Drive Magnetic Tape Recorder. Audio Engineering 32:11-15. April 1948.

New Technique for Magnetic Recording of Sounds. (In French) Toute la Radio (No. 125) 140-3. May 1948.

Javitz, A.E.: Magnetic Recording Media as Componenents in Product Design. Electrical Manufacturing 41:82. May 1948.

Elliot, William J.: Throw Away Those Discs. Library Journal 73:753. May 1948.

Carter, Gail S. and R. Koontz: Test Characteristics of Recording Wire. Tele-Tech 7:38. May 1948

Boyers. J.S.: Factors Affecting Frequency Response and Distortion in Magnetic Recording. Audio Engineering 32:18. May 1948.

Magnetic Belt Recorder. Mechanical Engineering 70:540. June 1948.

Wiegand, D.E.: Testing of Magnetic Recording Media. American Society Testing Materials. Preprint n 30a for meeting June 21-25, 1948. 12 pages.

Bigwood, R.F.: Applications of Magnetic Recording in Network Broadcasting. Audio Engineering 32:31-34. July 1948.

O'Brien, Richard S.: The Edispot-A Spotting Device for Magnetic Tape Editing. Audio Engineering 32:11. July 1948.

Ranger, R.H. and R.H. Kunnapfel: Ingenious Drive Mechanism. Product Engineering 19:125-126. August 1948.

Stereophonic Sound. Electronics 21:88-89. August 1948.

Temple, William J.: Speech Recording in the Classroom. Audio Engineering 32:21. August 1948.

Set and Service Review: Amplifier Corp. of America Model 810-B Magnetape Twin-Trax Recorder. Radio Craft 20:42. Oct. 1948.

Haynes, N.M.: Modern Achievements and Trends in Magnetic Tape Recording. American Record Guide 15:35. Oct. 1948.

Hasemeir, Warren L.: What Is This Thing Called Tape. Record Retailing 12:18. Oct. 1948.

Electron Optical Techniques for Ferromagnetic Studies. Electrical Manufacturing 42:166. Oct. 1948.

Ranger, R.H.: Performance Features New Magnetic Tape Recorder. Tele-Tech 7:40-42, 64-65, 72. Oct. 1948.

Lindsay, H. and M. Stolaroff: Magnetic Tape Recorder of Broadcast Quality. Audio Engineering 32:13. Oct. 1948.

Camras, Marvin: Magnetic Records for Home Entertainment. Proceedings National Electric Conference 4:47. Nov. 1948.

O'Dea, Dorothy: Magnetic Recording for the Technician. Society Motion Picture Engineers Journal 51:468-480. Nov. 1948.

Fitzgerald-Lee, G.: Magnetic Materials. Electronic Engineering 20:351. Nov. 1948.

Dimmick, G.O. and S.W. Johnson: Optimum High-Frequency Bias in Magnetic Recording. Society of Motion Picture Engineers Journal 51:489-500. Nov. 1948.

Masterson, Earl: 35-MM Magnetic-Recording System. Society of Motion Pictures Engineers Journal 51:481-488. Nov. 1948.

Baruch, R.: High Fidelity Tape Recording. Communications 28:32-33, 37. Nov. 1948.

Ranger, R.H.: New Tape Techniques. FM and Television 8:40-41. Dec. 1948.

Begun, S.J.: Magnetic Field Distribution of a Ring Recording Head. Audio Engineering 32:11-13,39. Dec. 1948.

Chevalier, A.: Enregistrement Sur Fil Et Ruban Magnetiques. Technique 23:675-679. Dec. 1948.

Camras, M.: Magnetic Records for Home Entertainment. Proceedings National Electronics Conference 47-53 No. 4, 1948.

Herr, R., B.F. Murphey and W.W. Wetzel: Some Distinctive Properties of Magnetic-Recording Media. Society of Motion Picture Engineers Journal 52:77-87. Jan. 1949.

Murphey, B.F. and H.K. Smith: Head Alignment with Visible Magnetic Tracks. Audio Engineering 33:12-13,38-39. Jan. 1949.

Dundovic, J.F.: Synthetic Reverberation. Radio News 41:68. Jan. 1949.

Wroblewski, T.: Design Considerations for Magnetic Wire Recordings. Sylvania Technologist 2:6-11. Jan. 1949.

Wetzel, W.W. and others: Some Distinctive Properties of Magnetic Recording Media. Society of Motion Picture Engineers Journal 52:77. Jan. 1949.

Spencer, Steven M.: Sing Me To Sleep, Doctor. Saturday Evening Post 221:30. Jan. 29, 1949.

Montani, Angelo: What Is Supersonic Bias. Radio Craft 20:47. Jan. 1949.

Mittell, B.E.G.: Development of Magnetic Tape Recorder. Engineer 187:313. March 18, 1949.

Olson, M.N.: Multiple Tape Recording. FM and Television 9:30, 33. March 1949.

New Professional Tape Recorder. (Fairchild) Tele-Tech 8:34-35, 64. March 1949.

Gration, J.W.: Noise in Magnetic Recording Systems as Influenced by Characteristics of Bias and Erase Signals. Journal of the Acoustical Society of America 21:74. March 1949.

Irvine, J.O.: Tape Is The Answer. Broadcasting. April 1949, p. 105.

Herr, R.: Making Magnetic Recordings Visible. Audio Engineering 33:23. April 1949.

Mass Productions of Tape Recordings. Audio Engineering 33:21. April 1949.

Camras, Marvin: A Stereophonic Magnetic Recording. Proceedings of the Institute of Radio Engineers 37:442. April 1949.

Stewart, W.E.: New Portable Tape Recorder Performs With Studio Quality. (RCA RT-3A) Tele-Tech 8:40-41, 50-51. April 1949.

Marsh, W.: Tape Recorder Time Clock Control. Communications 29:24,34. April 1949.

R.M.A. Subcommittee on Magnetic Recorders: Measuring Procedures for Magnetic Recording. Audio Engineering 33:19. April 1949.

E.M.I. Ltd.: Compensation for Wear in a Magnetophone Recorder Head. Electronic Engineering 21:124. April 1949.

Raffin-Roanne, R.A.: Enregistreur sur Fil Magnetique - Magnetophone d'Amateur. (Magnetic Wire Recorder. Amateur Magnetophone.) Haut-Parleur 25:370-3. May 19, 1949.

Ferrophon Junior, Ein Neues Magnetengerat. (Ferrophone Junior, A New Magnetic Device). Funk Technik. 4:288-9. May 1949.

La Construction des Machines Sonares Magnetiques. (The Construction of Magnetic Sound Equipment). Radio Profess. 18:44-7. May 1949.

Begun, S.J.: Magnetic Recording. FM and Television 9:28-30. May 1949.

Cooter, I.L.: Magnetic Fields Surrounding Recording Wires. Electrical Engineering 68:433. May 1949.

Camras, Marvin: Graphical Analysis of Linear Magnetic Recording Using High Frequency Excitation. Proceedings of the Institute of Radio Engineers 37:569-573. May 1949.

Hemardinquer, P.: Transformation Et Progres De L'Enregistrement Magnetique. (Transformation and Progress in Magnetic Recording.) Electricite 32:186-91. Nov. 1948. ANN. Telecommun. 4:23915, June 1949.

Hemardinquer, P.: Developpement Et Pratique De L'Enregistrement Magnetique. (Development and Use of Magnetic Recording.) Radio Technicien 4:24-29 Jan. 1949. Ann. Telecommun. 4:23917. June 1949.

Das Heimmagnetophon. (Magnetophon for the Home) Radio Technik, Austria 24:509-512 (Oct. 1948. Ann. Telecommun. 4:23916. June 1949.

Entwicklung Und Wirkungsiveise Des Bandmagnetophons. (Development of the Ribbon Magnetophone and Its Method of Operation) Radio Technik, Austria, 25:131-132. Feb. 1949. Ann. Telecomm. 4:23918. June 1949.

Johnson, S.W.: Factors Affecting Spurious Printing in Magnetic Tapes. Society of Motion Picture Engineers Journal 52:619-627. June 1949.

Mueller, W.A. and G.R. Groves: Magnetic Recording in the Motion Picture Studio. Society of Motion Picture Engineers Journal 52:605-612. June 1949.

Montani, A.: Mechanism of Supersonic Bias. Electrical Engineering 68:511. June 1949.

Mittell, B.E.G.: Development of Magnetic Tape Recorders. Institution of Electrical Engineers - Proceedings 96:305-306 pt III. July 1949.

Begun, S.J.: The Limitations of Sound Recording. Communications 29:28. July 1949.

Merchant, R.: Tape Characteristics for Audio Quality. Tele-Tech 8:30-33,56-57. July 1949.

Gunby, B. O.: Portable Magnetic-Recording System. Society of Motion Picture Engineers Journal 52:613. June 1949.

Haynes, N. M.: Magnetic Tape and Head Alighment Nomenclature. Audio Engineering 33:22. June 1949.

Marchant, R.: Duplicating Tape Recordings. Electronics 22:72. July 1949.

Booth, A. D.: A Magnetic Digital Storage System. Electronic Engineering 21:324. July 1949.

Magnetic Tape Recorder (G.E.) Engineer 188:198-199. Aug. 19, 1949.

Stolaroff, M. J.: Low Cost Precision Magnetic Recorder for Professional Use. (Ampex 300) Audio Engineering 33:17-18, 30-31. August 1949.

Herr, R.: Magnetic Tape Erasure by Permanent Magnets. Audio Engineering 33:14-16, 29-30. Aug. 1949.

TV Prompt System Uses Tape Recorder, Deaf Aids. Tele-Tech 8:39. Aug. 1949.

Thompson, C. S.: Analysis of Magnetic Recording. Electrical Engineering 68:793. Sept. 1949.

Frayne, J. G. and H. Wolfe: Magnetic Recording in Motion Picture Techniques. Society of Motion Picture Engineers Journal 53:217-234. Sept. 1949.

Begun, S. J.: Magnetic Recording. Scientific Monthly 69:192-7. Sept. 1949.

Mass Record Duplication. Scientific News Letter 56:244. Oct. 15, 1949.

Alixant, M.: Magnetic Recording. Radio Tech. Digest (France) 3:259-91. Oct. 1949.

Fishoff, L. A.: New Types of Magnetic Recorder. Radio Tech. Digest (France) 3:291-294. Oct. 1949.

Roe, D.: Magnetic Recording Technique. Wireless World 55:362-364. Oct. 1949.

New Magnetic Tape Records Data in Flying Rockets. Science News Letter 56:217. Oct. 1, 1949.

Holmes, L. C.: Techniques for Improved Magnetic Recording. Electrical Engineering 68:836-841. Oct. 1949.

Herr, R.: Duplication of Magnetic Tape Recording by Contact Printing. Tele-Tech 8:28-30. Nov. 1949.

Harris, C. C.: Poratble Magnetic Tape Broadcasting Recorder. Communications 29:6-7. Dec. 1949.

Camras, Marvin: Duplicating Magnetic Tapes By Contact Printing. Description. Electronics 22:78-81. Dec. 1949.

Herr, R.: Duplicating Magnetic Tapes By Contact Printing. Analysis. Electronics 22:81-83. Dec. 1949.

New Audio Trends; Lip-Synchronous Tape Recorder. Electronics 23:68-70. Jan. 1950.

Mandl, M.: Quality Loss in Tape and Wire Recorders Due to Metallic Dust. Radio and Television News 43:70. Feb. 1950.

Zenner, R. E.: Magnetic Recording of Meter Data. Audio Engineering 34:16-7, 33. Feb. 1950.

Crane, G.R., J.G. Frayne and E.W. Templin: Supplementary Magnetic Facilities for Photographic Sound Systems. Journal of the SMPTE 54:315-27. March 1950.

Ranger, R.H.: Sprocketless Synchronous Magnetic Tape. Journal of the SMPTE 54:328. March 1950.

Rettinger, M.: Magnetic Recording In Motion Pictures. Audio Engineering 34:9-12, 32-35. March 1950. 34:18-20,42. April 1950.

Smith, C.P.: A New Technique for Reducing Distortion in Sound Recording. Audio Engineering 34:28. April 1950.

The following reports are available from the Office of Technical Services, Department of Commerce, Washington 25, D.C.

A.E.G., Berlin: Magnetic Recorder K-4 (Magnetophon K-4) (AEF Report 3; AAF-T-2 Reel 2302, Frame 979) 27p. Abstract prepared at Headquarters Air Material Command, Wright Field, Dayton, Ohio.

Thiessen, G.J.: The Magnetophone of A.E.G. (British Intelligence Objectives Subcommittee Final Report 207, Item 9) 10 p.

Lee, H.B.: Stereophone Sound Recording System. PB 338.

Kern, J.G. and others: I.G. Farbenindustrie A.G. PB 385. 69 p.

Ranger, Richard R.: Further Studies in Magnetophones and Tapes. FIAT Final Report No. 923.

Raynor, K. C.: German Magnetic Tape Recorders, Tonschreiber Models b and bl. PB 1027.

Henderson, Robert G.: Translations of Operating Instructions. Tonschreiber model b. PB 1028.

The Telephonograph Recording System. FIAT Report 1163.

Rose, C.E. and D.R. White: Report on Interviews With Technical Personnel From the Agfa Plant at Wolfen. PB 1312.

Hansell, C.W. and others: Report on the Magnetophone. PB 1346.

U.S. Army: Report on the Magnetophone (field model). PB 1347.

U.S. Army. Signal Corps: Spot Report on German MS 2 (Code Tape Recorder) PB 2243.

U.S. Army. Signal Corps: German Tape Impulse Recorder. PB 2259.

Jones, C.B. and D.B. Davies: Sound Recording on Magnetic Materials. OSRD Report 3099.

U.S. Army. Signal Corps: Magnetic Sound Recorders "Magnetophone" and "Tonschreiber." PB 3536.

Briglio, A. and others: A Recording Field Sight. PB 5923.

Magnetophon. Type K-7. (Mechanical Drawings and Construction Details.) PB 6074.

Schuster, R.R.: Recorder AN/ANQ-(XA-) and Recorder-Reproducer ANQ-1 (XA-1), trade-name "Aerobserver." PB 6232.

Dunlevy, Max H. and D.E. Rob: Examination and Test of Preliminary Model of Recorder AN/ANQ-1 (XA-5) and Recorder-Reproducer AN/GNQ-1 (XA-5) PB 6235.

Jones, C.B. and D.B. Davies: Sound Recording on Magnetic Materials. PB 6558.

Brush-Development Co.: Sound Recording on Magnetic Materials. PB 6559.

Lorenz, C.: Methods of Producing Sound Carriers For Magnetic Recording Equipment. PB 12245.

Lorenz, C.: Arrangement for the Recording of Telephone or Telegraph Messages for the Purposes of Secrecy. German patent. PB 12446.

Debell, J. and Others: German Plastic Practices. PB 12467.

Menard, James C.: High Frequency Magnetophone Magnetic Sound Recorders. PB 12659.

Columbia University: Handbook of Instructions, Magnetic Tape Recorders. PB 13885.

Marshall, J.R. and others: D-1800 "Recorder." PB 13940.

Electricord Recording Machine. U.S. War Dept. Technical Manual. PB 22359.

Thiessen, G.J.: The Magnetophone. PB 23646.

Kornei, O. and others: Investigations of New Magnetic Recording Media. PB 24381.

Brush Development Co.: Development of a High Frequency Strain Analyser. PB 24884.

Lloyd, C.G.: Miscellaneous German Radio and Communication Targets. PB 25653.

Harcourt, W.M. Agfa Colour. PB 25659.

Carlisle, Gerald: Technical Report on the German Tape Recorder. PB 27762.

Hansell, C.W.: Miscellaneous Developments in German Science and Industry. PB 31594.

Brush Development Co.: Development of a High Frequency Strain Analyzer, PB 32604. PB 32605. PB 32606.

U.S. Holabird Signal Depot: German Magnetic Tape Recorder. PB 33126.

Temple, M.D.: Investigations on New Magnetic Recording Media. PB 33200.

U.S. War Dept. Magnetic Wire Recorder (G.E. Models 50A and 51) PB 37072.

U.S. War Dept. Boehme Automatic Keying and Recording Equipment. PB 41267.

Magnetic Recorder Magnetophone K-4. PB 45933.

Magnetic Wire Recorder. (G.E. Model 20N). PB 48304.

Magnetic Wire Recorder. (G.E. Model 20B-2) PB 48394.

Robin, H.L.: Magnetophone, Type K-7. PB 60743.

Pulling, M.J.L.: The Magnetophone Sound Recording and Reproducing System. PB L 60899.

The Difficulty of Modulation in Magnetic Recording at High Audio Frequencies. (In German). PB L 70402.

Reports on High Frequency, Super Conductivity, Magnetic Sound Recording. PB L 74284.

Ranger, Richard H.: Further Studies in Magnetophones and Tapes. PB L 79558.

Hanson, R.O.: The Bell Telephone Laboratories High Fidelity Tape Recorder. PB L 80603.

Boyers, J.S.: Notes on the Operation of Wire Recorders at the New London Laboratory. PB L 80604.

Wide Range 22 Second Recording-Reproducing Set. PB 81045.

Hanson, R.O.: Magnetic Wire Recorders. (G.E. Model 20A, Armour Research Foundation Model 50) PB L 81052.

Hanson, R.O.: The General Electric Model 20N Wire Recorder. PB L 81053. PB L 81054.

Herrnfeld, Frank P.: Oscillator (125 kc) for Use With High Fidelity Tape Recorder. Columbia University, Division of War Research. PB L 81359.

Begun, S.J.: Magnetic Recording. Publisher: Murray Hill Book Co., Inc. 1949.

Frayne, J.G. and H. Wolfe: Elements of Sound Recording. Publisher: John Wiley. 1949.

Indiana Steel Products Co.: Magnetic Tape Recording Handbook. The Indiana Steel Producers Co., 6 No. Michigan Avenue, Chicago 2, Ill.

Indiana Steel Products Co.: Hyflux Magnetic Recording Tape. Engineering Bulletin No. EBT101. 1947.

Stromberg-Carlson Co.: Investigations of Magnetic Recording Systems. (Monthly Progress Reports). Evans Signal Lab. Project 2001-9, 1947. Contract W-33-039-SC 32276. Available on loan from Science and Technology Project, Library of Congress, Washington, D.C.

Armour Research Foundation: An Analysis of Magnetic Recording with Frequency Modulated Signals. Available from the Armour Research Foundation, Magnetic Recording Division.