



DEPARTMENT OF THE NAVY

OFFICE OF COUNSEL
NAVAL UNDERSEA WARFARE CENTER DIVISION
1176 HOWELL STREET NEWPORT RI 02841-1708

IN REPLY REFER TO

Attorney Docket No. 300001
25 February 2016

The below identified patent application is available for licensing. Requests for information should be addressed to:

TECHNOLOGY PARTNERSHIP ENTERPRISE OFFICE
NAVAL UNDERSEA WARFARE CENTER
1176 HOWELL ST.
CODE 00T2, BLDG. 102T
NEWPORT, RI 02841

Serial Number 14/867,220
Filing Date 28 September 2015
Inventor Anthony A. Ruffa

Address any questions concerning this matter to the Office of Technology Transfer at (401) 832-1511.

DISTRIBUTION STATEMENT
Approved for Public Release
Distribution is unlimited

VEHICLE-BASED VECTOR SENSOR

STATEMENT OF GOVERNMENT INTEREST

[0001] The invention described herein may be manufactured and used by or for the Government of the United States of America for governmental purposes without the payment of any royalties thereon or therefore.

CROSS REFERENCE TO OTHER PATENT APPLICATIONS

[0002] None.

BACKGROUND OF THE INVENTION

(1) Field of the Invention

[0003] The invention is an unmanned underwater vehicle that can function as an acoustic vector sensor.

(2) Description of the Prior Art

[0004] It is known that a propagating acoustic plane wave in water will cause fluid particles to move in an oscillatory motion. A "fluid particle," as the term relates to the present invention, is a small volume of fluid surrounding a point where averaged properties (e.g., velocity, temperature, etc.) can be analyzed with continuum mechanics. An acoustic vector sensor measures the particle motion via an accelerometer and combines

the motion measurement with a hydrophone in order to obtain a high degree of directionality in a relatively small package. Based on these advantages, acoustic vector sensors have become an active area of research.

[0005] An outgrowth in the research of vector sensor technology is that if an object in water is neutrally buoyant and small compared to a wavelength (if the acoustic wavelength is at least ten times larger than the object's representative length scale); the object will respond as a fluid particle in the sense that an acoustic plane wave will cause the object to move back and forth with the same oscillatory motion induced in the surrounding water.

[0006] At low frequencies, unmanned underwater vehicles (UUVs) are typically small in measurement as compared to an acoustic wavelength. For example: at a frequency of 100 Hz in water, the wavelength is fifteen meters. This wavelength is large compared to the diameter of almost all known UUVs and is even large compared to the length of many UUVs. If the UUV is also neutrally buoyant in water; the UUV will assume the same motion as the neighboring fluid particles induced by the acoustic fields propagating in the water in a direction transverse to the UUV axis. Thus, the UUV itself can function as an accelerometer for the purposes of acting as an acoustic vector sensor under these conditions.

[0007] In the prior art of sensor technology; Glenning (United States Patent No. 6,046,963) discloses an undersea vehicle incorporating a hull array in a stowed position. Sensors are joined to analysis circuitry within an inner hull. The sensors can be either velocity sensors or pressure sensors operating on piezoelectric, optical or magneto-strictive principles or the like. The hull array is slidably mounted at each side to guide track sets. Each guide track has an outer track and an inner track.

[0008] In Cray et al. (United States Patent No. 6,697,302) an underwater acoustic receiver is provided that measures pressure. Acoustic particle acceleration being sensed by each of the accelerometers (which can be converted to acoustic velocity by taking the time derivative) is obtained by taking the average of the acceleration along a given axis. For example: the x-acceleration component (denoted "u" in terms of velocity) is obtained by summing accelerometer outputs and dividing by two. The acceleration components are obtained in a similar manner.

[0009] In Houston et al. (United States Patent No. 6,972,678), a schematic depicts a planar waveguide formed on the outer surface of a hull of a vessel. The waveguide comprises an outer dielectric layer, an optional metal coat, an inner dielectric layer and the outer surface of the hull.

[0010] In Hickling (United States Patent No. 7,054,228), a method and apparatus for locating and quantifying sound sources using an array of acoustic vector probes is disclosed. The set of sound-intensity vectors measured by the array provides a set of directions to a sound source whose approximate spatial coordinates are determined using a least-squares triangulation formula. The sound intensity vectors also determine sound-power flow from the source.

[0011] In Cray et al. (United States Patent No. 7,106,658), a single directional sensor that can be positioned on an underwater or surface vehicle is disclosed. A transponder radiates a coded acoustic signal. The signal is received at the sensor on the vehicle. A sensor processor is also positioned on the vehicle. The sensor processor includes a clock synchronized with a source processor clock. The sensor processor calculates distance between the transponder and the sensor using the one-way time delay from signal transmission and the speed of signal propagation through the environment.

[0012] In Abdi (United States Patent No. 7,505,367) vector components of an acoustic field may be measured using devices including, but not limited to, transducers, receivers and vector sensors. Measurements of the scalar components of the acoustic field may be made using devices which include, but are not limited to, pressure sensors, transducers, hydrophones, omni-

Attorney Docket No. 300001

directional hydrophones, directional hydrophones and/or any other devices that achieve the same or similar functionality. Recovering information from the vector components of the acoustic field is not limited to any particular sensor type; any device capable of measuring a vector component of the acoustic field suffices.

[0013] In Naluai et al. (United States Patent No. 7,536,913), a probe is disclosed that can be directly mounted to an external support structure via a central support rod at a desired elevation measurement point and oriented in a desired measurement direction. Combinations of the various signal output of the probe yield accurate measurements of the vector field of the acoustic intensity.

[0014] In Ruffa (United States Patent No. 7,679,999) a bow dome acoustic sensor assembly is disclosed that includes a forward-most outer hull portion of the submarine and surface ship - known as the "bow dome". An acoustic panel is mounted on a pressure hull portion via acoustically isolating supports. An after surface of the acoustic panel is provided with optical properties which permit analysis of light from a laser.

[0015] Donskey et al. (United States Patent No. 8,085,622) illustrates an ultra low frequency acoustic vector sensor; the acoustic sensor is adapted to measure ultra low frequency liquid particle oscillations when positioned in a body of water. More

particularly, the acoustic sensor includes a spherically-shaped housing which has a liquid-tight compartment or horn positioned centrally therein.

[0016] Deng (United States Patent No. 8,638,956) illustrates an exemplary buoyant object of an acoustic velocity microphone shown in relation to an acoustic wavelength. The feature size of the buoyant object may be smaller than the wavelength of an acoustic wave. The buoyant object follows the movement of the acoustic particle of the acoustic wave passing thru the buoyant object. In other words, the velocity of the buoyant object is the same as or similar to the particle velocity of the acoustic wave.

[0017] Stacey et al. (United States Patent No. 8,385,155) discloses a digital acoustic sensor system comprising an acoustic sensor that is configured to detect an underwater acoustic signal and form an analog signal that is proportional to the underwater acoustic signal. In another embodiment, the acoustic sensor can be an accelerometer configured to sense a change in velocity caused by an underwater acoustic signal. An acoustic vector sensor, such as a hydrophone vector sensor, can be used to measure the direction of the acoustic signal.

[0018] The preceding patent references are general approaches for realizing a vector sensor, in some cases not limited to any particular sensor type. The references teach a situation

different from an underwater vehicle that can be made neutrally buoyant and is often smaller than an acoustic wavelength. As such, a novel approach would be to use the entire underwater vehicle to emulate an underwater acoustic sensor. Furthermore, the prior art does not teach the use of the accelerometers primarily employed by a UUV for inertial navigation that can also determine acceleration measurements necessary to operate as an acoustic vector sensor.

SUMMARY OF THE INVENTION

[0019] It is therefore a general purpose and primary object of the present invention to provide an unmanned underwater vehicle (UUV) in which the vehicle can emulate the operation of an acoustic vector sensor.

[0020] To attain the object described, the present invention provides an acoustic vector sensor based on the movement of a neutrally buoyant UUV. A synergistic design that emulates an acoustic vector sensor takes advantage of two characteristics of the UUV. One is that the use of an accelerometer for the inertial navigation system can also be used as the accelerometer component of the vector sensor. The tri-axial accelerometer used for the inertial navigation system of a UUV is typically much more accurate than accelerometers typically used for acoustic sensing. If the UUV uses another form of navigation

that does not use an accelerometer, then a separate accelerometer would be used with the hydrophone to perform the acoustic vector function.

[0021] The accelerometer of the inertial navigation system can measure the particle acceleration associated with an acoustic wave arriving at an arbitrary incidence angle. When the accelerometer's output signal is combined with an output of a hydrophone positioned within the UUV; the resulting output emulates the operation of a low-frequency acoustic vector sensor.

[0022] Because the invention can apply to underwater vehicles that are neutrally buoyant when their length scale is small compared to an acoustic wavelength; the present invention takes advantage of UUV characteristics that already exist to provide a low frequency vector sensor. Also, interference by other internal components has minimal operational impact on the hydrophone or the accelerometer of the inertial navigation system (for the purposes of performing vector sensor measurements) because of diffraction at low frequencies.

[0023] A distinct advantage of the present invention is having a portable, low cost and low frequency directional capability by the technically simple but novel act of integrating a hydrophone with the accelerometer capabilities of the inertial navigation system of a UUV.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] Other objects, features and advantages of the present invention will become apparent upon reference to the following description of the preferred embodiments and to the drawing, wherein **FIG. 1** depicts a schematic of the underwater vehicle of the present invention with use of an accelerometer of the inertial navigation system and the hydrophone acting as a vector acoustic sensor.

DETAILED DESCRIPTION OF THE INVENTION

[0025] The present invention can apply to underwater vehicles that are neutrally buoyant and when their length is less than an acoustic wavelength. In the present invention shown in **FIG. 1**, a neutrally buoyant UUV **10** (for example: having a diameter of twenty-four inches) can effectively sense acoustic energy **100** in an ocean environment **200** with the energy arriving at a direction "A" (broadside to a longitudinal axis of the UUV). In the operational example using the schematic of **FIG. 1**; the acoustic energy **100** would have wavelengths of 20 feet, or roughly 6 meters.

[0026] In the figure, the UUV **10** includes an inertial navigation system with an accelerometer **20** capable of measuring velocity in an "x-y-z" direction (as shown by the axis'). The

accelerometer **20** is operationally connected to or integrated with a hydrophone **30** on which the hydrophone measures the acoustic energy **100** arriving at the UUV **10** in direction "A". A processor **40** gathers the data from the accelerometer **20** of the navigation system and the hydrophone **30** to transform the data into usable units of measurement.

[0027] The hydrophone **30** does not have to be co-located with the accelerometer **20** and the accelerometer does not have to be part of the inertial navigation system. The separate accelerometer **20** and the hydrophone **30** can be located anywhere in the vehicle, since the vehicle dimensions are small compared to an acoustic wavelength.

[0028] The UUV **10** is neutrally buoyant in that the vehicle has the same density as seawater. Because the density is the same, the acoustic characteristics of the UUV **10** will be the same when its characteristic diameter is small compared to an acoustic wavelength. Transmission of sound thru a shell **50** (or material layer) of the UUV **10** is not hindered at low frequencies (i.e., when the shell or layer thickness is small compared to an acoustic wavelength); thereby, making measurement by a hydrophone practical. If there is any hindrance by the shell **50**, the effect would be almost non-existent on the operation of the hydrophone **30**.

[0029] The math supporting the operating scenario of **FIG. 1** is as follows. The neutrally buoyant UUV **10** should be a tenth of a wavelength or less to act as a fluid particle. If its diameter is 24 inches, the wavelength λ should be at least $24 \times 10 = 240$ inches, or 20 feet, or 6.096 m. The frequency is $f = c/\lambda = 1500/6.096 = 246$ Hz (or approximately 250 Hz)

[0030] In other words, the UUV **10** could effectively become a vector sensor for frequencies of 250 Hz or lower, because the UUV would move with the fluid particle - at least for plane waves propagating in directions transverse to the UUV. Using this approach to sense acoustic energy propagating along the UUV would only be valid at lower frequencies because of a longer length (relative to a diameter).

[0031] It will be understood that many additional changes in the details, materials, steps and arrangement of parts, which have been herein described and illustrated in order to explain the nature of the invention, may be made by those skilled in the art within the principle and scope of the invention as expressed in the appended claims.

[0032] The foregoing description of the preferred embodiments of the invention has been presented for purposes of illustration and description only. It is not intended to be exhaustive nor to limit the invention to the precise form disclosed; and obviously many modifications and variations are possible in

Attorney Docket No. 300001

light of the above teaching. Such modifications and variations that may be apparent to a person skilled in the art are intended to be included within the scope of this invention as defined by the accompanying claims.

What is claimed is:

1. A vector sensor sized to a predetermined acoustic wavelength, said sensor comprising:

an unmanned neutrally buoyant underwater vehicle with an interior space in which a length of said underwater vehicle is equal to one tenth of the acoustic wavelength;

an inertial navigation system for navigating said underwater vehicle, said navigation system including an accelerometer positioned within the interior space of said underwater vehicle with said accelerometer capable of measuring velocity in a triaxial direction; and

a hydrophone positioned within the interior space of said underwater vehicle and operationally connected to said accelerometer wherein said hydrophone is capable of sensing acoustic energy of the wavelength in an ocean environment when the acoustic energy arrives broadside to a longitudinal axis of said underwater vehicle.

2. The vector sensor in accordance with claim 1 wherein said underwater vehicle has a diameter of twenty-four inches.

3. The vector sensor in accordance with claim 1 wherein the length of said underwater vehicle is less than one tenth of the acoustic wavelength.

4. A vector sensor sized to a predetermined acoustic wavelength, said sensor comprising:

an unmanned neutrally buoyant underwater vehicle with an interior space in which a length of said underwater vehicle is equal to one tenth of the acoustic wavelength;

an accelerometer positioned within the interior space of said underwater vehicle with said accelerometer capable of measuring velocity in a triaxial direction;
and

a hydrophone positioned within the interior space of said underwater vehicle and operationally connected to said accelerometer wherein said hydrophone is capable of sensing acoustic energy of the wavelength in an ocean

environment when the acoustic energy arrives broadside to a longitudinal axis of said underwater vehicle.

5. The vector sensor in accordance with claim 4 wherein said underwater vehicle has a diameter of twenty-four inches.

6. The vector sensor in accordance with claim 4 wherein the length of said underwater vehicle is less than one tenth of the acoustic wavelength.

VEHICLE-BASED VECTOR SENSOR

ABSTRACT OF THE DISCLOSURE

A neutrally buoyant underwater vehicle is provided in which a length of the vehicle is up to one tenth the length of a predetermined acoustic wavelength. The vehicle includes an inertial navigation system with an accelerometer capable of measuring velocity in a multi-axis direction. The navigation system is operationally connected to a hydrophone which measures acoustic energy of the wavelength arriving at the underwater vehicle. A processor gathers the data from the accelerometer and the hydrophone to convert the data into usable units. The operation of the vehicle-based components is similar to a vector sensor for frequencies of 250 Hz or lower.

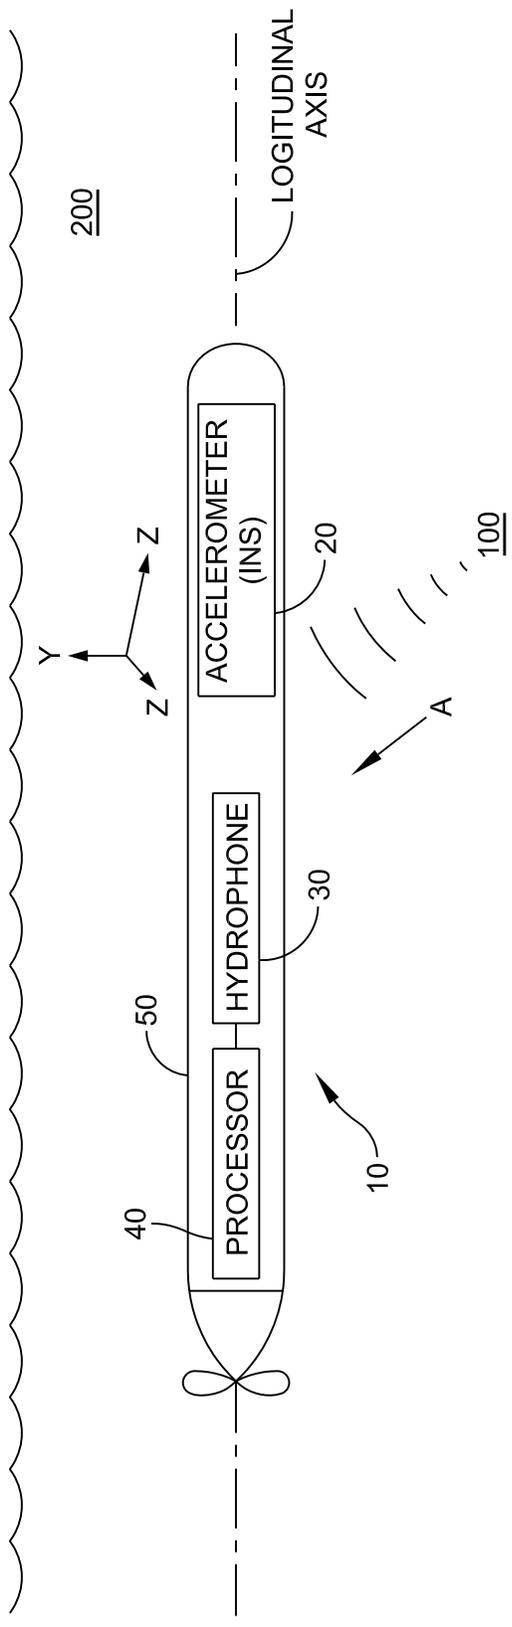


FIG. 1