UNCLASSIFIED

AD NUMBER
AD873038
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; JUL 1970. Other requests shall be referred to Air Force Materials Lab., Attn: MAYE, Wright-Patterson AFB, OH 45433.
AUTHORITY
Air Force Materials Lab ltr dtd 7 Dec 1972

THIS PAGE IS UNCLASSIFIED

AD873038

AD No. ____
DDC FILE COPY

AFML-TR-70-138

Dielectric Measurements on High-Temperature Materials

W. B. Westphal and J. Iglesias
Laboratory for Insulation Research
Massachusetts Institute of Technology
Cambridge, Massachusetts

Technical Report AFML-TR-70-138

July 1970

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of AF Materials Laboratory (MAYE), WPAFB, Ohio 45433

AIR FORCE SYSTEMS COMMAND
AIR FORCE MATERIALS LABORATORY
WRIGHT-PATTERSON AIR FORCE BASE, OHIO

DDC
RECEIVED
AUG 26 1970
C

Best Available Copy

ACCESSION for
CFSTI WHITE SECTION
DDC BUFF SECTION
UNANNOUNCED
JUSTIFICATION
BY
DISTRIBUTION/AVAILABILITY CODES
DIST. AVAIL. and/or SPECIAL
2

NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Copies of this report should not be returned to the Air Force Materials Laboratory unless return is required by security considerations, contractual obligation, or notice on a specific document.

Dielectric Measurements on High-Temperature Materials

W. B. Westphal and J. Iglesias

Laboratory for Insulation Research
Massachusetts Institute of Technology
Cambridge, Massachusetts

Technical Report AFML-TR-70-138

July 1970

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of AF Materials Laboratory (MAYE) WPAFB, Ohio 45433

FOREWORD

This report was prepared by the Massachusetts Institute of Technology, Laboratory for Insulation Research, Cambridge, Massachusetts, under USAF Contract F33615-67C-1612. This Contract was initiated under Project No. 7371, "Exploratory Development in Electrical, Electronic, and Magnetic Materials," Task No. 737101, "Dielectric Materials." The work was administered under direction of the AF Materials Laboratory, with Mr. D. Evans acting as project engineer.

This Final Report covers work conducted from Nov. 1, 1966 to March 31, 1970, and was submitted on May 21, 1970, by the authors for publication.

This technical report has been reviewed and is approved

DAVID J. IDEN
Lt. Colonel, USAF
Chief, Electromagnetic
Materials Branch
Materials Physics Division
Air Force Materials Laboratory

ABSTRACT

Extensions of the laboratory's measuring techniques for complex dielectric constants to wider ranges of temperature (4° to $2000^{o}K$) and frequency (.008 Hz to 90 GHz) are reviewed. Methods of interpreting dielectric data and computer programs for finding the components of complex spectra are discussed. Measurement data of general interest accumulated in the last three years appear in graphical and/or tabular form.

TABLE OF CONTENTS

	Page
Introduction	1
Measurement Techniques	1
Computations in Spectrum Analysis	6
Appendix - Computer Programs	14
Index to Dielectric Data	24

ILLUSTRATIONS

Figure		Page
1.	Measurement methods and temperature ranges.	2
2.	High-temperature reentrant cavity.	3
3.	Type of samples for copper-clad dielectrics. (a) Disk for two-terminal measurements. (b) Large square for precision three-terminal measurements. (c) Rectangular three-terminal sample for measurements in liquid-helium Dewar.	3
4.	Microwave dielectric-filled cavity formed of doubly-clad sheet stock.	4
5.	Rectangular cavity for microwave measurement on sheet using liquid displacement.	5
6.	Standing-wave method with thin sample, located a quarter wavelength from end of line. (a) Coaxial line. (b) Circular hollow waveguide TE11 mode.	5
7.	Thick-wall copper cavity for measurements on thick anisotropic laminates.	6
8.	Construction of sample holder section for high-loss liquids.	7
9.	Terminology for sections in liquid sample holder.	7
10.	Chart for finding κ', κ'' in terms of node shift ΔN and node width ΔX.	9
11.	Terminology for initial line fit to three experimental points.	10
12.	Terminology for fit between line and experimental points	11

INTRODUCTION

A review of the general properties of high-temperature insulators has been previously given (Tech. Rep. 203). Since that time we have measured new samples of BN, SiO_2, sapphire, and spinel ($MgAl_2O_4$), all of which have good high-temperature properties. These are listed in Section III and are indexed according to the same categories used in our previous review report 203. Sections I and II describe respectively measurement techniques and calculation procedures.

MEASUREMENT TECHNIQUES

Since our last summary report on measurement methods (Tech. Rep. 182), the frequency and temperature ranges have been extended and different techniques have been used on special materials. These are briefly described in this section. Figure 1 shows graphically the frequency and temperatures available for measurement. The letter designations refer to equipment or methods as listed in the following summary.

Summary of Methods of Measurement

A. Laboratory-built three-terminal low-frequency bridge used mainly on another contract. For a description see Tech. Rep. 6 under Contract N00014-67A-0204-0003.

B. Laboratory-built three-terminal high-frequency bridge, see above.

C. Laboratory-built three-terminal bridge with automatic frequency scanning and recording. See Tech. Rep. 4 of above contract.

D. Laboratory-built wide-range bridge, three-terminal 1 to 10^5 Hz, two-terminal 1 to 4×10^7 Hz. See Tech. Rep. 201 under Contracts AF 33(616)-8353 and Nonr-1841(10)

E. Susceptance variation method with reentrant cavity: (a) 60 to 100 MHz, 2-inch disks; (b) 300 MHz, 1-inch disks.

F. Experimental Laboratory capacitance bridge, 50 MHz to 300 MHz.

G. Standing-wave method with open-circuited line: (a) disk sample, 300 MHz to 200°C; (b) coax sample, 100 to 300 MHz, R.T. only.

H. Reentrant cavity with twin coaxial sample. Used only for good sensitivity ($\tan \delta$ 3 to 5×10^{-5}) on coaxial samples at 300 MHz, R.T. only.

I. Standing-wave method with coaxial sample $\lambda/4$ away from short, near R.T. only.

J. Standing-wave method with coaxial sample against short, -150 to +500°C.

K. Standing-wave method with cylindrical sample, -150° to 1000°C at 8.52 GHz, to 800°C at 14 and 24 GHz.

L. Coaxial cavity, frequency variation method, 1 to 3 GHz, -195° to +1400°C.

M. Dielectric-filled cylindrical cavity, -195° to 1500°C, 3 to 6 GHz, -195° to 1700°C, 9 GHz.

N. Transmission bridge, free-space method, 90 GHz, under development.

The obvious gap in high-temperature measurements near 10^8 Hz could be remedied by construction of a doubly reentrant cavity as proposed in a previous report.[1] A model (Fig. 2) useful to about 800°C, using silver instead of platinum and iridium foils, is under construction and will be studied for expected temperature gradients.

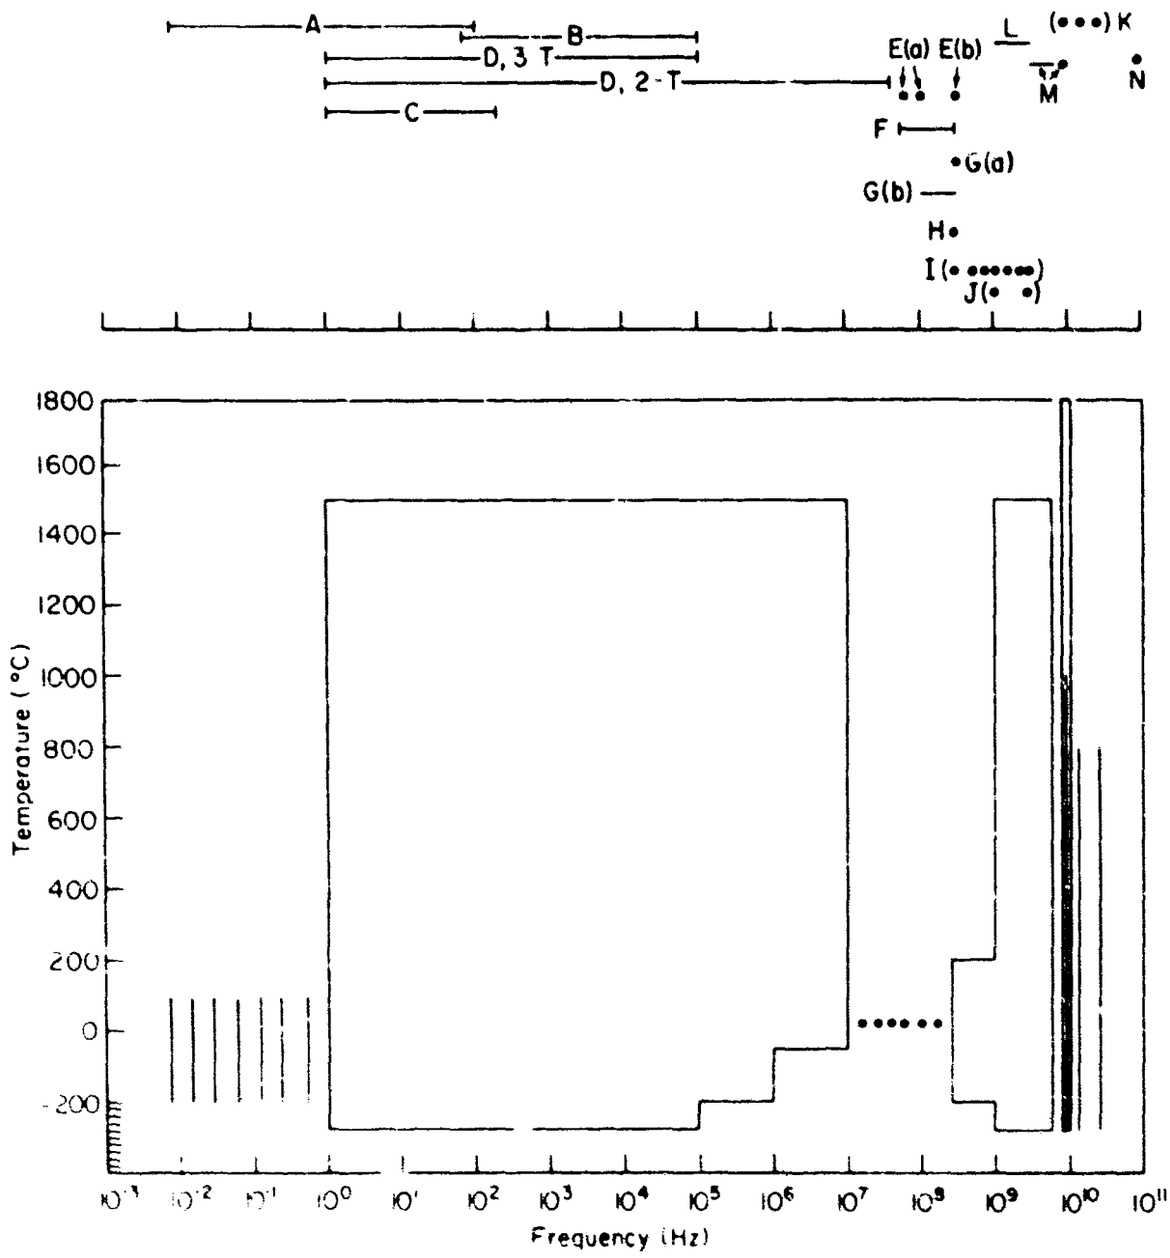

Fig. 1. Measurement methods and temperature ranges. See summary list for letter designations.

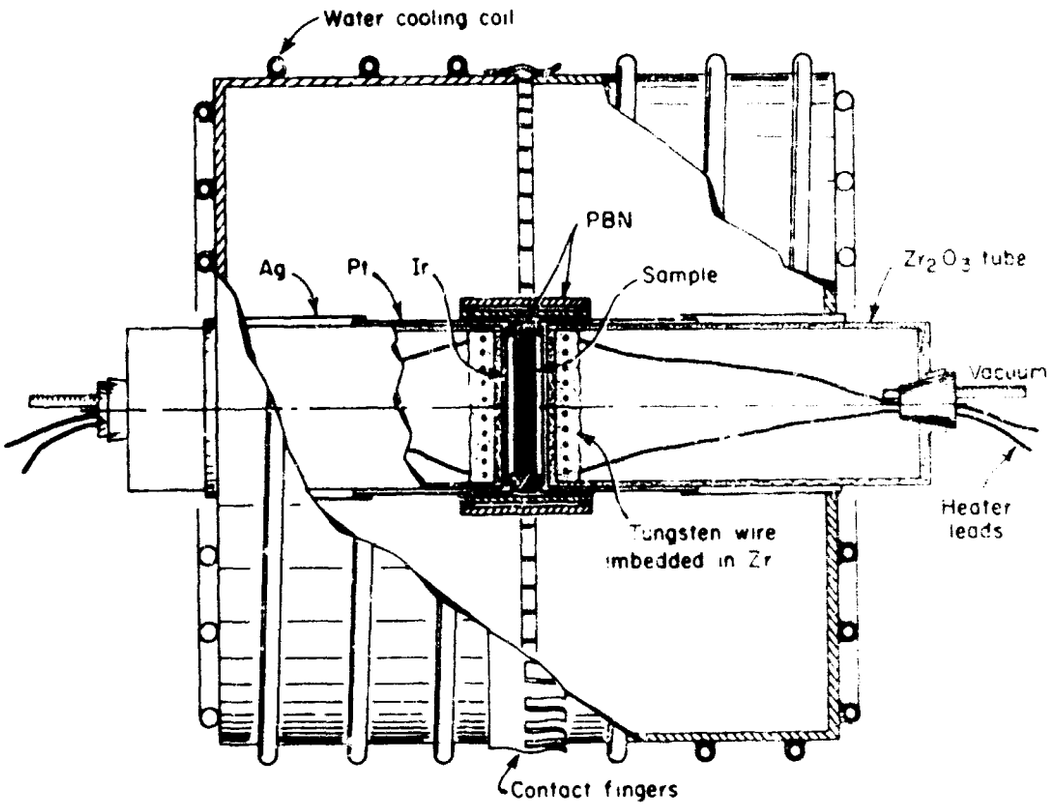

Fig. 2. High-temperature reentrant cavity (shown about 1/3 size for 100 MHz).

The 90-GHz measurements are still being developed.

For some of the data listed in Section III more than one method of measurement was used. An example is the Sude DiClad 522, which was supplied as doubly copper-clad sheet or as unclad sheet. With the clad sheet two-terminal and three-terminal samples were cut (Figs. 3a,b,c).

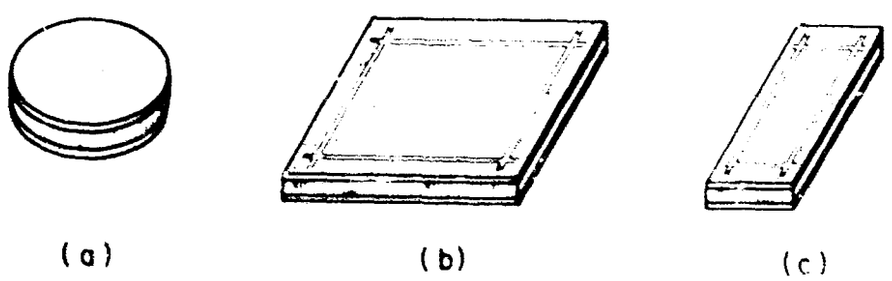

Fig. 3. Type of samples for copper-clad dielectrics. (a) Disk for two-terminal measurements. (b) Large square for precision three-terminal measurements. (c) Rectangular three-terminal sample for measurements in liquid-helium Dewar.

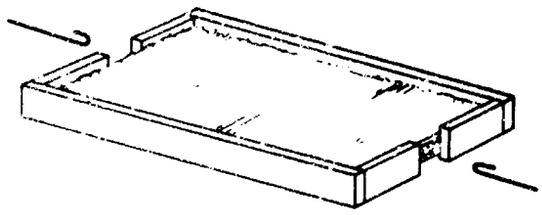

Fig. 4.
Microwave dielectric-filled cavity formed of doubly-clad sheet stock.

For microwave measurements, pieces of the same stock were soldered to close the periphery of a rectangular piece as shown in Fig. 4. The resultant dielectric-filled cavity having a width of 4.449 cm and a length of 15.30 cm resonated in the TE_{104} mode at 3.14 GHz. A thickness measurement of the plate is not involved in the computation of the dielectric constant

$$\kappa' = \frac{\lambda^2}{4} \left[\left(\frac{1}{w}\right)^2 + \left(\frac{4}{\ell}\right)^2\right]^{1/2}. \tag{1}$$

The equivalent loss tangent for copper loss was computed:

$$\tan \delta_w = \frac{\frac{1}{w}(w + 2t) + \left(\frac{4}{\ell}\right)^2(\ell + 2t)}{1.31\times10^4 \; wt \; \frac{\lambda}{s}\left[\frac{1}{w^2} + \frac{4}{\ell^2}\right]^{3/2}}, \tag{2}$$

where s is the resistivity of the copper relative to its room-temperature resistivity. The value of $\tan \delta_w$ was 2.48×10^{-4} at 25°C and was small compared to dielectric loss at all temperatures.

Measurements on declad stock were made by using the three-terminal liquid displacement method[2] at 10^4 Hz and a rectangular cavity (as shown in Fig. 5) near 3 GHz.

Measurements were made with air-filled cavity (1), sample added (2), benzene (3), sample added (4). As in the three-terminal liquid displacement method, the four sets of data allow measurements of κ' without measurement of sample thickness:

$$\kappa'_s = \frac{\left[\left(\frac{\lambda_3}{\lambda_1}\right)^2\left(\frac{\lambda_3}{\lambda_4}\right)^2 - \left(\frac{\lambda_1}{\lambda_2}\right)^2\right]}{\left(\frac{\lambda_3}{\lambda_4}\right)^2 - \left(\frac{\lambda_1}{\lambda_2}\right)^2} \kappa'_{air}. \tag{3}$$

Equation 3 holds for any TE cavity but requires the same mode in all four measurements. Since the edge of the sample is in regions of low field strength, the length and width are not critical.

For measurements with ∥ field, a single thickness (1/16 inch) unclad sample was located $\lambda/4$ from the end of a coaxial line (Fig. 6a) or circular waveguide (Fig. 6b). The sources of errors and their magnitudes are listed. Stacking samples improves the sensitivity for measuring small losses. For accurate measure-

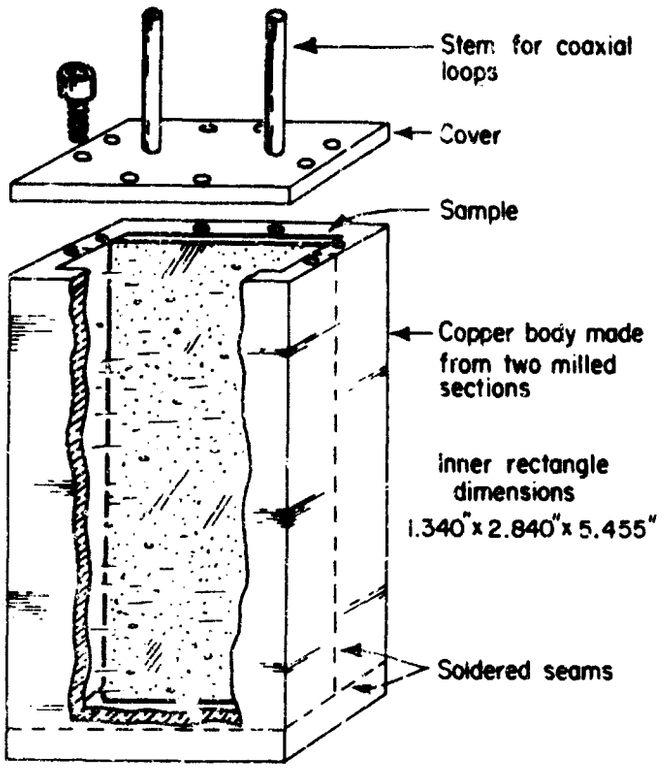

Fig. 5.

Rectangular cavity for microwave measurement on sheet using liquid displacement.

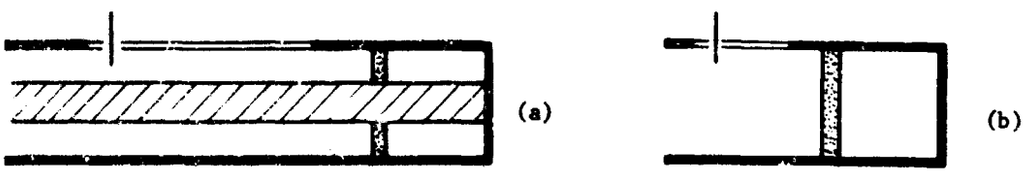

At 3 GHz:	% error κ	At 8.5 GHz; TE11	
Instrument repeatability 10 μ	.38	Instrument repeatability 5 μ	.11
1 mil uncertainty in clearance	.78	1 mil uncertainty in clearance	.06
1/2 mil " in thickness	.80	1/2 mil " in thickness	.80
	1.96		.97
tan δ sensitivity	.00015	tan δ sensitivity	.00015

Fig. 6. Standing-wave method with thin sample, located a quarter wavelength from end of line: (a) Coaxial line; (b) circular hollow waveguide TE_{11} mode.

ments appropriate density corrections are used. Liquid immersion has been proposed but not used here.

In measurements on another glass-Teflon material (Duroid) data with both ⊥ and ∥ fields were required as a function of temperature for 1-inch thick stock. For these measurements, a thick-wall (0.81-inch) circular cavity (Fig. 7) was made of copper. Two disks of 1-3/8 inch diameter were press-fitted into the cavity. An oversized copper plunger was cooled in liquid nitrogen and then pressed into the die. The dielectric-filled cavity thus formed was operated in the TM_{010} mode for E ⊥ measurements and in the TE_{111} mode for E ∥. As the material was heated,

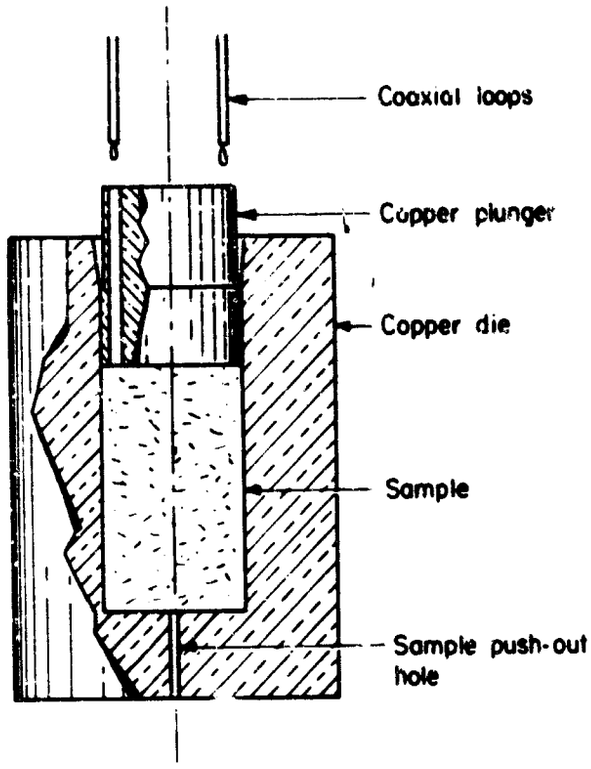

Fig. 7.

Thick-wall copper cavity for measurements or thick anisotropic laminates.

thermal expansion moved the plunger. This motion was monitored and thermal expansion of the copper was used in calculating the cavity dimensions for each temperature. The thermal expansion was large, and the sample remained 15% thicker after the run. In our knowledge, the precision and temperature range of this run are unique for this material.

COMPUTATIONS IN SPECTRUM ANALYSIS

The current trend for computers to program and control measurement procedure, to compute results and analyze them in terms of time or frequency has not yet led to completely automated dielectric spectroscopy. For the present we use the IBM 360 to compute values of dielectric constant and loss from instrument readings and to analyze frequency response.

Computation of κ', κ''

As an example of this first use we consider the calculation of dielectric constant and loss of a liquid contained as shown in Fig. 8 and measured by the standing-wave method in coaxial line (Program 1, Appendix). The sample holder is designed so that the region below the sample is $\lambda/4$ long. Sample-out data are AN, the node, and ΔXA the node width and wavelength λ. Sample-in data are SN, the node, and ΔXS the node width. The basic transmission-line equations give boundary impedances (Z_{B1}, Z_{B2},...) in terms of intrinsic-line constants (ZO_n γ_n) and line

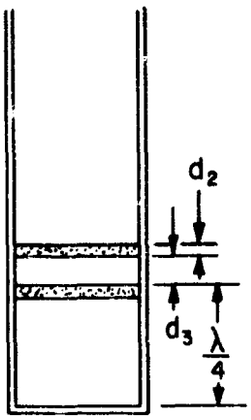

Fig. 8. Construction of sample holder section for high-loss liquids.

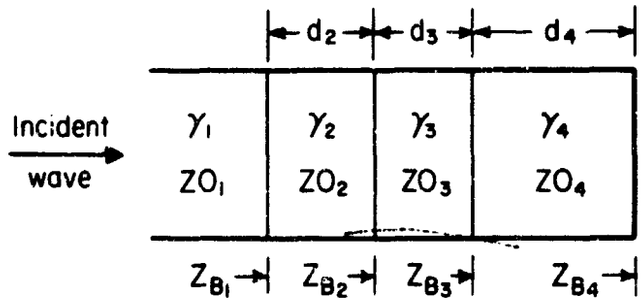

Fig. 9. Terminology for sections in liquid sample holder.

length d_n (Fig. 8). For Fig. 9 the general formulation for TE or TEM waves defines

$$\tanh \rho_{Bn} = \frac{Z_{Bn}}{ZO_n}, \quad \tanh \rho_{B(n+1)} \frac{Z_{B(n+1)}}{ZO_{(n+1)}}, \text{ etc.} \tag{4}$$

Then the impedance at a boundary Z_{Bn} is related to the impedance at the next boundary $Z_{B(n+1)}$:

$$\frac{Z_{Bn}}{\tanh[(\gamma d)_{(n+1)} + \rho_{(n+1)}]} = \frac{Z_{B(n+1)}}{\tanh \rho_{(n+1)}} . \tag{5}$$

The experimentally measured quantity is $\tanh \rho_{B1}$:

$$\tanh \rho_{B1} = \frac{E - j \tan 2\pi X_o/\lambda}{1 - j E \tan 2\pi X_o/\lambda} = \frac{X - jY}{1 - jXY} \equiv \frac{X - Z1}{1 - Z1X} = \frac{Z2}{Z3} = Z4, \tag{6}$$

where E, the inverse standing-wave ratio,

$$= \frac{\sin \pi\Delta X/\lambda}{(1 - \cos^2 \pi\Delta X/\lambda)^{1/2}} \equiv X, \tag{7}$$

and X_o is the distance from the first minimum to B1. In the above and the following equations the $\equiv$ sign separates computer program terminology on the right from previous notation:

$$\tanh \rho_{B2} = \frac{Z_{B2} \tanh (\gamma_2 d_2 + \rho_{B2})}{Z_{B1}} , \tag{8}$$

$$= \frac{\tanh \rho_{B1} - \frac{ZO_2}{ZO_1} \tanh \gamma_2 d_2}{\frac{ZO_2}{ZO_1} - \tanh \gamma_2 d_2 \cdot \tanh \rho_{B1}} . \tag{9}$$

Substituting γ_1/γ_2 for ZO_2/ZO_1,

$$\frac{ZO_2}{ZO_1} \tanh \rho_{B2} = \frac{\tanh \rho_{B1} - \frac{\gamma_1}{\gamma_2} \tanh \rho_2 d_2}{1 - \frac{\gamma_2}{\gamma_1} \tanh \gamma_2 d_2 \tanh \rho_{B1}} . \tag{10}$$

Neglecting losses in Section 2, the right-hand side reduces to

$$\frac{\tanh \rho_{B1} - j(1/\sqrt{\kappa_2'}) \tan(2\pi d_2 \kappa_2'/\lambda)}{1 - j \tanh \rho_{B1} \cdot \kappa_2' \tan(2\pi d_2 \kappa_2'/\lambda)} \equiv \tag{11}$$

$$\frac{Z4 + j\,K1}{1 + jK2 \cdot Z4} = \frac{Z6}{Z8} = \frac{1}{Z9} . \tag{12}$$

With Section 4 a quarter wavelength with negligible losses:

$$Z_{B2} = ZO_3 \coth \gamma_3 d_3 = ZO_2 \tanh \rho_{B2} . \tag{13}$$

Substituting the right-hand side from Eq. 10,

$$ZO_1 \frac{\tanh \gamma_3 d_3}{ZO_3} = Z9; \tag{14}$$

then

$$\gamma_3 d_3 \tanh \gamma_3 d_3 = \gamma_1 d_3 Z9 = j \frac{2\pi d_3}{\lambda} Z9 \equiv \frac{Z9}{K3} = Z11. \tag{15}$$

Assuming that $\gamma_3 d_3$ is small (<1 radian) and substituing u for $\gamma_3 d_3$, we get

$$u \tanh u \cong u^2 - \frac{u^4}{3} = Z11 . \tag{16}$$

Solving for u in terms of Z11,

$$u = [Z11 - \frac{1}{3} (Z11)^2]^{1/2} \equiv Z12SQ. \tag{17}$$

The complex dielectric constant at this point in the program would be

$$\kappa' - j\kappa'' = (Z12SQ \cdot K3)^2 . \tag{18}$$

Instead, the complex parts of u (A,B) are varied in steps until the equation

$$Z14 = u \tanh u = Z11 \qquad (19)$$

is nearly satisfied. The final steps are 0.001% in both A and B. Line 39 defines the error. First B(DO 600), then A(DO 700), is varied. The final print-out lists sample node and ΔX, the dielectric constant K1, the loss factor K2, the loss tangent TAN, and the two complex numbers Z11 and Z14 so the degree of matching can be confirmed. The total cost of calculating 68 data sets at $2.09 per minute of calculation was $1.47. Although the approximation of Eq. 16 is not good for samples longer than one radian, the iteration part of the program extends the range to at least 1.4 radians. For values greater than π/2, an underflow develops and stops the program.

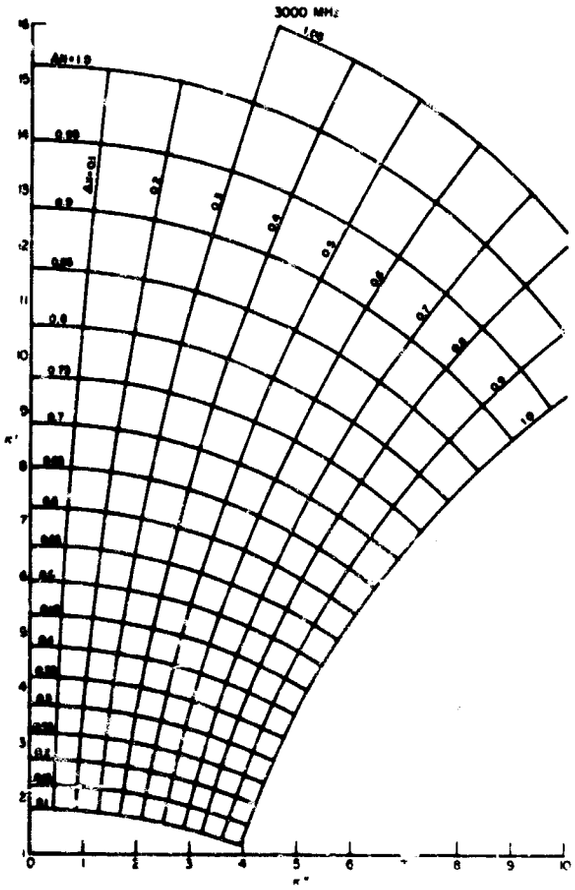

Fig. 10. Chart for finding κ', κ" in terms of node shift ΔN and node width ΔX.

A modification of the program (Program II, Apendix) uses arrays of node shifts (DN) and DX values; thus charts such as Fig. 10 can be prepared to any desired accuracy to eliminate the need of further use of the computer for a particular sample holder. In principle the iteration procedure of these programs can be used to refine other calculations for any length of sample. Previously published computation procedures[3] have been restricted in the upper limit of loss tangent.

Spectrum Analysis

In our frequency range the fundamental problem of dielectric analysis is to determine from the wide-band frequency response the number and type of subspectra. One approach in analysis is to represent the total spectrum as the sum of subspectra, each having a single relaxation time. Mathematically the composite spectrum is represented as the sum of its components:

$$\kappa'(\omega) = \kappa_\infty + \frac{\Delta\kappa_1}{1 + \omega^2\tau_1^2} + \cdots + \frac{\Delta\kappa_n}{1 + \omega^2\tau_n^2} \qquad (20)$$

and

$$\kappa''(\omega) = \frac{\Delta\kappa_1}{1 + \omega^2\tau_1^2}\,\omega\tau_1 + \cdots + \frac{\Delta\kappa_n}{1 + \omega^2\tau_n^2}\,\omega\tau_n + \frac{\sigma}{\omega\epsilon_o}\,, \qquad (21)$$

where K_∞ is the high-frequency (near infrared) dielectric constant, σ is the d-c conductivity $(\text{ohm-cm})^{-1}$, n is the number of relaxators, ε_0 is the dielectric constant of vacuum (fds/cm).

The purpose of Program III (Appendix), conceived and first executed by Dr. D. B. Knoll*) of this laboratory, is to find the number of components and compare the composite spectrum with the measured values. The initial portion of the program (to line 29) accepts a number (H) of capacitance and loss readings from a capacitance bridge and a second number (L) of readings from a low-frequency bridge. The parameters κ'(K1), κ''(K2), $\omega\kappa''$(K2W), κ''/ω(K2dW) are computed for each measurement frequency.

The arrays of data are scanned (lines 31-83) to determine if measurement errors exist. Three criteria are involved in starting from the high frequency end for any combination of relaxators as in Eqs. 20 and 21:

1. $\omega\kappa''(I) > \omega\kappa''(I+1)$, (22)

2. $\kappa'(I) < \kappa'(I+1)$, (23)

3. $\dfrac{\kappa'(I+1) - \kappa'I}{\omega\kappa''I - \kappa''(I+1)} = \tau > 0.$ (24)

Print-out statements 42, 48, 56, 61, 71, 82 advise users of errors or equalities.

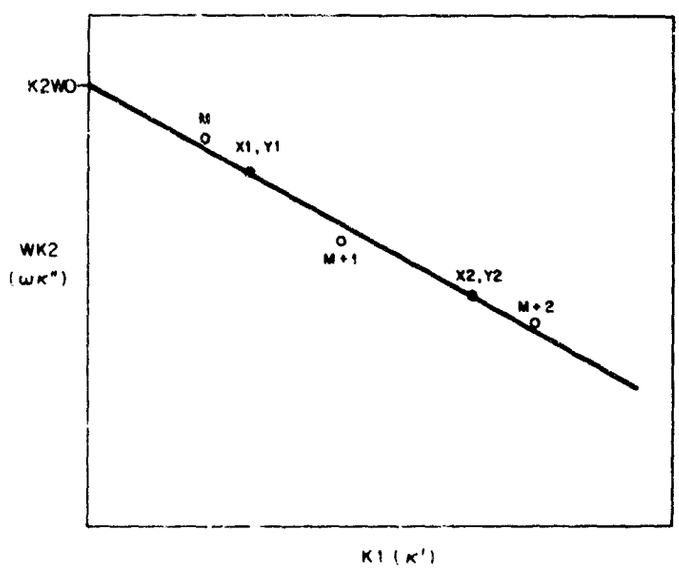

Fig. 11.
Terminology for initial line fit to three experimental points.

The Subroutine LINE fits a line to three successive experimental points according to Fig. 11.

*) Present address: Texas Instruments Corporation, Materials Research Group, Dallas, Texas.

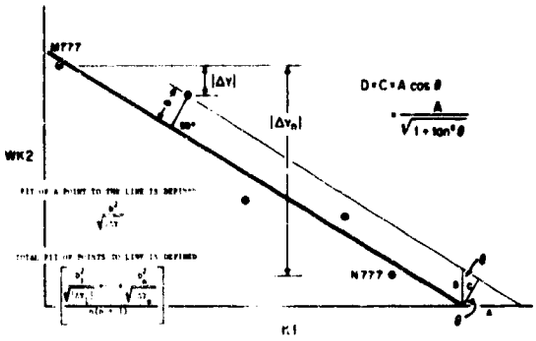

Fig. 12. Terminology for fit between line and experimental points.

Subroutine EROS is concerned with fit of the line to the points. The distance D(I) from a point (I) to line is shown in Fig. 12. In the figure $\frac{A}{B} = \tau \tan \theta$; $C = A \cos \theta = A/(1 + \tan^2\theta)^{1/2}$:

$$D(I) = C = \frac{\kappa'(I) + \tau\omega\kappa''(I) - \tau\kappa''\omega(0)}{(1 + \tau^2)^{1/2}} , \tag{25}$$

$$SE = [D(I)]^2/(|\Delta Y|)^{1/2}, \tag{26}$$

$$ERRER = \left[\frac{[D(I)]^2}{(|\Delta Y_1|)^{1/2}} + \frac{[D(I + 1)]^2}{(|\Delta Y_2|)^{1/2}}\right]^{1/2} . \tag{27}$$

More points are added to the array until ERRER increases. Subsequently both the slope (line 107) and high-frequency termination (line 116) are varied in steps to improve the fit. The final slope (line 141) determines τ_1. The first calculation of κ_∞ follows using the high-frequency values of κ'. From (20),

$$\kappa'(I) = \kappa_\infty + \frac{\Delta\kappa_1}{1 + [\omega(I)\tau_1]^2} , \tag{28}$$

$$\kappa'(I+1) = \kappa_\infty + \frac{\Delta\kappa_1}{1 + [\omega(I+1)\tau_1]^2} . \tag{29}$$

Eliminating ΔK_1 between Eq. 28 and 29 and solving for κ_∞ (line 155) yields

$$\kappa_\infty = \frac{\kappa'(I)\{1 + [\omega(I)\tau_1]^2\} - \kappa'(I+1)\{1 + [\omega(I+1)\tau_1]^2\}}{[\omega(I)\tau_1]^2 - [\omega(I+1)\tau_1]^2} . \tag{30}$$

Solving for K_1 yields (line 147):

$$\Delta K_1 = \frac{\kappa'(I+1) - \kappa'(I)}{\dfrac{1}{1 + [\omega(I+1)\tau_1]^2} + \dfrac{1}{1 + [\omega(I)\tau_1]^2}} . \tag{31}$$

The high-frequency residue is regarded as the low-frequency contribution of a relaxator far outside the measuring range. The change in κ' with frequency in the measurement range is negligible, but the change in loss is obtained from the measured increment in κ'' for two frequencies minus the same increment due to the first spectrum component. Neither the time constant nor ΔK value of the off-range spectrum is known but their product is (line 162):

$$\Delta K_h \tau_h = \frac{(\omega\kappa'')I - (\omega\kappa'')I{+}1 - \Delta K_1 \tau_1 \left[\dfrac{\omega_I^2}{1 + (\omega_I \tau_1)^2} - \dfrac{\omega_{I+1}^2}{1 + (\omega_{I+1}\tau_1)^2}\right]}{\omega_I^2 - \omega_{I+1}^2} . \tag{32}$$

This high-frequency residue (HC) has a low-frequency counterpart (LC) at the other end of the measurement range. Here again neither the ΔK nor τ of an out-of-range spectrum can be found but their ratio $\Delta K_\ell/\tau_\ell$ appears with the same effect as a d-c conductance component. From two successive values of κ''/ω this component can be computed (line 173):

$$\frac{\Delta K_\ell}{\tau_\ell} = \frac{\left(\frac{\kappa''}{\omega}\right)_I - \left(\frac{\kappa''}{\omega}\right)_{I+1} - \Delta K_1 \tau_1 \left[\dfrac{1}{1 + (\omega_I \tau_1)^2} - \dfrac{1}{1 + (\omega_{I+1}\tau_1)^2}\right]}{\dfrac{1}{\omega_I^2} - \dfrac{1}{\omega_{I+1}^2}} . \tag{33}$$

If no data have been taken at frequencies $< \frac{1}{2\pi\tau_1}$, the analysis is complete in that the number and magnitude of the relevant components have been determined. If lower frequency measurements exist, the contribution of HC and relaxator 1 are subtracted from each data point. These are now treated as new experimental points and the line fitting procedure is called again (205).

The approximate values of all unknowns LC, ΔK_n, $\tau_n \cdots \Delta K_1$, τ_1, HC, κ_∞ are refined in steps in subroutine ERROR to achieve the best overall fit to the experimental points. Since the capacitance errors are usually less than conductance errors in our measurements, differences in the κ' fit are multiplied by 2, then added to differences in the κ'' fit to establish the total error criteria (lines 16 to 18).

Obviously many modifications and uses of the program are possible. They are used to study the effect on measurement errors, to help decide the possibilities of hidden spectra and distributed time constants. There is a basic resolution problem in fitting a smooth curve to a series of experimental points with scatter that does not occur with "ideal" data. This makes the results of any curve-fitting program, such as ERROR, have some degree of dependence on the magnitude of the starting components. The difficulties arise because the function relating the total error to the magnitude of one-component is not a smooth function. In the future more automatic measurements will be made with decreased frequency separation. Then it may be feasible to smooth experimental errors before analysis.

REFERENCES

1. Semiannual Progress Report, April-September, 1967, Contract F33615-67C-1612.
2. See, for example, Standard D-1531, Carl Andeen et al., American Society for Testing Materials.
3. B. C. Gray, "Programming for Dielectric Constants," Electronic Industries, p. 106, August 1961; P. H. Gam and B. A. Schoomer, Jr., "A Speedy Method of Computing Dielectric Properties," ibid., September 1963, p. 90.

```
FORTRAN IV G LEVEL 1, MOD 3          MAIN          DATE = 70077          02/13/10

0001          REAL*8 K1,K2,K3,Y,XF,AN,SN,LW,DX,DS,DA,X,A,B,A2,B2,Z14RE,Z14IM,
             2BOLD,Z14IOD,Z14ROD,ERROR1,EROLD,AOLD,AIM,RE,TAM,Z11RE,Z11IM,COSINE
0002          COMPLEX*16 Z1,Z2,Z3,Z4,Z5,Z6,Z7,Z8,Z9,Z10,Z11,Z12,Z13,Z14R,Z14I,
             2Z14,Z12NEW,Z12RE,Z12IM,Z12SQ
0003          REAL STEP(4)/0.01,0.001,0.0001,0.00001/,F(2)/1.,-1./
0004          DIMENSION DS(200),SN(200),DATE(18)
0005          NAMELIST/IN/DS,SN,NX/CONST/DA,AN,XF,K1,K2,K3,LW/OUT/K1,K2,K3,LW
0006      200 FORMAT(1X,18A4)
0007       77 READ(5,200,END=88) DATE
0008      201 FORMAT(1H1,20X,18A4)
0009          WRITE(6,201) DATE
0010          READ(5,IN)
0011          READ(5,CONST)
0012      100 FORMAT(1H0,5X,2HNS,10X,2HDS,11X,2HK1,11X,2HK2,12X,3HTAN,20X,3HZ11,
             231X,3HZ14//)
0013          WRITE(6,100)
0014          DO 10 I=1,NX
0015          Y=6.2832*(XF-AN+SN(I))/LW
0016          DX=DS(I)-DA
0017          COSINE=DCOS(3.1416*DX/LW)**2
0018          X=DSIN(3.1416*DX/LW)/DSQRT(2.-COSINE)
0019          Z1=(0.,1.)*DTAN(Y)
0020          Z2=X-Z1
0021          Z3=1.-Z1*Y
0022          Z4=Z2/Z3
0023          Z5=(0.,1.)*K1
0024          Z6=Z4+Z5
0025          Z7=(0.,1.)*K2
0026          Z8=1.+Z4*Z7
0027          Z9=Z8/Z6
0028          Z10=(0.,1.)/K3
0029          Z11=Z10*Z9
0030          Z11RE=REAL(Z11)
0031          Z11IM=AIMAG(Z11)
0032          Z12SQ=CDSQRT(Z11+(1./3.)*Z11**2)
0033          A=REAL(Z12SQ)
0034          B=AIMAG(Z12SQ)
0035          A2=DTANH(A)*(1.+DTAN(B)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
0036          B2=DTAN(B)*(1.-DTANH(A)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
0037          Z14RE=A*A2-B*B2
0038          Z14IM=A*B2+B*A2
0039          ERROR1=DABS((Z14RE-Z11RE)/Z11RE)+DABS((Z14IM-Z11IM)/Z11IM)
0040          DO 400 K=1,4
0041          DO 600 J=1,2
0042      401 BOLD=B
0043          Z14IOD=Z14IM
0044          Z14ROD=Z14RE
0045          EROLD=ERROR1
0046          B=B*(1.+STEP(K)*F(J))
0047          A2=DTANH(A)*(1.+DTAN(B)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
0048          B2=DTAN(B)*(1.-DTANH(A)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
0049          Z14RE=A*A2-B*B2
0050          Z14IM=A*B2+B*A2
0051          ERROR1=DABS((Z14RE-Z11RE)/Z11RE)+DABS((Z14IM-Z11IM)/Z11IM)
0052          IF(ERROR1.LE.EROLD) GO TO 401
0053          Z14IM=Z14IOD
0054          Z14RE=Z14ROD
0055          B=BOLD
0056          ERROR1=EROLD
0057      600 CONTINUE
0058          DO 700 J=1,2
0059      402 AOLD=A
0060          Z14ROD=Z14RE
0061          Z14IOD=Z14IM
0062          EROLD=ERROR1
0063          A=A*(1.+STEP(K)*F(J))
0064          A2=DTANH(A)*(1.+DTAN(B)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
0065          B2=DTAN(B)*(1.-DTANH(A)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
0066          Z14RE=A*A2-B*B2
0067          Z14IM=A*B2+B*A2
0068          ERROR1=DABS((Z14RE-Z11RE)/Z11RE)+DABS((Z14IM-Z11IM)/Z11IM)
```

PROGRAM I (cont.)

```
0069          IF(ERROR1.LE.EROLD) GO TO 402
0070          Z14RE=Z14ROD
0071          Z14IM=Z14IOD
0072          A=AOLD
0073          ERROR1=EROLD
0074      700 CONTINUE
0075      400 CONTINUE
0076          Z12RE=(1.,0.)*A
0077          Z12IM=(0.,1.)*B
0078          Z12NEW=(Z12RE+Z12IM)**2
0079          Z13=-Z12NEW*K3**2
0080          Z14R=(1.,0.)*Z14RE
0081          Z14I=(0.,1.)*Z14IM
0082          Z14=Z14R+Z14I
0083          AIM=-AIMAG(Z13)
0084          RE=REAL(Z13)
0085          TAN=AIM/RE
0086      300 FORMAT(2X,F8.4,5X,F7.4,5X,F9.3,5X,F9.3,5X,F8.4,5X,E13.6,3X,E13.6,
             25X,E13.6,3X,E13.6)
0087          WRITE(6,300) SN(I),DS(I),RE,AIM,TAN,Z11,Z14
0088       10 CONTINUE
0089          WRITE(6,OUT)
0090          GO TO 77
0091       98 CALL EXIT
0092          END
```

TYPICAL PRINT-OUT

NS	DS	K1	K2	TAN
9.5316	0.1478	75.084	13.954	0.1859
9.5280	0.1973	74.785	19.207	0.2568
9.5191	0.2270	75.403	24.938	0.3307
9.5381	0.2686	68.878	28.039	0.4071

Z11		Z14	
-0.9761040-01	0.1876110-01	-0.9761070-01	0.1876110-01
-0.9710490-01	0.2581460-01	-0.9710580-01	0.2581450-01
-0.9778690-01	0.3353430-01	-0.9778620-01	0.335342D-01
-0.8894200-01	0.3748580-01	-0.8894290-01	0.3748570-01

PROGRAM II

```
ORTRAN IV G LEVEL 1, MOD 3            MAIN              DATE = 70103          20/37/02

C001          REAL*8 K1,K2,K3,Y,XE,LW,CX,DN,D,X,A,B,A2,B2,Z14RE,Z14IM,COSINE,
             2BOLD,Z14IOD,Z14ROD,ERROR1,EROLD,ACLD,AIM,RE,TAN,Z11RE,Z11IM
0002          COMPLEX*16 Z1,Z2,Z3,Z4,Z5,Z6,Z7,Z8,Z9,Z10,Z11,Z12,Z13,Z14R,Z14I,
             2Z14,Z12NEW,Z12RE,Z12IM,Z12SQ,Z2A
0003          COMPLEX*16 ZONE,ZONEI
0004          REAL STEP(4)/0.01,0.001,0.0001,0.00001/,F(2)/1.,-1./
0005          DIMENSION DATE(18),DN(9)
C006          NAMELIST/IN/DN,XE,LW,ND,NX,K1,K2,K3/OUT/K1,K2,K3,LW,X,Y,Z1,Z2,Z3,
             2Z4,Z5,Z6,Z7,Z8,Z9,Z10,Z11
0007          ZONE=(1.,0.)
00C8          ZONEI=(0.,1.)
0009      200 FORMAT(1X,18A4)
0010       77 READ(5,200,END=88) DATE
0011      201 FORMAT(1H1,20X,18A4)
0012          WRITE(6,201) DATE
0013          READ(5,IN)
0014      100 FORMAT(1H0,5X,2HDX,10X,2HDN,11X,2HK1,11X,2HK2,12X,3HTAN,20X,3HZ11,
             231X,3HZ14//)
0015          WRITE(6,100)
0016          DX=0.
0017          D=0.01
0018          DO 500 L=1,NX
0019          DX=DX+D
0020          IF(DX.EQ.0.) GO TO 500
0021          COSINE=DCOS(3.1416*DX/LW)**2
0022          X=DSIN(3.1416*DX/LW)/DSQRT(2.-COSINE)
C023      800 FORMAT(2X,F7.4)
```

PROGRAM II (CONT.)

```
      WRITE(6,800) DX
      DO 10 I=1,ND
      IF(DN(I).EQ.0.) GO TO 10
      Y=6.2832*(XE-DN(I))/LW
      Z1= ZONEI * DTAN(Y)
      Z2=X-Z1
      Z2A=Z1*X
      Z3=ZONE-Z2A
      Z4=Z2/Z3
      Z5=ZONEI*K1
      Z6=Z4+Z5
      Z7=ZONEI*K2
      Z8=ZONE+Z4*Z7
      Z9=Z8/Z6
      Z10=ZONEI/K3
      Z11=Z10*Z9
      Z11RE=REAL(Z11)
      Z11IM=AIMAG(Z11)
      Z12SQ=CDSQRT(Z11+(1./3.)*Z11**2)
      A=REAL(Z12SQ)
      B=AIMAG(Z12SQ)
      A2=DTANH(A)*(1.+DTAN(B)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
      B2=DTAN(B)*(1.-DTANH(A)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
      Z14RE=A*A2-B*B2
      Z14IM=A*B2+B*A2
      ERROR1=DABS((Z14RE-Z11RE)/Z11RE)+DABS((Z14IM-Z11IM)/Z11IM)
      DO 400 K=1,4
      DO 600 J=1,2
  401 BOLD=B
      Z14IOD=Z14IM
      Z14ROD=Z14RE
      EROLD=ERROR1
      B=B*(1.+STEP(K)*F(J))
      A2=DTANH(A)*(1.+DTAN(B)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
      B2=DTAN(B)*(1.-DTANH(A)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
      Z14RE=A*A2-B*B2
      Z14IM=A*B2+B*A2
      ERROR1=DABS((Z14RE-Z11RE)/Z11RE)+DABS((Z14IM-Z11IM)/Z11IM)
      IF(ERROR1.LE.EROLD) GO TO 401
      Z14IM=Z14IOD
      Z14RE=Z14ROD
      B=BOLD
      ERROR1=EROLD
  600 CONTINUE
      DO 700 J=1,2
  402 AOLD=A
      Z14ROD=Z14RE
      Z14IOD=Z14IM
      EROLD=ERROR1
      A=A*(1.+STEP(K)*F(J))
      A2=DTANH(A)*(1.+DTAN(B)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
      B2=DTAN(B)*(1.-DTANH(A)**2)/(1.+DTANH(A)**2*DTAN(B)**2)
      Z14RE=A*A2-B*B2
      Z14IM=A*B2+B*A2
      ERROR1=DABS((Z14RE-Z11RE)/Z11RE)+DABS((Z14IM-Z11IM)/Z11IM)
      IF(ERROR1.LE.EROLD) GO TO 402
      Z14RE=Z14ROD
      Z14IM=Z14IOD
      A=AOLD
      ERROR1=EROLD
  700 CONTINUE
  400 CONTINUE
      Z12RE=ZONE*A
      Z12IM=ZONEI*B
      Z12NEW=(Z12RE+Z12IM)**2
      Z13=-Z12NEW*K3**2
      Z14R=ZONE*Z14RE
      Z14I=ZONEI*Z14IM
      Z14=Z14R+Z14I
```

PROGRAM II (CONT.)

```
      AIM=-AIMAG(Z13)
      RE=REAL(Z13)
      TAM=AIM/RE
  300 FORMAT(14X,F8.4,5X,F9.3,5X,F9.3,5X,F8.4,5X,E13.6,3X,E13.6,
     25X,E13.6,3X,E13.6)
      WRITE(6,300) DN(I),RE,AIM,TAM,Z11,Z14
   10 CONTINUE
  500 CONTINUE
      WRITE(6,CUT)
      GO TO 77
   88 CALL EXIT
      END
```

PRINT-OUT

DX	DN	K1	K2	TAN
0.0100				
	1.0000	14.384	0.128	0.0089
	1.0500	15.728	0.142	0.0090
	1.1000	17.231	0.159	0.0092
	1.1500	18.923	0.180	0.0095
	1.2000	20.845	0.206	0.0099
	1.2500	23.054	0.237	0.0103
	1.3000	25.621	0.278	0.0108
	1.3500	28.643	0.329	0.0115
	1.4000	32.140	0.398	0.0124
0.0200				
	1.0000	14.382	0.255	0.0177
	1.0500	15.726	0.284	0.0180
	1.1000	17.228	0.318	0.0185
	1.1500	18.919	0.360	0.0190
	1.2000	20.841	0.411	0.0197
	1.2500	23.048	0.475	0.0206
	1.3000	25.613	0.555	0.0217
	1.3500	28.634	0.658	0.0230
	1.4000	32.099	0.797	0.0248

Z11		Z14	
-0.486634D 00	0.505513D-02	-0.486633D 00	0.505514D-02
-0.540838D 00	0.581521D-02	-0.540827D 00	0.581521D-02
-0.603588D 00	0.677495D-02	-0.603592D 00	0.677497D-02
-0.677235D 00	0.801064D-02	-0.677236D 00	0.801065D-02
-0.765076D 00	0.963883D-02	-0.765076D 00	0.963882D-02
-0.871886D 00	0.118448D-01	-0.871887D 00	0.118449D-01
-0.100484D 01	0.149379D-01	-0.100486D 01	0.149378D-01
-0.117528D 01	0.194655D-01	-0.117530D 01	0.194655D-01
-0.140214D 01	0.264735D-01	-0.139439D 01	0.264736D-01
-0.486532D 00	0.101087D-01	-0.486524D 00	0.101097D-01
-0.540711D 00	0.116283D-01	-0.540709D 00	0.116283D-01
-0.603426D 00	0.135470D-01	-0.603419D 00	0.135470D-01
-0.677023D 00	0.160172D-01	-0.677033D 00	0.160172D-01
-0.764794D 00	0.192718D-01	-0.764778D 00	0.192717D-01
-0.871458D 00	0.236808D-01	-0.871482D 00	0.236808D-01
-0.100429D 01	0.298615D-01	-0.100427D 01	0.298615D-01
-0.117445D 01	0.389066D-01	-0.117445D 01	0.389065D-01
-0.140081D 01	0.529018D-01	-0.139109D 01	0.529020D-01

PROGRAM III

```
FORTRAN IV G LEVEL 1, MOD 3                MAIN                DATE = 70098          13/12/07

0001              IMPLICIT REAL (K)
0002              DIMENSION FR(50),K1EX(50),K2EX(50),DATE(18),G(50),C(50),N(50),
                 2F(50),GS(50),R(50),M(50),K1EXP(50),K2EXP(50),K1S(50),K2S(50),
                 2X(50),XI(50),K1(50),K2(50),W(50),K2W(50),K2DW(50),B(50),PX(50)
0003              INTEGER H,Z,Z123
0004              REAL STEP(4)/0.1,0.02,0.005,0.001/
0005              REAL STEPP(8)/0.01,-0.01,0.004,-0.004,0.0015,-0.0015,0.0006,
                 2-0.0006/
0006              NAMELIST/IN/CO,C,G,F,N,FR,R,M,H,L/TA/TAU/M7/M777/M9/M1/L9/L1/LE/
                 2L1E
0007           10 READ(5,200,END=350)DATE
0008          200 FORMAT(1X,18A4)
0009              READ(5,IN)
0010              WRITE(6,201)DATE
0011          201 FORMAT(1H1///20X,18A4//)
0012              IF(H.EQ.0) GO TO 41
0013              DO 40 I=1,H
0014              GS(I)=G(I)*R(I)*M(I)/(10.*(1.+(R(I)/2000.)+G(I)*(1.E6+1000.*R(I)))
                 6)
0015           40 CONTINUE
0016              IF(L.EQ.0) GO TO 38
0017           41 DO 50 I=1,L
0018              A=1.0/(1.0+(F(I)/1.01)*(1.0-F(I))*1.0E6*G(H+I))
0019              GS(H+I)=(G(H+I)*A*(N(I)+F(I)/1.01)*(1.0+1.0F4*A*G(H+I)*(N(I)+F(I)/
                 21.01)))/(1.0+1.E4*A*G(H+I)*(N(I)+F(I)/1.01)-100.0*A*G(H+I)*(N(I)+
                 2F(I)/1.01)**2)
0020           50 CONTINUE
0021           38 MN=H+L
0022              DO 222 I=1,MN
0023              K1EX(I)=C(I)/CO
0024              K2EX(I)=GS(I)/(6.2832*FR(I)*CO*1.E-12)
0025              K1(I)=K1EX(I)
0026              K2(I)=K2EX(I)
0027              W(I)=FR(I)*6.2832
0028              K2W(I)=K2(I)*W(I)
0029              K2DW(I)=K2(I)/W(I)
0030          222 CONTINUE
0031              Z123=1
0032              L1=MN
0033          413 Z=3
0034              MEXIT=0
0035              M111=L1-1
0036              DO 224 I=Z123,M111
0037              M750=I
0038              IF(K2W(I).EQ.K2W(I+1)) GO TO 25
0039              GO TO 35
0040           25 K2W(I+1)=1.1*(K2W(I))
0041           20 FORMAT(1X,'FOUND K2W(I+1)=K2W(I) FIX UP TAKEN K2W(I+1)=1.1*K2W(I)
                 2')
0042              WRITE(6,20)
0043           35 TAU=(K1(I+1)-K1(I))/(K2W(I)-K2W(I+1))
0044              IF(0.LT.TAU) GO TO 225
0045          224 CONTINUE
0046              GO TO 888
0047          225 M1=M750
0048              WRITE(6,M9)
0049              M222=L1-M1
0050              DO 260 I=1,M222
0051              J=L1-I
0052              IF(K2W(J).EQ.K2W(J+1)) GO TO 26
0053              GO TO 36
0054           26 K2W(J+1)=1.1*(K2W(J))
0055           21 FORMAT(1X,'FOUND K2W(J+1)=K2W(J) FIX UP TAKEN K2W(J+1)=1.1*K2W(J)
                 2')
0056              WRITE(6,21)
0057           36 TAU=(K1(J+1)-K1(J))/(K2W(J)-K2W(J+1))
0058              IF(0.0.LT.TAU) GO TO 265
0059          260 CONTINUE
0060          265 L1E=J+1
```

```
      WRITE(6,LE)
      L1=L1E
      L1D=L1E-1
      DO 650 I=M1,L1D
      CHECK=K1(I+1)-K1(I)
      IF(0.0.LT.CHECK) GO TO 650
      IF(K2W(I).EQ.K2W(I+1)) GO TO 27
      GO TO 37
   27 K2W(I+1)=1.1*(K2W(I))
   22 FORMAT(1X,'FOUND K2W(M+1)=K2W(M) FIX UP TAKEN K2W(M+1)=1.1*K2W(M)
     2')
      WRITE(6,22)
   37 TAU=(K1(I+1)-K1(I))/(K2W(I)-K2W(I+1))
      IF(0.0.LT.TAU) GO TO 650
      L1C=I+1
      DO 651 J=L1C,L1E
      CHECK=(K1(J)-K1(I))/K1(I)
      IF(CHECK.LT.(-0.01)) GO TO 652
  651 CONTINUE
  650 CONTINUE
      GO TO 251
  652 L1=L1C-1
      WRITE(6,L9)
  251 M777=M1
      K2WO=0.0
  777 CALL LINE (M777,K1,K2W,TAU,K2WO,L1,MN)
      IF(Z.EQ.3) GO TO 304
      IF(TPREVS.LT.TAUT) GO TO 304
  788 M777=M777+1
      M777P=M777+2
      IF(M777P.GE.L1) GO TO 888
      WRITE(6,TA)
      GO TO 777
  304 IF(TAU.LE.0.0) GO TO 788
      M777P=M777+2
      IF(L1.LE.M777P) GO TO 290
  991 N777=M777+2
      ERRER=0.0
      CALL EROS (M777,N777,TAU,K2WO,K1,K2W,ERRER)
  229 IF(N777.EQ.L1) GO TO 290
  227 ERRER1=ERRER
      N777=N777+1
      ERRER=0.0
      CALL EROS (M777,N777,TAU,K2WO,K1,K2W,ERRER)
      IF(ERRER.LE.ERRER1) GO TO 229
      TAUOLD=TAU
      K2WOLD=K2WO
      DO 400 J=1,8
  228 ERRERT=ERRER
      TAUT=TAU
      TAU=TAUT*(1.+STEPP(J))
      ERRER=0.0
      CALL EROS (M777,N777,TAU,K2WO,K1,K2W,ERRER)
      IF(ERRER.LE.ERRER1) GO TO 229
      IF(ERRER.LT.ERRERT) GO TO 228
      TAU=TAUT
      ERRER=ERRERT
  301 ERRERN=ERRER
      K2WON=K2WO
      K2WO=K2WON-K2W(M777)*STEPP(J)*0.1
      ERRER=0.0
      CALL EROS (M777,N777,TAU,K2WO,K1,K2W,ERRER)
      IF(ERRER.LE.ERRER1) GO TO 229
      IF(ERRER.LT.ERRERN) GO TO 301
      K2WO=K2WON
      ERRER=ERRERN
  400 CONTINUE
      TAU=TAUOLD
      IF(Z.EQ.3) GO TO 401
      IF(TPREVS.LT.TAU) GO TO 401
  402 M777=N777
      GO TO 777
  401 K2WO=K2WOLD
```

PROGRAM III (CONT.)

```
      IF(L1.LE.N777) GO TO 291
      MOLD=M777
      M777=N777
      CALL LINE (M777,K1,K2W,TAU,K2WO,L1,MN)
      IF(TAU.LT.TAUOLD) GO TO 303
      GO TO 678
  303 IF(3.LT.Z) GO TO 304
      M1=M777
      WRITE(6,M9)
      GO TO 304
  678 M777=MOLD
      TAU=TAUOLD
  291 X(Z+1)=TAU
      TPREVS=TAU
      KK=0.0
      N776=N777-1
      DO 960 I=M777,N776
      B(I)=(K1(I+1)-K1(M777))/(1./(1.+(W(I+1)*TAU)**2)-1./(1.+(W(M777
     2)*TAU)**2))
      KK=KK+B(I)
  960 CONTINUE
      X(Z)=KK/(N777-M777)
      IF(X(Z).LT.0.0) GO TO 402
      IF(3.LT.Z) GO TO 921
      XXKINF=0.0
      DO 910 I=M777,N776
      XKINF=(K1(M777)*(1.+(W(M777)*TAU)**2)-K1(I+1)*(1.+(W(I+1)*TAU)
     2**2))/((W(M777)*TAU)**2-(W(I+1)*TAU)**2)
      XXKINF=XXKINF+XKINF
  910 CONTINUE
      X(1)=XXKINF/(N777-M777)
      XXHC=0.0
      HSTORD=0.0
      DO 920 I=M777,N776
      XHCXHC=((K2W(M777)-K2W(I+1))-B(I)*TAU*(W(M777)**2/(1.+(W(M777)*
     2TAU)**2)-W(I+1)**2/(1.+(W(I+1)*TAU)**2)))/(W(M777)**2-W(I+1)**2)
      IF(XHCXHC.LT.0.0) GO TO 483
      IF(HSTORD.EQ.0.0) GO TO 482
      IF(HSTORD.LT.XHCXHC) GO TO 483
  482 HSTORD=XHCXHC
  483 XXHC=XXHC+XHCXHC
  920 CONTINUE
      X(2)=XXHC/(N777-M777)
  921 XXLC=0.0
      XSTORD=0.0
      DO 922 I=M777,N776
      XLCXLC=(K2DW(M777)-K2DW(I+1)-B(I)*TAU*(1./(1.+(W(M777)*TAU)**2)
     2-1./(1.+(W(I+1)*TAU)**2)))/(1./W(M777)**2-1./W(I+1)**2)
      IF(XLCXLC.LT.0.0) GO TO 481
      IF(XSTORD.EQ.0.0) GO TO 480
      IF(XSTORD.LT.XLCXLC) GO TO 481
  480 XSTORD=XLCXLC
  481 XXLC=XXLC+XLCXLC
  922 CONTINUE
      X(Z+2)=XXLC/(N777-M777)
      IF(MEXIT.EQ.1) GO TO 999
      DO 320 I=M777,L1
      SK1SK1=X(Z)/(1.+(W(I)*TAU)**2)
      IF(3.LT.Z) GO TO 307
      SK1SK1=SK1SK1+X(1)
  307 X1(I)=K1(I)-SK1SK1
      SK2W=X(Z)*W(I)**2*TAU/(1.+(W(I)*TAU)**2)
      K2W(I)=K2W(I)-SK2W
      SK2DW=X(Z)*TAU/(1.+(W(I)*TAU)**2)+X(2)
  322 K2DW(I)=K2DW(I)-SK2DW
  320 CONTINUE
      GO TO 370
  290 MEXIT=1
      N777=L1
      GO TO 291
  370 DO 710 I=M777,L1
      M751=I
```

```
0201          8888=1.0/W(I)
0202          IF(X(Z+1).LE.8888) GO TO 711
0203      710 CONTINUE
0204      711 M777=M751
0205          IF(L1.LT.(M777+1)) GO TO 999
0206          WRITE(6,M7)
0207          Z=Z+2
0208          GO TO 777
0209      999 NX=Z+2
0210          IF(0.0.LT.X(NX)) GO TO 731
0211          X(NX)=XSTORD
0212      731 IF(0.0.LT.X(2)) GO TO 666
0213          X(2)=HSTORD
0214      666 NP=NX-2
0215          DO 551 J=3,NP,2
0216          XRE=X(J)
0217          X(J)=X(J+1)
0218          X(J+1)=XRE
0219      551 CONTINUE
0220          DO 441 I=1,NX
0221          PX(I)=X(I)
0222      441 CONTINUE
0223          X(1)=PX(NX)
0224          NXC=NX-1
0225          DO 331 J=1,NXC
0226          X(J+1)=PX(NX-J)
0227      331 CONTINUE
0228          DO 333 I=1,NX
0229          XI(I)=X(I)
0230      333 CONTINUE
0231          MMM=2
0232          CALL ERROR(NX,M1,K1S,X,K2S,FR,K1EX,K2EX,SUM,K1EXP,K2EXP,L1,SUMK1,
             2SUMK2)
0233          SUMOLD=SUM
0234          SUM1=0.
0235          DO 500 J=1,4
0236      701 DO 700 L=1,MMM
0237          SUM2=SUM1
0238          DO 600 I=1,NX
0239          XOLD=X(I)
0240          X(I)=X(I)*(1.+STEP(J))
0241          CALL ERROR(NX,M1,K1S,X,K2S,FR,K1EX,K2EX,SUM,K1EXP,K2EXP,L1,SUMK1,
             2SUMK2)
0242          IF(SUM.LT.SUMOLD) GO TO 601
0243          X(I)=XOLD
0244          X(I)=X(I)*(1.-STEP(J))
0245          CALL ERROR(NX,M1,K1S,X,K2S,FR,K1EX,K2EX,SUM,K1EXP,K2EXP,L1,SUMK1,
             2SUMK2)
0246          IF(SUM.LT.SUMOLD) GO TO 601
0247          X(I)=XOLD
0248          SUM1=SUMOLD
0249          GO TO 600
0250      601 SUM1=SUM
0251          SUMOLD=SUM
0252      600 CONTINUE
0253      700 CONTINUE
0254          IF(SUM1.LT.SUM2) GO TO 900
0255          GO TO 555
0256      900 MMM=1
0257          GO TO 701
0258      555 MMM=1
0259          SUM1=SUM2
0260      500 CONTINUE
0261      507 FORMAT(1H0,13X,8HXINITIAL,5X,9HXCOMPUTED//)
0262          WRITE(6,507)
0263      115 FORMAT(1X,2HLC,8X,E12.5,3X,E12.5)
0264          WRITE(6,115) XI(1),X(1)
0265          NT=NX-3
0266          DO 112 I=2,NT,2
0267      113 FORMAT(1X,7HKS-KINF,3X,E12.5,3X,E12.5)
0268          WRITE(6,113) XI(I),X(I)
0269      114 FORMAT(1X,3HTAU,7X,E12.5,3X,E12.5)
```

```
0270          WRITE(6,114) XI(I+1),X(I+1)
0271      112 CONTINUE
0272      111 FORMAT(1X,2HHC,4X,E12.5,3X,F12.5)
0273          WRITE(6,111) XI(NX-1),X(NX-1)
0274      508 FORMAT(1X,4HKINF,6X,E12.5,3X,E12.5)
0275          WRITE(6,508) XI(NX),X(NX)
0276      509 FORMAT(//1H0,5X,2HFR,12X,4HK1EX,13X,3HK1S,12X,4HK2EX,13X,3HK2S,
             211X,6HK1EX %,11X,6HK2EX %//)
0277          WRITE(6,509)
0278      510 FORMAT(1X,E12.5,3X,E12.5,3X,E12.5,3X,E12.5,3X,E12.5,3X,F12.5,3X,
             2F12.5)
0279          WRITE(6,510) (FR(I),K1EX(I),K1S(I),K2EX(I),K2S(I),K1EXP(I),
             2K2EXP(I),I=M1,L1)
0280      801 FORMAT(73X,5HSUM =,F11.5,5X,F11.5)
0281          WRITE(6,801) SUMK1,SUMK2
0282          IF(L1E.EQ.L1) GO TO 10
0283          Z123=L1+1
0284          L1=L1E
0285          GO TO 413
0286      888 GO TO 10
0287      350 CALL EXIT
0288          END
```

TOTAL MEMORY REQUIREMENTS 002F7A BYTES

FORTRAN IV G LEVEL 1, MOD 3 ERROR DATE = 70098 13/12/07

```
0001          SUBROUTINE ERROR (NX,M1,K1S,X,K2S,FR,K1EX,K2EX,SUM,K1EXP,K2EXP,
             2L1,SUMK1,SUMK2)
0002          IMPLICIT REAL (K)
0003          DIMENSION K1S(50),X(50),K2S(50),FR(50),K1EX(50),K2EX(50),
             2K1EXP(50),K2EXP(50)
0004          NJ=NX-3
0005          NW=NX-1
0006          SUM=0.
0007          SUMK1=0.
0008          SUMK2=0.
0009          DO 100 I=M1,L1
0010          K1S(I)=X(NX)
0011          K2S(I)=X(NW)*6.2832*FR(I)+X(1)/(6.2832*FR(I))
0012          DO 101 J=2,NJ,2
0013          K1S(I)=K1S(I)+X(J)/(1.+(6.2832*FR(I)*X(J+1))**2)
0014          K2S(I)=K2S(I)+X(J)*6.2832*FR(I)*X(J+1)/(1.+(6.2832*FR(I)*X(J+1))
             2**2)
0015      101 CONTINUE
0016          DK1=(K1EX(I)-K1S(I))/K1EX(I)*2
0017          DK2=(K2EX(I)-K2S(I))/K2EX(I)
0018          SUM=SUM+ABS(DK1)+ABS(DK2)
0019          K1EXP(I)=DK1*50.
0020          K2EXP(I)=DK2*100.
0021          SUMK1=SUMK1+ABS(K1EXP(I))
0022          SUMK2=SUMK2+ABS(K2EXP(I))
0023      100 CONTINUE
0024          RETURN
0025          END
```

TOTAL MEMORY REQUIREMENTS 000486 BYTES

FORTRAN IV G LEVEL 1, MOD 3 EROS DATE = 70098 13/12/07

```
0001          SUBROUTINE EROS (M777,N777,TAU,K2WO,K1,K2W,ERRER)
0002          IMPLICIT REAL (K)
0003          DIMENSION K1(50),K2W(50),D(50),DS(50)
0004          DO 200 I=M777,N777
0005          D(I)=(K1(I)+TAU*K2W(I)-TAU*K2WO)/SQRT(1.+TAU**2)
0006      200 CONTINUE
0007          M778=M777+1
0008          SE=0.0
```

```
0009          IF(K2W(M777).EQ.K2W(M778)) GO TO 202
0010          SE=(D(M777)**2/SQRT(ABS(K2W(M777)-K2W(M778))))
0011      202 DO 201 I=M778,N777
0012          IF(K2W(M777).EQ.K2W(I)) GO TO 110
0013          DS(I)=(D(I)**2/SQRT(ABS(K2W(M777)-K2W(I))))
0014          GO TO 115
0015      110 DS(I)=0.
0016      120 FORMAT(1X,'EROS K2W(M777)=K2W(I) FIX UP DS(I)=0.')
0017          WRITE(6,120)
0018      115 SE=SE+DS(I)
0019      201 CONTINUE
0020          IF(K2W(M777).EQ.K2W(M778)) GO TO 204
0021          ERRER=SQRT(SE/((N777-M777)*(N777-M777+1)))
0022          GO TO 205
0023      204 ERRER=SQRT(SE/((N777-M777-1)*(N777-M777)))
0024      205 RETURN
0025          END
```

TOTAL MEMORY REQUIREMENTS 000668 BYTES

FORTRAN IV G LEVEL 1, MOD 3 LINE DATE = 70098 13/12/07

```
0001          SUBROUTINE LINE (M777,K1,K2W,TAU,K2WO,L1,MN)
0002          IMPLICIT REAL (K)
0003          DIMENSION K1(50),K2W(50)
0004          M=M777
0005       40 FORMAT(1X,I3,3X,I3)
0006          WRITE(6,40) M,L1
0007          IF(M.EQ.L1) GO TO 9
0008          M1=M+1
0009       45 FORMAT(1X,E12.5)
0010          WRITE(6,45) (K1(I),I=1,M1)
0011          IF(M1.EQ.L1) GO TO 10
0012          X1=(2*K1(M)+K1(M+1))/3.
0013          X2=(K1(M+1)+2*K1(M+2))/3.
0014          Y1=(2*K2W(M)+K2W(M+1))/3.
0015          Y2=(K2W(M+1)+2*K2W(M+2))/3.
0016          IF(Y1.EQ.Y2) GO TO 10
0017          TAU=(X2-X1)/(Y1-Y2)
0018          IF(TAU.EQ.0.0) GO TO 30
0019          K2WO=Y1+X1/TAU
0020          GO TO 31
0021       30 K2WO=0.
0022       31 M777=M1
0023          GO TO 9
0024       10 IF(K2W(M).EQ.K2W(M+1)) GO TO 11
0025          TAU=(K1(M+1)-K1(M))/(K2W(M)-K2W(M+1))
0026          GO TO 12
0027       11 WRITE(6,20)
0028       20 FORMAT(1X,'LINE K2W(M+1)=K2W(M) FIX UP D) NOT CHANGE TAU')
0029          GO TO 9
0030       12 M777=M1
0031        9 RETURN
0032          END
```

TOTAL MEMORY REQUIREMENTS 00040E BYTES

INDEX TO DIELECTRIC DATA

	Page
I. INORGANIC COMPOUNDS	
Aluminum oxide, single crystal, Union Carbide	27
" " multicrystalline, G.E. AT-100	28
A-976	28
A-1000	29
A-923	30
A-1004	30
Boron nitride, pyrolytic, Raytheon	31
" " laminate, Union Carbide	31
" " hot-pressed, Carborundum Grade HP	32
Grade A	33
Grade M	34
" " hot-pressed, Union Carbide Grade HBR	35
HD 0092	35
HD 0093	35
HD 0094	36
cold-pressed, " " rod sample	36
Magnesium aluminate (spinel), single crystal, Union Carbide	27
Magnesium orthosilicate, multicrystalline, G.E. F-118	37
F-202	37
Mercuric iodide, hot-pressed	38
Mercurous chloride, hot-pressed	38
Mercuric sulfide, " "	38
Silicon dioxide glass, Dynasil Corp., Dynasil 4000	39
" " " Thermal American Fused Quartz, Spectrosil A	40
Spectrosil B	40
Vitreosil, optical	40
Vitreosil, commercial	40
Silicon dioxide, sintered, Brunswick, slip-cast	41
" " " Brunswick, slip-cast, with 2.5% Cr_2O_3	41
" " " Corning Code 7941	42
Corning Multiform glass	42
Quartz fiber sample, Philco Ford AS-3DX-1R	42
Glass EE 9, Owens-Illinois	43
EE 10, " "	43

II. MINERALS, ROCKS, SOILS, MISCELLANEOUS INORGANICS

	Page
Rocks	
Hawaian, high-density basalt	43
" low-density basalt	43
" deep ocean basalt	44
Soils	
Hawaian soil	44
Synthetic basalt	44
Lunar rocks, Apollo 11 and 12	44
Miscellaneous inorganics	
Corning Code 0330	45
Isomica 4950, General Electric	45

III. ORGANIC COMPOUNDS

(Listed according to mfg. or source of sample)

American Concrete Products, artificial concrete	45
Amicon Corp., Conformal coating 1517-36-3	45
Amphenol Corp., polyethylene, irradiated	46
Avisun, polypropylene, natural	46
plateable	46,47
Budd, DiClad-522, polytetrafluoroethylene, fiberglas laminate	47
Chemplast, Zitex, low-density polytetrafluoroethyelene film	48
Custom Materials, Load 4101	48
707-4	48
707-(3.75)	48
Dow Corning Sylgard 182	48
184	48
E. I. Dupont de Nemours "Kapton," 500 H film	49
Emerson & Cumings "Eccogel" 1265	49
"Eccofoam FH"	49
General Electric RTV-11	49
3-M, Scotchcast 221	50
Monsanto, polyimide foam	50
Quantum Inc., Radar tape	50
Rogers Corp., Duroid	51

IV. LIQUIDS

	Page
Allied Chemical, fluorocarbon derivative P-1C	52
E. I. Dupont de Nemours, fluorinated ethers	52
U.S. Bureau of Fisheries, mullet oil	52

Note: In the following data sheets κ (or κ') is the dielectric constant relative to air; κ'' is the loss factor; tan δ is the loss tangent; ρ is the resistivity in ohm-cm.

Aluminum oxide, single crystal

Sapphire Al_2O_3

Union Carbide Corporation
Electronics Division
8888 Balboa Ave.
San Diego, Calif. 92123

Loss tangents at 8.5 GHz, 25°C: $E \perp c$, <.00002

$E \parallel c$, <.00005

Dielectric constants at ~3 GHz:

T°C	$E \perp c$	$E \parallel c$
25	9.390*	11.584*
-75	9.292	11.433
-195	9.257	11.357

Variation of dielectric constant at 25°C with inclination of electric field direction with respect to optic axis was calculated from elliptic polarization function:

$$\kappa = \left[\frac{11.584^2 \times 9.39^2 \ (1 + \cot^2\theta)}{11.584^2 + 9.39^2 \cot^2\theta} \right]^{1/2}$$

θ°	κ
10	11.494
20	11.246
30	10.895
40	10.507
50	10.1295
60	9.820
70	9.584
80	9.439

Average κ for random oriented full-density ceramic:

$\kappa_{av} = 10.071$ from $\kappa_{av} = (9.39 \times 9.39 \times 11.584)^{1/3}$

or 10.121 for approximate value, $\frac{11.584 + 2 \times 9.390}{3}$

* These values are in reasonable agreement with optically measured values of 11.56 and 9.406 [E. E. Russell and Bell, J. Opt. Soc. Amer. 57, 543 (1967)].

Aluminum oxide, multicrystalline

AT-100 (near 100% Al_2O_3, fine grained)

Density, g/cm^3: (10^2 to 10^8 Hz) - 3.956

(4; 8 GHz) - 3.955

General Electric Company
Electronic Components Division
Microwave Tube Business Section
One River Road
Schenectady, N.Y. 12305

		Frequency in Hz						
T°C		10^2	10^3	10^4	10^5	10^6	10^7	8.5×10^9
25	κ	9.98	9.98	9.98	9.98	9.98	9.98	9.96
	10^6 tanδ	7	<1	<1	<1	<1.5	<7	48
100	κ	10.09	10.09	10.09	10.09	10.09	10.09	
	10^6 tanδ	52	6	<1	<1	<1.5	<7	
200	κ	10.21	10.21	10.21	10.21	10.21	10.21	
	10^6 tanδ	603	128	45	20	10	<7	
300	κ	10.42	10.37	10.355	10.35	10.35	10.35	
	10^4 tanδ	61.3	16.3	5.27	2.28	.62	.12	
400	κ	10.84	10.68	10.57	10.46	10.44	10.44	
	tanδ	0307	.0133	.00407	.00103	.00034	.00006	
500	κ	12.60	11.28	10.86	10.71	10.63	10.62	
	tanδ	.289	.069	.0237	.0044	.00082	.0002	

A-976 (near 100%)

		Frequency in Hz						
T°C		10^2	10^3	10^4	10^5	10^6	10^7	8.5×10^9
25	κ	9.90	9.90	9.90	9.90	9.90	9.90	9.81
	10^6 tanδ	70	34	20	10	<10	<10	66
100	κ	10.01	10.01	10.00	10.00	10.00	10.00	
	10^5 tanδ	15	7	3	1.5	<1	<1	
200	κ	10.14	10.12	10.11	10.11	10.11	10.1	
	10^5 tanδ	66	23	8	6	3	<1	
300	κ	10.32	10.29	10.26	10.26	10.26	10.26	
	10^4 tanδ	25	11	3.8	1.1	.4	.2	
400	κ	10.65	10.50	10.43	10.42	10.41	10.41	
	10^4 tanδ	395	102	27.8	8.7	2.9	1.0	
500		11.30	10.81	10.65	10.59	10.58	10.56	
	10^3 tan	461	118	22.4	4.59	1.97	1.1	

Density of disk - 3.919; density of cylinder - 3.917

Aluminum oxide, multicrystalline

A-1000 (99.8% Al_2O_3, fine grained) General Electric Company

Density, g/cm^3: (10^2 to 10^8 Hz) - 3.900

(8.5×10^9) - 3.896

		Frequency in Hz						
T°C		10^2	10^3	10^4	10^5	10^6	10^7	8.5×10^9
25	κ	10.08	10.08	10.07	10.04	9.98	9.96	9.77
	tan δ	.00048	.00048	.00135	.00354	.00664	.00612	.00258
100	κ	10.20	10.16	10.15	10.15	10.15	10.15	
	tan δ	.00184	.00077	.00037	.00058	.00208	.0061	
200	κ	10.39	10.36	10.33	10.33	10.31	10.29	
	tan δ	.00344	.00198	.00101	.00045	.00051	.00170	
300	κ	10.65	10.55	10.51	10.47	10.45	10.44	
	tan δ	.0193	.0059	.00226	.00079	.00049	.00065	
400	κ	11.86	10.89	10.68	10.63	10.60	10.58	
	tan δ	.213	.0461	.00936	.00206	.00076	.00057	
500	κ	33.3	13.98	11.28	10.83	10.80	10.76	
	tan δ	1.212	.525	.130	.0201	.00341	.00135	

A-919 (97% Al_2O_3, magnesia-free)

Density, g/cm^3: (10^2 to 10^8 Hz) - 3.747

(8.5×10^9 Hz) - 3.750

		Frequency in Hz						
T°C		10^2	10^3	10^4	10^5	10^6	10^7	8.5×10^9
25	κ	10.33	9.95	9.62	9.45	9.38	9.37	9.35
	tan δ	.0240	.0251	.0206	.0082	.00139	.00030	
100	κ	10.29	9.88	9.60	9.51	9.49	9.49	.00069
	tan δ	.0316	.0252	.0123	.00303	.00048	.00025	
200	κ	9.74	9.62	9.60	9.59	9.59	9.59	
	tan δ	.0210	.0046	.00089	.00021	.00006	<.0001	
300	κ	10.32	9.89	9.79	9.78	9.77	9.77	
	tan δ	.0760	.0237	.00475	.00097	.00033	.00010	
400	κ	14.38	11.13	10.18	9.96	9.90	9.89	
	tan δ	1.65	.295	.0590	.0128	.00195	.00063	
500	κ	16.56	13.67	11.44	10.37	10.08	10.03	
	tan δ		6.83	.866	.122	.0203	.0035	

Aluminum oxide, multicrystalline

A-923 (97% Al_2O_3) General Electric Company

Density, g/cm^3: (10^2 to 10^8 Hz) - 3.740

(8.5×10^9 Hz) - 3.740

Frequency in Hz

T°C	10^2	10^3	10^4	10^5	10^6	10^7	8.5×10^9
25 κ	10.26	10.23	10.10	9.61	9.28	9.27	9.24
tan δ	.00227	.00432	.0173	.0357	.00952	.00165	.00067
100 κ	10.33	10.30	10.19	9.72	9.40	9.39	
tan δ	.00330	.00352	.0178	.0320	.0118	.00157	
200 κ	10.18	9.73	9.55	9.53	9.50	9.50	
tan δ	.0349	.0238	.0073	.00200	.0089	.00040	
300 κ	10.38	9.84	9.74	9.65	9.64	9.64	
tan δ	.0678	.0232	.0074	.00313	.00167	.00112	
400 κ	12.50	10.48	9.97	9.82	9.80	9.79	
tan δ	.205	.082	.0228	.00735	.0035	.0017	
500 κ	16.72	13.93	10.98	10.08	9.95	9.91	
tan δ	8.03	1.20	.240	.0444	.00976	.0037	

A-1004 (94% Al_2O_3)

At 25°C: 2×10^4 Hz, κ = 10.10, tan δ= .0426; 5×10^4 Hz, κ = 9.76, tan δ = .0536;

3×10^5, κ = 9.19, tan δ = .0341.

Density, g/cm^3: (10^2 to 10^8 Hz) - 3.645

(8.5×10^9 Hz) - 3.649

Frequency in Hz

T°C	10^2	10^3	10^4	10^5	10^6	10^7	8.5×10^9
25 κ	10.48	10.41	10.26	9.51	9.10	9.00	9.01
tan δ	.00226	.00716	.0319	.0534	.0142	.00228	.00125
100 κ	10.63	10.55	10.48	9.89	9.19	9.10	
tan δ	.00355	.00555	.0208	.0505	.0271	.0515	
200 κ	10.49	9.73	9.34	9.25	9.21	9.20	
tan δ	.0450	.0439	.0171	.0047	.00163	.00105	
300 κ	10.52	9.81	9.55	9.44	9.37	9.36	
tan δ	.0767	.043	.0132	.0059	.0022	.0020	
400 κ	12.63	10.39	9.78	9.54	9.43	9.36	
tan δ	.227	.0887	.033	.0136	.0072	.0040	
500 κ	19.19	12.59	10.55	10.03	9.83	9.74	
tan δ	1.16	.452	.121	.0298	.0133	.0071	

Boron nitride

Pyrolytic — Raytheon Company

Data supplementary to p. 40, Tech. Rep. 203

Post-treated samples, measured at 8.52 GHz, 25°C

Density (g/cm^3)	κ	tan δ
1.233	2.994	.00008 ± .00002
1.237	3.013	.00005 ± .00003

Sample 2A + 2B, density at 25°C 1.381

5.07 to 5.00 GHz

T°C	κ	tan δ
25	3.199	<.0002
200	3.212	<.0002
400	3.226	<.0002
600	3.241	.0002 ± .0001
800	3.255	.0002 ± .0001
1000	3.272	.0002 ± .0001
1200	3.288	.0002 ± .0001
1300	3.297	.0003 ± .0002
1400	3.309	.0007 ± .0004

Test for anisotropic effects at 8.52 GHz, 25°C, by rotation and reversal of sample:

κ_{max} = 3.0018

κ_{min} = 2.9894

Pyrolytic laminate — Union Carbide

8.52 GHz E ∥ laminate

T°C	κ	tan δ
25	5.15 ± .05	.00025 ± .00005
173	↓	.00025 ± .0001
225	↓	↓
341	↓	↓
470	↓	↓
610	↓	↓
800	↓	↓
978	↓	.0003 ± .0001

Boron nitride, hot-pressed

Grade HP, 25°C

The Carborundum Company
Refractories & Electronics Division
Whirlpool Technical Center
Niagara Falls, N.Y., 14302

All tan δ values multiplied by 10^4

Sample No.	Density (g/cm³)	Field direct.	(Hz)	10^2	10^3	10^4	10^5	10^6	10^7	10^8
1	2.120	unknown	κ	4.59	4.56	4.54	4.54	4.54	4.54	4.54
			tanδ	8.5	3.58	2.30	2.3	2.3	2.8	3.5
2	1.762	⊥	κ	4.14	4.02	3.97	3.96	3.96	3.96b	
			tanδ	414	174	41.6	9.9	3.4	2.0	
3	2.131	‖	κ	4.71	4.64	4.54	4.46	4.40	4.32	
			tanδ	100	110	120	125	141	123	
			(Hz)	3×10^8	10^9	3×10^9	8.5×10^9		1.4×10^{10}	2.4×10^{10}
4 (various not meas.)		unknown	κ	4.59	4.59	4.59	4.39		4.62	4.57
			tanδ	2.7	3.5	4.2	6.55		6.0	6.0
5	1.999	unknown	κ							
			tanδ							
6	2.033	⊥	κ	4.47	4.468	4.457				
			tanδ	5.3	4.6	6.0				
7	1.748	mixed	κ	3.88	3.880	3.876				
			tanδ	4.1	4.7	4.0				
8	2.111	⊥	κ				4.584			
			tanδ				6.0			
9	2.061	⊥	κ				4.552			
			tanδ				7.1			
9	"	‖	κ				4.507			
			tanδ				7.7			
10	2.117	⊥	κ						4.75	
			tanδ						8.0	
11	2.063	⊥	κ						4.55	
			tanδ						8.7	
11	"	‖	κ						4.51	
			tanδ						8.8	
12	2.118	⊥	κ							4.69
			tanδ							8.5
13	2.066	⊥	κ							4.61
			tanδ							7.9
13	"	‖	κ							4.48
			tanδ							9.2

Boron nitride, hot-pressed

Grade A, 25°C

Carborundum

All tan δ values are multiplied by 10^4

Sample No.	Density (g/cm^3)	Field direct.	(Hz)	10^2	10^3	10^4	10^5	10^6	10^7	10^8
1	2.084	unknown	κ	4.13	4.12	4.090	4.087	4.086	4.080	4.08
			tanδ	11.8	10.4	7.9	4.3	3.1	2.7	2.6
2	2.040	⊥	κ	4.40	4.40	4.39	4.39	4.39	4.38	
			tanδ	8.7	6.3	6.0	3.1	1.8	1.0	
3	2.066	‖	κ	3.99	3.99	3.98	3.98	3.98	3.97	
			tanδ	6.9	5.6	4.5	3.0	2.4	1.1	
			(Hz)	$3x10^8$	10^9	$3x10^9$	$8.5x10^9$	$1.4x10^{10}$	$2.4x10^{10}$	
4 (various not meas.)		unknown	κ	4.46	4.46	4.46		4.6	4.61	
			tanδ	4.0	3.3	3.4		5.8	3.5	
5	2.099	unknown	κ				4.605			
			tanδ				20			
6	2.091	⊥	κ	4.62	4.615	4.599				
			tanδ	2.6	3.7	3.8				
7	2.097	mixed	κ	4.36	4.359	4.352				
			tanδ	2.2	1.3	1.5				
8	2.069	⊥	κ				4.586			
			tanδ				6.4			
9	2.077	⊥	κ				4.550			
			tanδ				3.6			
9	"	‖	κ				4.268			
			tanδ				4.5			
10		⊥	κ					4.268		
			tanδ					4.5		
11	2.093	⊥	κ					4.53		
			tanδ					4.5		
11	"	‖	κ					4.28		
			tanδ					10.4		
12	2.090	⊥	κ						4.56	
			tanδ						5.3	
13	2.095	⊥	κ						4.54	
			tanδ						4.6	
13	"	‖	κ						4.24	
			tanδ						3.2	

Boron nitride, hot-pressed, with silica

Grade M, 25°C

Carborundum

All tan δ values multiplied by 10^4

Sample No.	Density (g/cm^3)	Field direct.		(Hz)	10^2	10^3	10^4	10^5	10^6	10^7	10^8
1	2.143	unknown	κ		3.71	3.70	3.69	3.69	3.69	3.68	3.68
			tanδ		4.0	2.78	2.22	2.07	1.63	1.8	2.3
2	2.107	⊥	κ		4.34	4.33	4.32	4.30	4.30	4.30	
			tanδ		16.9	14.3	10.5	6.6	3.7	1.9	
3	2.109	‖	κ		3.76	3.76	3.76	3.75	3.75	3.75	
			tanδ		7.4	7.0	6.7	4.6	3.4	3.6	
				(Hz)	3×10^8	10^9	3×10^9	8.5×10^9	1.4×10^{10}		2.4×10^{10}
4	(various not meas.)		κ		4.24	4.24	4.24		4.32		
			tanδ		2.8	3.1	3.7		5.5		
5	2.145		κ					4.328			
			tanδ					4.1			
6	2.137	⊥	κ		4.27	4.27	4.255				
			tanδ		3.8	4.9	4.9				
7	2.118	mixed	κ		3.99	3.992	3.983				
			tanδ		3.9	4.5	5.2				
8	2.095	⊥	κ					4.192			
			tanδ					6.6			
9	2.120	⊥	κ					4.332			
			tanδ					6.2			
9		‖	κ					3.668			
			tanδ					8.5			
10	2.125	⊥	κ						4.23		
			tanδ						5.4		
11	2.123	⊥	κ						4.295		
			tanδ						11.0		
11	"	‖	κ						3.63		
			tanδ						7.8		
12	2.066	⊥	κ								4.22
			tanδ								5.1
13	2.121	⊥	κ								4.28
			tanδ								7.9
	"	‖	κ								3.64
			tanδ								10.5

Boron nitride, hot-pressed

Grade HBR

Union Carbide Corporation
Carbon Products Division
270 Park Ave.
New York, N,Y,m 10017

E ⊥ direction of pressing

T^oC		10^2	10^3	10^4	10^5	10^6	10^7
25	κ	4.77	4.77	4.76	4.76	4.76	4.76
	10^4 tan δ	18.2	7.1	4.9	1.5	1.4	0.9
100	κ	4.85	4.80	4.78	4.78	4.78	4.78
	10^4 tan δ	165	45.4	9.4	4.1	2.1	0.6
200	κ	5.26	4.96	4.85	4.82	4.81	4.81
	10^4 tan δ	596	277	101	39	5.4	23
300	κ	5.75	5.25	5.00	4.89	4.85	4.85
	10^4 tan δ	855	526	231	109	33.8	12.5
400	κ	6.75	5.70	5.21	5.00	4.88	4.87
	10^4 tan δ	28.0	11.57	4.95	2.3	1.2	.37
500	κ	8.07	6.46	5.62	5.31	5.08	4.93
	tan δ	1.994	.389	.109	.0419	024	.014

Boron nitride, hot-pressed

Grade HD 0092,

Density 1.9745 g/cm^3

At 8.52 GHz

κ_{min} = 3.993 tan δ = 0.00025

κ_{max} = 4.091 tan δ = 0.00026

At 4.54 to 4.47 GHz

T^oC	κ	tan δ
25	4.08	.00026
113	4.08	.0003
185	4.09	0005
322	4.09	.00055
423	4.10	.00040
530	4.11	.00035
639	4.12	.00040
752	4.13	.00045
863	4.13	.00050
943	4.14	.00050
1021	4.15	.00055
1096	4.16	.00080
1170	4.16	.0013
1219	4.17	.0019
1287	4.18	.0034
1373	4.19	.0040
1427	4.20	.0028
1446	4.22	.0023
1460	4.24	.0044
1470	4.24	0046

Grade HD 0093

Density 1.9165 g/cm^3

At 3.52 GHz

κ' = 3.998 ± 0.002

tan δ = 0.00052

At 4.53 to 4.44 GHz

T^oC	κ	tan δ
25	4.003	.0005
207	4.048	.0004
393	4.072	.00045
513	4.088	.0004
593	4.101	.0007
788	4.146	.0030
852	4.166	.0052
891	4.204	.0040
1018	4.320	.0028
1077	4.479	.0057
1094	4.485	.0071
1110	4.54	.01
943	4.25	.0026
860	4 19	
25	4.01	

Density check after run 1.916

Boron nitride, hot pressed

Grade HD 0094, at 8.52 GHz

Sample 2: density 1.303 g/cm^3

T°C	κ	tan δ
25	3.004	.00033

Sample 1: density 1.307 g/cm^3

T°C		
25	3.016	.00033
93	3.02±.03	.00030
192		.00035
339		.00037
471		.00040
602	3.04±.03	.00040
705		.00047
754		.00060
793		.00095
843		.0020
954		.0085
999		.0135

Union Carbide

At 5.30 to 5.26 GHz

Density: 1.303 g/cm^3

T°C	κ	tan δ
25	3.004	.00033
120	3.008	.00037
203	3.012	.00039
325	3.018	.00044
404	3.021	.00043
498	3.026	.00046
601	3.032	.00046
721	3.039	.00065
812	3.047	.00186
884	3.053	.00447
908		>.01

Boron nitride, cold-pressed

Union Carbide

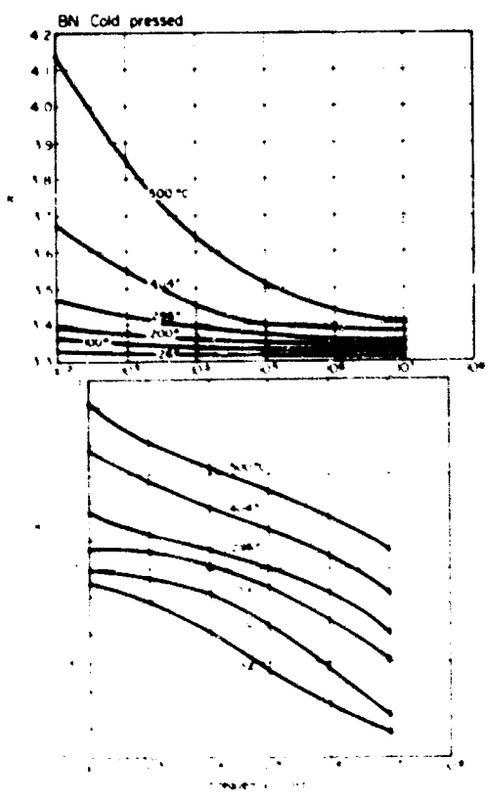

Rod sample, at 8.52 GHz

Density: 1.474 g/cm^3

At 25°C:

$\kappa' = 3.412$; $\tan \delta = .00046$

Magnesium aluminate (spinel) $MgOAl_2O_3$

Single crystal — Union Carbide

Density at 25.0°, 3.57389 g/cm^3

At 8.52, 25°C: κ' = 8.26 ± .04

tan δ = .00009 ± .00002

Magnesium orthosilicate, multicrystalline — General Electric

F-118 Density: disk 3.087, cylinder 3.071 g/cm^3

	25°C		100°C		200°C		300°C		400°C		500°C		550°C	
Freq. Hz	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ
10^2	6.625	.00098	6.70	.00445	6.80	.00134	6.91	.00636	7.23	.0662	8.78	.421		
10^3	6.62	.00027		.00065	6.79	.00076	6.89	.00198	7.04	.0127	7.44	.0890		
$2x10^3$				.00086										
$3x10^3$				.00098	6.78	.00057								
$4x10^3$				.00108										
$5x10^3$				.00110										
$6x10^3$				.00107										
$8x10^3$				.00102										
10^4	6.62	.00013	6.70	.00090	6.78	.00044	6.88	.00090	6.98	.00334	7.20	.0188		
10^5	6.62	.000110	6.69	.00024	6.78	.00064	6.87	.00051	6.96	.00123	7.14	.0049		
$5x10^5$					6.77	.00098								
10^6	6.62	.000072	6.69	.00016	6.77	.00074	6.85	.00046	6.95	.00069	7.09	.00329		
10^7	6.62	.00011	6.69	.00024	6.77	.00025	6.84	.00083	6.95	.00023	7.08	.00149		
10^8														
$8.5 x10^9$	6.59	.00083	6.64	.00086	6.73	.00092	6.81	.00100	6.90	.00109	6.98	.00119	7.03	.00124
$1.4x10^{10}$														
$2.4x10^{10}$														

F-202

	25°C		100°C		200°C		300°C		400°C		500°C		550°C	
Freq. Hz	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ		
10^2	6.77	.000515	6.86	.00107	6.99	.00277	7.26	.02835	9.74	.508	14.73	4.29		
10^3	6.76	.000293	6.85	.00063	6.98	.00202	7.14	.0076	7.70	.142	10.08	.822		
10^4	6.76	.000240	6.84	.00056	6.96	.00124	7.08	.0037	7.34	.0293	8.13	.178		
10^5	6.76	.000233	6.83	.00035	6.95	.00077	7.06	.0017	7.22	.00705	7.40	.0474		
10^6	6.76	.000245	6.83	.00032	6.94	.00067	7.06	.00120	7.18	.0025	7.31	.00975		
10^7	6.76	.00025	6.83	.00025	6.94	.00052	7.05	.00098	7.15	.00153	7.28	.00394		
10^8														
$8.5x10^9$	6.74	.00080	6.81	.00090	6.92	.0015	7.02	.0014	7.13	.0019	7.23	.0027	7.28	.0031
$1.4x10^{10}$														
$2.4x10^{10}$														

Density of disk 3.087, cylinder 3.086 g/cm^3

Mercuric compounds, hot-pressed

Theort. density	Compound	Sample No.	Density (g/cm^3)	T^oC		10^2	10^3	10^4	10^5	10^6	10^7	8.5×10^9
6.27	HgI_2	1	-	25	κ		13.7			11.8		13.4
					tan δ		.191			.0034		.0037
		2	5.48	25	κ		14.3			12.57		
					tan δ		.208			.0026		
		3	5.49	25	κ							13.9
					tan δ							< .003
		4	5.56	25	κ	16.11	13.15	12.41	12.39	12.38	12.37	
					tan δ	.828	.154	.0268	.00427	.00117	.00043	
				50	κ	44.35	16.87	13.50	12.98	12.90	12.85	
					tan δ	2.33	.888	.168	.0264	.0047	.00095	
				25	κ	15.45	13.03	12.45	12.42	12.41	12.40	
					tan δ	.713	.185	.0334	.0057	.00149	.00076	
7.15	HgCl	1	5.36	25	κ	7.49	7.48	7.48	7.48	7.46	7.45	
					tan δ	.0013	.00044	.00029	.00034	.00040	.00029	
				50	κ	7.62	7.61	2.59	7.58	7.57	7.57	
					tan δ	.00328	.00095	.00046	.00021	.00028	.00039	
				25	κ	7.58	7.58	7.57	7.57	7.56	7.56	
					tan δ	.00050	.00027	.00018	.00021	.00034	.00046	
7.73	HgS	1	5.19	25	κ	9.75	9.72	9.68	9.64	9.62	9.58	
					tan δ	.0038	.0035	.0029	.0021	.0017	.0011	
				50	κ	9.64	9.61	9.58	9.56	9.53	9.49	
					tan δ	.00324	.00225	.00188	.00174	.00181	.00144	
				25	κ	9.63	9.62	9.62	9.61	9.58	9.57	
					tan δ	.00207	.00177	.00162	.00165	.00147	.00119	

Silicon dioxide, high purity glasses

Dynasil 4000

Dynasil Corporation of America
Berlin, New Jersey 08009

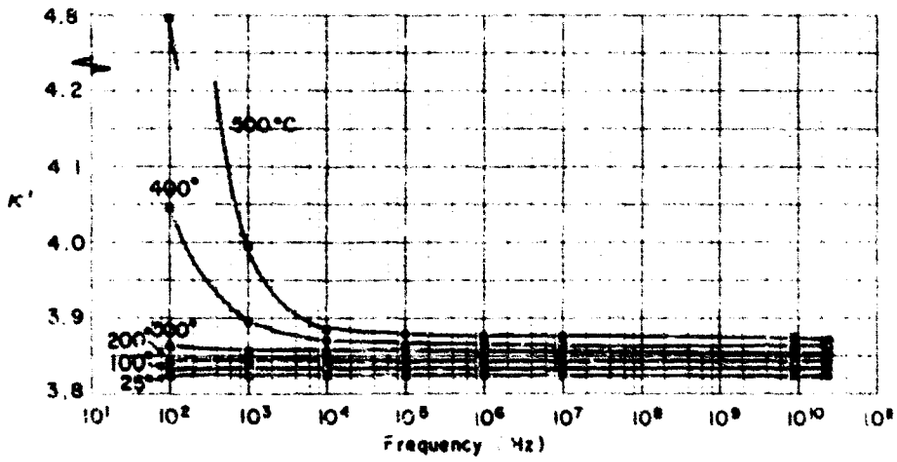

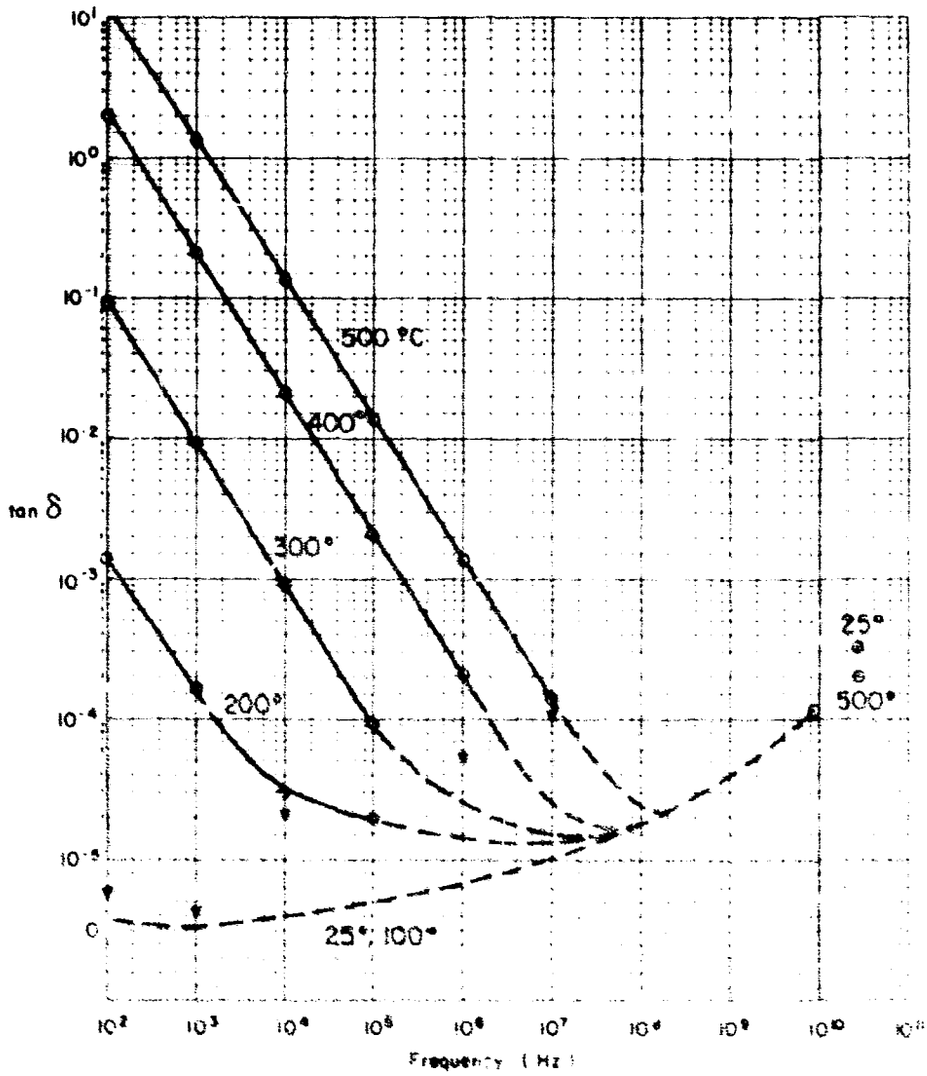

Silicon dioxide, high-purity glasses (cont.)

Spectrosil A

Thermal American Fused Quartz Co.
Montville, N.J. 07045

$25^{o}C$, 8.52 GHz: $\kappa' = 3.826 \pm .003$

$10 \tan \delta = 1.9 \pm .4$

Spectrosil B

25°, 8.52 GHz: $\kappa' = 3.825 \pm .003$

$10^4 \tan \delta = 1.5 \pm .2$

Frequency in Hz

$T^{o}C$		10^2	10^3	10^4	10^5	10^6	10^7
25	κ	3.823	3.823	3.823	3.823	3.823	3.823
	$10^6 \tan \delta$	<4	<4	6	7	<40	<130
100	κ	3.83	3.83	3.83	3.83	3.83	3.83
	$10^6 \tan \delta$	<4	<4	<8	<10	<40	<130
197	κ	3.84	3.84	3.84	3.84	3.84	3.84
	$10^6 \tan \delta$	264	44	15	<20	<40	<130
300	κ	3.86	3.86	3.86	3.86	3.86	3.86
	$10^4 \tan \delta$	151	15.9	2	<.4	<.6	<1.3
398	κ	3.89	3.86	3.86	3.86	3.86	3.86
	$10^2 \tan \delta$	15.9	1.76	.219	.04	<.02	<.02
486	κ	3.98	3.89	3.87	3.87	3.87	3.87
	$\tan \delta$	.79	.0883	.00954	.0015	.0005	.0002

Vitreosil, optical grade

$25^{o}C$, 8.52 GHz, $\kappa' = 3.811 \pm .005$; $10^4 \tan \delta = 1.17 \pm .2$

Vitreosil, commercial grade

$25^{o}C$, 8.52 GHz, $\kappa' = 3.805 \pm .01$; $10^4 \tan \delta = .80 \pm .13$

Silicon dioxide, sintered

Slip-cast

Density 1.957 g/cm^3

Brunswick

	25°C		100°C		200°C		300°C		400°C		500°C	
Freq.,Hz	κ	10^4tanδ	κ	10^4tanδ	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ
10^2	3.38	7.1	3.39	11.0	3.44	.0190	4.42	.896	7.91	9.51	19.1	33.8
$3x10^2$	3.38	8.6										
10^3	3.38	8.8	3.38	7.8	3.41	.99364	3.64	.178	5.09	1.66	7.57	9.00
$2x10^3$	3.38	7.3										
$5x10^3$			3.38	7.7								
10^4	3.37	6.2	3.38	7.6	3.41	.00158	3.47	.0246	3.90	.334	5.10	1.47
$5x10^4$			3.38	8.3					3.5			
10^5	3.37	4.5	3.37	8.3	3.41	.00099	3.46	.00465	3.54	.055	3.90	.290
$2x10^5$			3.37	7.5								
10^6	3.37	3.7	3.37	6.1	3.40	.00081	3.45	.00158	3.49	.0089	3.61	.0483
$6x10^6$			3.37	3.6								
10^7	3.37	2.5	3.37	3.2	3.40	.00068	3.45	.0008	3.49	.0021	3.55	.o112
$8.5x10^9$	3.364	6.6										

Silicon dioxide, with 2.5% chromium oxide

Brunswick

Slip-cast,

Density 1.928 g/cm^3

	25°C		100°C		200°C		300°C		400°C		500°C	
Freq.,Hz	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ	κ	tan δ
10^2	3.33	.00345	3.43	.0057	3.57	.0292	4.59	.935	8.73	9.39	36.7	42.4
10^3	3.33	.00257	3.42	.0043	3.51	.0113	3.72	.179	5.17	1.76	13.5	10.1
10^4	3.32	.00174	3.36	.0034	3.48	.0071	3.59	.0292	3.95	.324	6.09	2.41
10^5	3.32	.00152	3.34	.0027	3.40	.0054	3.51	.0109	3.63	.0537	4.39	.425
10^6	3.31	.00093	3.33	.0020	3.38	.0040	3.49	.0101	3.56	.0149	3.82	.094
10^7	3.31	.00035	3.32	.0017	3.34	.0022	3.42	.0076	3.53	.0106	3.68	.032
$8.5x10^9$	3.29	.00112										

Silicon dioxide, sintered

Code 7941

Density 1.923 g/cm^3

Freq., ~8.5 GHz

T°C	κ	tan δ
25	3.323	.0005
279	3.351	.0009
517	3.378	.0014
769	3.408	.0023
910	3.431	.0028
1043	3.451	.0037
1205	3.455	.0051
1372	3.513	.0091

Corning Glass

Corning Multiform Glass

At 8.52 GHz, 25°C, density = 1.906 g/cm^3

κ = 3.27; tan δ = .00063

Quartz fiber

Sample AS-3DX-1R

Source: Philco Ford Corp.
Newport Beach, Calif. 92663

Manufacturer: Fiber Materials Inc.
Graniteville, Mass. 01829

Freq., 8.52 GHz

T°C	κ	tan δ
25*	3.02	.0054
25	2.98	.0019
98	2.97	.0018
198	2.96	.0016
307	2.95	.0015
418	2.95	.0014
497	2.945	.0014
591	2.95	.0016
729	2.96	.0022
828	2.975	.0029
905	2.99	.0035
995	3.01	.0042

* As received, other values after vacuum bake for 24 hours at 125°C.

Glasses

Sample EE 9

Sample EE 10

Owens-Illinois
Toledo, Ohio 43601

EE 9 Freq., 8.52 GHz			EE 10 Freq., 8.52 GHz		
T^oC	κ	tan δ	T^oC	κ	tan δ
25	5.84	.0070	25	8.17	.0082
97	5.86	.0070	97	8.25	.0082
199	5.90	.0071	202	8.36	.0083
314	5.97	.0072	292	8.47	.0084
421	6.02	.0074	416	8.63	.0089
506	6.08	.0077	501	8.76	.0096
607	6.17	.0081	605	8.98	.0123
32	5.82	.0069	27	8.19	.0080

II. MINERALS, ROCKS, SOILS, MISCELLANEOUS INORGANICS

Rocks

Hawaian, high-density basalt*

50% relative humidity

Density 2.717 g/cm^3

	Sample 1	Sample 2	Sample 3	Sample 3	Sample 3	Sample 4
Freq. (Hz)	$3x10^8$	10^7	$3x10^8$	10^9	$3x10^9$	$8.5x10^9$
κ	8.36	9.90	9.30	9.08	8.85	8.40
tan δ	.043	.080	.034	.033	.037	.04
μ'/μ_o	1.174	1.17	1.113	1.10	1.08	1.01
tan δ_m	.0077	<.002	.0075	.026	.072	.06

Hawaian low-density basalt*

50% relative humidity

Freq. (Hz)	10^7	$3x10^8$	10^9	$3x10^9$
κ	4.9	3.74	3.51	3.30
tan δ	.068	.085	.0481	.053
μ'/μ_o	1.047	1.047	1.040	1.035
tan δ_m	<.002	.0040	.002	.002

---

* Data supplementary to Tech. Rep. 203, Lab. Ins. Res., Mass. Inst. Tech., Jan. 1967.

Rocks (cont.)

Deep ocean basalt

No change after heating to 200°C

Freq. (Hz)	10^5	10^6	10^7	8.5×10^9
κ	188	153	124	10.2
tan δ	93.5	11.6	.146	.560
ρ	1025	1015	995	36.9

Soils

Hawaian soil saturated with distilled H_2O*

% H_2O on dry weight basis = 127.5

% H_2O on volume basis = 63.0

Density 1.303 g/cm^3

Freq. (Hz)	10^3	10^4	10^5	10^6	9.5×10^6	7×10^7
κ	29,700	988	230	1295	81.5	64.2
tan δ	135	43.9	20.05	3.32	.776	.185

Hawaian soil* with approximately 25% H_2O on dry weight basis. Density ≅ .88 g/cm^3.

Freq. (Hz)	10^2	10^3	10^4	10^5	10^6	10^7	3×10^8	1×10^9	3×10^9	8.5×10^9
κ	10560	940	68.0	21.66	12.04	6.88	5.12	4.90	4.45	3.97
tan δ	2.30	4.43	7.25	2.67	.827	.389	.105	.079	.81	.135

Synthetic basalt and lunar rocks, Apollo 11 and 12, see:

D. H. Chung, W. B. Westphal, and G. Simmons, "Dielectric Properties of Apollo 11 Lunar Samples and Their Comparison with Earth Materials," J. Geophys. Res. 75, 1970 (in press).

D. H. Chung, W. B. Westphal, and G. Simmons, "Dielectric Properties of Apollo 12 Lunar Samples," a paper (T64c) presented at American Geophys. Union Meeting, April 23, 1970, Washington D.C.

---

* Data supplementary to Tech. Rep. 203, Lab. Ins. Res., Mass. Inst. Tech., Jan. 1967.

Miscellaneous inorganics

Corning Code 0330 — Corning Glass

3 GHz	25°C
κ	tan δ
6.58	.0055

Isomica 4950 — General Electric Company

Vacuum baked for 36 hrs. at 125°C, E ∥ sheet

Freq. (MHz)	κ	tan δ
300	5.33	.0013
8520	5.31	.00207
8520	5.32*	.0025*

* 50% relative humidity.

III. ORGANIC COMPOUNDS

(Listed according to manufacturer or source)

Artificial concrete — American Concrete Products

Material measured to be isotropic in κ within .5%

Freq. (MHz)	150	300	1000	3000
κ	6.06	6.04	6.02	6.0
tan δ	.0107	.0134	.0125	.0123

Conformal coating 1517-36-3 — Amicon Corporation

25°C, 50% relative humidity

Freq. (Hz)	κ	tan δ
10^2	4.31	.0206
10^3	4.21	.0204
10^6	3.76	.0298

Volume resistivity 3.7×10^{13} ohm-cm

Surface resistivity $>6 \times 10^{14}$ ohms per square

Polyethylene, irradiated

At 25°C

Source: Amphenol Corp.

Freq. (Hz)	κ'	tan δ
10^3	2.28 ± .02	.59 ± .05
10^6		.82 ± .05
10^8		2.3 ± .3
$4x10^8$	$2.27 \pm {}^{.02}_{.01}$	2.9 ± .5
10^9		2.8 ± .3
$3x10^9$		2.6 ± .3
$8.5x10^9$	$2.260 \pm {}^{.01}_{.005}$	2.5 ± .2

Polypropylene

Avisun Corporation
Post Road
Markus Hook, Pa. 19061

		Natural		Plateable 12-270A	
Freq., Hz	T°C	κ	10^4 tan δ	κ	10^4 tan δ
10^2	25	2.26	1.50	2.41	15.2
$2x10^2$			1.30		
$4x10^2$			1.18		
10^3			1.36	2.41	11.8
$3x10^3$			1.50		
10^2			1.65	2.39	10.5
$2x10^4$			1.68		
$5x10^4$			1.66		
10^5		2.25	1.51	2.38	8.70
10^6		2.25	0.96	2.37	7.25
10^7		2.25	1.26	2.36	6.55
10^8		2.25	2.04	2.36	8.2
$3x10^8$		2.25	2.8	2.35	12.4
10^9		2.25	4.7	2.35	17.5
$3x10^9$		2.25	4.0	2.35	15.7
$5x10^9$	25	2.245	3.7	2.344	12.1
	-55	2.265	3.0	2.352	6.0
	-75	2.271	2.7		
	-195	2.308	0.7 ± 0.3	2.375	2.8
$8.5x10^9$	25	2.245	3.6	2.343	12.3

Polypropylene (cont.) — Avisun Corporation

Natural, at 8.52 GHz

Sample	Density (g/cm^3)	T^oC	κ	tan δ
1 stacked sheet pcs		25	2.246	.00033
2 stacked injection molded pcs		25	2.236	.00035
3 rod	.9073	25	2.245	.00037

Polypropylene, plateable — Avisun Corporation

12-270A, at 8.52 GHz

Sample	Density	T^oC	κ	tan δ
4 stacked injection molded pcs	.9500	25	2.442	.00145
5 rod	.9303	25	2.343	.00123

Polytetrafluoroethylene, fiberglas laminate — The Budd Company Polychemicals Division

DiClad-522, E ⊥ sheet

All values of tan δ multiplied by 10^4

T^oC	Freq. (Hz)	10	10^2	10^3	10^4	10^5	10^6	10^7	$5.5x10^7$	$9x10^7$	$3.14x10^9$*
25	κ	2.739	2.740	2.738	2.737	2.735	2.734	2.733	2.732	2.731	2.712
	1 tan δ	8.6	7.0	6.7	6.1	6.3	6.95	7.7	10.0	11.7	22.5
100	κ		2.710	2.705	2.704	2.698	2.696	2.683			2.680
	1 tan δ		11.1	8.10	8.25	7.17	7.07	7.7			31
250	κ		2.554	2.534	2.522	2.503	2.502	2.49			
	1 tan δ		79.0	36.3	20.35	14.9	11.6	10.6			
-78	κ		2.796	2.793	2.790	2.784	2.78	2.78			2.752
	1 tan δ		4.2	5.9	6.8	7.1	7.7	9.8			17
-195	κ	2.801	2.799	2.794	2.792	2.787					2.758
	1 tan δ	.0005	2.2	4.5	5.1	5.4					12
-269	κ	2.709	2.789	2.784	2.783	2.780					
	1 tan δ	.0003	1.2	2.0	2.2	2.1					

* Copper cavity

E ∥ sheet

T^oC	Freq. (Hz)	$3x10^8$	10^9	$3x10^9$	$8.5x10^9$	$1.4x10^{10}$	$2.4x10^{10}$
25	κ	3.155	3.153	3.152	3.146	3.133	3.127
	tan δ	28	30	33	40	48	52
100	κ				3.11		
	tan δ				39		
-250	κ				3.03		
	tan δ				36		
-54	κ				3.17	3.13	
	tan δ				35	39	
-195	κ				3.22	3.12	
	tan δ				28	31	

Polytetrafluoroethylene film

Zitex

Density 0.463 g/cm^3

25°C, 8.52 GHz: κ = 1.194, tan δ = .00010

Chemplast Inc.
150 Day Road
Wayne, N.J. 07470

Custom Materials

Custom Materials Inc.

Custom load 4101

Freq. (GHz)	T°C	κ	tan δ_e	μ'/μ_o	tan δ_m
3	25	13.8	.050	2.69	.451
8.5	25	13.3	.031	1.65	.747
8.5	-67	13.7	.006	1.57	.748
8.5	85	14.5	.051	1.68	.735

Custom 707-4

25°C, 8.52 GHz: κ = 4.04, tan δ = .00090

Custom 707-(3.75)

25°C, 8.52 GHz: κ = 3.753, tan δ = .00076

Sylgard 182

Dow Corning

1 MHz

T°C	κ	tan δ
25	2.86	.00132
70	2.72	.00080
25 again	-	.00109
25 (after 24 hrs. in H_2O) wt. gain .019%	2.86	.00142

Sylgard 184

Dow Corning

At 25°C

Freq. (Hz)	50	10^3	10^5	10^6
κ	2.86	2.86	2.84	2.84
10^4 tan δ	2	10.2	18.4	14.0

Sylgard 184

Dow Corning

2nd sample at 1 MHz

T°C	κ	tan δ
25	2.88	.00123
70	2.70	.00071
25	-	.00040
25 (after 24 hrs in H_2O) wt. gain .025%	2.89	.00129

"Kapton"* E. I. Dupont de Nemours

Type 500 H film

At 25°C, 45% relative humidity

Electric field in plane of sheet, $\kappa \pm .05$, $\tan\delta \pm .0005$

			After 48 hrs. at 100°C	
Freq. (GHz)	κ	$\tan\delta$	κ	$\tan\delta$
0.3	3.43	.0074	-	-
1	3.40	.0076	3.30	.0041
3	3.37	.0080	3.28	.0044
8.5	3.33	.0087	3.26	.0047
24	3.25	.0098	-	-

After 12 to 18 hrs. vacuum bake at 425°C, 2 microns, 8.52 GHz:

$\kappa = 3.03 \pm 0.1$, $\tan\delta = .0015 \pm .0003$

"Eccogel" 1265 Emerson & Cuming

	Freq. (Hz) 60		10^3		10^6	
T°C	κ	$\tan\delta$	κ	$\tan\delta$	κ	$\tan\delta$
25	7.60	.025	7.20	.0595	4.05	.1115
70					6.02	.0545
25 again					-	.0897
25 (after 24 hrs. in H_2O) wt. gain 1.08%					5.38	.128

"Eccofoam FH" Emerson & Cuming

3.938 lb/cu.ft.

8.52 GHz		24 GHz	
κ	$\tan\delta$	κ	$\tan\delta$
1.0856	.00161	1.0798	.00165

RTV-11 General Electric Company

At 1 MHz

T°C	κ	$\tan\delta$
25	3.25	.00285
70	3.05	.00372
25	-	.00242
25 (after 24 hrs in H_2O) wt. gain .035%	3.31	.00563

* Supplementing data given in Tech. Rep. 203.

Scotchcast 221 3-M

At 1 MHz

T°C	κ	tan δ
25	3.06	.0273
70	3.73	.1373
25	-	.0245
25 (after 24 hrs. in H_2O) wt. gain .274%	3.12	.0352

Polyimide foams Monsanto

At 8.52 GHz

	Density (lbs/cu.ft.)	T°C	κ	tan δ
HD-139	8.4	25	1.1439	.00277
		150	1.128	.00040
		304	1.118	.00045
		25	1.126	.0014
HD-140	16.7	25	1.301	.00507
		154	1.264	.00094
		307	1.260	.00121
		25	1.260	.00037
HD-144	21.8	25	1.412	.00635
		148	1.355	.00135
		303	1.382	.00190
		28	1.351	.0068

Radar tape Quantum Inc.
Lufbery Ave.
Wallingford, Conn.

At 14.2 GHz

T°C	κ	tan δ
25	3.56	.0132
150	3.37	.0055
320	3.32	.0074
477	3.36	.0130

Duroid (1" thick sheet)

Rogers Corporation

	3.7 GHz E //		4.3 GHz E ⊥		
T°C	κ	tan δ	κ	tan δ	Cavity length (inches)
25	2.476	.00156	2.317	.00125	2.015
81.5	2.458	.00176	2.301	.00153	2.042
106.8	2.447	.00178	2.289	.00140	2.055
125	2.438	.00176	2.282	.00142	2.067
152	2.425	.00166	2.268	.00149	2.083
176	2.412	.00160	2.255	.00155	2.106
202	2.399	.00159	2.239	.00167	2.127
250	2.370	.00165	2.203	.00202	2.159
310	2.301	.00182	2.130	.0024	2.320
362	2.031	.00225	1.878	.0015	2.869

[illegible]. LIQUIDS

Fluorocarbon derivative P-10
At 25°C

Allied Chemical Corp.
Specialty Chemical Div.

Freq. (GHz)	κ	tan δ
1	1.92	.0050
3	1.92	.0140
8.52	1.89	.029
14	1.87	.038

Fluorinated ethers
At 27°C
T°C = <6 to 28

E. I. Dupont de Nemours & Co.
Organic Chemicals Department

	FPS-1418		FPS-1419		FPS-1420	
	b.p. 148°C		b.p. 101°C		b.p. 153°C	
Freq. (Hz)	κ	tan δ	κ	tan δ	κ	tan δ
10^2	1.890	3×10^{-6}	1.859	1.6×10^{-5}	2.570	3.23×10^{-3}
10^5	1.890	3×10^{-6}	1.859	2×10^{-6}	2.570	1.6×10^{-5}
10^8	1.888	.00243	1.857	4.2×10^{-4}	2.53	.0126
10^9	1.851	.0142	1.833	.0042	2.420	.0952
3×10^9	1.838	.0124	1.832	.0076	2.213	.0995
8.5×10^9	1.797	.0068	1.798	.0084	2.026	.0907

Muller oil

U. S. Bureau of Fisheries

	24 ± 0.5°C		10 ± 1°C	
Freq. (GHz)	κ	tan δ	κ	tan δ
1	2.54	.068	-	-
8.5	2.52	.0507	2.50	.0458
14	2.42	.0468	2.39	.0443
24	2.35	.0384	2.36	.0380

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Laboratory for Insulation Research, Massachusetts Institute of Technology, Cambridge, Mass. 02139	2a. REPORT SECURITY CLASSIFICATION 2b. GROUP

3. REPORT TITLE

Dielectric Measurements on High-Temperature Materials

4. DESCRIPTIVE NOTES (Type of report and inclusive dates)

Technical Report

5. AUTHOR(S) (Last name, first name, initial)

W. B. Westphal and J. Iglesias

6. REPORT DATE July 1970	7a. TOTAL NO. OF PAGES 52	7b. NO. OF REFS 3
8a. CONTRACT OR GRANT NO. F33615-67C-1612 b. PROJECT NO. 7371 c. Task No. 737101 d.	9a. ORIGINATOR'S REPORT NUMBER(S) 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) AFML-TR-70-138	

10. AVAILABILITY/LIMITATION NOTICES

This document is subject to special export controls and each transmittal to foreign nations may be made only with prior approval of AF Materials Laboratory.

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY Air Force Materials Laboratory Air Force Systems Command Wright-Patterson Air Force Base, Ohio

13. ABSTRACT

Extensions of the laboratory's measuring techniques for complex dielectric constants to wider ranges of temperature (4° to 2000°K) and frequency (.008 Hz to 90 GHz) are reviewed. Methods of interpreting dielectric data and computer programs for finding the components of complex spectra are discussed. Measurement data of general interest accumulated in the last three years appear in graphical and/or tabular form.

DD FORM 1 JAN 64 1473

Unclassified

Security Classification

Unclassified

Security Classification

14. KEY WORDS	LINK A ROLE	LINK A WT	LINK B ROLE	LINK B WT	LINK C ROLE	LINK C WT
Dielectric constant measurements						
Dielectric loss measurements						
High-temperature materials						
Relaxation spectrum analysis						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization *(corporate author)* issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers *(either by the originator or by the sponsor)*, also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

(1) "Qualified requesters may obtain copies of this report from DDC."

(2) "Foreign announcement and dissemination of this report by DDC is not authorized."

(3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."

(4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."

(5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring *(paying for)* the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as *(TS)*, *(S)*, *(C)*, or *(U)*.

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.

Unclassified

Security Classification