UNCLASSIFIED

AD NUMBER
AD378494
CLASSIFICATION CHANGES
TO: unclassified
FROM: confidential
LIMITATION CHANGES
TO: Approved for public release, distribution unlimited
FROM: Distribution: Further dissemination only as directed by Director of Supersonic Transport Development, Federal Aviation Agency, Washington, DC 20553 SEP 1966 or higher DoD authority.
AUTHORITY
Federal Aviation Agency ltr dtd 23 Feb 1972; Federal Aviation Agency ltr dtd 23 Feb 1972

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

378494

AD NO.
DDC FILE COPY

BAC

CLASSIFICATION CHANGED
TO UNCLASSIFIED
FROM CONFIDENTIAL
PER AUTHORITY LISTED IN
TAB NO. 72-8 | FAA ltr, 23 Feb 72
DATE 15 April 1972

D6A10111-1

UNCLASSIFIED

UNCLASSIFIED

Best
Available
Copy

UNCLASSIFIED

NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

All / [illegible]tion of this document is controlled. In addition to sec[illegible] [illegible]ements which apply to this document and must be met, it m[illegible] [illegible]rther distributed by the holder only with specific prior approval of:

Director of Supersonic Transport Development
Federal Aviation Agency
Washington, D. C. 20553

The distribution of this report is limited because it contains technology identifiable with items excluded from export by the Department of State (U. S. Export Control Act of 1949, as amended).

UNCLASSIFIED

UNCLASSIFIED

Phase III Proposal

(6) Supersonic Transport Development Program.

BOEING MODEL 2707.

PROPULSION PERFORMANCE SPECIFICATION (GENERAL ELECTRIC) (U), (9)

(14) DGA18112-1 (11) 6 Sep 66

September 6, 1966 (12) 64p.

PREPARED BY Paul E Johnson APPROVED BY [illegible]

APPROVED BY CA Gritz APPROVED BY [illegible]

(10) Paul E. Johnson (15) FA-SS-66-5

Prepared for

FEDERAL AVIATION AGENCY

Office of Supersonic Transport Development Program

"THIS DOCUMENT CONTAINS SENSITIVE, COMPETITIVE, AND PROPRIETARY DATA AND IS NOT TO BE REPRODUCED OR RELEASED OUTSIDE OF YOUR ORGANIZATION OR USED FOR ANY PURPOSE OTHER THAN SUPERSONIC TRANSPORT EVALUATION WITHOUT THE WRITTEN PERMISSION OF EITHER THE FEDERAL AVIATION AGENCY, ATTN: OFFICE OF SUPERSONIC TRANSPORT DEVELOPMENT ATTENTION: SST-20, OR THE BOEING COMPANY, SUPERSONIC TRANSPORT DIVISION, ATTENTION: CONTRACT ADMINISTRATION."

THIS MATERIAL CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 18 U.S.C., SECTIONS 793 AND 794. THE TRANSMISSION OR REVELATION OF WHICH IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.

GROUP 4
DOWNGRADED AT 3 YEAR INTERVALS; DECLASSIFIED AFTER 12 YEARS.
DOD DIR 5200.10

DDC
JAN 25 1967
DDC-IRA A

BOEING
SUPERSONIC TRANSPORT DIVISION

FAA

UNCLASSIFIED

ISSUE NO 1 17

(402 097)

UNCLASSIFIED

CONTENTS

Section		Page
1.	SCOPE	1
2.	APPLICABLE DOCUMENTS	1
2.1	Specifications	1
2.2	Standards	1
2.3	Other Publications	1
3.	REQUIREMENTS	3
3.1	Performance	3
3.1.1	Functional Characteristics	3
3.1.1.1	Engine Performance Characteristics	3
3.1.2	Operability	43
3.2	Subsystem Definition	43
3.2.1	Interface Requirements	43
3.2.1.1	Schematic Arrangement	43
3.2.1.2	Detailed Interface Definition	50
3.3	Design and Construction	50
4.	QUALITY ASSURANCE PROVISIONS	51
4.1	Engineering Test and Evaluation	51
4.1.1	Engine Test and Evaluation	51
4.1.2	Inlet Performance	51
4.1.3	Nozzle Development	51
4.2	Preliminary Qualification Testing	51
4.3	Formal Qualification Testing	51
4.4	Reliability Test and Analysis	51
4.5	Performance Quality Verification Cross Reference Index	51
5.	PREPARATION FOR DELIVERY	51
6.	NOTES	51
SUPPLEMENT I	PROTOTYPE SPECIFICATION	53
Supplement II	FINAL ENGINE PERFORMANCE	55

UNCLASSIFIED

UNCLASSIFIED

ILLUSTRATIONS

Figure		Page
1	Takeoff Thrust and SFC, Standard Day	5
2	Takeoff Thrust and SFC, Standard Day +25°F	6
3	Takeoff Thrust and SFC, Standard Day +40°F	7
4	Climb and Acceleration Net Thrust and SFC, Standard Day	8
5	Climb and Acceleration Net Thrust and SFC, Standard Day +10°C	9
6	Cruise Net Thrust and SFC, Standard Day	10
7	Cruise Net Thrust and SFC, Standard Day +10°C	11
8	Subsonic Net Thrust and SFC, Sea Level	12
9	Subsonic Net Thrust and SFC, 15,000 Feet	13
10	Subsonic Net Thrust and SFC, 25,000 Feet	14
11	Subsonic Net Thrust and SFC, 36,150 Feet	14
12	Subsonic Net Thrust and SFC, 45,000 Feet	15
13	Normal and Emergency Descent Thrust and Fuel Flow, Standard Day	16
14	Engine Operating Envelope, Standard Day	17
15	Inlet Total Pressure Recovery	18
16	Nozzle Secondary Airflow Schedule	19
17	B-2707 Design Mission Placards	21
18	Inlet Schematic	22
19	Local Mach Number versus Freestream Mach Number	24
20	Freestream Capture Area, Design Mission Placards	25
21	Inlet Supply/Engine Demand Area Ratio, Design Mission Placards	26
22	Part Power Engine Demand Area Ratio, Standard Day	27

UNCLASSIFIED

ILLUSTRATIONS (Cont.)

Figure		Page
23	Inlet Installed Drag Coefficient, Climb and Acceleration, Standard Day	23
24	Inlet Installed Drag Coefficient, Climb and Acceleration, Standard Day +10°C	24
25	Inlet Installed Drag Coefficient, Normal Descent, Standard Day	29
26	Inlet Installed Drag Coefficient, Emergency Descent, Standard Day	30
27	Part Power Excess Air Drag Coefficient, Standard Day	31
28	Inlet Spillage Drag Coefficient	31
29	Normal Shock Spillage	33
30	Additive Drag Coefficient	33
31	Lip Suction Force Coefficient	34
32	Lip Suction Ratio, K_s	34
33	Inlet Bleed Drag Coefficient	35
34	Inlet Bleed Total Pressure Recovery	35
35	Inlet Bleed Mass Flow Ratio	37
36	Inlet Bleed Exit Thrust Coefficient	37
37	Bypass Drag Coefficient	38
38	Bypass Area Ratio	39
39	Lower Wave Drag Coefficient	40
40	Bypass Momentum Drag Coefficient	42
41	Bypass Exit Velocity Coefficient	44
42	Bypass Exit Discharge Angle	44
43	Bypass Total Pressure Recovery	45

ILLUSTRATIONS (Cont.)

Figure		Page
44	Nozzle Boattail Angle	45
45	Nozzle Internal Thrust Coefficient	46
46	Nozzle Boattail Drag Coefficient	47
47	Nozzle Pressure Ratio	48
48	Propulsion Subsystem Performance Interface Diagram	49

TABLES

Table		Page
I	Engine Performance	4
II	Average Horsepower Extractions	20

1. SCOPE

This specification establishes the requirements for the performance and method of calculation of the B-2707 (GE) propulsion system. The General Electric GE4/J5P engine performance data is the primary data for the production propulsion performance specification. Supplement I of this specification defines the prototype propulsion performance and method of calculation by showing the discrete differences between the production and the prototype engines.

2. APPLICABLE DOCUMENTS

The following documents of the exact issue shown form a part of this specification to the extent specified herein. In the event of conflict between documents listed herein, with the exception of the Engine/Airframe Technical Agreement (D6A10198-1), the requirements specified by the specification shall take precedence.

2.1 Specification.

A.S.T.M. D1655-64T	1964	Fuel Specification

2.2 Standards.

None

2.3 Other Publications.

NACA Report No. 1135	1953	Equations, Tables and Charts for Compressible Flow
NACA Report No. 1253	1955	A correlation by means of Transonic Similarity Rules of Experimentally Determined Characteristics of a Series of Symmetrical and Cambered Wings of Rectangular Plan Form.
NACA Report No. 1094	1952	An experimental investigation of transonic flow past two-dimensional wedge and circular arc sections using Mach-Zehnder interferometer.
Federal Aviation Agency	30 June 1966	Phase III Request for Proposal
U. S. Government Printing Office	1962	U. S. Standard Atmosphere
General Electric Co.	15 July 1966	Engine Performance Deck

General Electric Co.	15 July 1966	Exhaust Nozzle Performance Deck
General Electric Co.	31 June 1966	Engine Model Specification
M.I.T. Technical Report No. 1 - Zdenek Kopal	1947	Tables of Supersonic Flow Around Cones
McGraw Hill T. A. Romney	1960	Engineering Supersonic Aerodynamics

Boeing

D6A10049-1	6 Sept 1966	Accessory Drive Subsystem
D6A10113-1	6 Sept 1966	Aircraft Engine Installation Sub-system
D6A10114-1	6 Sept 1966	Air Induction Subsystem
D6A10116-1	6 Sept 1966	Fuel Subsystem
D6A10121-1	6 Sept 1966	Environmental Control
D6A10117-1	6 Sept 1966	Engine Inlet Anti-Icing Subsystem
D6A10198-1	6 Sept 1966	Engine/Airframe Technical Agreement
D6-7842	Feb 1963	Pressures on Bodies of Revolution at Supersonic Speeds
D6-2559	Oct 1964	SST Exhaust Nozzle Boattail Drag Tests at Subsonic and Transonic Conditions

3. REQUIREMENTS

3.1 Performance.

3.1.1 Functional Characteristics. The functions of propulsion performance are:

a. To deliver thrust with minimum fuel consumption and minimum inlet drag.

b. To transmit torque to the accessory drive subsystem.

c. To deliver air to the environmental control subsystem, and engine inlet anti-icing subsystem.

3.1.1.1 Engine Performance Characteristics. The performance characteristics of the installed engine shall be as shown in Table I. The installed engine net thrust and specific fuel consumption for the standard day and non-standard day for various altitudes, Mach numbers, and power settings are shown in Figs. 1 through 13. The terms constituting net thrust and specific fuel consumption are shown as subparagraphs hereunder and in logical sequence.

3.1.1.1.1 Performance Criteria. The installed engine performance for all power levels shall be calculated by use of CE4/05P Engine Performance data deck and Exhaust Nozzle Performance data deck supplied by the General Electric Co. The installed net thrust and specific fuel consumption curves shall include the effects of inlet total pressure recovery, compressor discharge air bleed, shaft horsepower extraction, and exhaust nozzle secondary airflow within the engine design and operation envelope shown in Fig. 14. The data decks define production engine estimated performance representing maximum fuel flow and minimum net thrust for all power settings from idle to maximum augmentation. Engine performance is based on U. S. Standard Atmosphere, 1962, Geometric Altitude, and the use of a fuel conforming to Fuel Specification A.S.T.M. D1655-64T Jet A or A-1 Type aviation kerosene. The minimum lower heating value of this fuel is 18 400 B.T.U/lb and is used in all performance data presented herein. The nozzle secondary airflow used in calculating engine performance is shown in Fig. 16.

3.1.1.1.1.1 Inlet Total Pressure Recovery. The inlet total pressure recovery used in calculating engine performance is shown in Fig. 15.

3.1.1.1.1.2 Horsepower Extraction. Table II lists the average horsepower extracted from the engine to supply power for aircraft systems.

3.1.1.1.1.3 Engine Air Bleed. The average amounts of airbleed required from the engine compressor to meet the average requirements of the environmental control subsystem are given in Table I. Engine and inlet anti-icing bleed is of a short term nature and is omitted from engine performance.

Power setting	Pressure altitude (ft)	Ambient temp.	Mach Number	Inlet Ram Recovery	Net thrust (lb)	S.F.C. (lb/hr/lb)	Airflow (lb/sec)	Nozzle Extension (%)	Secondary air (lb/sec)	Bleed air (lb/sec)
Maximum Augmented	0	Std.	0	0.96	33,600	1.75	596	850	72	0
Maximum Non-Augmented	0	Std.	0	0.96	46,400	1.07	595	450	70	0
Maximum Augmented	0	Std. +40°F	0	0.96	31,400	1.80	534	650	73	0
Maximum Non-Augmented	0	Std. +40°F	0	0.96	40,100	1.08	534	650	32	0
Maximum Augmented	45,000	Std.	1.2	0.986	22,300	1.72	221	450	13	0
Maximum Augmented	45,000	Std. +10°C	1.2	0.986	21,650	1.76	211	450	13	0
Partial Augmented	65,000	Std.	2.7	0.91	15,000	1.51	291	650	3.8	0
Partial Augmented	65,000	Std. +10°C	2.61	0.914	15,000	1.65	252	650	34	0
Partial Non-Augmented	36,150	Std.	0.85	0.99	5,000	1.11	165	450	13	0
Partial Non-Augmented	15,000	Std.	0.50	0.988	5,000	1.35	233	450	17	0
Idle	0	Std.	0	0.97	1,530	*	139	300	7.0	2.1
Idle	50,000	Std.	1.2	0.986	-760	**	87	500	5.7	1.47
Maximum Reverse	0	Std.	0	0.96	25,000	***	595	330	-	2.1

* W_f = 4,500 lb/hr
** W_f = 1,440 lb/hr
*** W_f = 49,600 lb/hr

Proposed

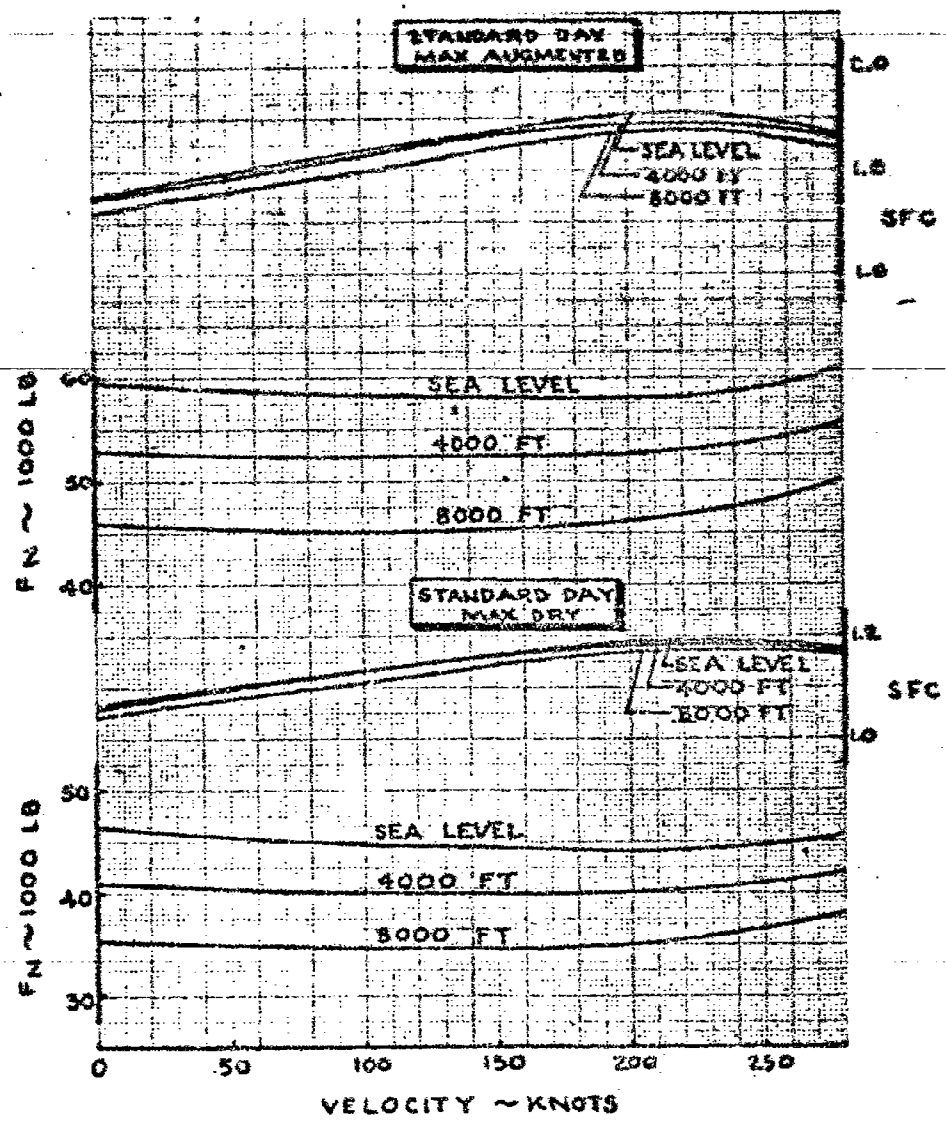

Figure 1. Takeoff Thrust and SFC, Standard Day

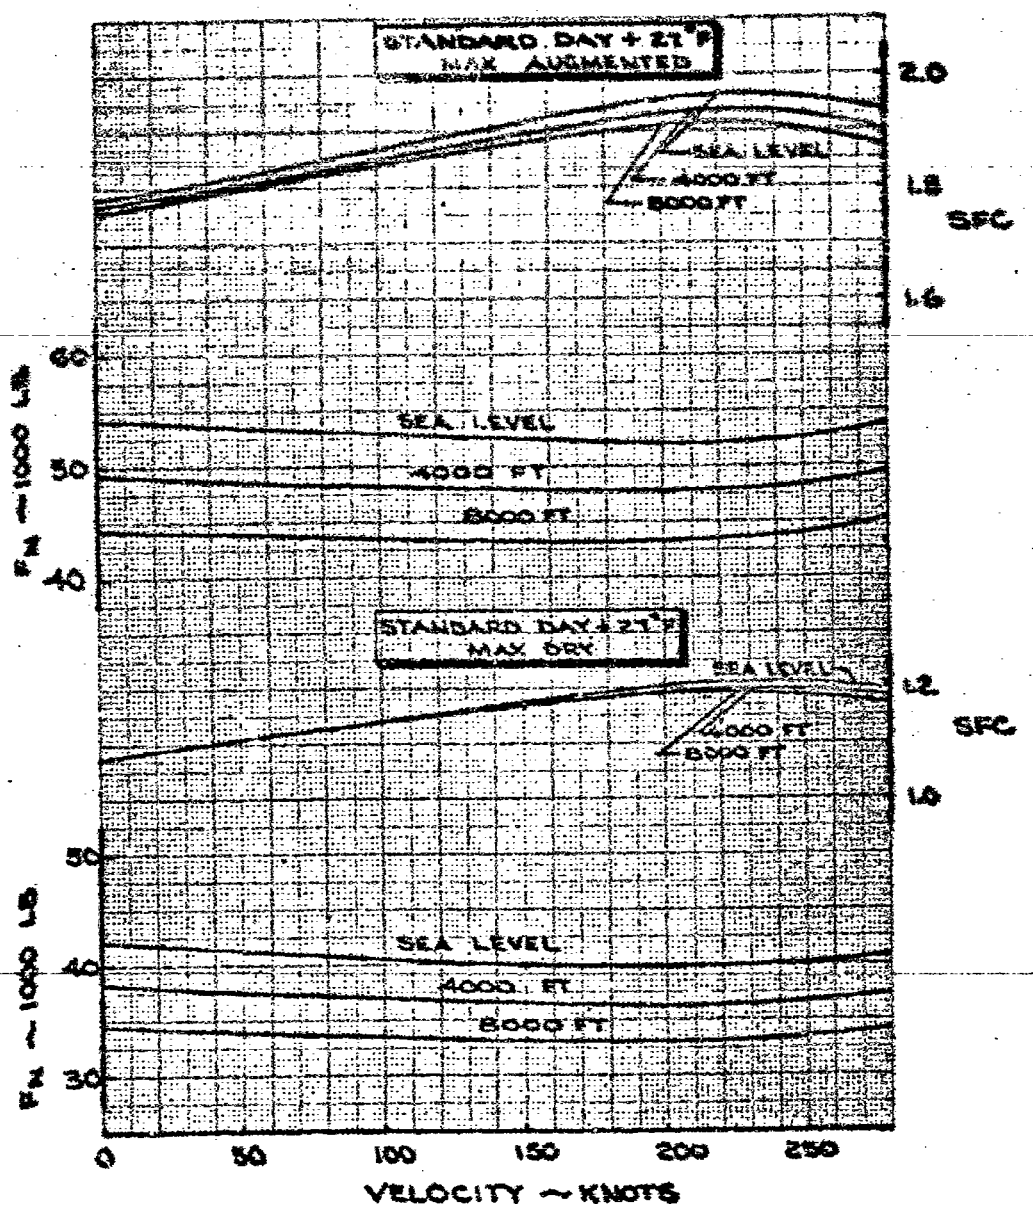

Figure 2. Takeoff Thrust and SFC, Standard Day + 27°F

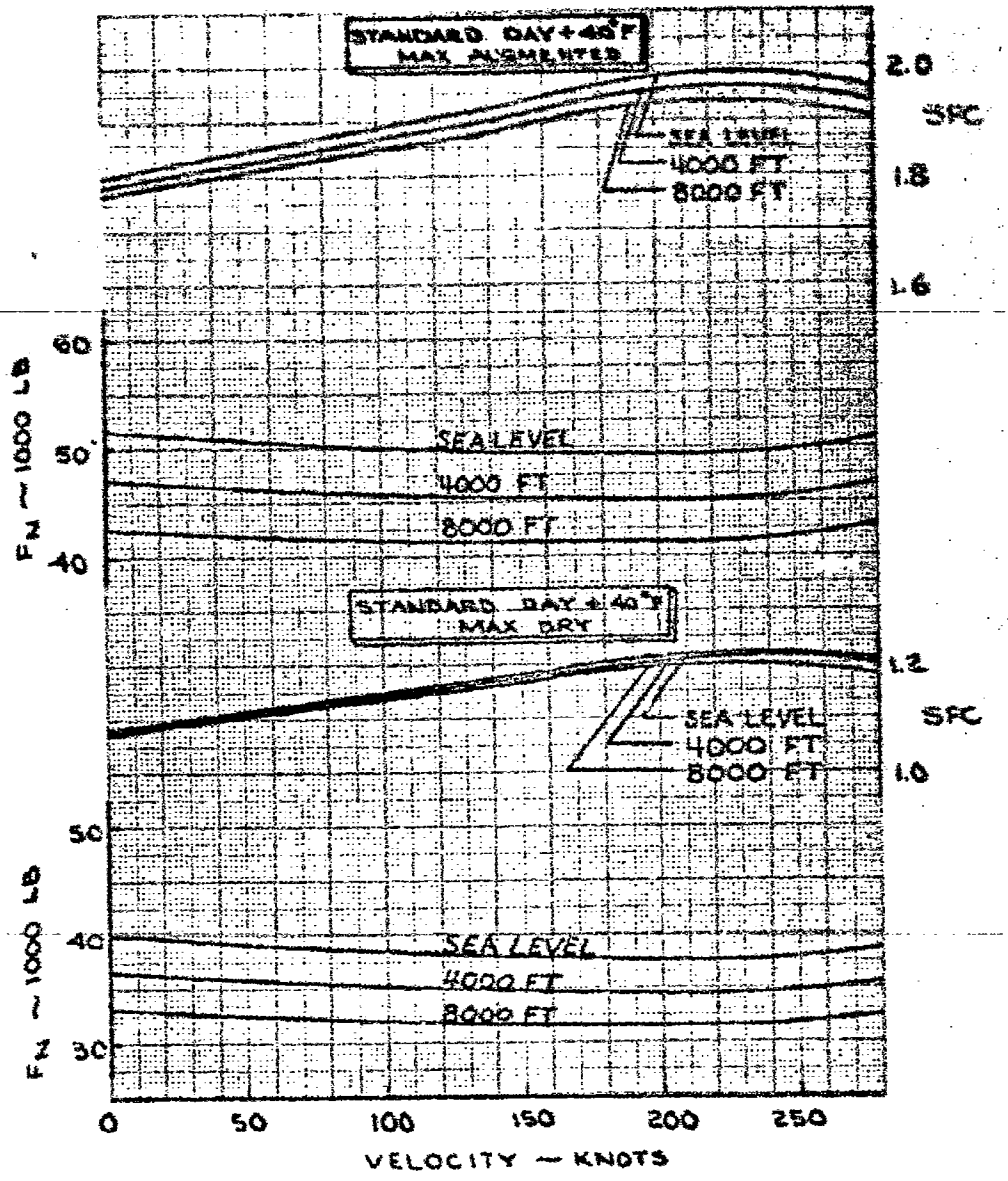

Figure 3. Takeoff Thrust and SFC, Standard Day + 40°F

GE

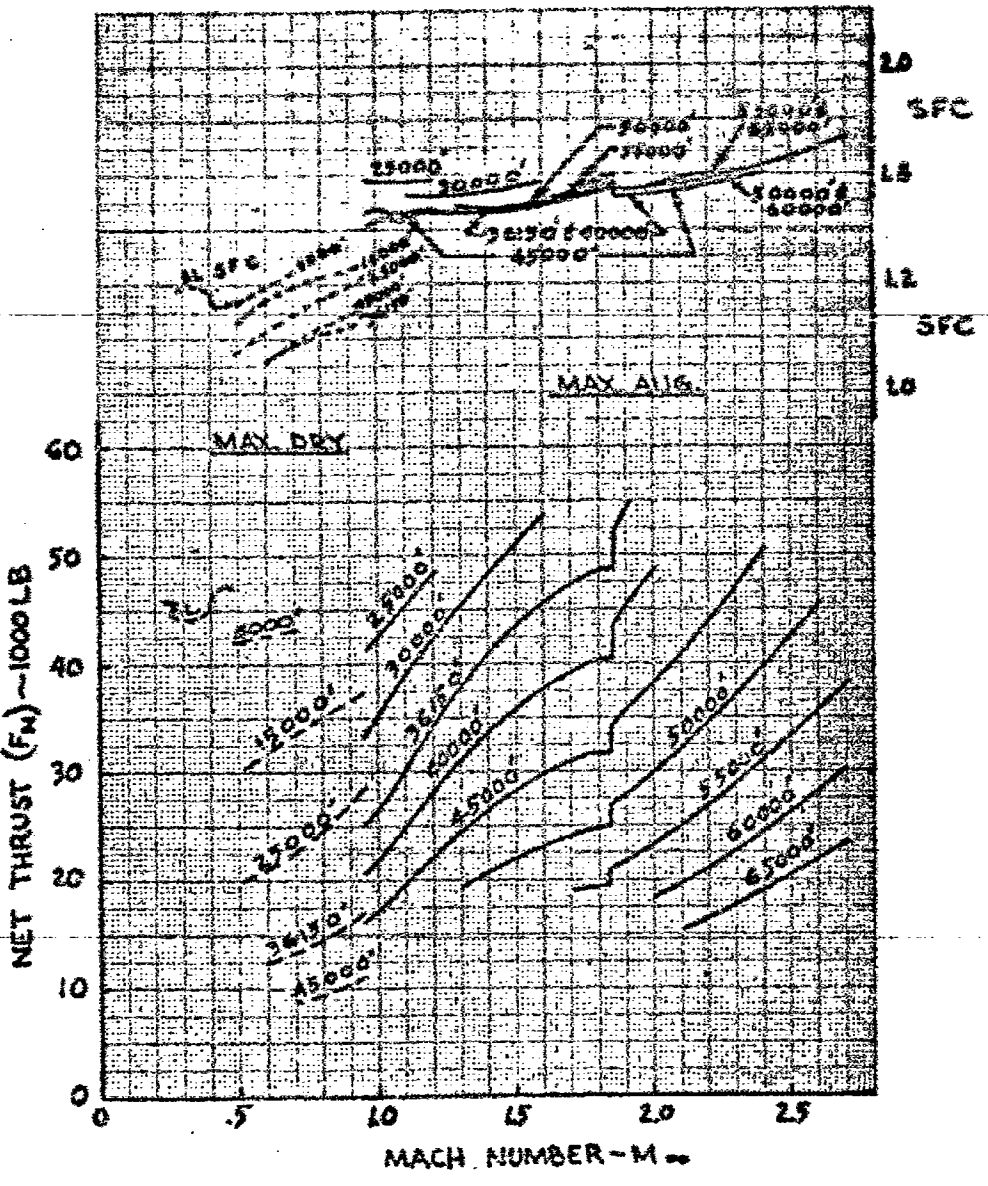

Figure 4. Climb and Acceleration Net Thrust and SFC, Standard Day

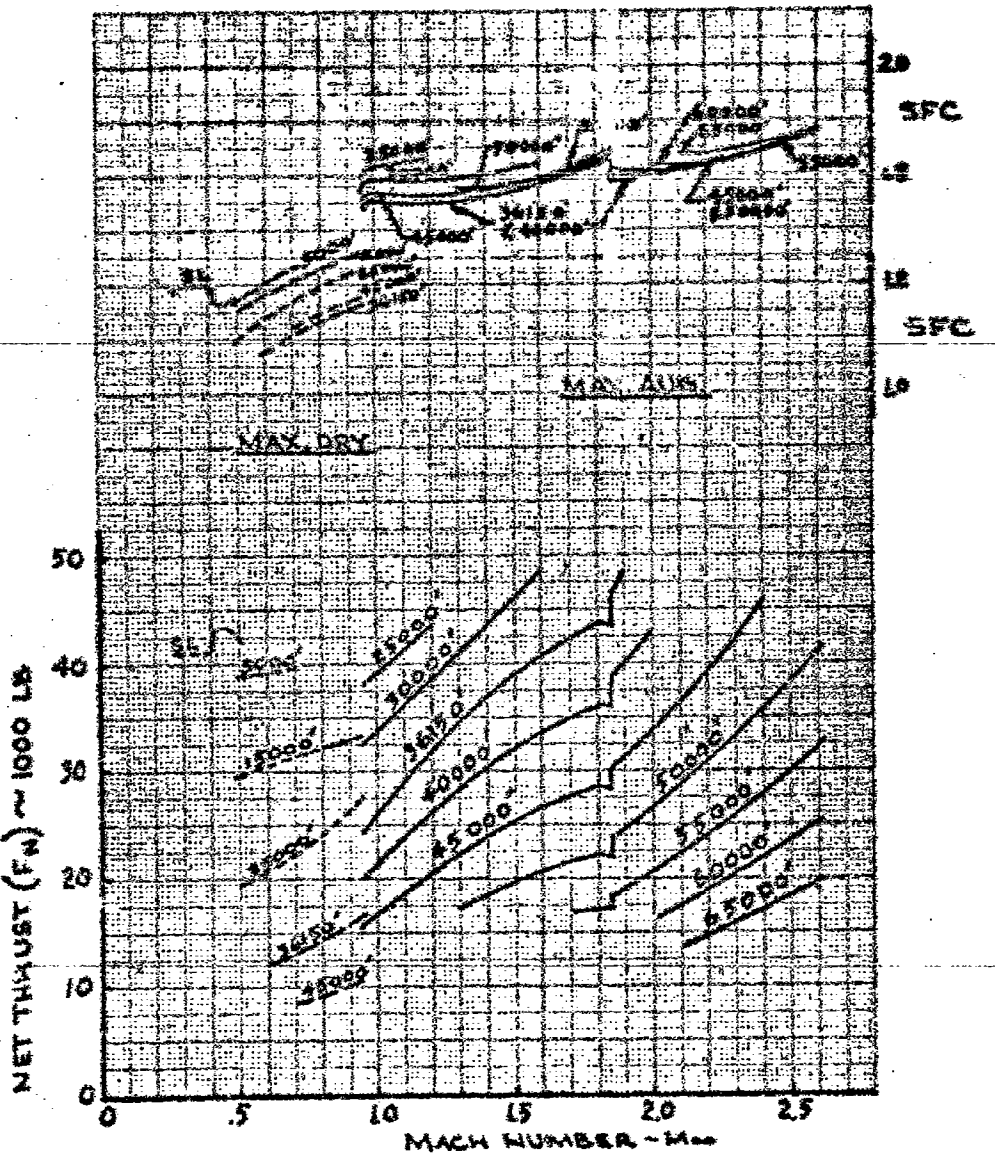

Figure 5. Climb and Acceleration Net Thrust and SFC, Standard Day +10° C

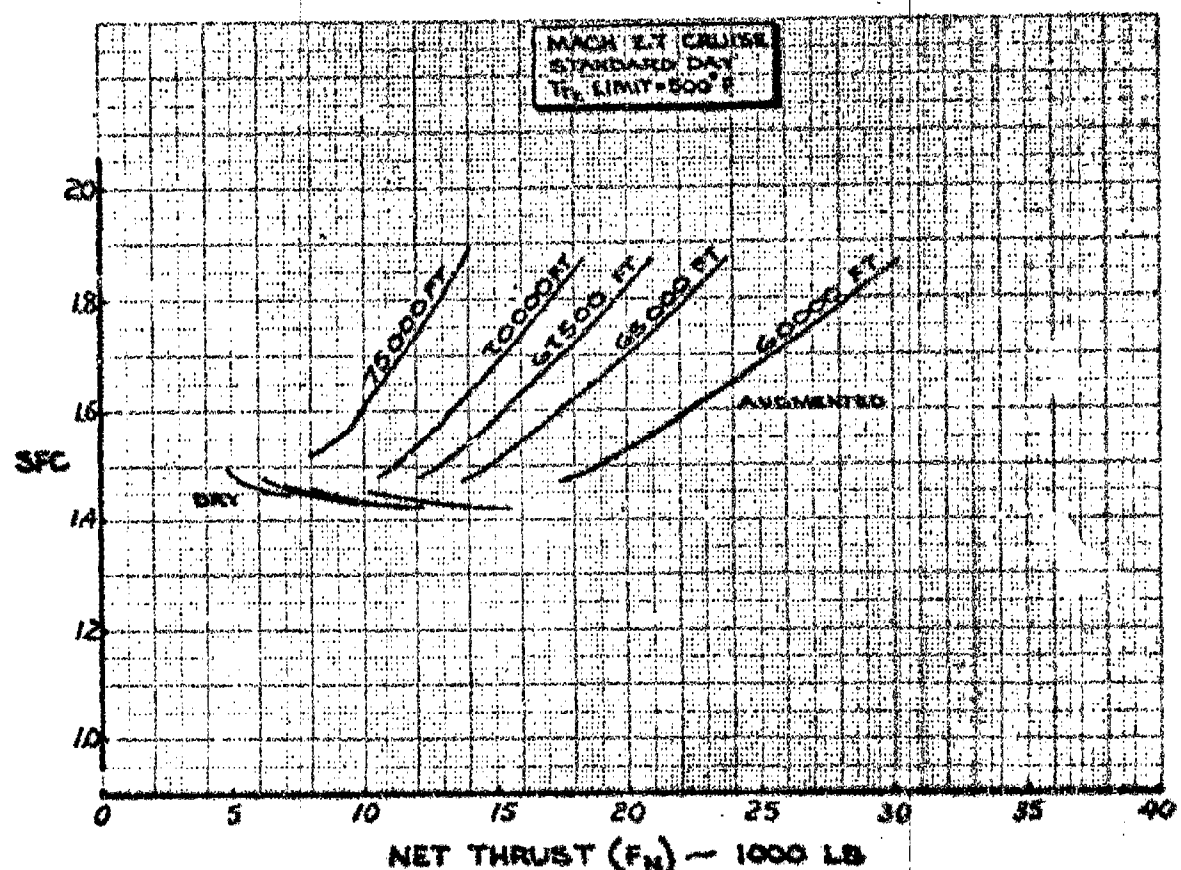

Figure 6. Cruise Net Thrust and SFC, Standard Day

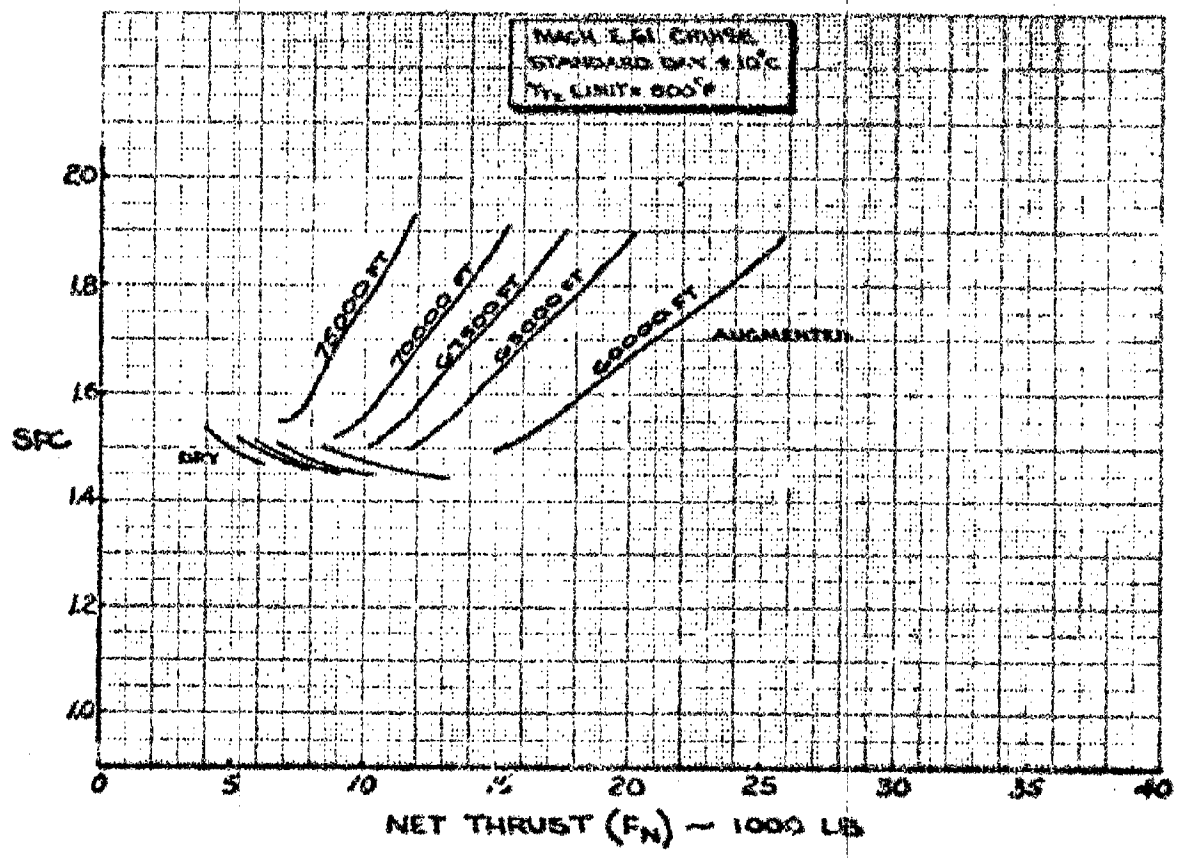

Figure 7. Cruise Net Thrust and SFC, Standard Day + 10°C

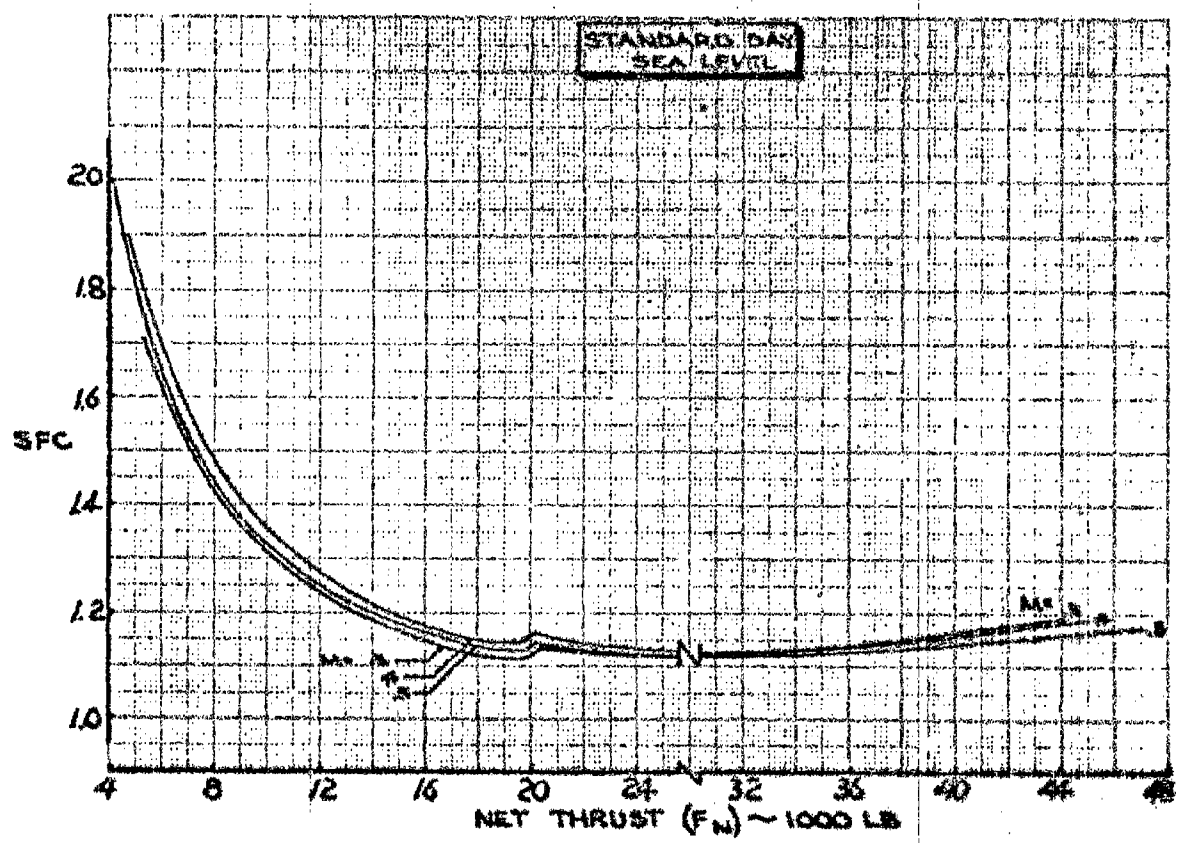

Figure 5. Subsonic Net Thrust and SFC, Sea Level

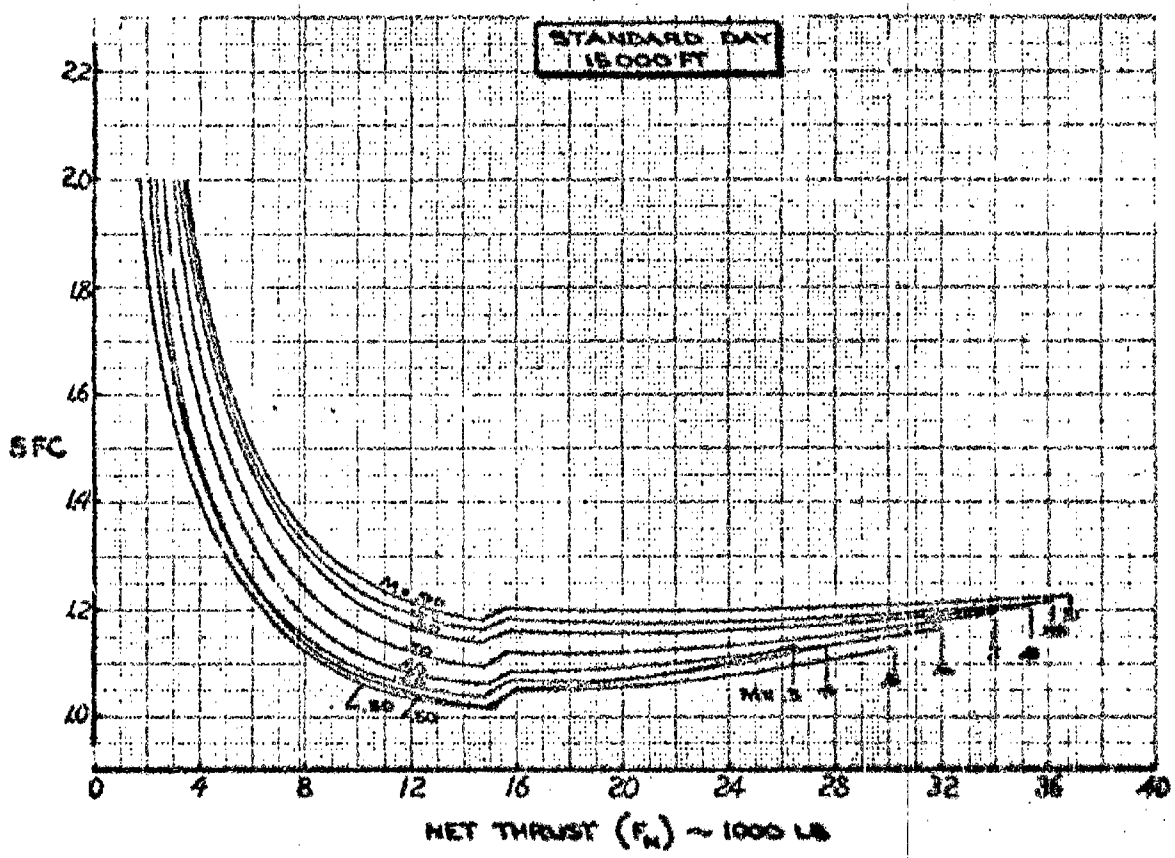

Figure 9. Subsonic Net Thrust and SFC, 15,000 Feet

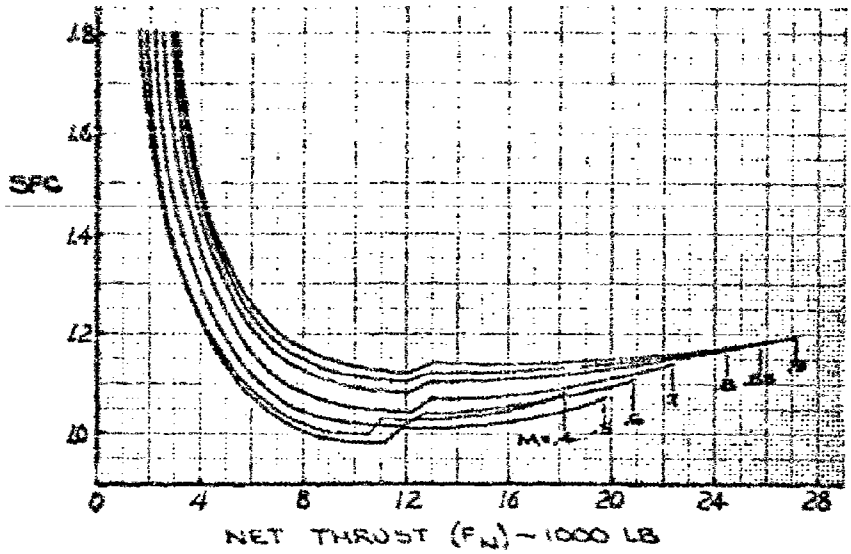

Figure 10. Subsonic Net Thrust and SFC, 25,000 Feet

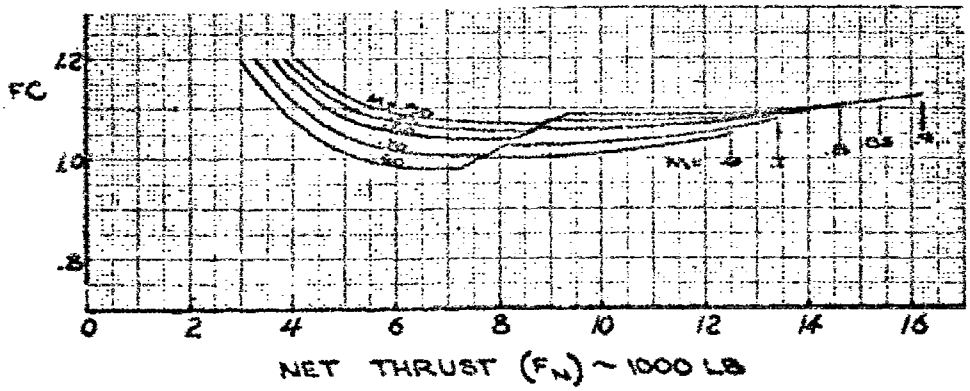

Figure 11. Subsonic Net Thrust and SFC, 36,150 Feet

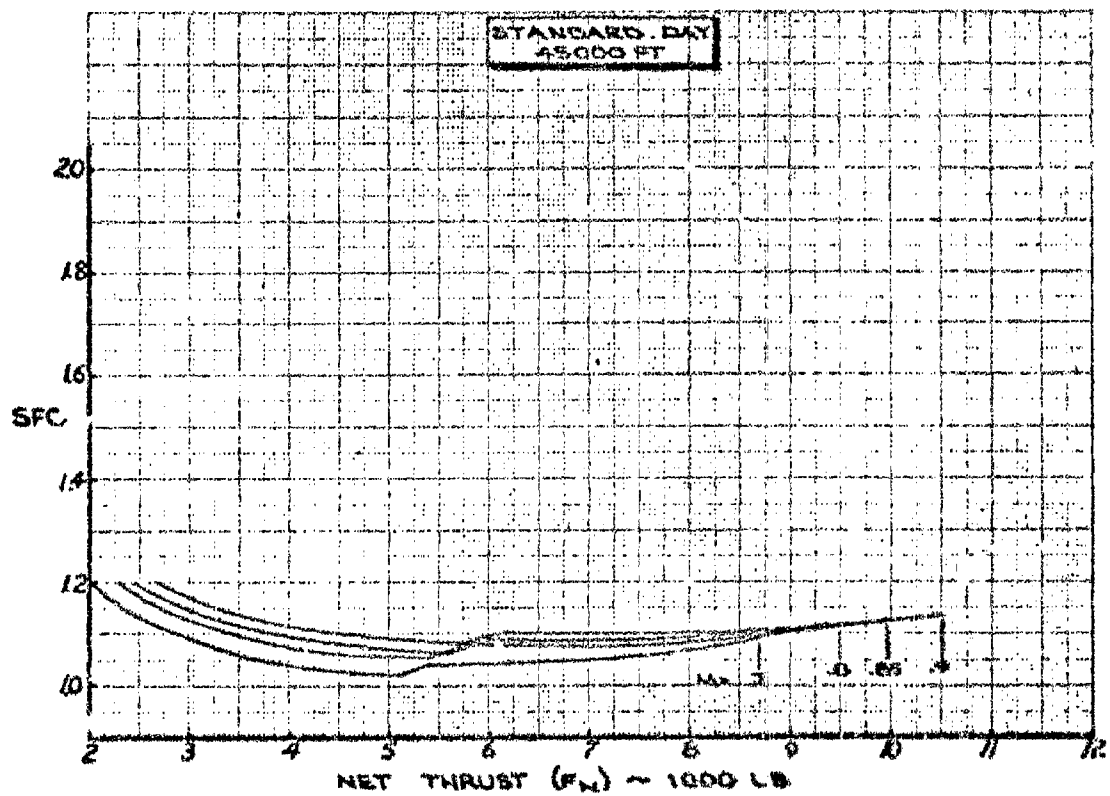

Figure 12. Subsonic Net Thrust and SFC, 45,000 Feet

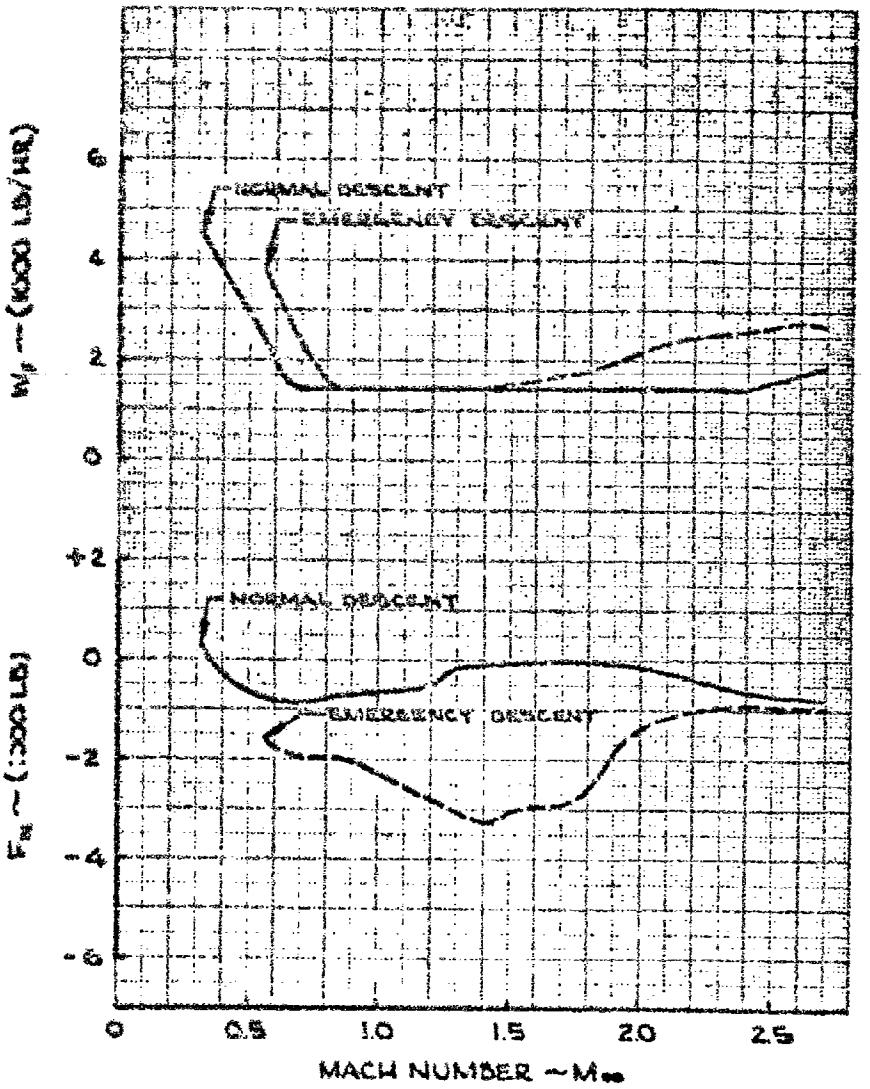

Figure 15. Normal and Emergency Descent Thrust and Fuel Flow, Standard Day

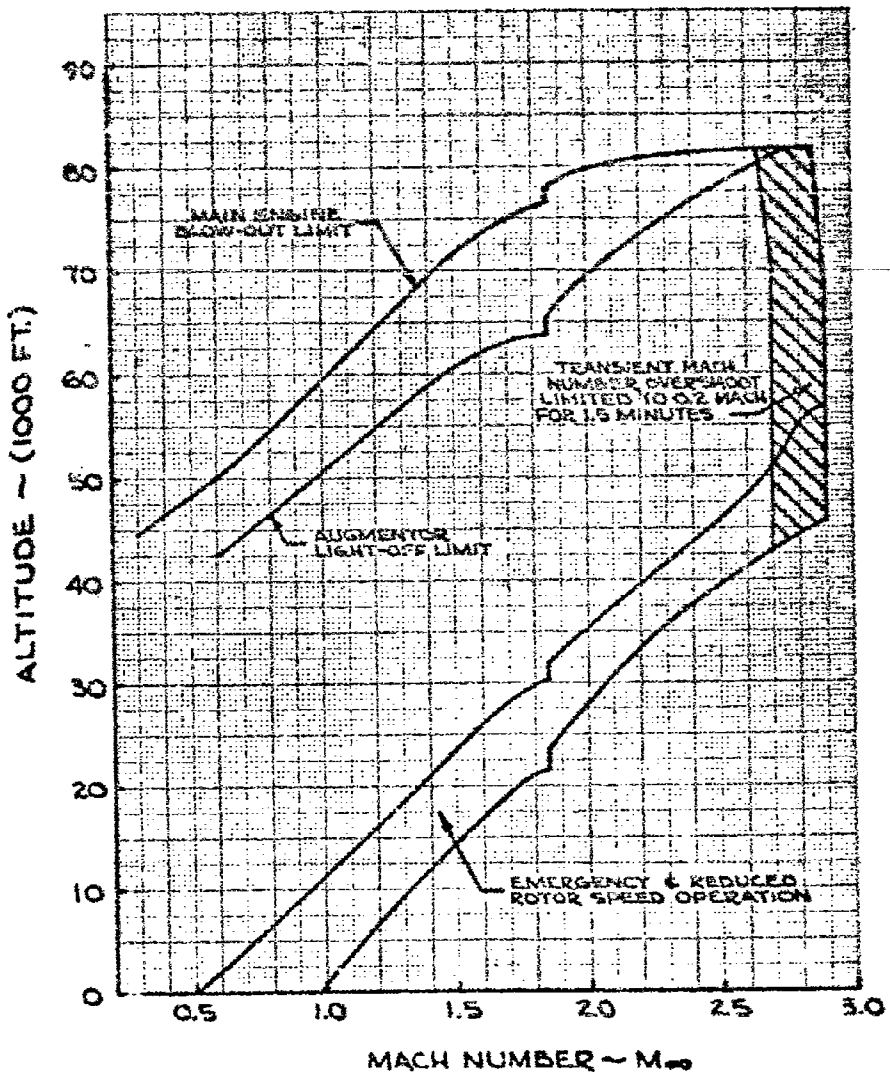

Figure 14. Engine Operating Envelope, Standard Day

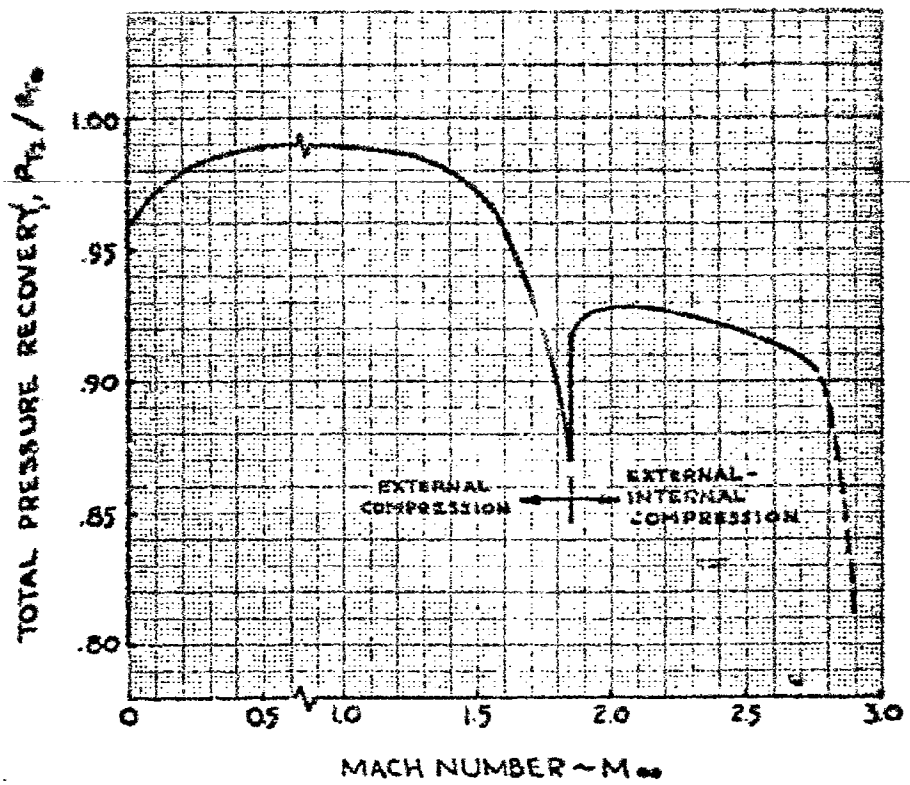

Figure 15. Inlet Total Pressure Recovery

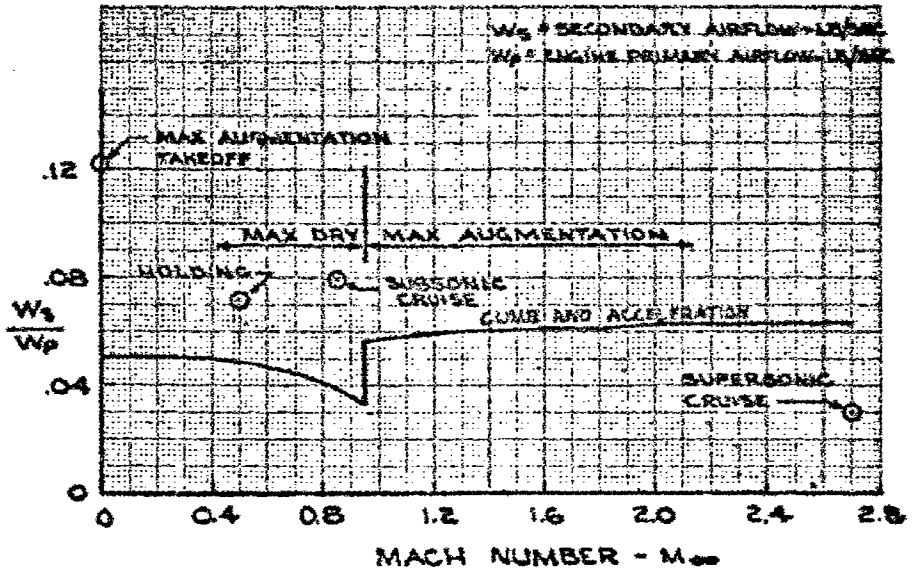

Figure 16: Nozzle Secondary Airflow Schedule

Table II. Average Horsepower Extractions

Airplane Operating Condition	Horsepower Extraction Per Engine
Takeoff	450
Climb and acceleration	450
Supersonic cruise	450
Holding at Mach 0.4, 15,000 ft	450
Cruise to alternate at Mach 0.8, 36,150 ft	450
Descent M < 1.2	400
M ≥ 1.2	500

3.1.1.1.2 Inlet Drag Characteristics. The inlet drag for all flight operating conditions shall be calculated by analytical methods. The inlet drag calculation method is based on summation of spillage, bypass and boundary layer bleed drag increments. Fig. 15 is an inlet schematic identifying terms used in calculating inlet drag, additive drag and spillage drag.

3.1.1.1.2.1 Engine Demand. Typical mission engine airflow demands in terms of freestream inlet capture area shown in Fig. 20 are based on engine airflow including nozzle secondary airflow and using the inlet total pressure recovery schedule shown in Fig. 15 and nozzle secondary flow schedule shown in Fig. 16 and mission design placards shown in Fig. 17. The engine airflow demand in square feet is calculated by the following equation.

$$A_E = \frac{W_2\sqrt{\theta_{T_2}}}{\delta_2}\left(\frac{P_{T_2}}{P_{T_o}}\right) f(M_o) .0108 \left(\frac{R}{\gamma g}\right)^{1/2}$$

Where $f(M_o) = \frac{1}{M}\left[1 + \left(\frac{\gamma - 1}{2}\right) M^2\right]^{\frac{\gamma+1}{2(\gamma-1)}}$

and $\frac{W_2\sqrt{\theta_{T_2}}}{\delta_2}$ = Engine corrected flow

$\left(\frac{P_{T_2}}{P_{T_o}}\right)$ = Inlet Recovery

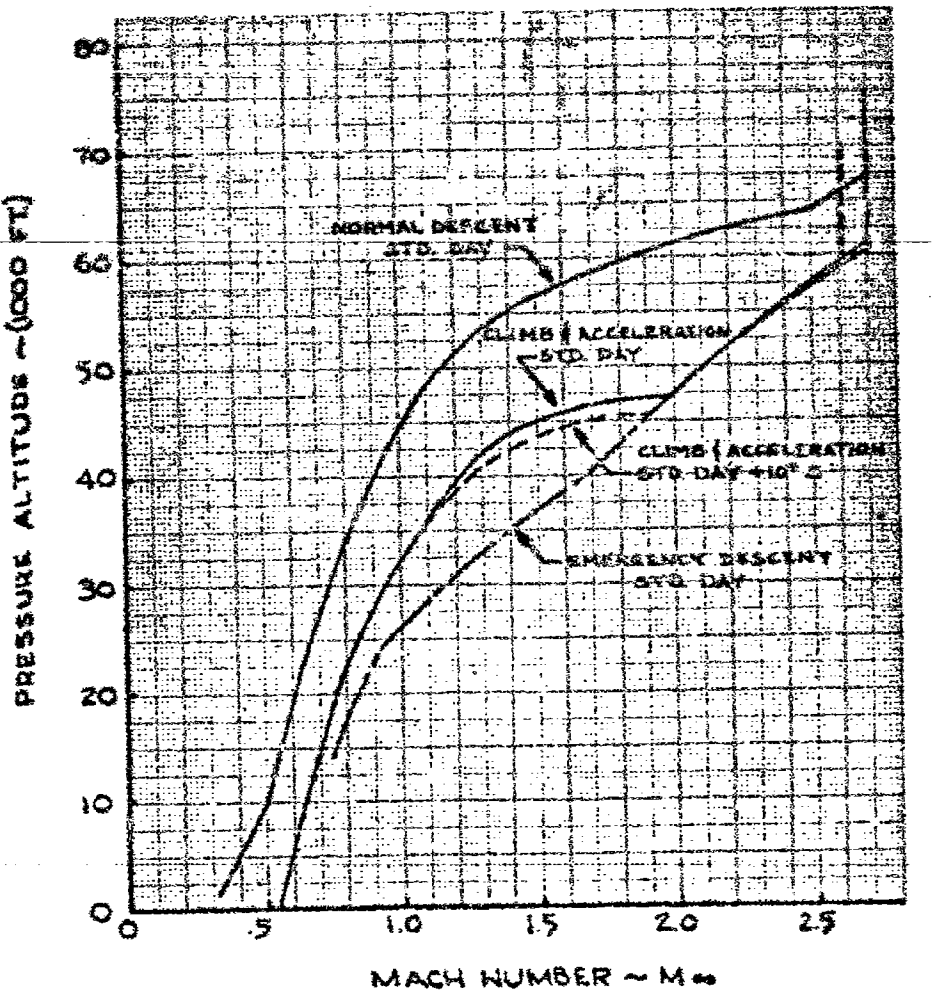

Figure 17. B-2707 Design Mission Placards

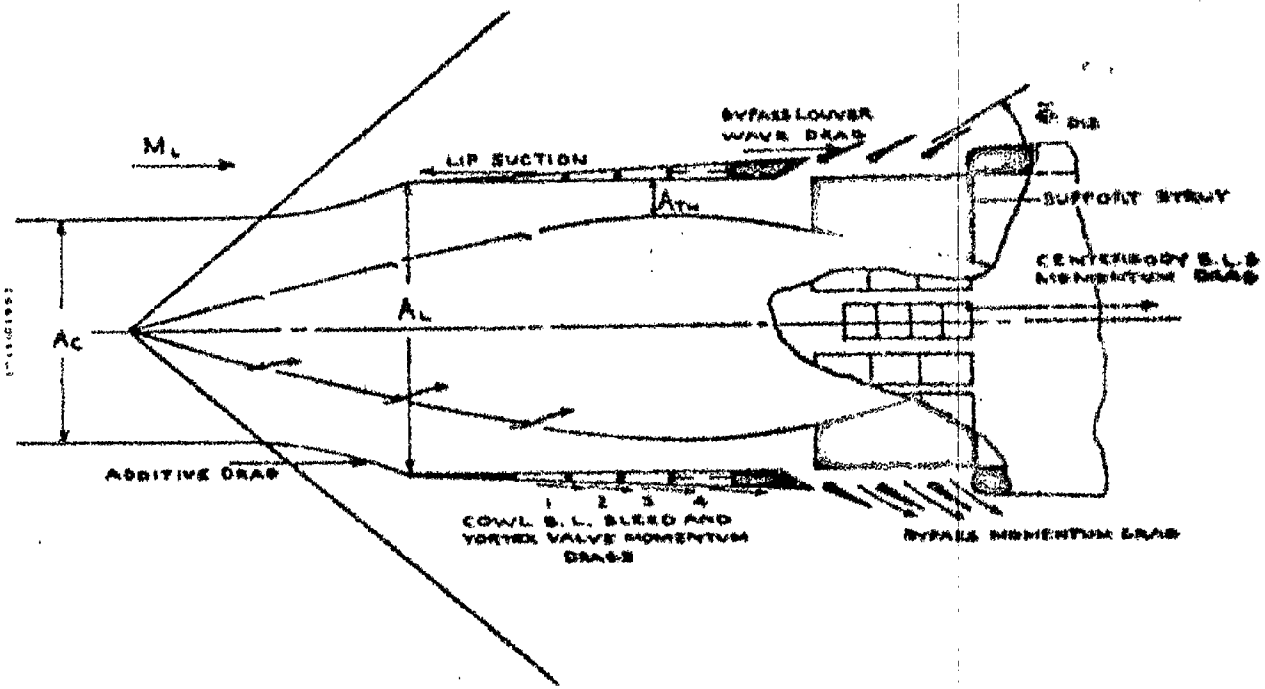
M_L
LIP SUCTION
BYPASS LOUVER WAVE DRAG
A_{TH}
SUPPORT STRUT
CENTERBODY B.L. & MOMENTUM DRAG
A_L
A_C
ADDITIVE DRAG
1 2 3 4
COWL B.L. BLEED AND VORTEX VALVE MOMENTUM DRAGS
BYPASS MOMENTUM DRAG

R = Universal gas constant

g = Gravitational acceleration

M = Freestream Mach number

Y = Ratio of specific heats

3.1.1.1.2.2 Inlet Supply-Engine Demand. The inlet supply capture area ratio is shown in Fig. 21. Engine demand area ratio curves are shown in Fig. 21 for four-engine operating conditions:

a. Climb and Acceleration, Standard Day

b. Climb and Acceleration, Standard Day +10°C

c. Normal Descent, Standard Day

d. Emergency Descent, Standard Day

The engine demand curves shown include nozzle secondary air, and are corrected to local inlet flow conditions based on the local to freestream Mach number relationship shown in Fig. 19.

3.1.1.1.2.2.1 Part Power Engine Demand, Standard Day. The engine demand capture area ratios for selected part power conditions are shown in Fig. 22. At part throttle operation minimum excess air drag shall be achieved by control of the inlet throat Mach number.

3.1.1.1.2.3 Inlet Installed Drag Coefficient. The composite curves of inlet installed drag coefficients shown in Figs. 23 through 26 are based on freestream dynamic pressure and inlet lip frontal area of 21.23 sq ft for all calculations.

3.1.1.1.2.3.1 Climb and Acceleration, Standard Day. A composite curve of inlet installed drag coefficients for climb and acceleration is shown in Fig. 23.

3.1.1.1.2.3.2 Climb and Acceleration, Standard Day +10°C. A composite curve of inlet installed drag coefficients is shown in Fig 24 for climb and acceleration.

3.1.1.1.2.3.3 Normal Descent, Standard Day. A composite curve of inlet installed drag coefficients is shown in Fig. 25 for normal descent.

3.1.1.1.2.3.4 Emergency Descent, Standard Day. A composite curve of inlet installed drag coefficients is shown in Fig. 26 for emergency descent.

3.1.1.1.2.3.5 Part Power, Standard Day. The inlet installed drag coefficient increments for part throttle engine demand are shown in Fig. 27 for selected part power conditions. The total installed inlet drag

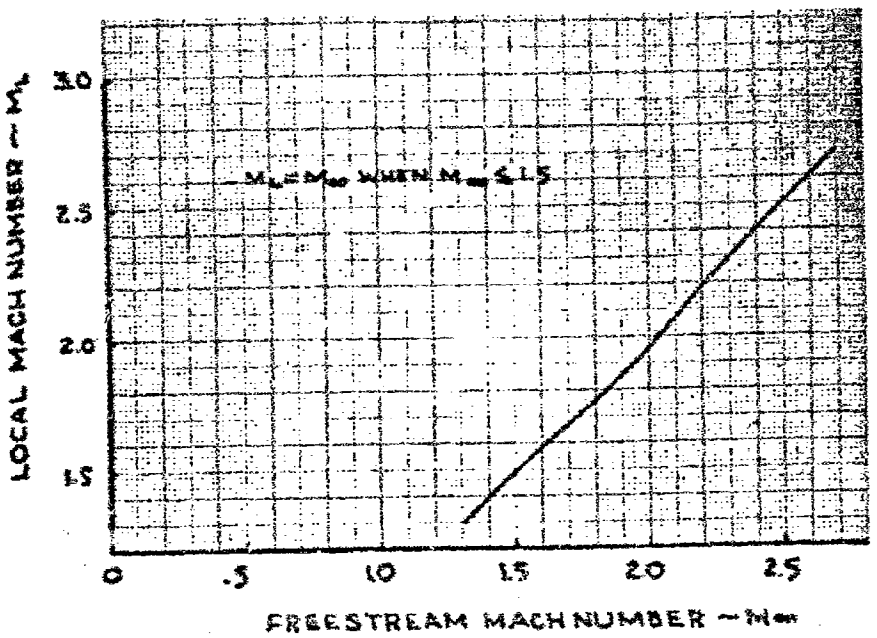

Figure 19. Local Mach Number Versus Freestream Mach Number

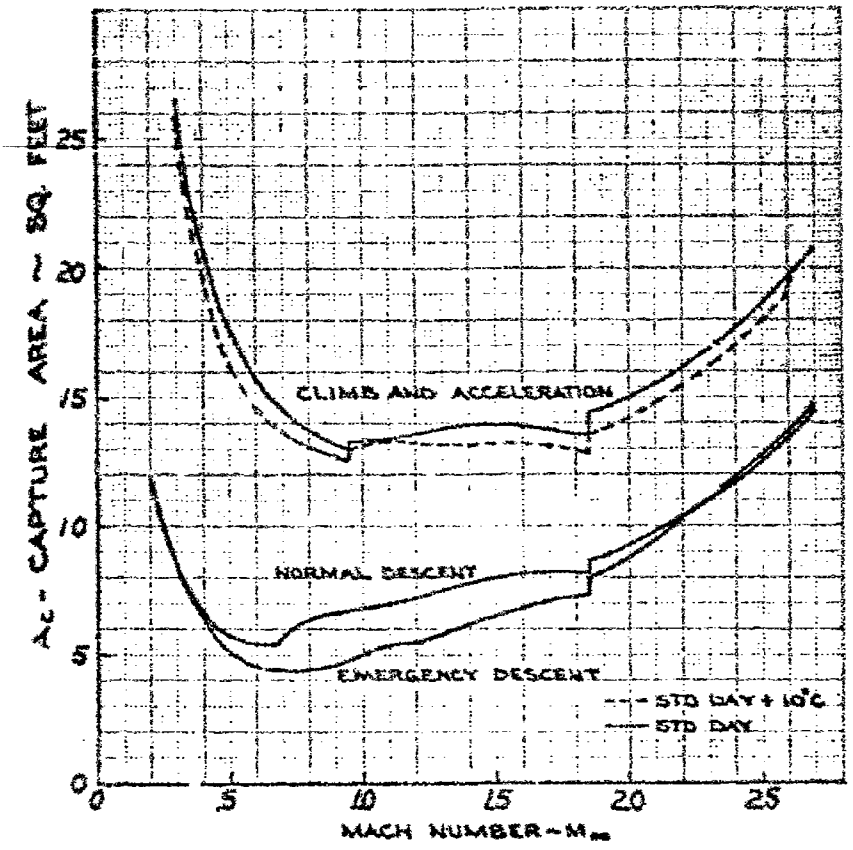

Figure 20. Freestream Capture Area, Design Mission Flyout

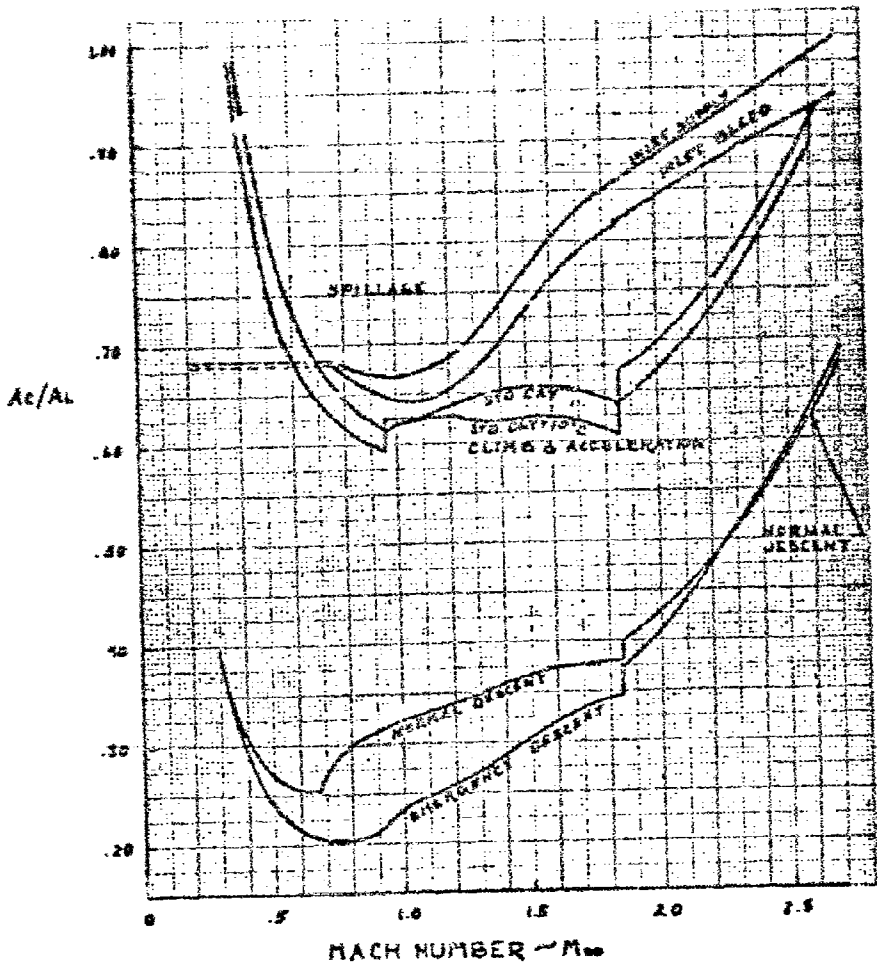

Figure 21. Inlet Supply/Engine Demand Area Ratio, Design Mission Placards

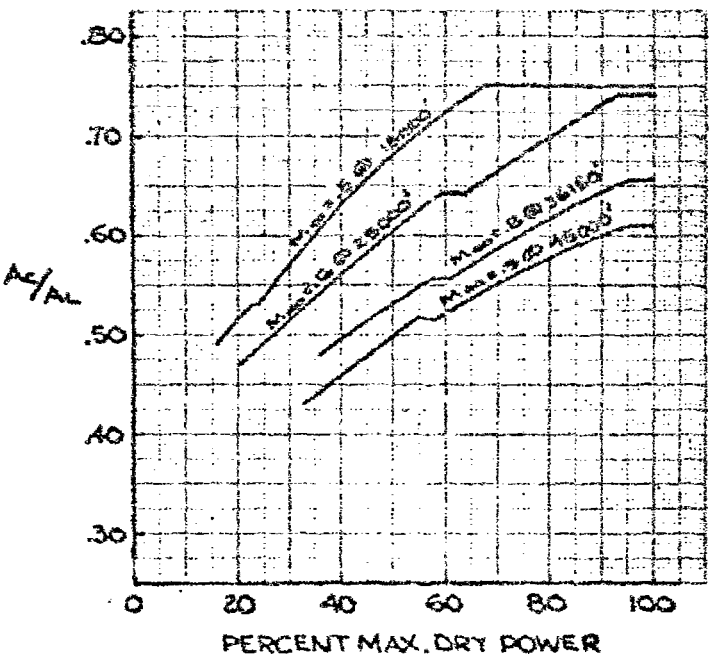

Figure 22. Part Power Engine Demand Area Ratio, Standard Day

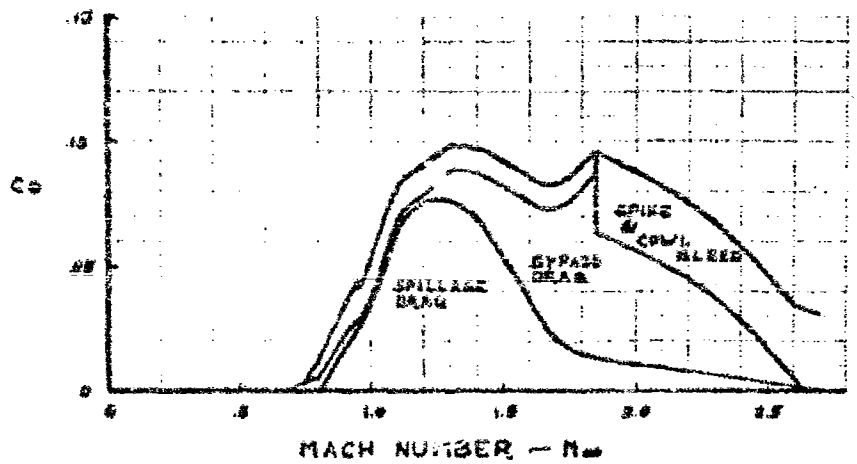

Figure 23. Inlet Installed Drag Coefficient, Climb and Acceleration, Standard Day

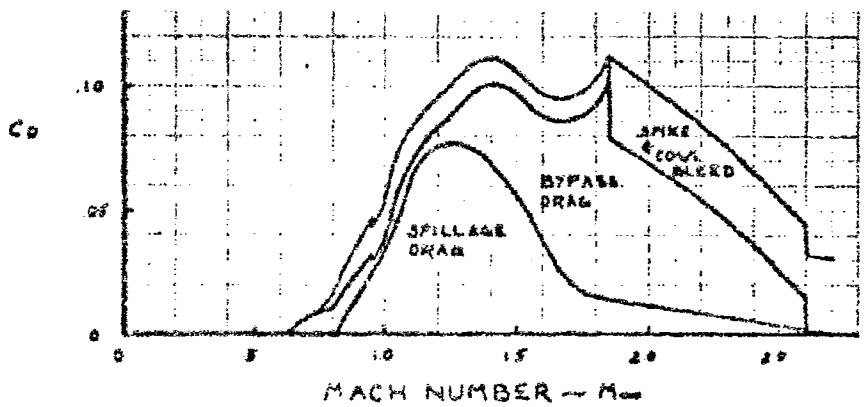

Figure 24. Inlet Installed Drag Coefficient, Climb and Acceleration, Standard Day + 10° C

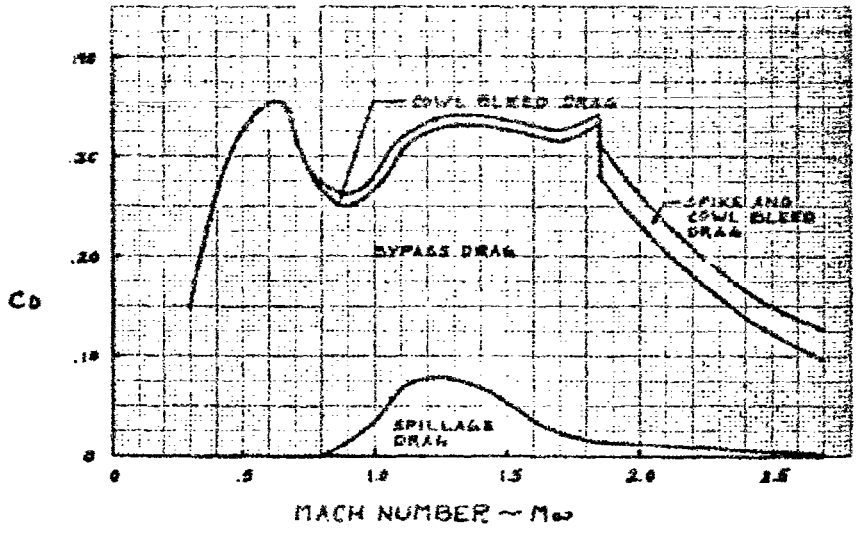

Figure 25. Inlet Installed Drag Coefficient, Normal Descent, Standard Day

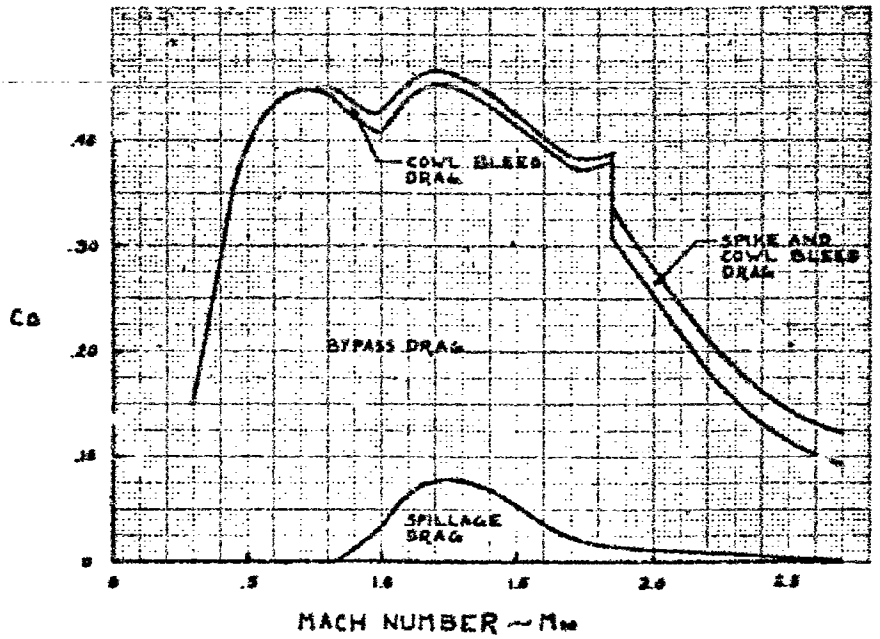

Figure 26. Inlet Installed Drag Coefficient, Emergency Descent, Standard Day

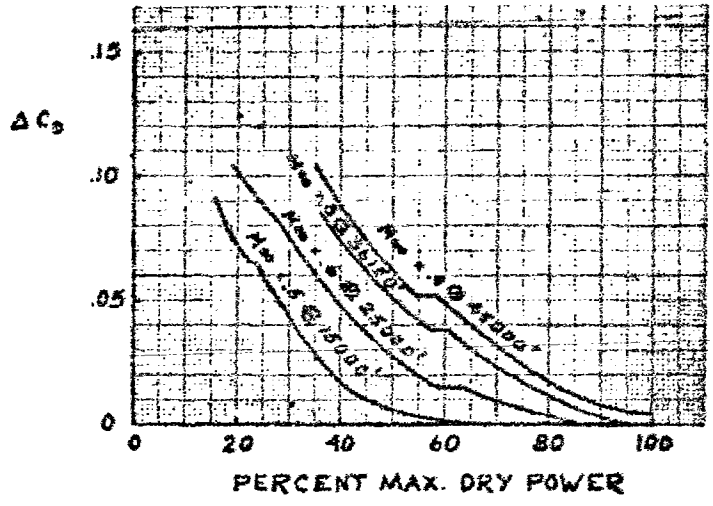

Figure 27 Part Power Excess Air Drag Coefficient – Standard Day

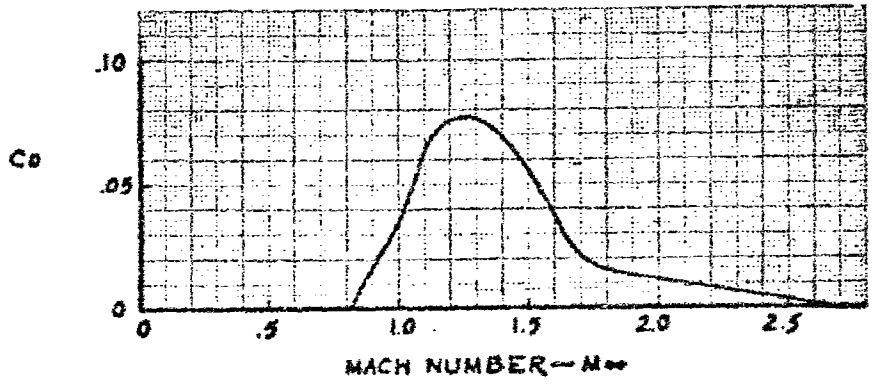

Figure 28. Inlet Spillage Drag Coefficient

coefficient for part power operation shall be the sum of the part power drag coefficient increments and the drag coefficients shown in Fig. 28.

3.1.1.1.2.4 Inlet Spillage Drag Coefficient. The inlet spillage drag coefficient is shown in Fig. 28. Below Mach 1.3, inlet spillage drag has been determined by inlet drag tests. For Mach numbers above 1.3, spillage drag was calculated by taking the difference between the theoretical additive drag and lip suction force.

3.1.1.1.2.4.1 Inlet Additive Drag Coefficient. Above Mach 1.3, the additive drag coefficient was calculated by the following equation:

$$C_{D_{Add}} = C_{D_{Conical\ Flow}} + C_{P_{Stagnation}} \left[\frac{M_c}{M_L}_{Conical\ Flow} - \frac{M_c}{M_L} \right]$$

$$\text{where } C_{P_{Stagnation}} = \frac{\left(\frac{6M_L^2}{5}\right)^{3.5} \left(\frac{6}{7M_L^2 - 1}\right) - 1}{\frac{7}{10} M_L^2}$$

The conical flow additive drag coefficient (C_D) Conical Flow and Mass Flow ratio (M_c/M_L) are are computed by the methods contained in

M.I.T. Technical Report No. 1. The difference between the theoretical conical flow mass flow ratio and the inlet operating mass flow ratio (normal shock spillage) is shown in Fig. 29. The additive drag coefficient for Mach numbers above 1.3 is shown in Fig. 30.

3.1.1.1.2.4.2 Lip Suction Force Coefficient. The lip suction force coefficient is shown in Fig. 31. The lip suction force coefficient above 1.8 was calculated by the method shown in D6-7842. The ratio of lip suction force to additive drag is shown in Fig. 32.

3.1.1.1.2.5 Inlet Boundary Layer Bleed Drag Coefficient. The cowl boundary layer bleed system shall be divided into four plenum chambers, including the vortex valve. The cowl boundary layer bleed drag shall be based on a bleed flow of 5 percent of the engine demand mass flow at supersonic cruise Mach number. This shall include 0.2 percent leakage for drag estimates. The energy level of the leakage air shall be the same as for the boundary layer bleed from the fourth cowl plenum. The centerbody boundary layer bleed drag shall be based on 2.8 percent of the engine demand mass flow at supersonic cruise. This shall include 0.3 percent leakage for drag estimates. The energy level of the centerbody leakage shall be the same as the centerbody boundary layer bleed. The boundary layer bleed drag coefficients are shown in Fig. 33. This

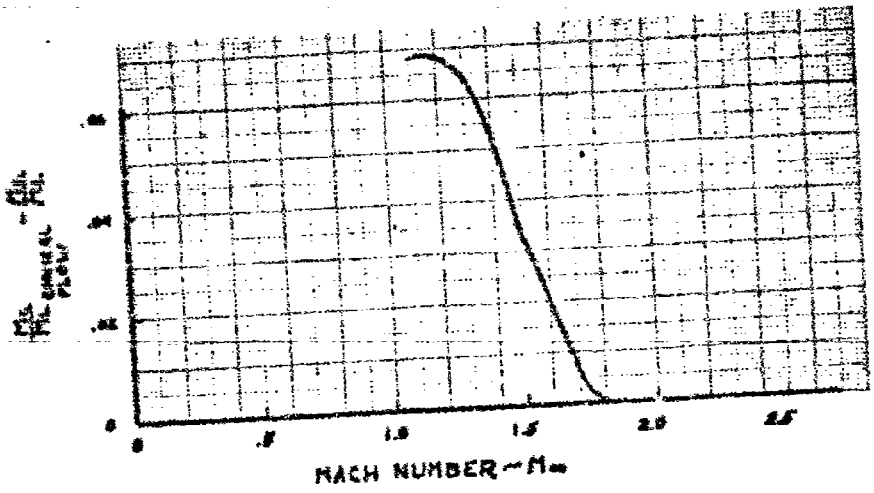

Figure 29. Normal Shock Spillage

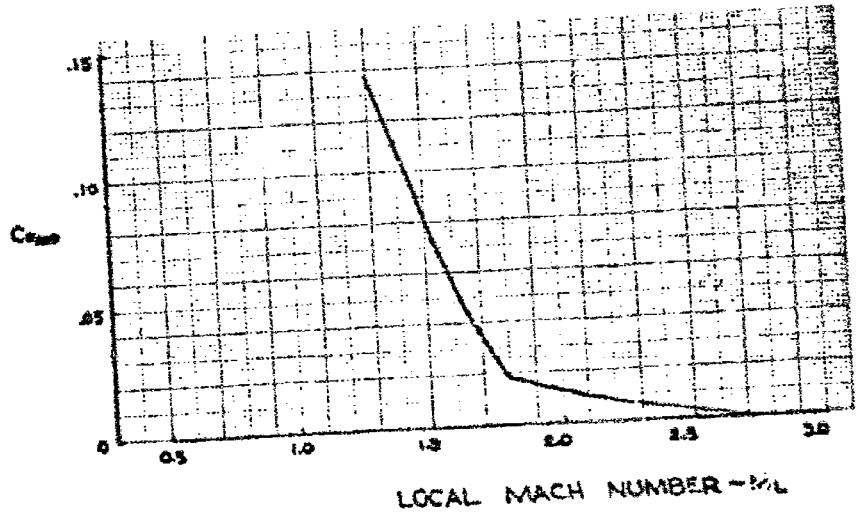

Figure 30. Additive Drag Coefficient

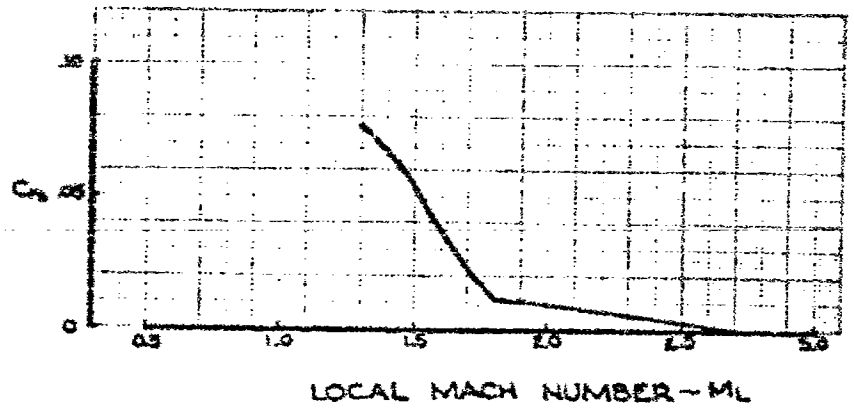

Figure 31. Lip Suction Force Coefficient

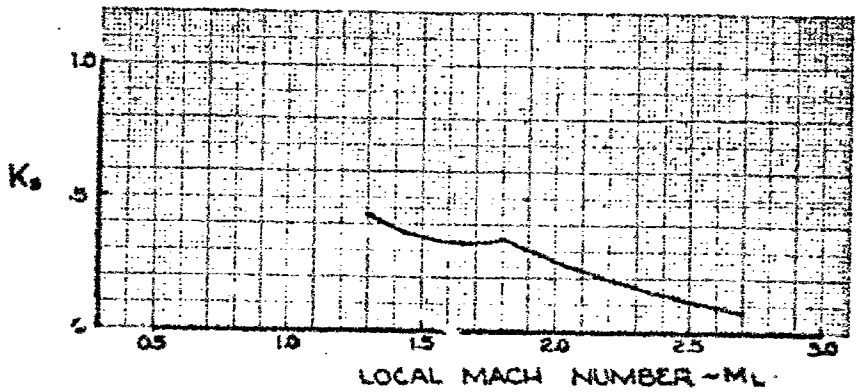

Figure 32. Lip Suction Ratio, K_s

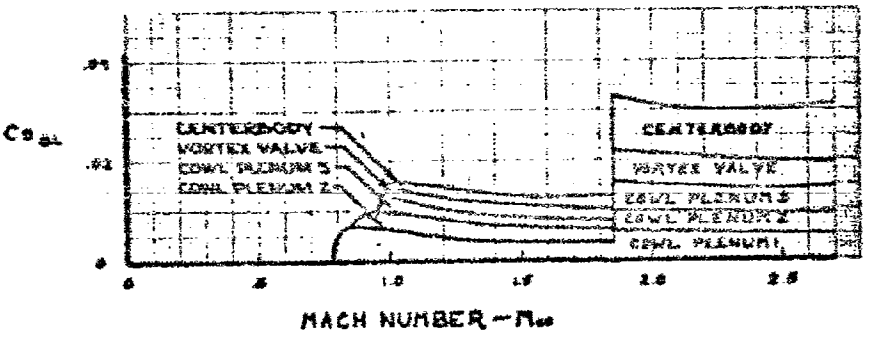

Figure 33. Inlet Bleed Drag Coefficient

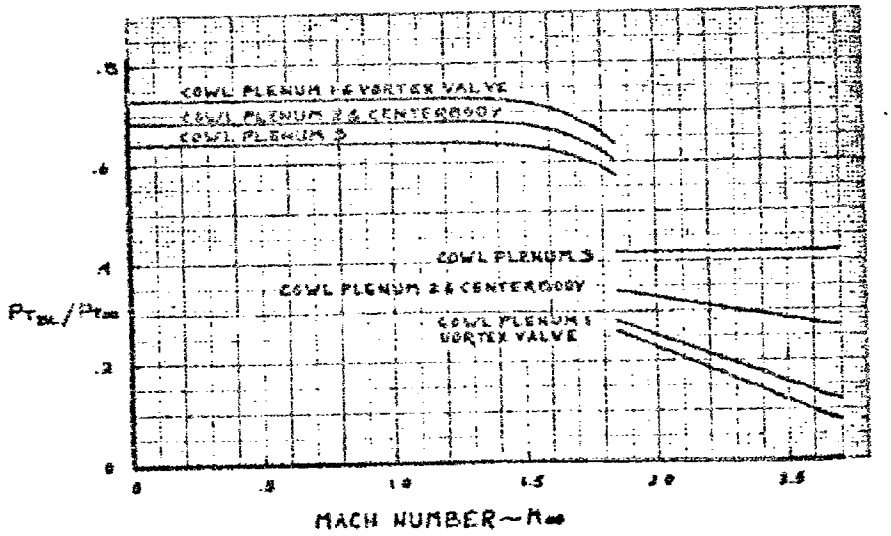

Figure 34. Inlet Bleed Total Pressure Recovery

curve is a composite, showing the total boundary layer bleed drag coefficient, and the contribution of each bleed plenum to the total boundary layer bleed drag coefficient. Air-conditioning bleed drag is not shown on this curve.

3.1.1.1.2.5.1 Boundary Layer Bleed Total Pressure Recovery. Boundary layer bleed total pressure recoveries are shown in Fig. 34 for all plenums. A 10-percent total pressure loss is included in the centerbody bleed total pressure recovery to account for ducting from the centerbody plenum to the centerbody bleed discharge.

3.1.1.1.2.5.2 Boundary Layer Bleed Mass Flow Ratio. The boundary layer bleed and air-conditioning bleed mass flow ratios at off-design Mach number are shown in Fig. 35. This curve is a composite, showing the total bleed mass flow ratio, and the contribution of each bleed component to the total bleed mass flow ratio. The bleed mass flow ratios shown in Fig. 35 are based on inlet lip frontal area.

3.1.1.1.2.5.3 Boundary Layer Bleed Exit Thrust Coefficient. The boundary layer bleed exit thrust coefficients for all bleed plenums are shown in Fig. 36. All bleed exits shall be convergent nozzles discharging at 7 deg from the inlet axis.

3.1.1.1.2.6 Bypass Drag Coefficient. Bypass drag coefficients are shown in Fig. 37. Bypass drag coefficient is the sum of bypass momentum drag coefficient and louver external wave drag.

3.1.1.1.2.6.1 Bypass Mass Flow Ratio. The bypass mass flow ratios are shown in Fig. 38. $A_{L_{BY}}$ is the stream tube area of the bypass flow based on local air density and velocity upstream of the inlet.

3.1.1.1.2.6.2 Louver Wave Drag Coefficient. The estimated external louver wave drags are shown in Fig. 39. The louver external pressure is based on two-dimensional oblique shock relationships (Ref. N.A.C.A. Report No. 1135) with finite aspect ratio pressure relief (Ref. McGraw-Hill, Engineering Supersonic Aerodynamics) when an oblique shock can be sustained ahead of the first louver. For conditions when a normal shock stands ahead of the first louver, the average louver external pressure is determined by using the methods shown in N.A.C.A. Report No.'s 1253 and 1054.

3.1.1.1.2.6.2.1 Louver Setting Angle. The average louver setting angle relative to the cowl external surface is calculated from the following equation:

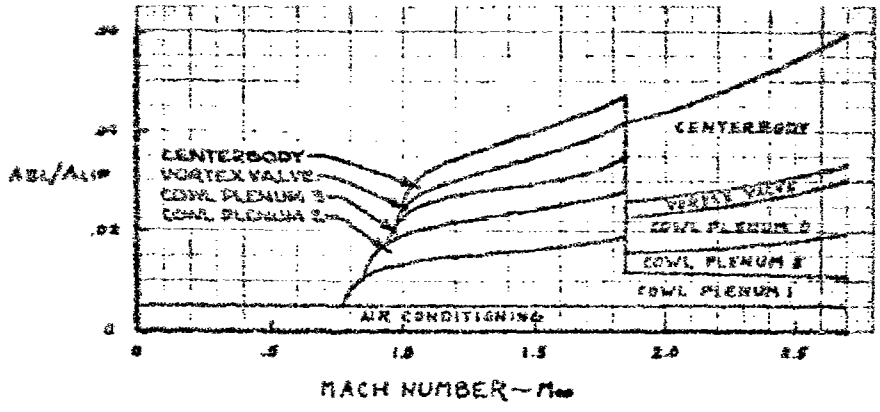

Figure 35. Inlet Bleed Mass Flow Ratio

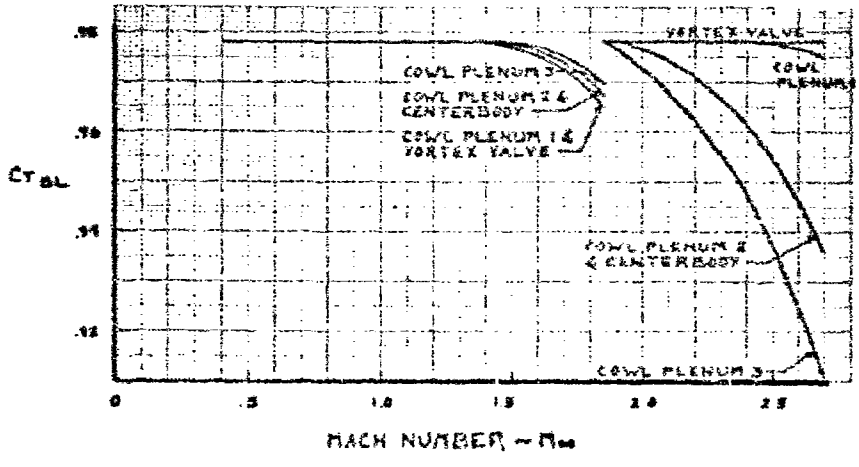

Figure 36. Inlet Bleed Exit Thrust Coefficient

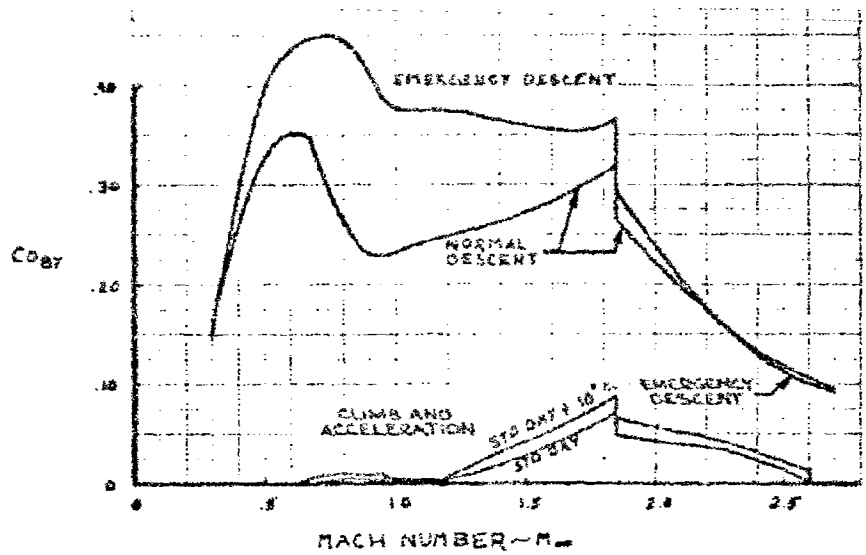

Figure 37. Bypass Drag Coefficient

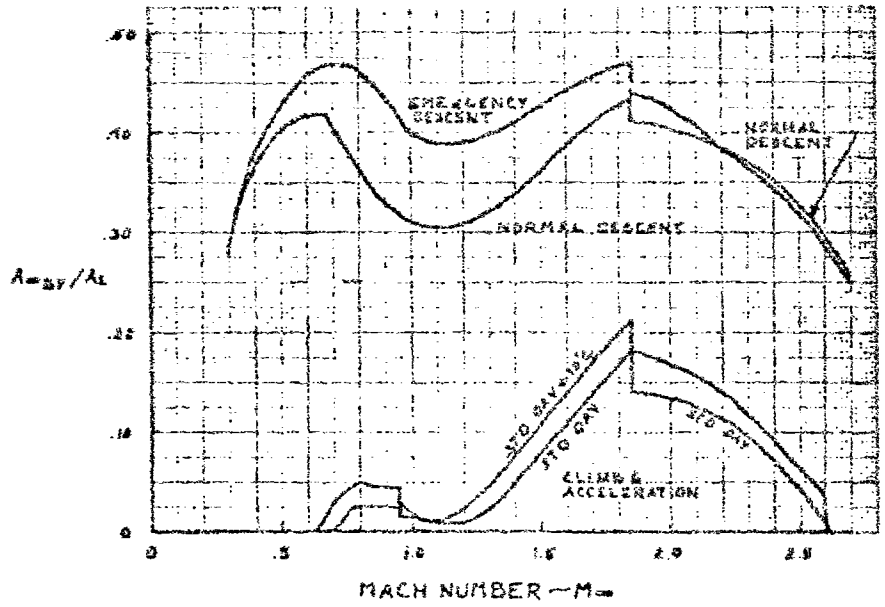

Figure 38 Bypass Area Ratio

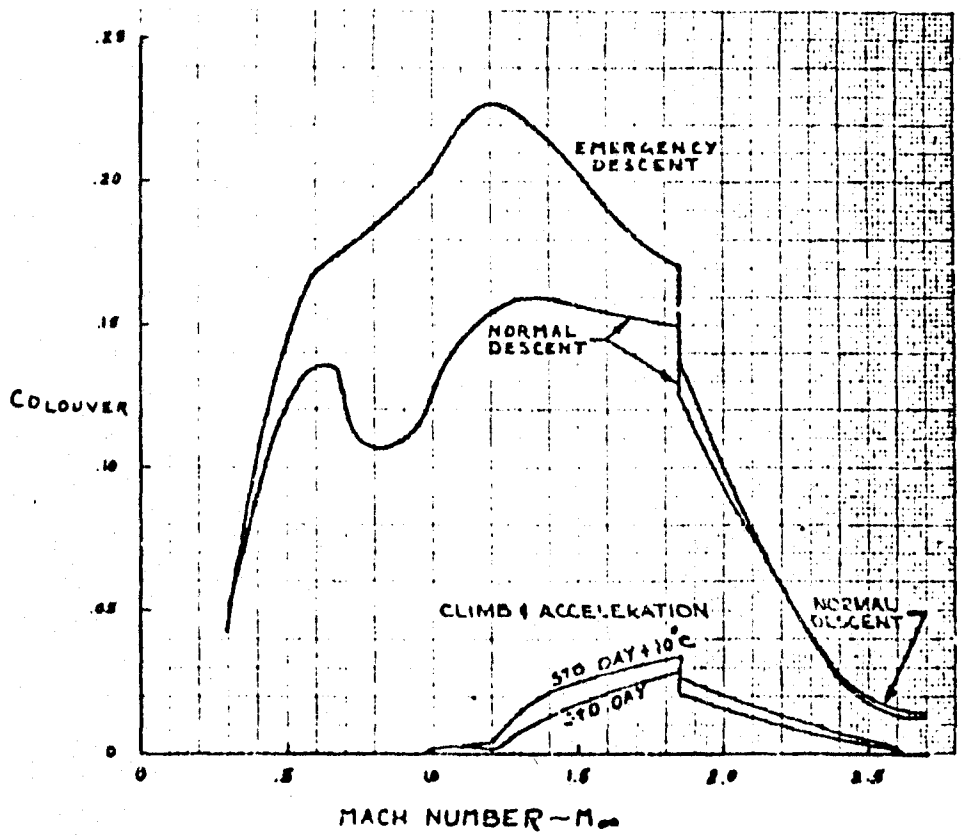

Figure 39. Louver Wave Drag Coefficient

$$\text{SIZE } \bar{S}_{Louver} = \frac{A_{L_{BY}} \left(\frac{A}{A^*}\right)_{DIS}}{\left(\frac{A}{A^*}\right)_{Local} C_{DIS} \left(\frac{P_{T_{BY}}}{P_{T_\infty}}\right) S_{Louver}}$$

where $A_{L_{BY}}$ is defined in Par. 3.1.1.1.2.6.1

$\frac{P_{T_{BY}}}{P_{T_\infty}}$ is defined in Par. 3.1.1.1.2.6.3.3

S_{Louver} is (1.02) (A_{Lip})

C_{DIS} is 1.05

$$\left(\frac{A}{A^*}\right)_{Local} = \frac{1}{M_L}\left(\frac{1 + .2M_L^2}{1.2}\right)^3$$

$$\left(\frac{A}{A^*}\right)_{DIS} = \frac{1}{M_{DIS}}\left(\frac{1 + .2M_{DIS}^2}{1.2}\right)^3$$

M_{DIS} is the discharge Mach number at the louver exit.

3.1.1.1.2.6.3 Bypass Momentum Drag Coefficient. Bypass momentum drag coefficients are shown in Fig. 40. The bypass momentum drag coefficient was calculated from the equation:

$$C_{D_{MV}} = 2\left[1 - C_V \cos\theta_{DIS}\left(\frac{V_{IDEAL}}{V_{LOCAL}}\right)\right]\left(\frac{A_{L_{BY}}}{A_L}\right)\left(\frac{q_L}{q_\infty}\right)$$

Where: V_{ideal} is the ideally expanded exit velocity (the nozzle back pressure is assumed to be P_L)

V_{local} is the local air velocity just upstream of the inlet

q_L is the local dynamic pressure $\left(\frac{\gamma}{2} P_L M_L^2\right)$

q_∞ is the freestream dynamic pressure $\left(\frac{\gamma}{2} P_\infty M_\infty^2\right)$

γ is 1.4

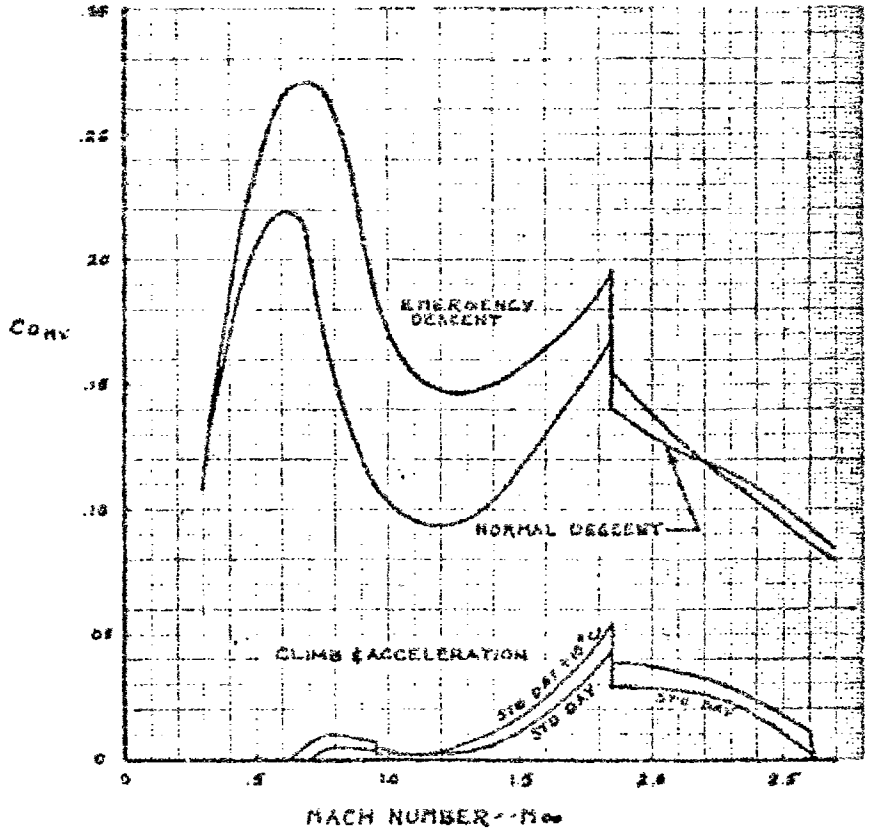

Figure 40. Bypass Momentum Drag Coefficient

C_v is defined in Par. 3.1.1.1.2.6.3.1.

θ_{DIS} is defined in Par. 3.1.1.1.2.6.3.2.

$A_{L_{BY}}$ is defined in Par. 3.1.1.1.2.6.1.

3.1.1.1.2.6.3.1 Bypass Exit Velocity Coefficient. The bypass exit velocity, C_v, is shown in Fig. 41. C_v includes under expansion losses, nozzle internal friction losses and velocity profile losses due to corner flow.

3.1.1.1.2.6.3.2 Bypass Exit Discharge Angle. The bypass exit discharge angles are shown in Fig. 42.

3.1.1.1.2.6.3.3 Bypass System Total Pressure Recovery. The bypass system estimated total pressure recovery is shown in Fig. 43. The bypass total pressure shall be 5 percent less than the total pressure behind the inlet normal shock during started inlet operation. During unstarted inlet operation the bypass total pressure shall be 6 percent less than the inlet throat total pressure.

3.1.1.1.3 Nozzle Performance Characteristics. Based on available data, the nozzle internal thrust coefficient and the nozzle external boattail drag are shown in Figs. 44, 45 and 46.

3.1.1.1.3.1 Nozzle Internal Thrust Coefficient. The nozzle internal thrust coefficient used for engine installed performance calculation is shown in Fig. 45. The coefficients are based on the secondary air flow schedule shown in Fig. 16.

3.1.1.1.3.2 Nozzle Boattail Drag. The nozzle boattail drag for all flight operating conditions shall be calculated by analytical methods which are established by aerodynamic theory (Ref. D6-7842) and by laboratory tests (Ref. D6-2559). The nozzle boattail drag coefficients are shown in Fig. 46. The nozzle boattail angle and nozzle pressure ratio used for calculating boattail drag are shown in Figs. 44 and 47, respectively.

3.1.2 Operability. Not applicable.

3.2 Subsystem Definition.

3.2.1 Interface Requirements. The propulsion subsystem performance interfaces are defined as analytical or functional interfaces. The subsystems defined below either take energy from, or add energy to, the propulsion performance subsystem.

3.2.1.1 Schematic Arrangement. The detailed interface schematic diagram for the B-2707 (GE) propulsion performance and adjoining subsystems is shown in Fig. 48.

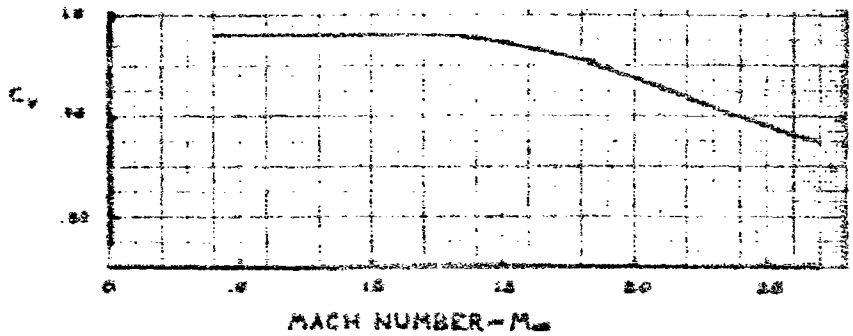

Figure 41. Bypass Exit Velocity Coefficient

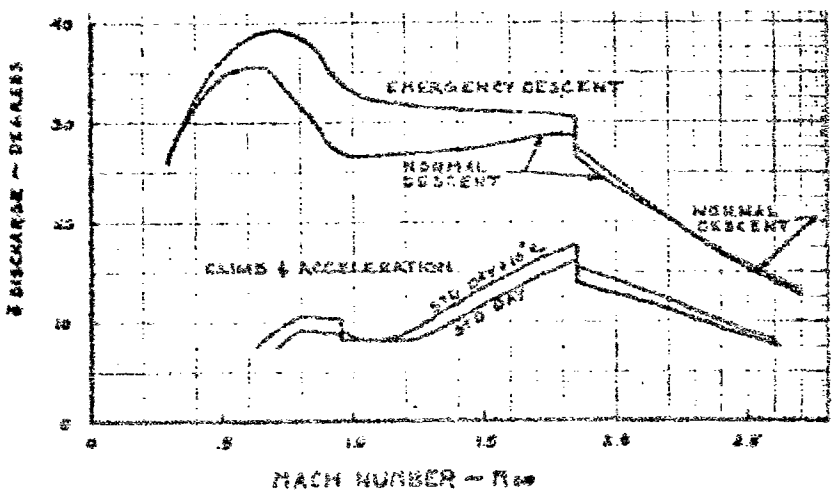

Figure 42. Bypass Exit Discharge Angle

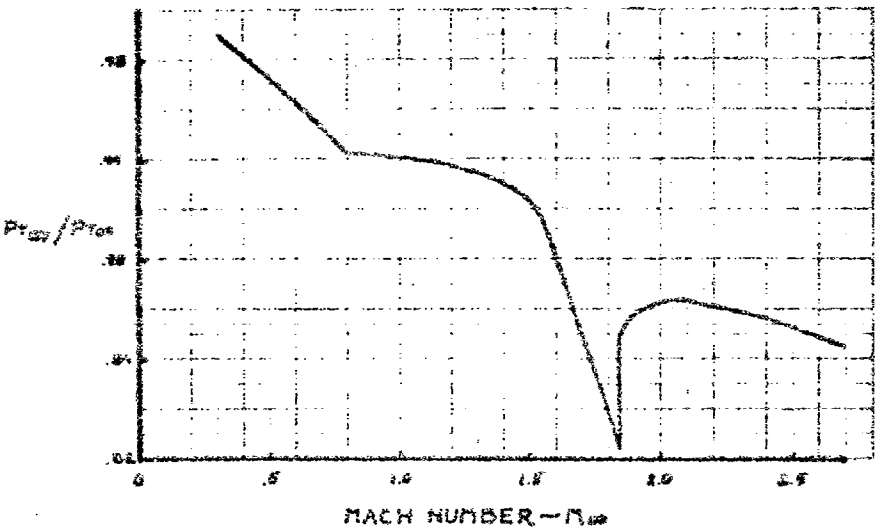

Figure 43. Bypass Total Pressure Recovery

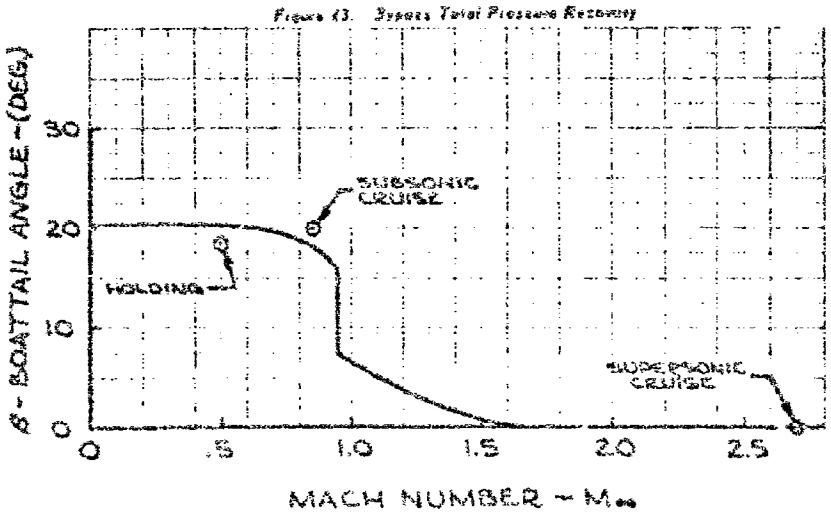

Figure 44. Nozzle Boattail Angle

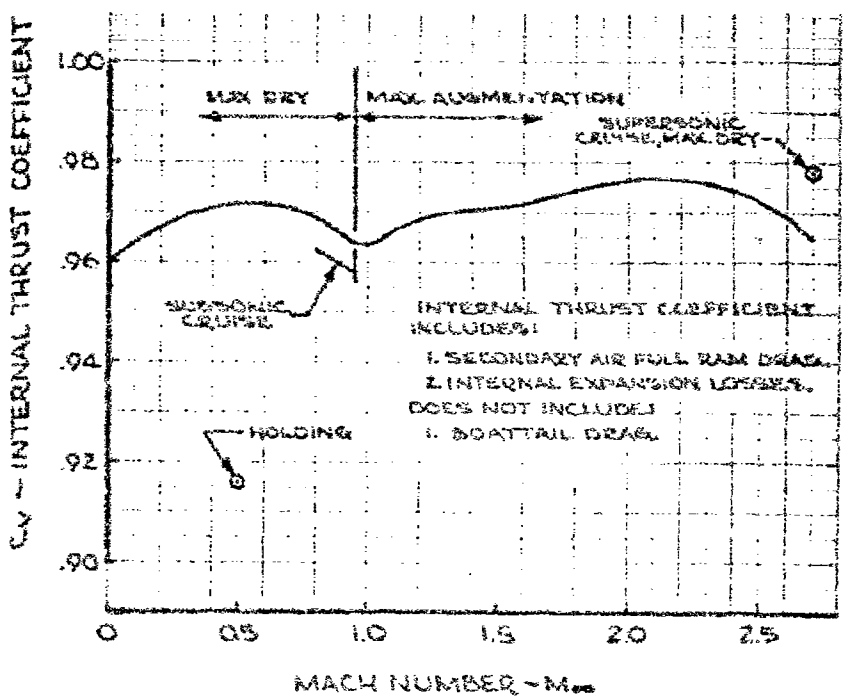

Figure 65 Nozzle Internal Thrust Coefficient

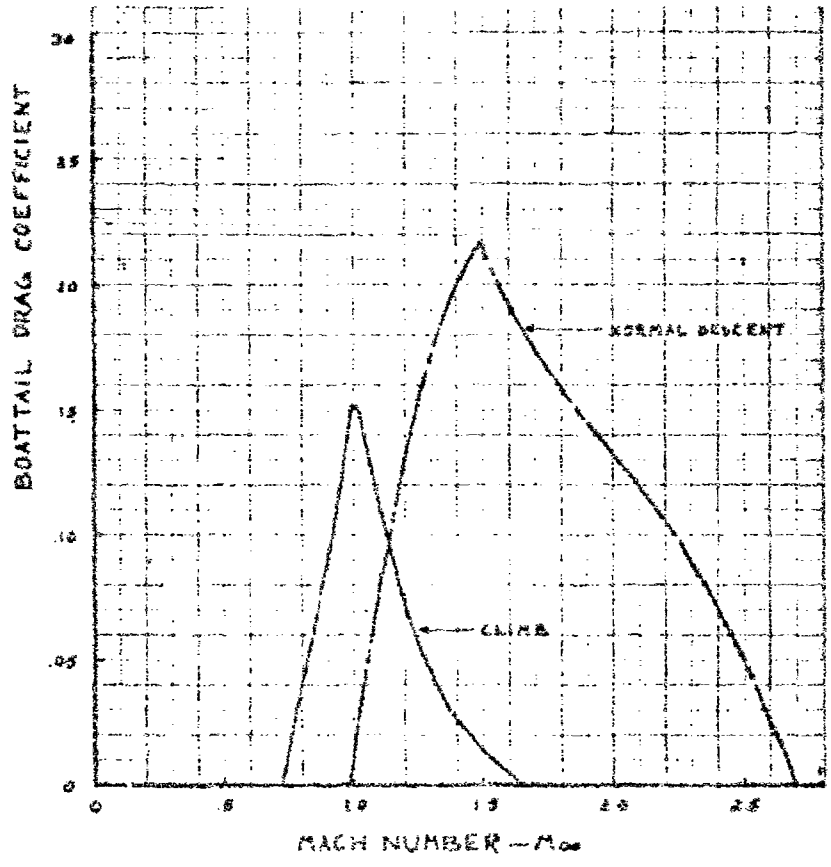

Figure 28 Nozzle Boattail Drag Coefficient

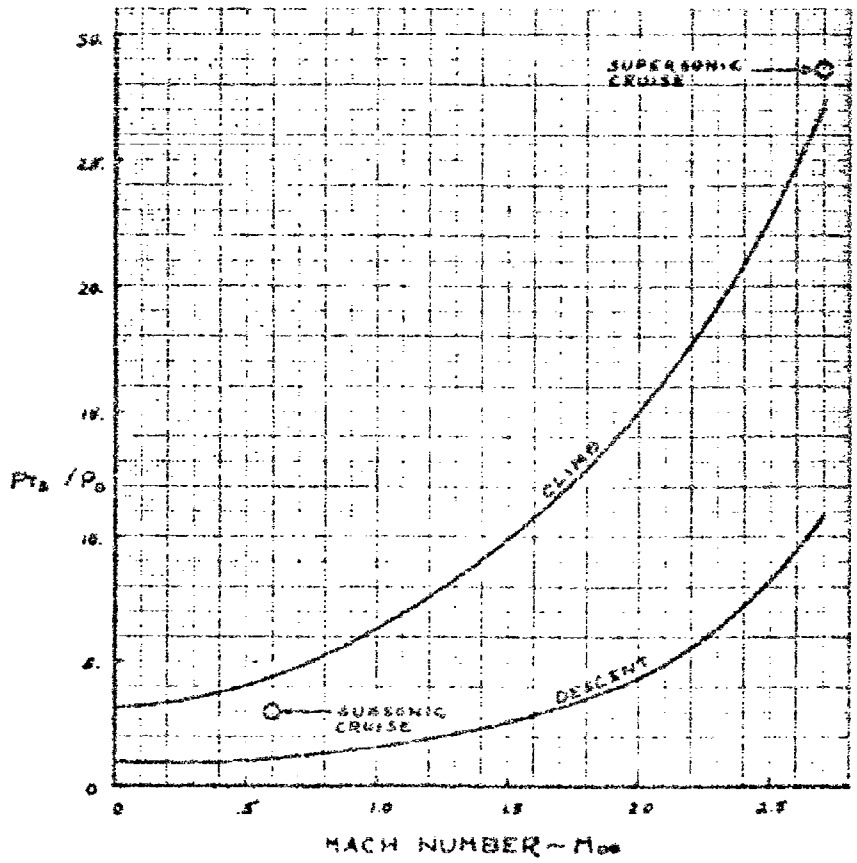

Figure 47 Nozzle Pressure Ratio

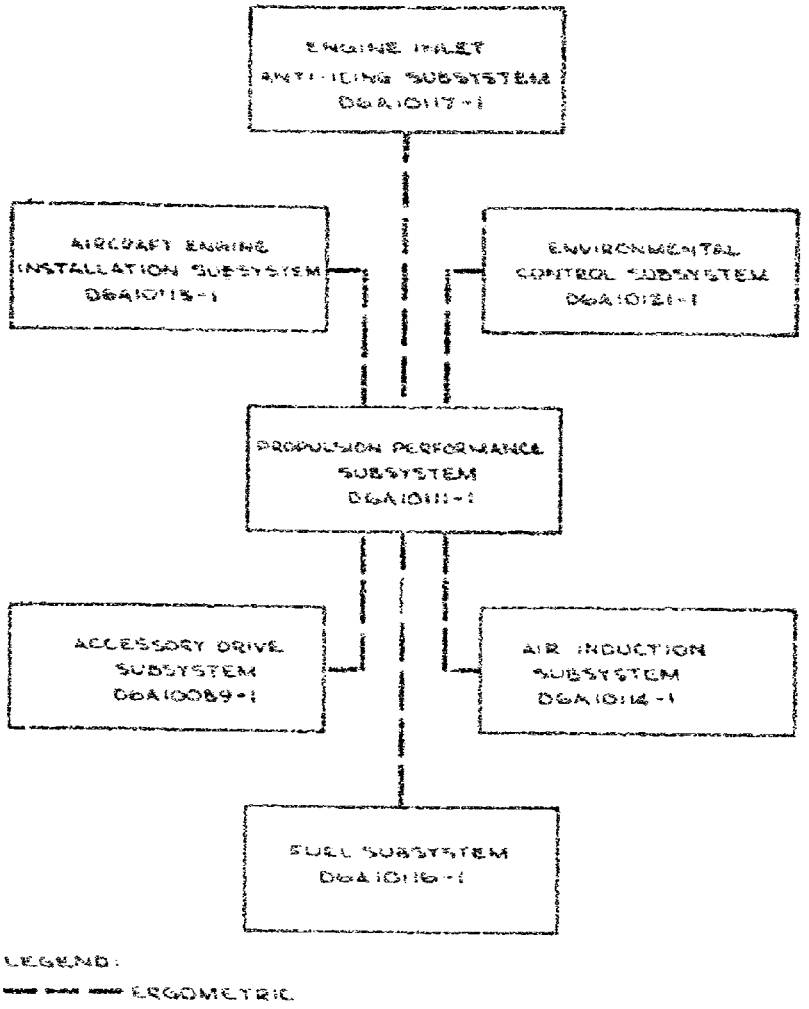

Figure 18 Propulsion Subsystem Performance Interface Diagram

3.2.1.2 Detailed Interface Definition. Not applicable.

3.3 Design and Construction. Not applicable.

4. QUALITY ASSURANCE PROVISIONS

4.1 Engineering Test and Evaluation.

4.1.1 Engine Test and Evaluation. Full scale engine tests, which are a part of D6A10198-1 Engine/Airframe Technical Agreement, conducted in a calibration stand and simulated altitude facility shall be used as a source of data to determine the effects of inlet recovery, inlet distortion, power extractions, and secondary airflow of Par. 3.1.1.1.

4.1.2 Inlet Performance. Model inlet tests shall be conducted to establish the spillage, bypass, and boundary layer bleed drag performance for selected operating conditions. The results of these tests shall be applicable to full scale inlet drag calculations and verify the performance calculations of Par. 3.1.1.1.

4.1.3 Nozzle Development. Model tests, which are a part of D6A10195-1 Engine/Airframe Technical Agreement, shall be conducted at selected operating conditions to establish nozzle performance characteristics. Data from full scale tests being performed for other purposes shall also be used.

4.2 Preliminary Qualification Testing. Not applicable.

4.3 Formal Qualification Tests. Not applicable.

4.4 Reliability Test and Analysis. Not applicable.

4.5 Performance Quality Verification Cross Reference Index. Not applicable.

5. PREPARATION FOR DELIVERY. Not applicable.

6. NOTES. Not applicable.

SUPPLEMENT I

PROTOTYPE SPECIFICATION

1. SCOPE

This supplement describes the performance requirements for the prototype propulsion subsystem.

The performance requirements presented in this supplement shall be the minimum acceptable to demonstrate the feasibility of the prototype engine.

Section and paragraph numbers appearing in this supplement are identical to those which appear in the basic specification. When no entry is made in this supplement for a specific entry in the basic Propulsion Performance Subsystem Specification, the entire paragraph shall also be applicable to the prototype engine. Portions of sections or paragraphs which are not applicable to the prototype engine are replaced, revised or deleted. Deletion of a major section or paragraph also deletes all subsections or subparagraphs thereunder without individual notation of deletion for each subsection or subparagraph.

2. APPLICABLE DOCUMENTS. No change.

3. REQUIREMENTS. Change.

3.1.1.1 Engine Performance Characteristics. Change to read:

The performance characteristics of the prototype engine shall be as shown in Table I and in Figs. 1 through 13, with the following exceptions:

a. The maximum net engine thrust at maximum augmented and maximum dry power settings shall not be less than 95 percent of the production engine ratings shown in Table I of Par. 3.1.1.1.

b. The fuel flow for all thrust values shown in Table I, of Par. 3.1.1.1, shall not be more than 105 percent of the fuel flow at the same thrust value.

4. QUALITY ASSURANCE PROVISIONS. No change.

5. PREPARATION FOR DELIVERY. No change.

6. NOTES. No change.

SUPPLEMENT II

FINAL ENGINE PERFORMANCE

1. SCOPE

This supplement specifies the General Electric Company production engine performance of August 8, 1966. Not all the data in the preceding sections, which were based on earlier information, has been revised.

The data in this supplement shall be derated for the prototype airplane in accordance with the procedure specified in Supplement I.

The following paragraphs show the effect of the final engine performance data on the performance shown.

2.3 Other Publications. Change to read:

General Electric Co. August 1966	Engine Performance Deck GE4/J5P Engine R66FPD 228 E
General Electric Co. August 1966	Exhaust Nozzle Performance Deck GE4/J5P Nozzle R66FPD 228 N
General Electric Co. 6 September 1966	Engine Model Specification No. E-2056

3.1.1.1 Engine Performance Characteristics. Change.

Replace Table I and Figure 5

3.1.1.1.2.1 Engine Demand Change.

Replace Figure 20

3.1.1.1.2.2 Inlet Supply - Engine Demand Change.

Replace Figure 21

3.1.1.1.2.3.2 Climb and Acceleration, Standard Day + 10°C. Change

Replace Figure 24

3.1.1.1.2.6 Bypass Drag Coefficient. Change.

Figure 37. Replace that part of the composite that defines the Standard Day + 10°C drag increment.

3.1.1.1.2.6.1 Bypass Mass Flow Ratio. Change

Figure 38. Replace that part of the composite that defines the Standard Day + 10°C bypass mass flow ratio.

3.1.1.1.2.6.2 Louver Wave Drag Coefficient. Change

Figure 39. Replace that part of the composite that defines the Standard Day + 10°C increment.

3.1.1.1.2.6.3 Bypass Momentum Drag Coefficient. Change

Figure 40. Replace that part of the composite that defines the Standard Day + 10°C drag increment.

3.1.1.1.2.6.3.2 Bypass Exit Discharge Angle. Change

Figure 42. Replace that part of the composite that defines the Standard Day + 10°C discharge angle.

TABLE I ENGINE PERFORMANCE

Power Setting	Pressure Altitude (Ft)	Ambient Temp.	Mach Number	Inlet Ram Recovery	Net Thrust (lb)	S.F.C. lb/hr/lb	Airflow lb/sec	Power Extraction H.P.	Secondary Air lb/sec	Bleed Air lb/sec
Maximum Augmented	0	Std.	0	0.96	59,600	1.73	596.	450	72	0
Maximum Non-Augmented	0	Std.	0	0.96	46,400	1.07	595	450	30	6
Maximum Augmented	0	Std. +40°F	0	0.96	51,400	1.80	534	450	73	0
Maximum Non-Augmented	0	Std. +40°F	0	0.96	40,100	1.08	534	450	32	0
Maximum Augmented	45,000	Std	1.2	0.966	22,300	1.73	221	450	13	0
Maximum Augmented	45,000	Std. +10°C	1.2	0.966	21,300	1.77	217	450	13	0
Partial Augmented	65,000	Std.	2.7	0.91	15,000	1.51	391	450	8.8	0
Partial Augmented	65,000	Std. +10°C	2.61	0.914	15,000	1.63	253	450	24	0
Partial Non-Augmented	36,150	Std.	0.85	0.99	5,000	1.11	163	450	13	0
Partial Non-Augmented	15,000	Std.	0.50	0.988	5,000	1.50	235	450	17	0
Idle	0	Std.	0	0.97	1,530	*	139	300	7.0	2.1
Idle	50,000	Std.	1.2	0.966	-760	**	87	500	5.7	1.85
Maximum Reverse	0	Std.	0	0.96	23,000	***	595	550	-	2.1

* W_f = 4,500 lb/hr

** W_f = 1,440 lb/hr

*** W_f = 49,600 lb/hr

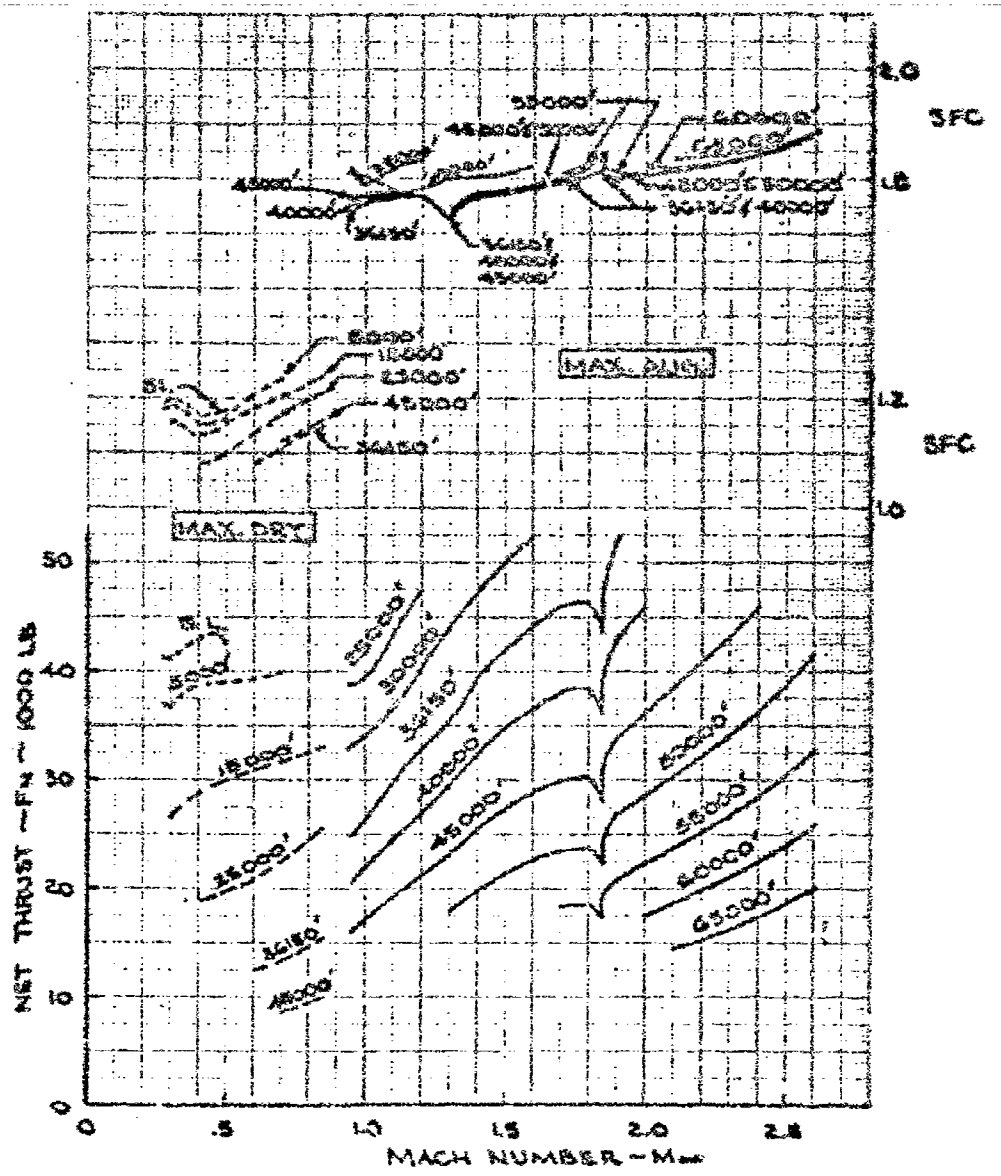

Figure 5 N.S. Climb and Acceleration Net Thrust and SFC, Standard Day + 18°C

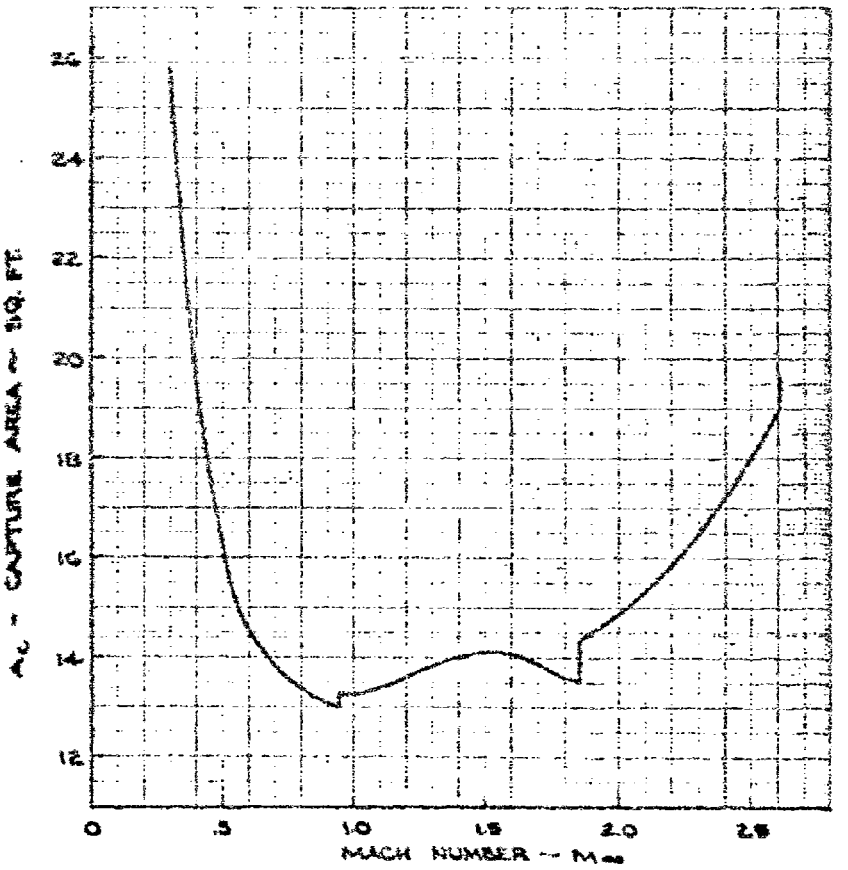

Figure 5 II 20. Freestream Capture Area, Climb and Acceleration, Standard Day + 10°C

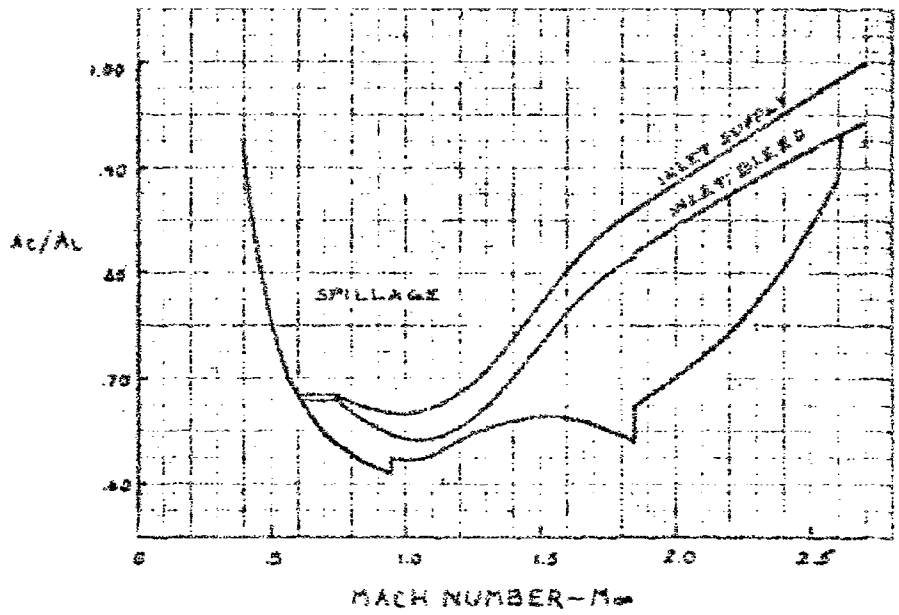

Figure 3 II 21. Inlet Supply/Engine Demand Area Ratio, Climb and Acceleration, Standard Day + 10°C

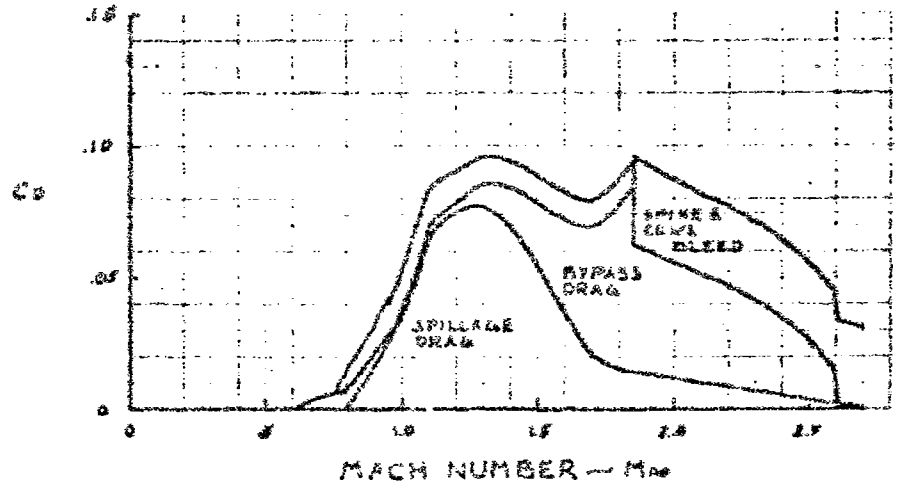

Figure 5 II 36. Inlet Installed Drag Coefficient, Climb and Acceleration, Standard Day + 10°C

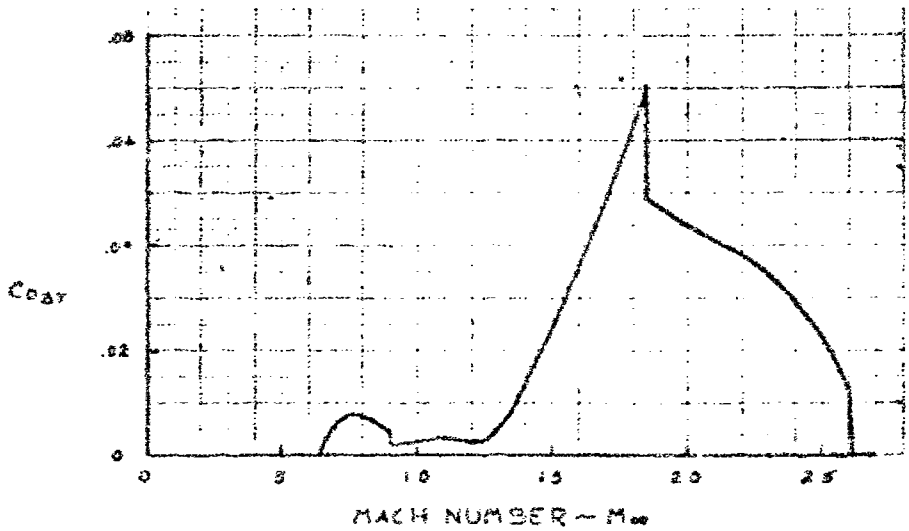

Figure 5 II 37. Bypass Drag Coefficient, Climb and Acceleration, Standard Day + 10°C

UNCLASSIFIED

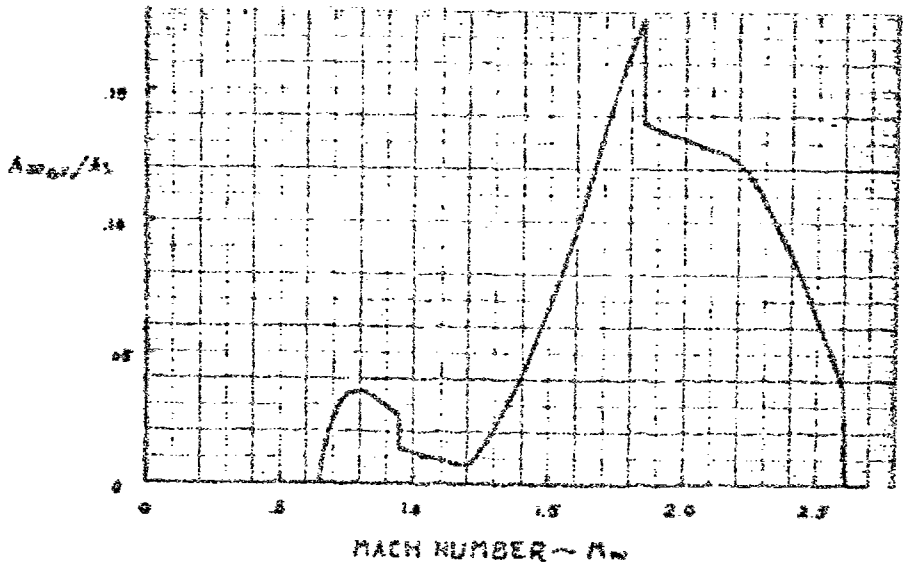

Figure 5.11.38. Bypass Area Ratio, Climb and Acceleration, Standard Day + 10°C

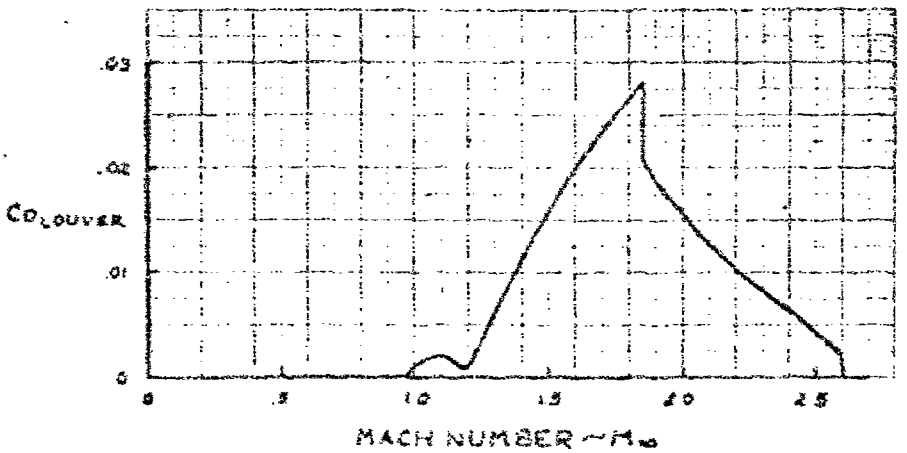

Figure 5.11.39. Louver Wave Drag Coefficient, Climb and Acceleration, Standard Day + 10°C

UNCLASSIFIED

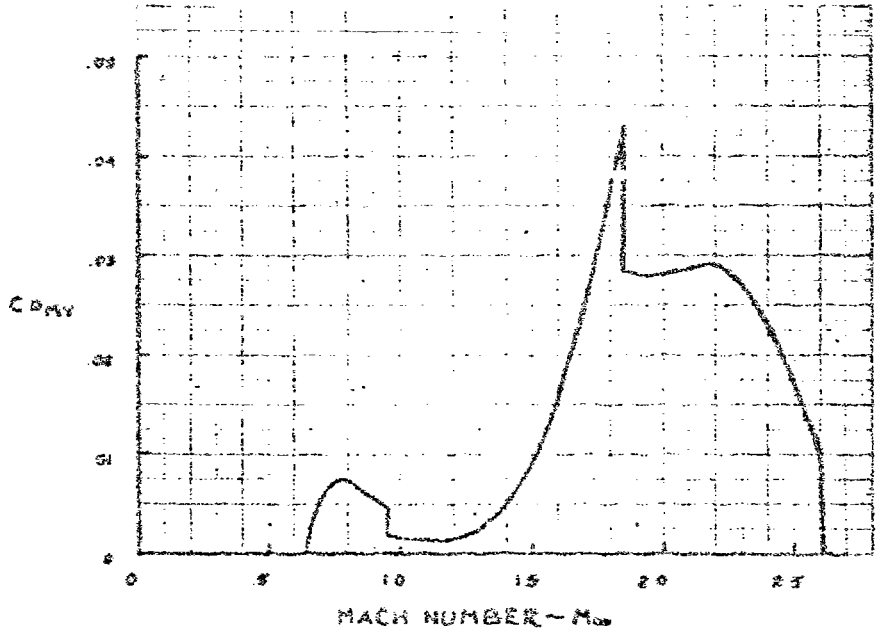

Figure 5.8.40. Bypass Momentum Drag Coefficient, Climb and Acceleration, Standard Day + 15°C

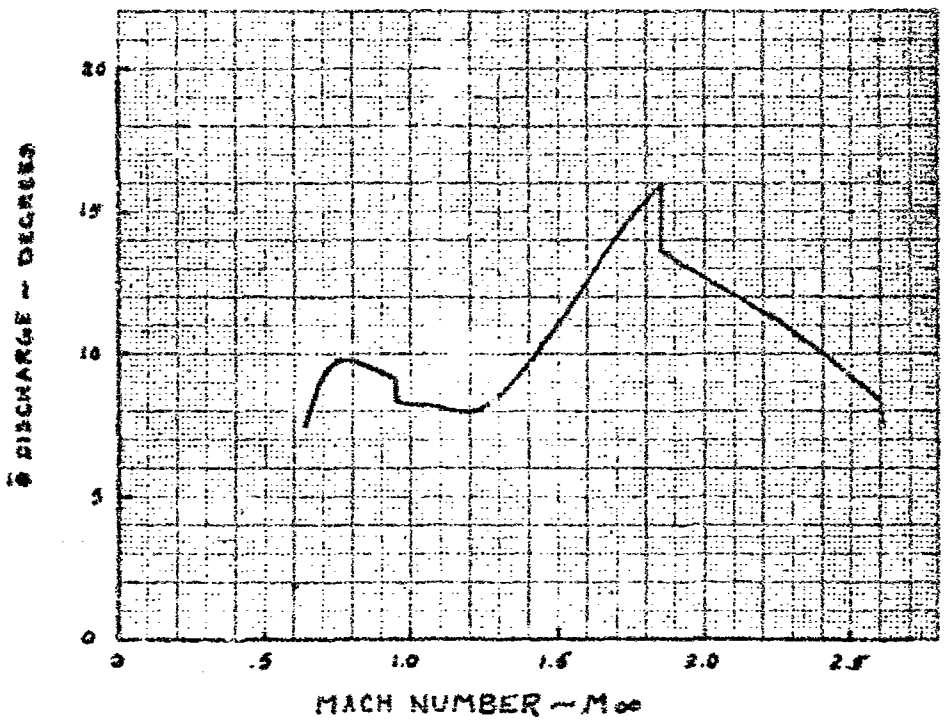

Figure 5 II 42. Bypass Exit Discharge Angle, Climb and Acceleration, Standard Day + 18°C