

ESD TR-67-290
File Copy

ESD RECORD COPY

ESD-TR-67-290

RETURN TO
SCIENTIFIC & TECHNICAL INFORMATION DIVISION

ESVHA



A COMPUTER SIMULATION EXPERIMENT
OF SUPERVISORY CONTROL OF
REMOTE MANIPULATION

ESD ACCESSION LIST
ESTI Call No. 63957
Copy No. 1 of 2 cys.

April 1967

Simon G. McCandlish

DECISION SCIENCES LABORATORY
ELECTRONIC SYSTEMS DIVISION
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
L. G. Hanscom Field, Bedford, Massachusetts

Project 7682
Task: 768204

(Prepared under Contract AF 19(628)-3317 by the Engineering
Projects Laboratory, Department of Mechanical Engineering,
Massachusetts Institute of Technology.)

AD0655375

When U. S. Government drawings, specifications or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Do not return this copy. Retain or destroy.

DDC AVAILABILITY NOTICES

Qualified requesters may obtain copies from Defense Documentation Center (DDC). Orders will be expedited if placed through the librarian or other person designated to request documents from DDC.

Copies available at Office of Technical Services, Department of Commerce.

ESD-TR-67-290

DSR 79960-5

A COMPUTER SIMULATION EXPERIMENT OF SUPERVISORY
CONTROL OF REMOTE MANIPULATION


April 1967

Simon G. McCandlish

Decision Sciences Laboratory
Electronic Systems Division
Air Force Systems Command
U.S. Air Force
L. G. Hanscom Field, Bedford, Massachusetts

Project 7682
Task 768204

(Prepared under Contract No. AF 19(628) 3317 by the Engineering
Projects Laboratory, Department of Mechanical Engineering,
Massachusetts Institute of Technology.)

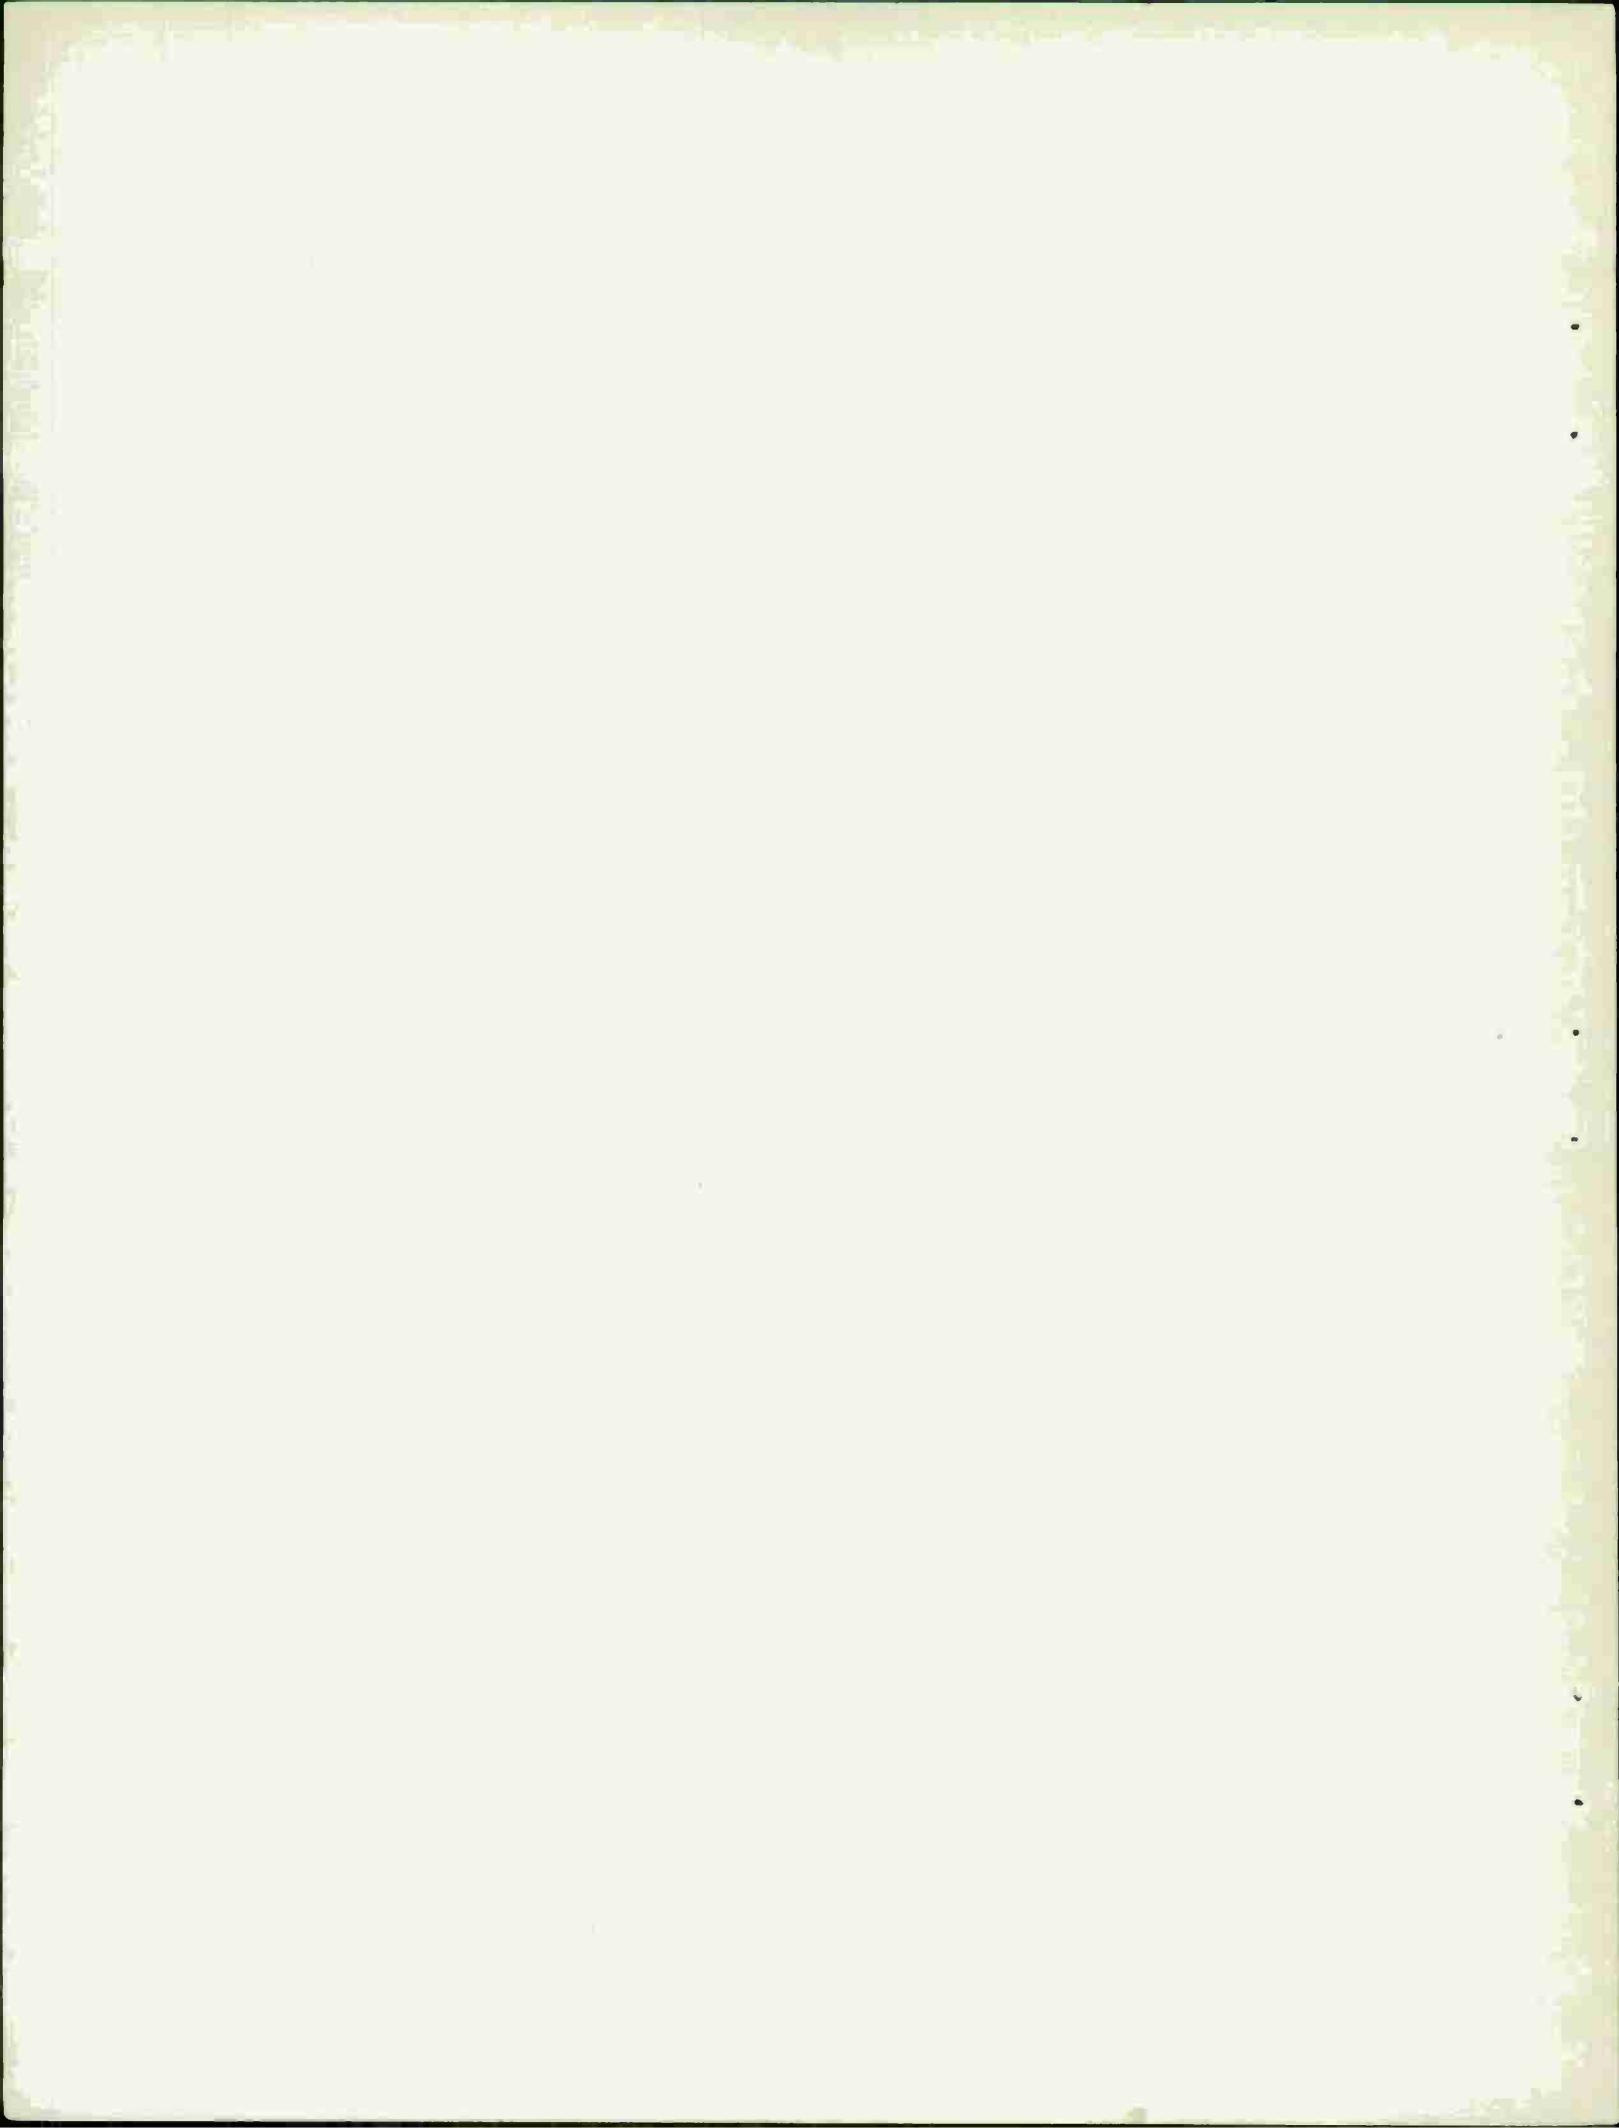


FOREWORD

One of the research goals of the Decision Sciences Laboratory is the development of design principles for automated training subsystems which could be built into future Information Systems. Such subsystems would provide Information Systems with the capability of automatically training their own operators and users. The need for such on-the-job training capability has already become apparent. To be able to design such a capability requires first the solution of many conceptual and experimental problems.

Task 768204, Automated Training for Information Systems, under Project 7682, Man-Computer Information Processing, was established to formulate and answer some of these questions. This report is one in a series supporting Task 768204. Dr. Sylvia R. Mayer served as Air Force Task Scientist and Contract Monitor.

This technical report has been reviewed and is approved.

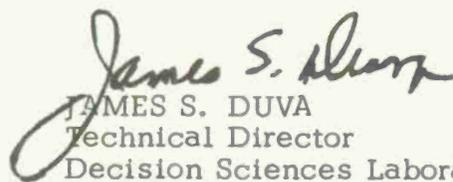
JAMES S. DUVA
Technical Director
Decision Sciences Laboratory


CHARLES A. LAUSTRUP
Colonel, USAF
Director, Decision Sciences
Laboratory

ABSTRACT

A COMPUTER SIMULATION EXPERIMENT OF SUPERVISORY CONTROL OF REMOTE MANIPULATION

by

SIMON G. MC CANDLISH

The long term aim of this work is the modeling of the process by which the human commands and controls a real-time information system containing automatic subroutines which may be used to accomplish portions of the task. Remote manipulation is believed to have all the typical attributes of such a system yet be simple enough to be amenable to laboratory investigation.

The replacement of men by remotely operated manipulators is desirable in hazardous task environments such as undersea or interplanetary space. The problems associated with remote operation show that there may be advantages in substituting supervisory control for direct continuous control by the human. This supervisory control requires some low-level intelligence at the remote manipulator.

This report describes a computer simulation of a remote manipulation task and rate-controlled manipulator; into the latter was built some low-level automatic decision making ability which could be used at the operator's discretion to augment his direct continuous control.

Under experimental investigation were the effect of transmission delay, dynamic lag and intermittent vision on

human manipulative ability. The results of these support earlier work which suggested that delay would not make remote manipulation impossible. They also showed that intermittent visual feedback, and the absence of rate information in the display presented to the operator do not seem to impair the operator's performance. These results suggest that a small-capacity visual feedback channel may be sufficient for remote manipulation tasks, or that one channel might be time-shared between several operators.

This report describes further experiments in which the operator called in sequence various on-site automatic control programs of the machine, and thereby acted as a supervisor. The results suggest that the supervisory mode of operation has some advantages when the task to be performed is difficult for a human controlling directly. Results show the supervisory mode to require more training than the direct mode. Anecdotal evidence suggested that the operator tended to want some visual feedback during the automatic subroutines portions of the task simply to maintain his confidence that the subroutines were performing as he had intended. Results also indicate that use of subroutines served more to ease the perceptual burden on the operators than to decrease completion time.

TABLE OF CONTENTS

ABSTRACT	ii
LIST OF FIGURES	
LIST OF TABLES	
1. INTRODUCTION	1
2. PROBLEM STATEMENT	5
3. JUSTIFICATION FOR THE EXPERIMENTAL PROCEDURE	6
4. THE SIMULATION PROGRAM	12
4.1. General Description	12
4.2. The Simulated Manipulation Task and the Manipulator	12
4.3. The Local Controller	14
4.4. The Input Section	16
4.5. The Display Control and Coordinate Transfer Section	16
4.6. The Data Logging Section	22
4.7. The Delay Section	22
4.8. The Output Section	24
4.9. The Reset Section	24
5. EXPERIMENTAL PROCEDURE AND RESULTS	26
5.1. Conduct of the Experiments	26
5.2. Effect of Delay, Dynamic Lag and Intermittent Vision on Performance	26
5.3. Effect of Lack of Motion Cues on Performance	38
5.4. Effect of Speed on Operator Performance	41
5.5. Effect of Increased Delay on Performance	42
5.6. Supervisory Control	45
6. CONCLUSIONS	54
APPENDIX 1. Operation of the Program	56
REFERENCES	63


LIST OF FIGURES

1.	View of the Display, and Control Panel	7
2a.	An Experimental Run, Showing the Start (top), and the Jaws Positioned to Grasp the Block (bottom).	8
2b.	The Block Being Raised (top), and Finally Positioned (bottom).	9
3.	Man-Machine Interactions.	11
4.	Man-Computer-Machine Interactions.	11
5.	Main Structure of Program.	13
6.	Flow Diagram of Block Stability Section.	15
7.	Flow Diagram of Grasp and Lift Subroutine.	17
8.	Flow Diagram of Lower and Search Subroutine.	18
9.	Flow Diagram of Lower and Release Subroutine.	19
10.	Control Knobs and Switches (half-scale).	20
11.	Block Diagram of System Dynamics.	21
12.	The Display.	23
13a.	Example of Program Type-Out.	25
13b.	Example of Program Punch-Out.	25
14.	Effect of Delay and Lag on Number of Commands Used (Continuous Vision).	33
15.	Effect of Delay and Lag on Number of Commands Used (Intermittent Vision).	33
16.	Effect of Delay and Lag on Number of Commands Used (Continuous and Intermittent Vision Combined).	34
17.	Effect of Delay and Lag on Completion Time (Continuous Vision).	34
18.	Effect of Delay and Lag on Completion Time (Intermittent Vision).	35
19.	Effect of Delay and Lag on Completion Time (Continuous and Intermittent Vision Combined).	35
20.	Effect of Delay and "Delay plus Lag" on Fuel Used (Continuous Vision).	36
21.	Effect of Delay and "Delay plus Lag" on Fuel Used (Intermittent Vision).	36
22.	Effect of Delay and "Delay plus Lag" on Fuel Used (Combined Continuous and Intermittent Vision).	37

23.	Effect of Speed on Operator Performance.	43
24.	Effect of Long Delay on Commands Used.	46
25.	Effect of Long Delay on Completion Time.	47
26.	Effect of Automatic Subroutine Use on Commands Used.	51
27.	Effect of Automatic Subroutine Use on Completion Time.	52

LIST OF TABLES

TABLE 1.	Effect of Delay, Lag and Intermittent Vision on Number of Commands.	30
TABLE 2.	Effect of Delay, Lag and Intermittent Vision on Completion Time.	31
TABLE 3.	Effect of Delay, Lag and Intermittent Vision on Fuel Used.	32
TABLE 4.	Effect of "Static" Vision on Inexperienced Subject's Performance.	39
TABLE 5.	Effect of Static Vision on Experienced Subject's Performance.	40
TABLE 6.	Effect of Static Vision on Inexperienced Subject's Performance.	41
TABLE 7.	Effect of Speed on Subject's Performance.	42
TABLE 8.	Effect of Long Delay on Performance.	44
TABLE 9.	Preliminary Results Using Subroutines.	48
TABLE 10.	Effect of Subroutine Use on Performance.	50

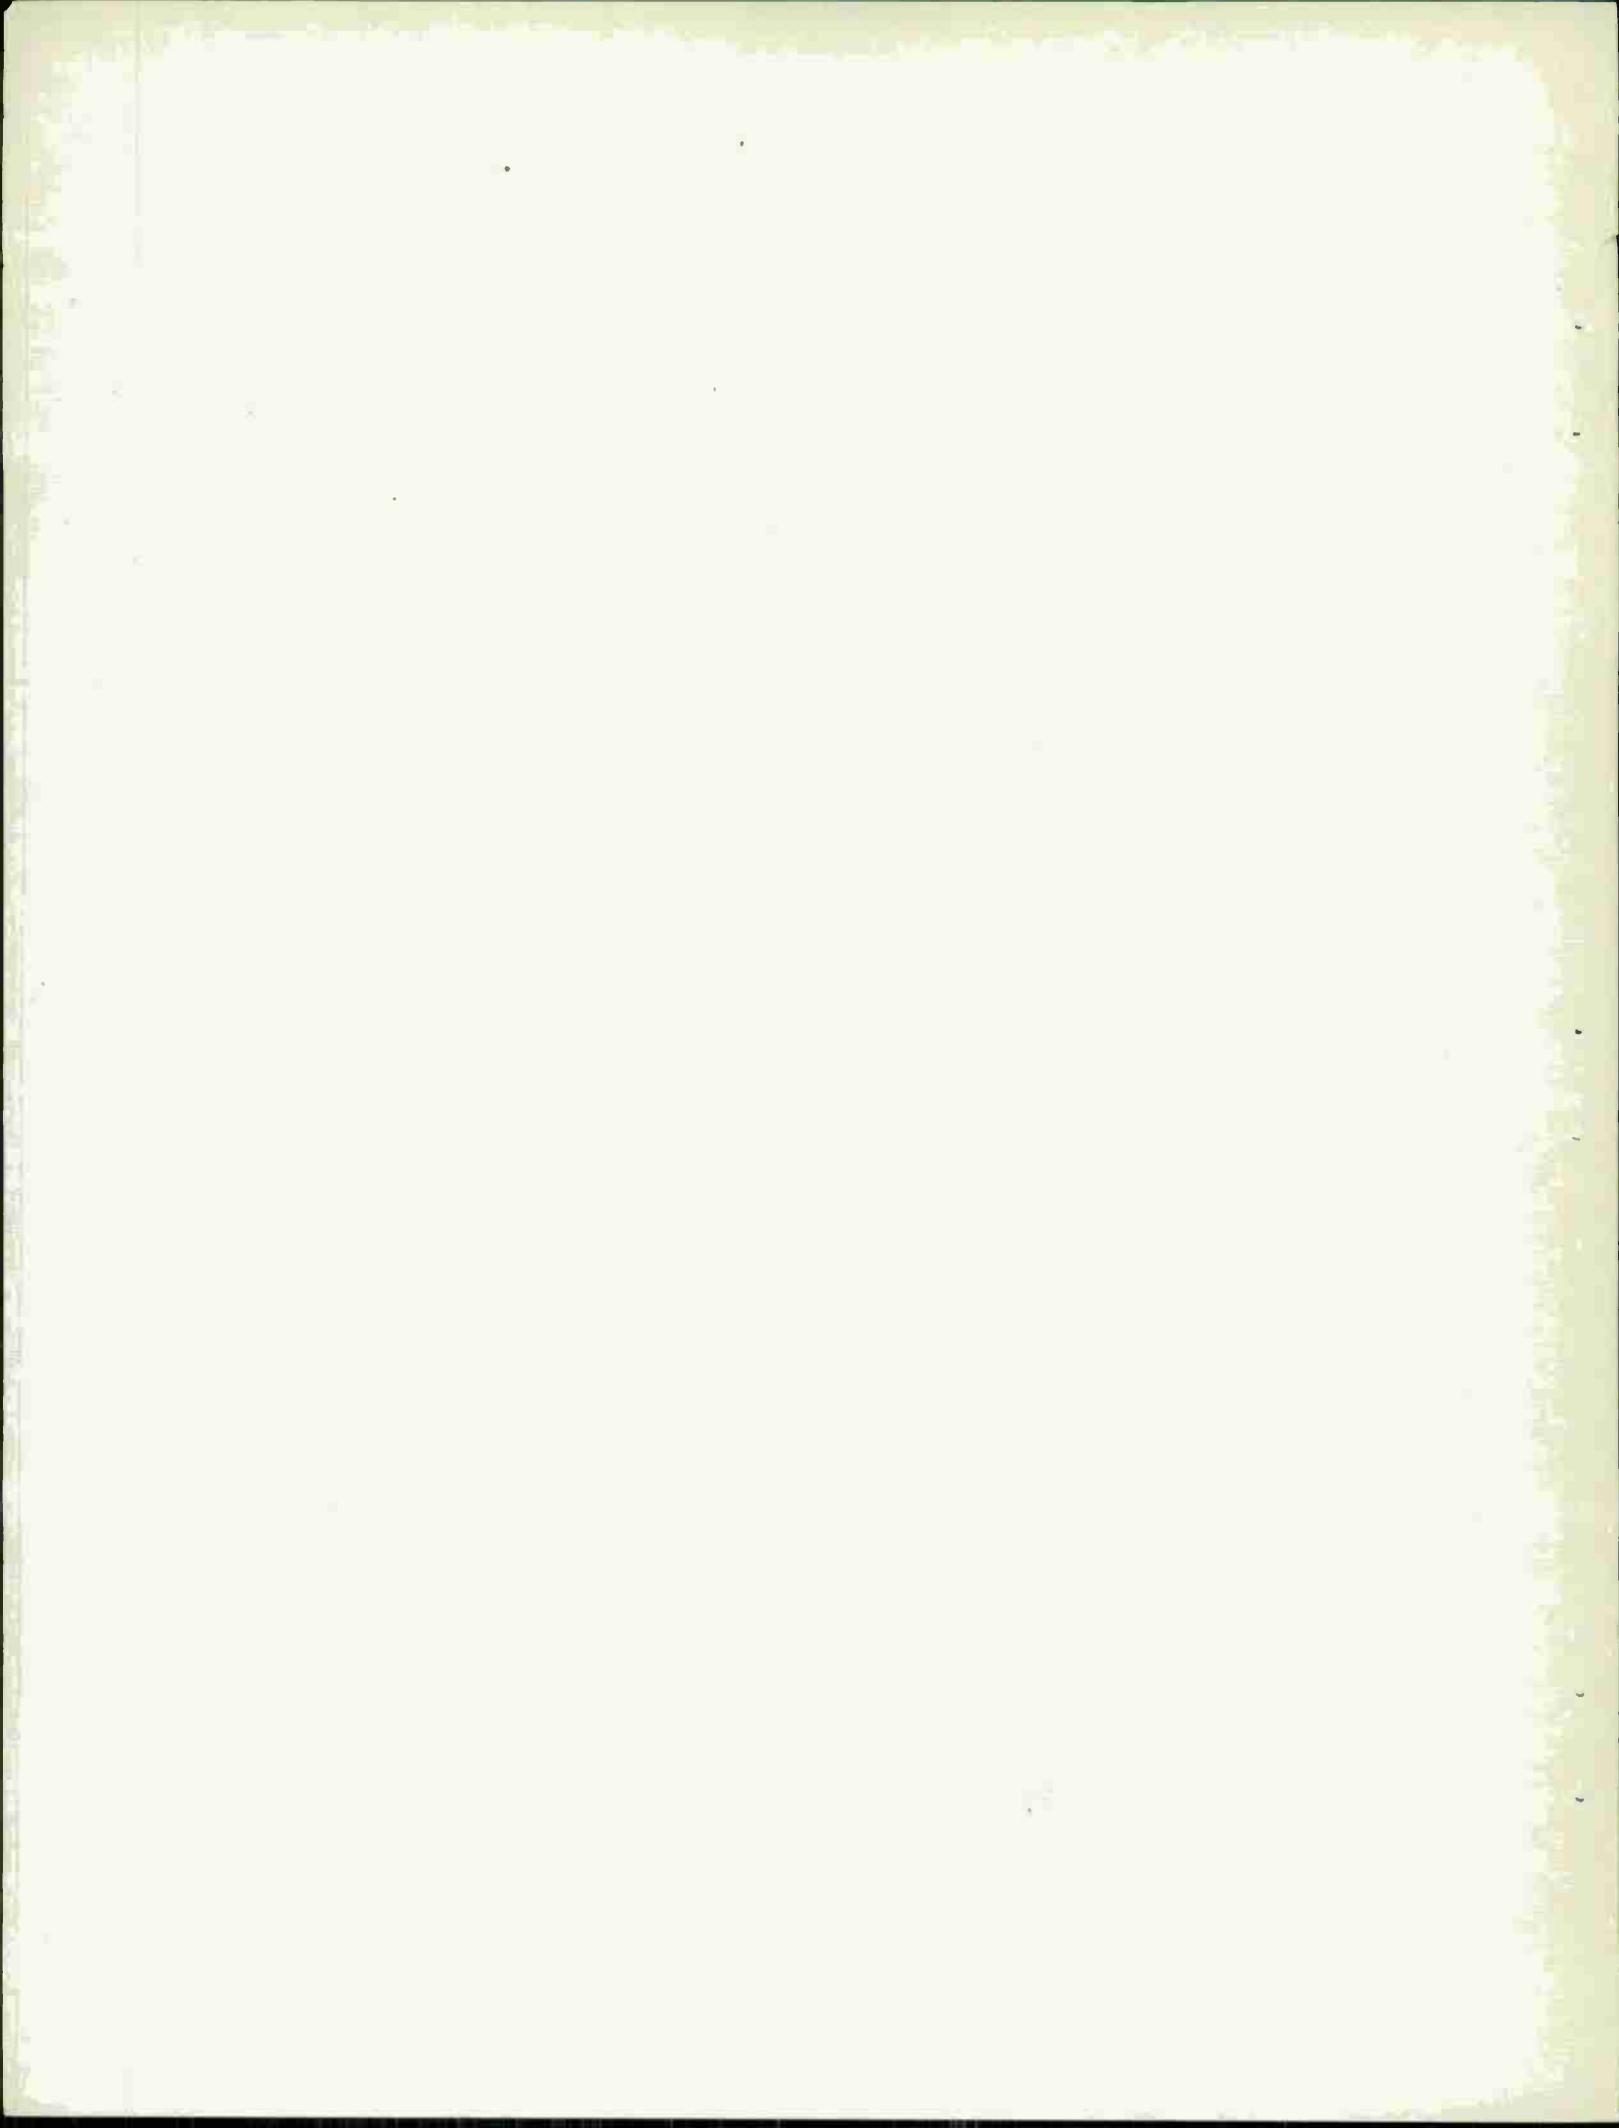

I. INTRODUCTION

The desire to be freed of the necessity of working is shared by much of mankind. Those lucky or clever enough to be in positions of power and influence have organized and directed the efforts of those less able than themselves. The twin advance of an organized mercantile system and technical skill introduced the motive and ability to replace human effort by mechanical effort. There are now portions of the world where very little hard physical effort is done by humans. However, those physical tasks requiring nonrepetitive actions and some adaptivity are performed by humans.

Another skill possessed by humans is decision making. The steam engine of the eighteenth century is a well known example of mechanized decision making. A large number of such decision-making devices are now in use, monitoring some physical process and organizing corrective or warning action. These devices are preferred to humans in these situations because the monitoring task they are doing is simple, they work quickly and because the decisions they have to make are simple and they do not fatigue. A human is still used where the decisions and actions required are complex and nonrepetitive and where the skills required are not precisely defined. A human may learn from his experience.

Recent advances in electrical technology have produced machines with a large high-speed, decision-making ability and a large quick access memory. These machines have been compared to human brains, and their abilities have been organized (by humans) so that they can play chess,

for example, and defeat an unskilled human.

Other concurrent technical advances have produced a need for human-like abilities in situations in which it is either difficult or impossible or costly for men to survive for biological reasons. The first example of these was the nuclear "hot-lab". Man's dexterity was transmitted through mechanical or electrical connections (1). Other proposed activities which may require some projections of man's abilities are deep water commercial exploitation and extra-terrestrial work. It would be possible to do work on the ocean floor, or on Mars (say), using machines similar to those in use, while the human operator stayed on earth. There are, however, some serious drawbacks to this arrangement. Two of the most obvious are the difficulty and cost of providing adequate feedback to the operator, and the effect of transmission delay. The use of on-the-spot decision making machines should reduce the effect of these difficulties (2).

The cost of sending machinery to these exotic places is high, so that the machine should be as versatile as possible. In order to match this mechanical versatility, the decision-making ability of the machine should be flexible and adaptable. Ideally, to use the machine efficiently, a complex man-machine "language" must be provided so that the human can cease being an "operator" and become a "supervisor", issuing complex instructions to his remote "slave" confident that, if possible, they will be executed or, if not possible, the "slave" will request further instructions. The "slave" must have a "language" sufficiently rich to describe its world and the supervisor must organize his thoughts to correspond to this "language". This requires effort on the part of the

human supervisor. "In this way a paradoxical situation arises: the richer the input language and the nearer the statement of the problem to living human language, the greater the labor the man must expend in matching his own original text to the capabilities of the formal system." (3)

The work done by a manipulator has a more human-like quality than that of a steam engine, say, or a Jacquard loom (4), to consider two examples of artifacts which have been "controlled" automatically for over a century. Ernst (5) in his thesis reports applause from an audience at one stage of a demonstration of his computer-controlled manipulator. His machine would stack blocks and put them into a box. If its environment changed, the box, for example, being moved, the machine would search for the box.

A machine that can be "led by the hand" and learn a set of motions is "Unimate" (6), which is a versatile material handling device.

The need for some form of supervisory control of manipulative devices was mentioned by several speakers at the Project ROSE Seminars in 1964 (7).

This study is part of a continuing program of work on human decision making and motor skills in the Man-Machine Systems Laboratory at M. I. T. These include several theses (8), (9) on the development of special sensor systems for remote manipulation. Ferrell (10) discovered that an information transmission delay did not make remote manipulation impossible, as had previously been surmised (11).

Ferrell pointed out, however, that the time taken to complete a given task increases with delay. With a long transmission delay and a complex task to perform, this increased time-to-completion may be intolerable.

2. PROBLEM STATEMENT

This report describes a study of remote manipulation using a digital computer simulator.

The problems investigated were:

- 1) Is a real-time simulation of a manipulation task possible, and can useful experimental results be obtained from such a simulation?
- 2) Will the operator of a rate-controlled manipulator adopt a "move-and-wait" strategy when working with a transmission delay, as suggested by Ferrell (12)?
- 3) What are the effects of a combination of transmission delay, inertial time constant, and intermitted display of a human operator's performance in a manipulative task?
- 4) Will supervisory control have any advantages in such a task?

3. JUSTIFICATION FOR THE EXPERIMENTAL PROCEDURE

The PDP-1 Computer of the Research Laboratory of Electronics at M. I. T. (see Appendix I) was available for these experiments. It has a speed high enough for the purpose and a cathode ray tube display. A real-time experiment requires that the computer be "available" to the user as he requires. A display requires considerable computational effort if it is to seem real to the user. The PDP-1 computer was adequate for the purpose provided that the task to be simulated was simple.

Making the task simple also made the evaluation of the results easier.

The task was two-dimensional throughout. The operator had control over a pair of fingers using the switch panel which is one of the in-out facilities of the computer. Using these fingers, the operator can grasp a rectangular block and move it across the screen. He is required to place it in a target hole (Fig. 2).

Rate-control of the manipulator was obtained using knob operated potentiometers available on the switch panel.

The measurements that can be made from such an experiment include the time taken to complete the task and the fuel consumed in performing it. Another measurement is the amount of telemetry required. It is easy to measure the time required using a computer with a stable cycle rate. It is fairly easy to measure energy or momentum expended provided that there are no impacts or rebounds during the experiment. When there are, then the method used to simulate them may affect the



Fig. 1. View of the Display, and Control Panel

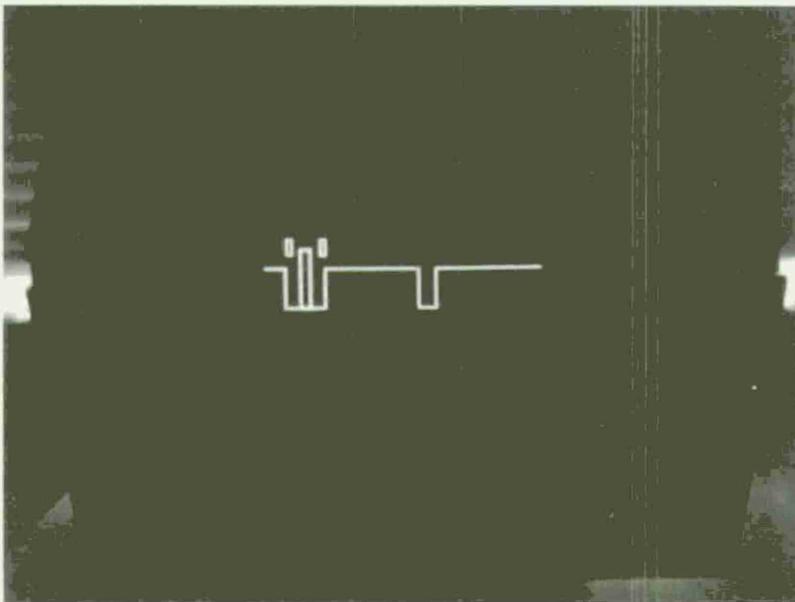
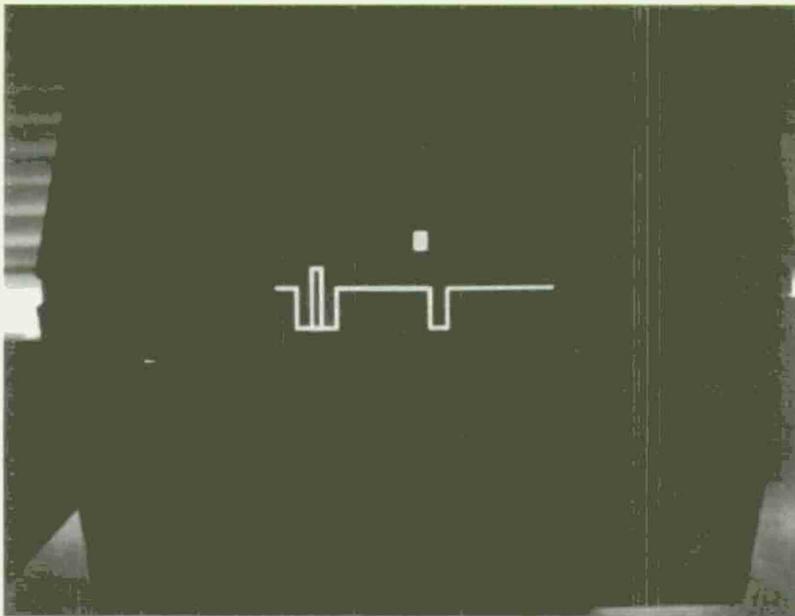


Fig.2(a). An experimental run, showing the start (top), and the jaws positioned to grasp the block (bottom).

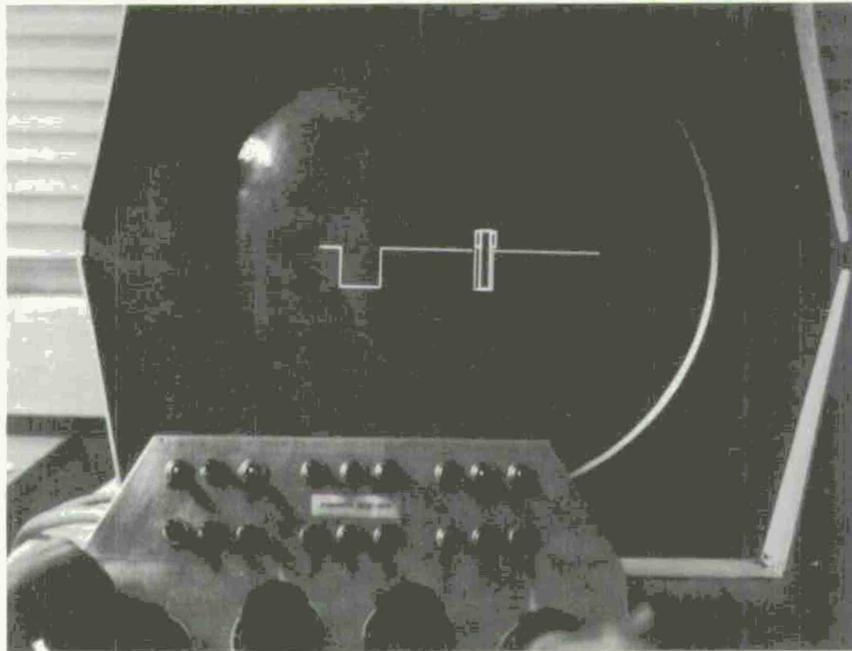
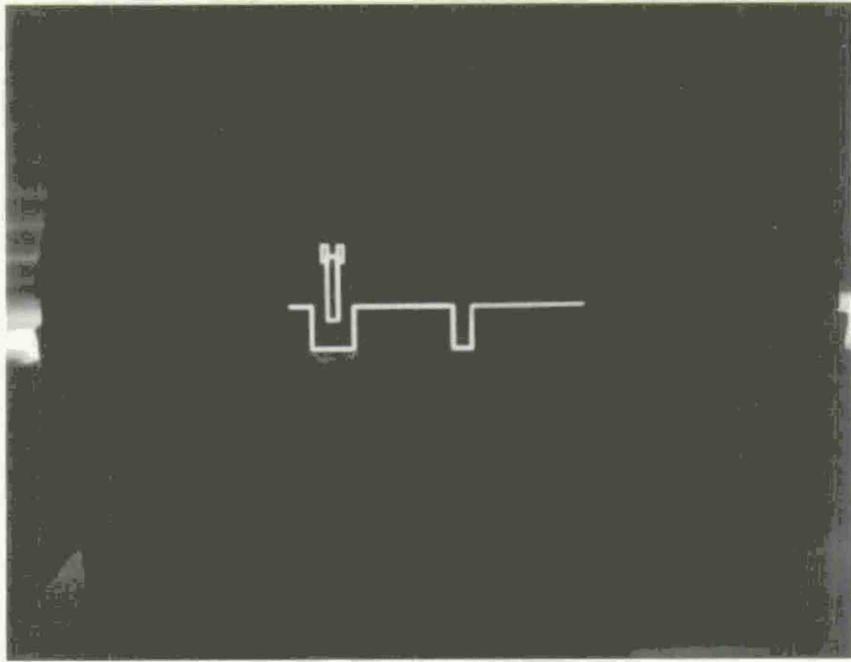


Fig.2(b). The block being raised (top), and finally positioned (bottom).

the use of supervisory control should reduce the mental effort and attention that the task requires from the man. A measure of this attention was obtained by counting the number of control signals that the operator "sent" to the remote manipulator. Supervisory control should reduce the number of these.

With such a simple task, it is possible to preprogram the entire job. This would not provide any significant results. In order to stimulate interaction between the operator, the remote controller and the manipulator (Figs. 3 and 4), three preprogrammed logical sets of instructions were provided which the operator could use at his discretion. These would use information from touch sensors, or from a timing device. These sets of instructions were chosen to perform the operations requiring precise monitoring and actuation by the operator.

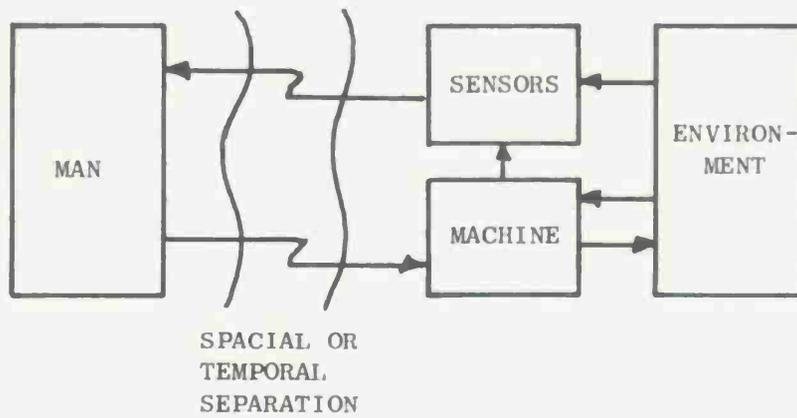


Fig. 3. Man-Machine Interactions.

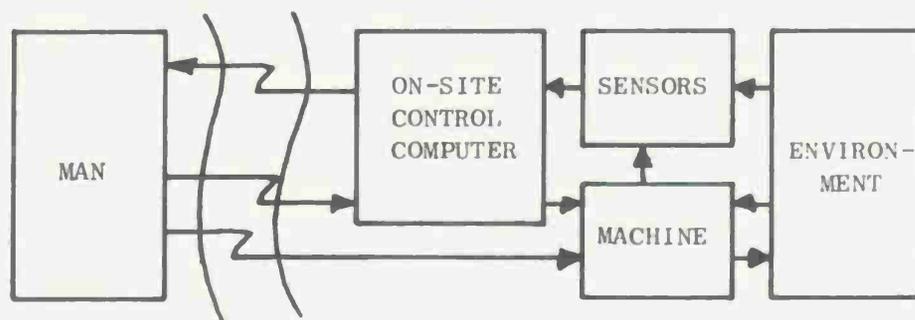


Fig. 4. Man-Computer-Machine Interactions.

4. THE SIMULATION PROGRAM

4.1 General Description

The program occupies nearly four thousand words of the core memory of the PDP-1 Computer. About eight hundred of these are storage tables. The program is divided into separate parts which are described in the following sections of this chapter.

During an experimental run, the program runs in a loop (Fig. 5) through all sections, except the Output and Reset parts. The cycling rate is 15 per second. This produces a slight flicker on the screen, but the task appears continuous to the subject.

4.2 The Simulated Manipulation Task and the Manipulator

Displayed on the Cathode Ray Tube Display Screen in front of the subject are a block, a pair of fingers and a ground profile with two holes in it. The block may be moved, grasped or knocked over by the fingers, and will fall to the ground if released above it. If the fingers try to push the block into the ground, or if the block has too high a vertical velocity when it hits the ground, then the program stops, prints an error statement, and resets itself to the initial positions. If the block when knocked over rotates through a right angle, an error statement is printed and the program restarted.

The features of the display are all rectangular, and the coordinates of their corners are stored and updated by the

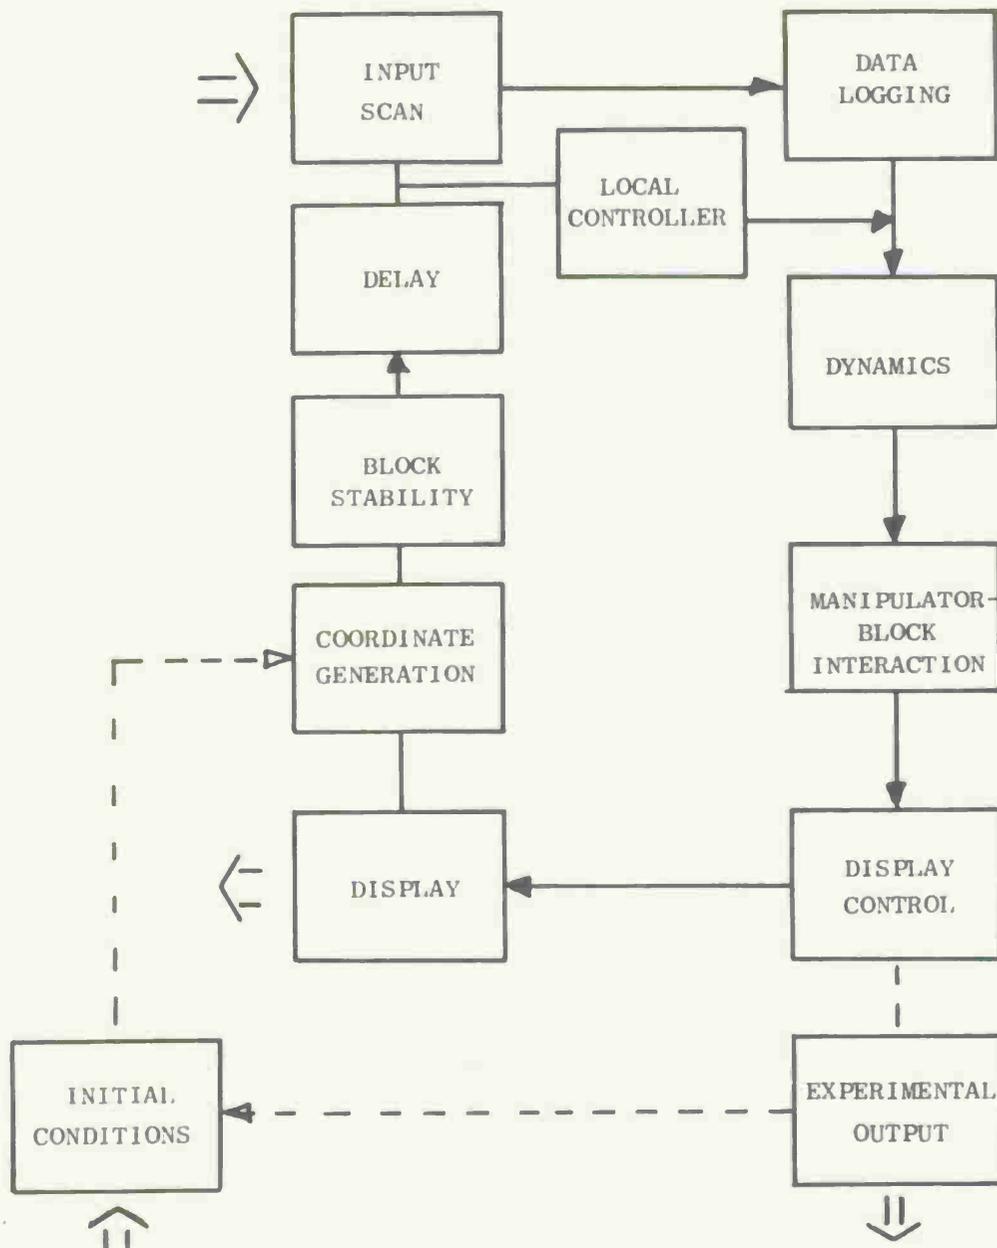


Fig. 5. Main Structure of Program.

program. The interactions, such as pushing, grasping and bouncing, are effected by comparing all these coordinates and determining whether any of them overlap, and making appropriate decisions about the motions of the block and the jaws. Figure 6 is a simplified flow chart of the part of the program which decides whether the block should fall, bounce or topple sideways. When the fingers, or jaws, overlap the block on both sides, the block is defined as grasped, and movements of the jaws move the block, but with the mass and weight of the block added. If the fingers meet through the block, an error statement is printed because the fingers are said to have crushed the block. If the fingers touch the ground, an error statement is printed out.

4.3 The Local Controller

Three particular sequences of operations have been preprogrammed, and simulate the logical decision making processes that an on-site controller might perform. They are arranged to carry out the three precise actions that the subject has to perform: picking up the block, finding the narrow hole into which the block should be placed, and lowering the block to the ground and releasing it.

These subroutines require signals from on-off touch sensors on the inside face of the fingers, a load sensitive sensor to determine whether the block is resting on the ground, and velocity sensors in the horizontal (x) direction and the vertical (y) direction.

While the subroutines are "switched on", the direct instructions from the subject to the task are ignored. The

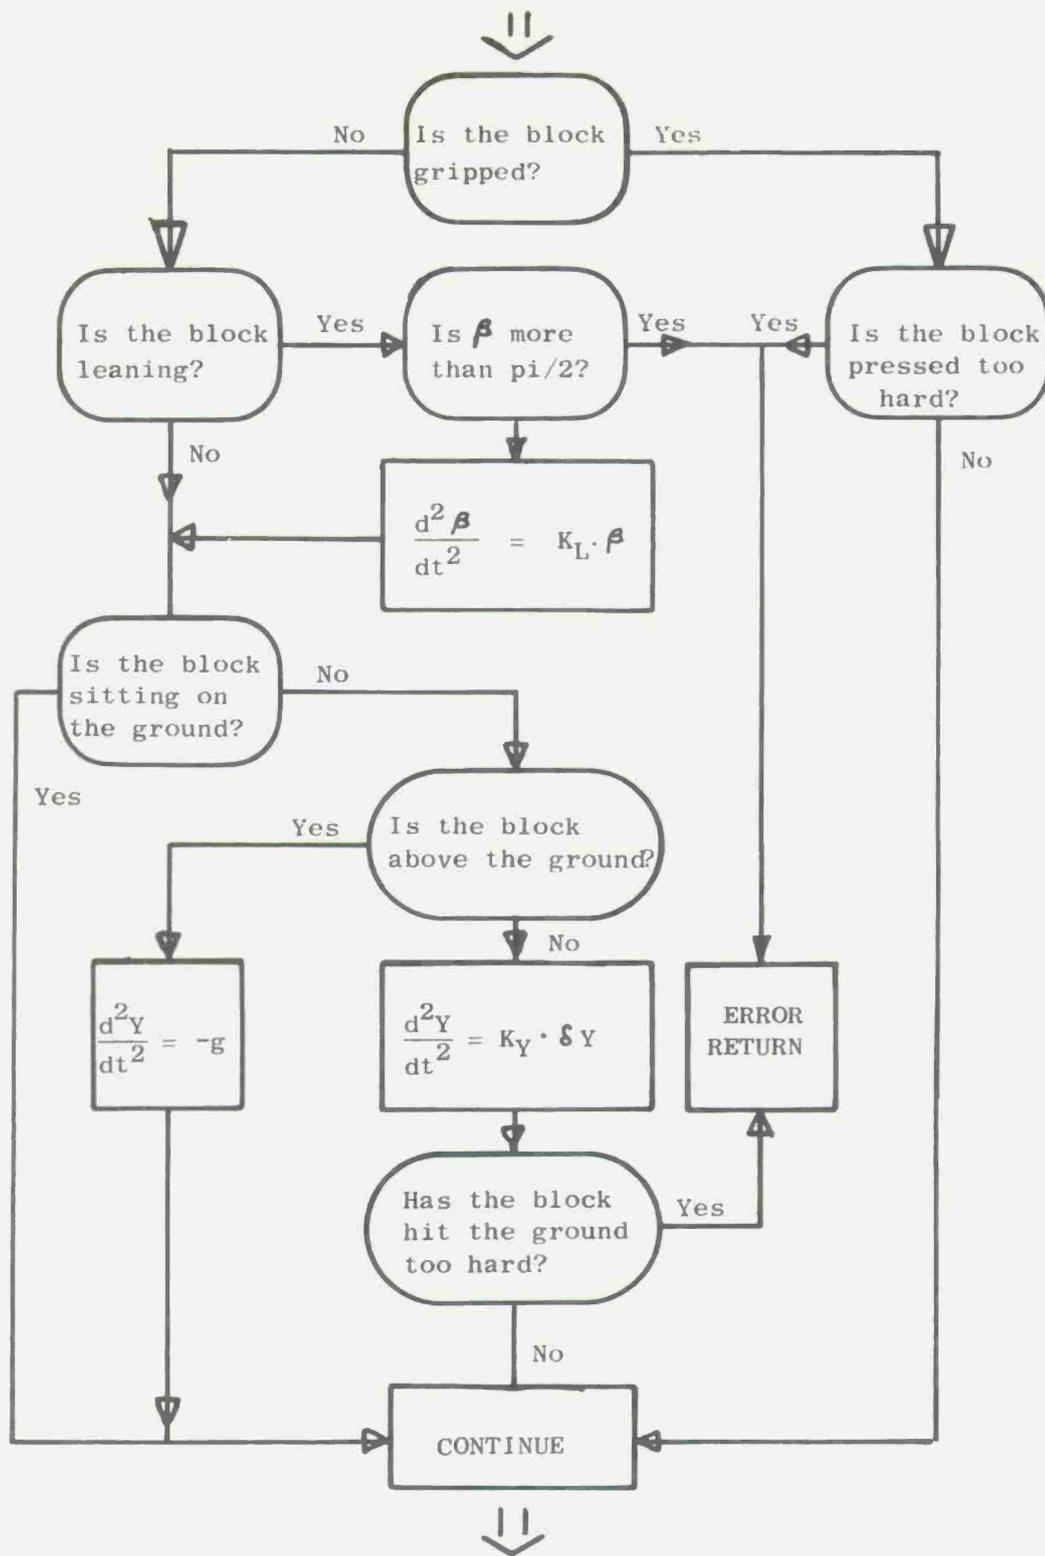


Fig.6.Flow Diagram of Block Stability Section.

subject may switch off the subroutine when he wishes. The subroutine returns control to the subject when it has completed its set of instructions. The logical arrangement of these subroutines is detailed in Figures 7, 8 and 9.

4.4 The Input Section

The subject moves the fingers and issues instructions using a bank of 18 switches and two knob-driven potentiometers (Fig. 10). These are "read" by the program on each cycle, the output of the potentiometers passing through an analog to a digital converter, and then shifted right to prevent contact noise being read by the program. The switches are read as a complete word into the computer. The program stores this word and interrogates appropriate sections of this word during the cycle. The switches enable the subject to open and close the jaws, to demand vision, to start and stop the experimental run, and to transfer control to the on-site subroutines. The knobs provide a velocity input to the fingers. If the fingers are grasping the block, this input is passed through a first order exponential lag whose time constant depends on the mass of the block, and may be varied from 1/8 to 8 seconds, by the experimenter (Fig. 11). A gravity term is added to the equation of motion for the y direction, but does not affect the null point of the control knob. When the time constant (due to the mass) is 3.14 seconds, the gravity term alters the y velocity by 25%.

4.5 The Display Control and Coordinate Transfer Section.

This section allows the experimenter to present various types of display to the subject, or to arrange for the subject to

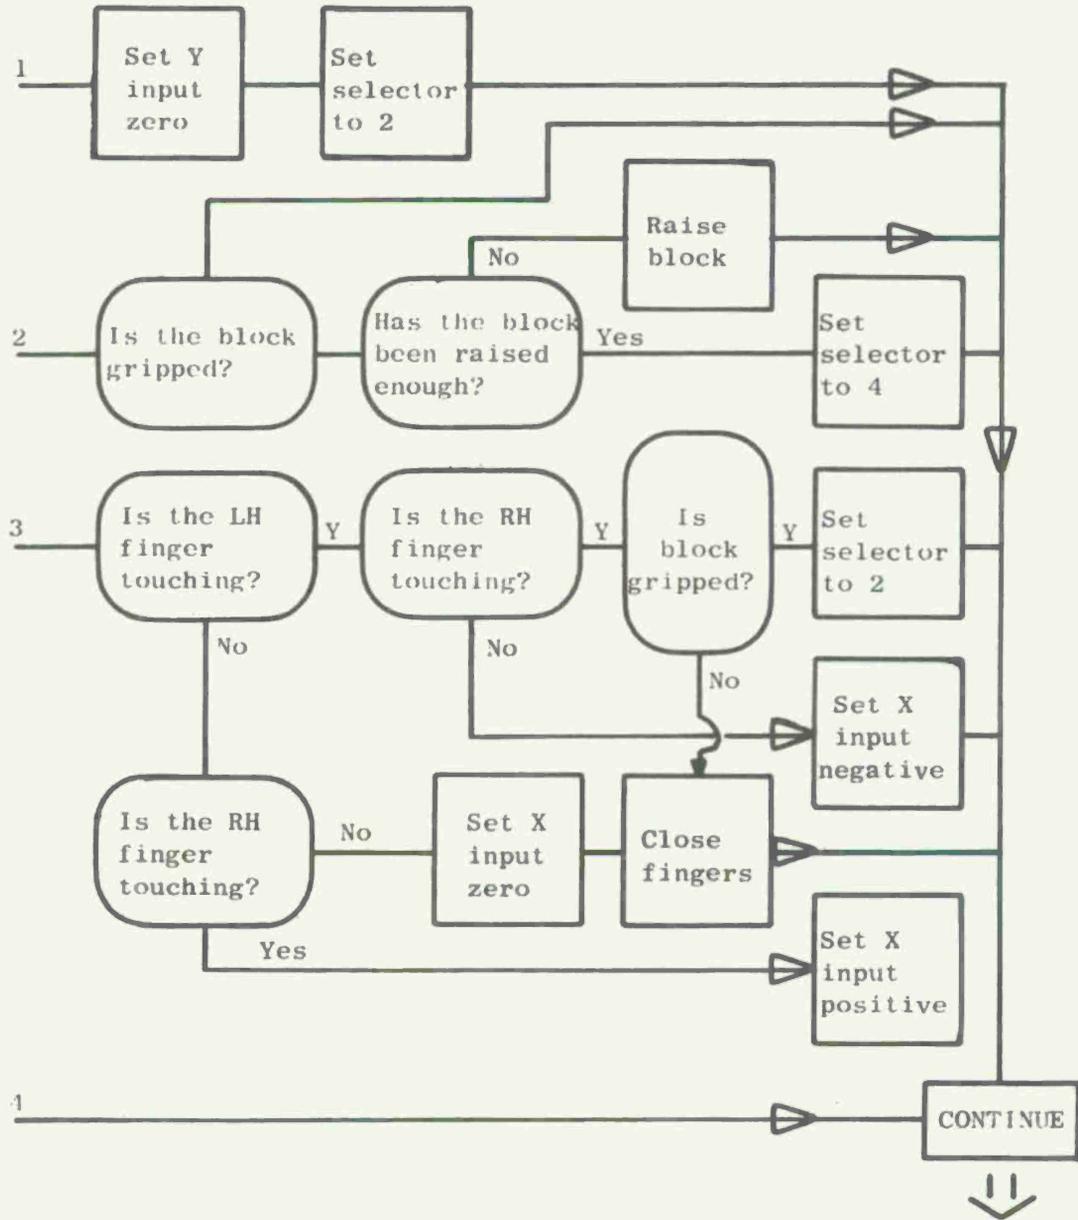
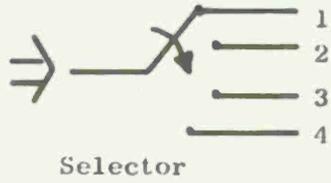


Fig. 7. Flow Diagram of Grasp and Lift Subroutine.

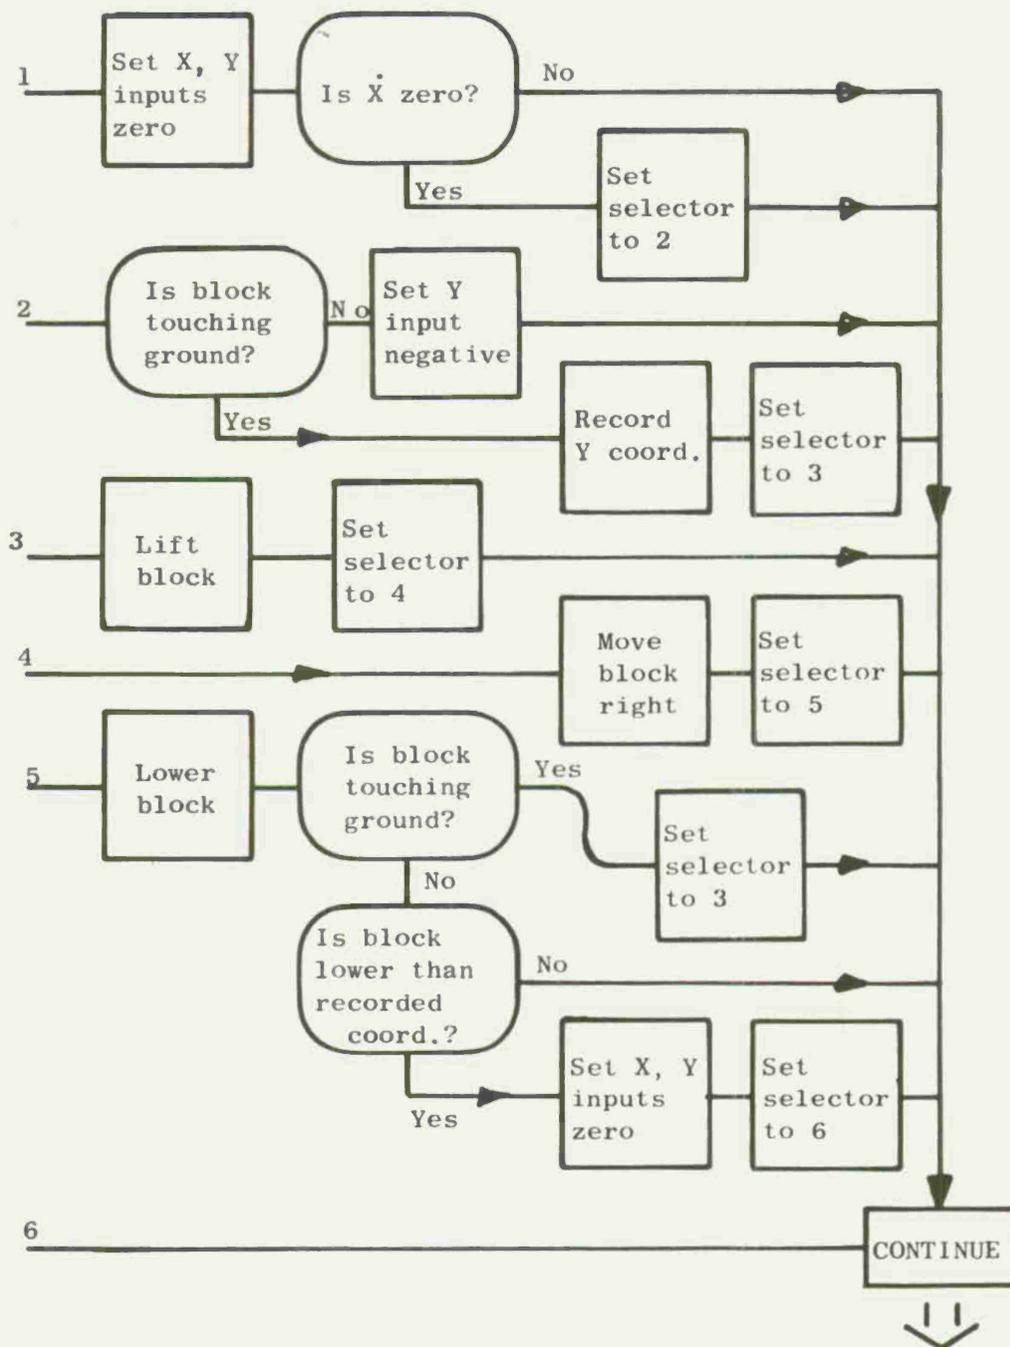
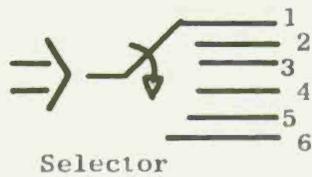


Fig. 8. Flow Diagram of Lower and Search Subroutine.



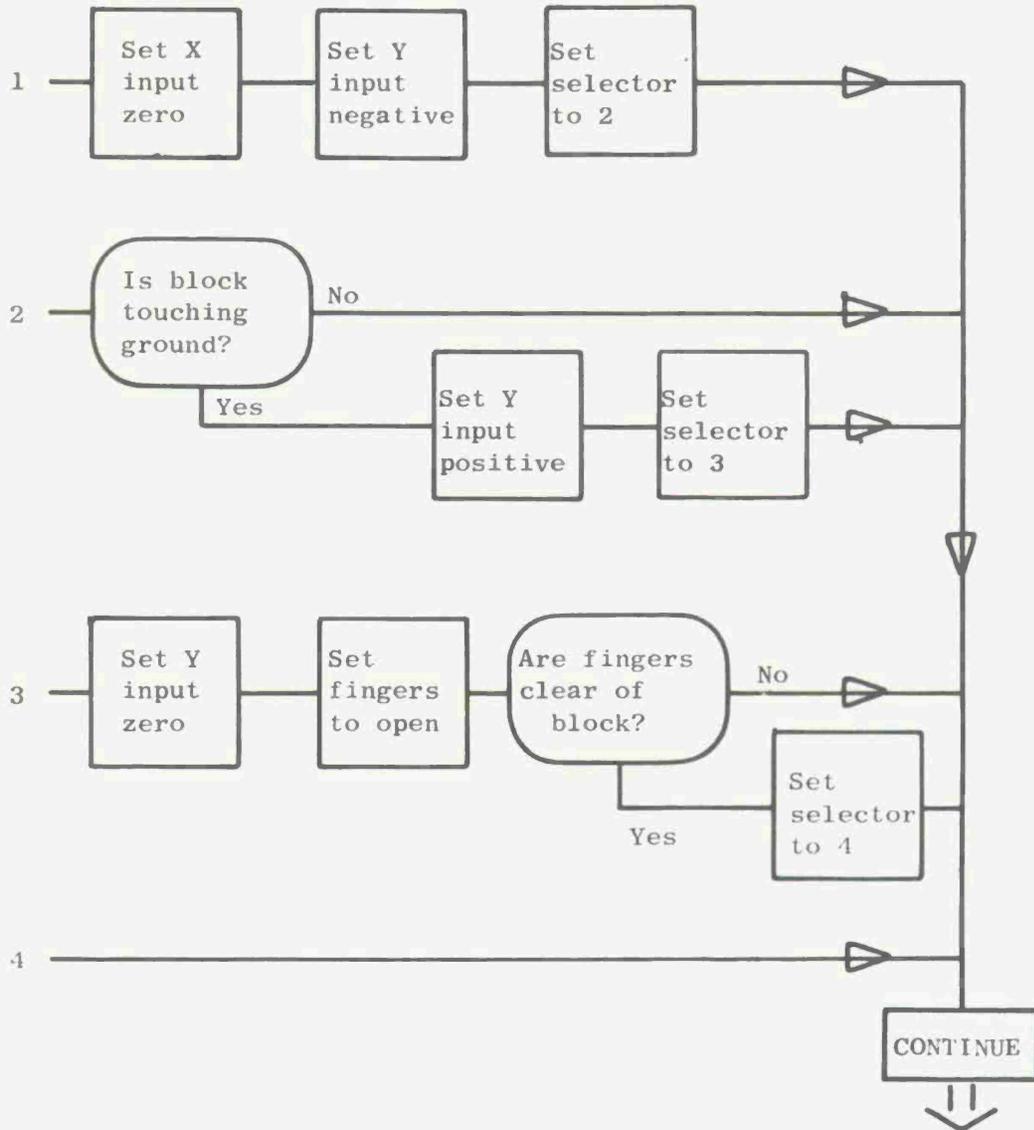


Fig. 9. Flow Diagram of Lower and Release Subroutine.

Switches
9 - 17

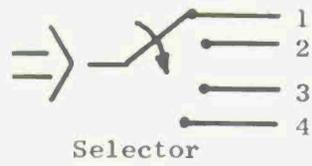

Buttons
0 - 8

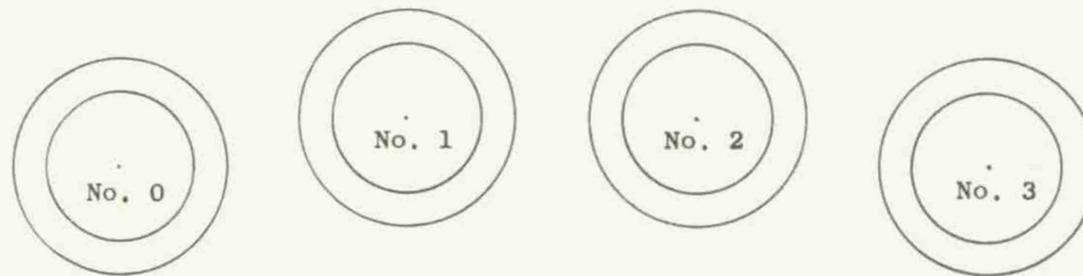

-20-

Fig. 10. Control Knobs and Switches (half-scale).

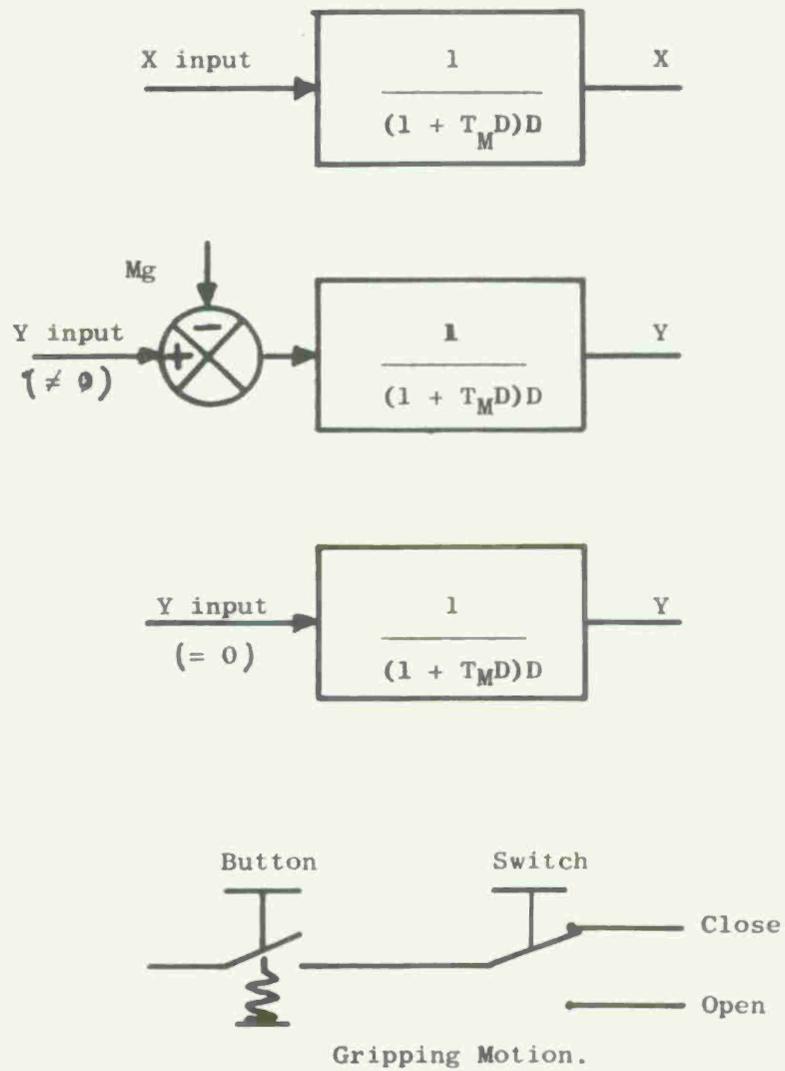


Fig. 11. Block Diagram of System Dynamics.

demand vision when he requires it (Fig. 12). The program maintains two sets of coordinates for the fingers and the jaws (but one set for the ground). Of the two sets, one is the "real" set of coordinates which determine the interactions, overlap, pushing, etc., while the "imaginary" one is the displayed set. The complete display is built up from the corners of the figures, using a line generating subroutine. It is possible to have differing types of display. Among these are the continuous, continually updated display (a TV-like image), an interrupted TV-like display, or a display of "static" pictures, obtained by transferring the "real" coordinates to the "imaginary" coordinate registers at large time intervals. It is also possible to have a display only when the subject demands it through his control panel.

4.6 The Data Logging Section

This section of the program records the commands given by the subject through the control knobs and switches. On each program cycle, the settings of these control knobs and switches is compared to those recorded on the previous cycle. Any change is noted, together with the time of occurrence and stored in a table in coded form. For details of the coding, see the instructions for using the program.

4.7 The Delay Section

This section lets the experimenter introduce a delay between the operator and the system. The maximum delay possible is 17 seconds, in steps of 1/15 second. Three sets of memory registers store the switch input signal and the digitally converted x and y input signals. The signals are read into and out of these storage registers by indirect

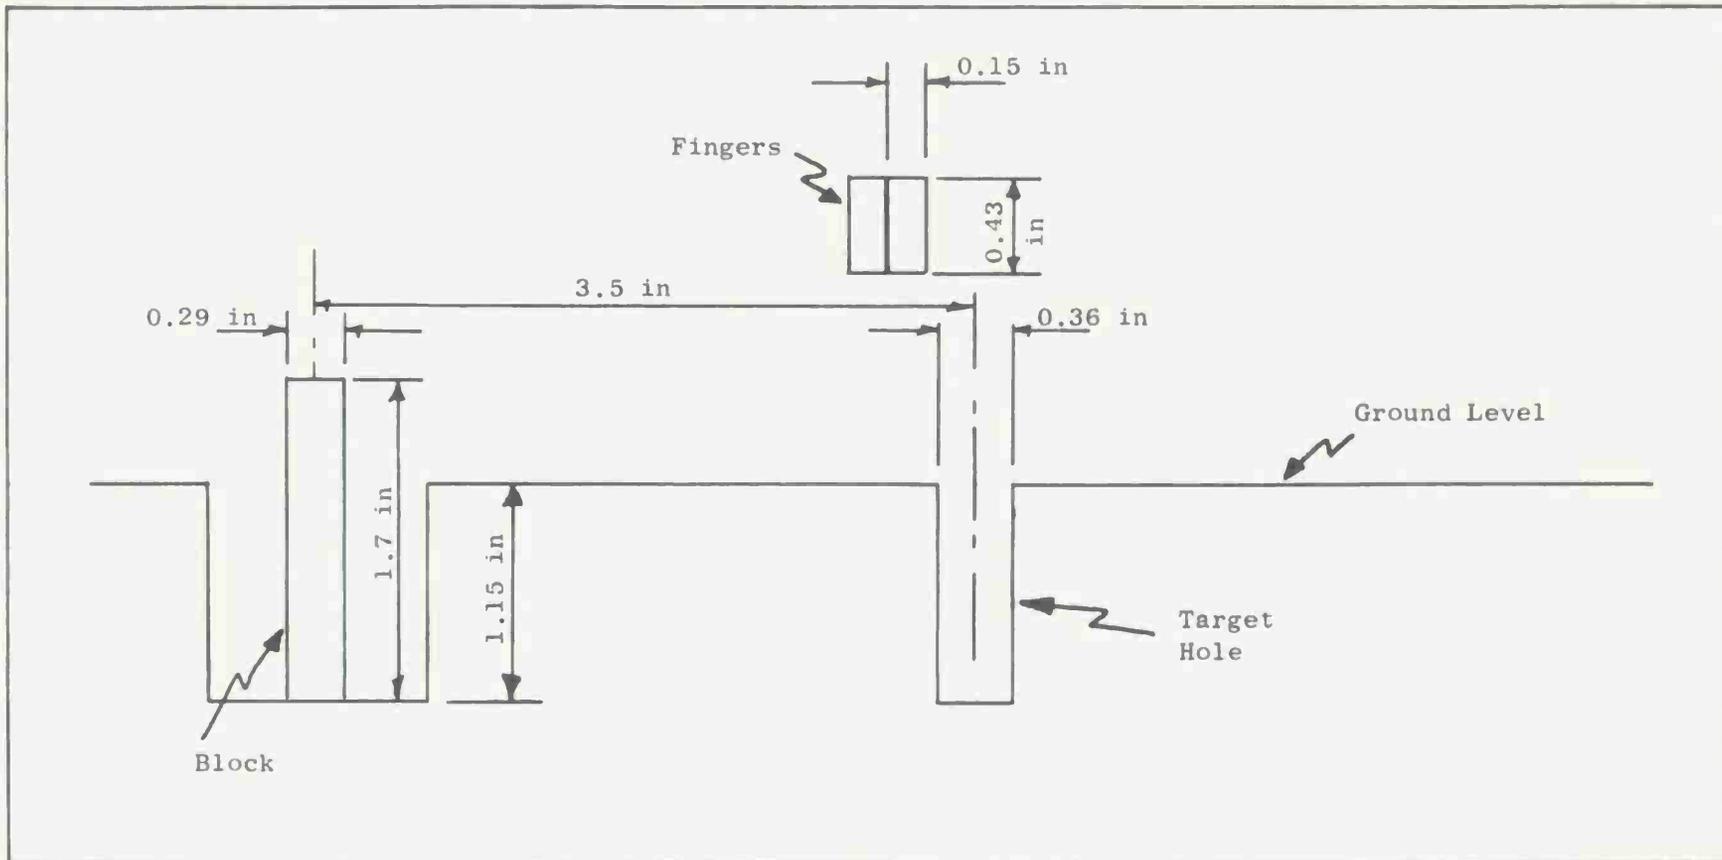


Fig. 12. The Display.

addresses which are indexed each cycle. At the start of each experimental run, the spacing between these indirect addresses is set equal to the contents of register dly.

4.8 The Output Section

At the end of each experimental run, the results are printed and punched out (see Fig. 13). The time taken is computed by dividing the number of program cycles by the time per cycle. The number of times that the "real" coordinates have been transferred to the "imaginary" display ones is printed. The number of commands (computed by the Data Logging Section) is printed, as is distance traveled, and "fuel" used. The "fuel" consumption is proportional to the modulus of the momentum change occurring during one run. The "score" or "cost" is computed, determined by the costs attached by the experimenter to time, fuel, commands and number of display coordinate transfers made.

4.9 The Reset Section.

This section clears all the storage tables, rests all counters to zero, and assigns the knobs to the program.

5/7th 1966 Type 60D30 Subject DJB Run 014707
 Total time secs 000261
 Trans pictures 002367
 Commands 000030
 Commands 000030
 Fuel 011704
 Error-free run
 Distance moved 012230
 Score 000000
 Display cycle 4.25 secs
 Display interval 4.25 secs
 Delay 3.14 secs
 Time constant 10.42 secs
 Task distance 060000
 Tolerance 001000
 phs 001000
 Punching completed

Fig. 13a. Example of Program Type-Out.

run,	014707
dte,	000007
tab,	450000
	050000
	320000
	220005
	430021
	210030
	450033
	310042
	040046
	320207
	310216
	220220
	320277
	310302
	050312
	020313
	050423
	010424
	320453
	310457
	320457
	310457
	410522
	450535

Fig. 13b. Example of Program Punch-Out.

5. EXPERIMENTAL PROCEDURE AND RESULTS

5.1 Conduct of the Experiments

The experiments were divided into two phases. Four subjects, all male graduate engineering students between 23 and 31 years old, were used, three of them during the first phase of the experiments and three during the second phase. One of these subjects was the author.

The instructions to the subjects were the same for every run. They were to move the displayed block into the small displayed hole using the fingers displayed on the screen. They should then close the fingers and press the finish button. They were to use the least number of commands that they could. They should avoid making errors. The subjects were told that their time to complete the task would be measured, but that they were not to try to complete the task as quickly as possible.

5.2 Effect of Delay, Dynamic Lag and Intermittent Vision on Performance.

During Phase I of the experiment, the three subjects each completed 10 consecutive experimental runs of the task under 18 different experimental conditions. These conditions were a factorial arrangement of 3 different time constants, 3 different delays, and 2 different display conditions. The time constants were 0.27 seconds, 1.0 second, and 8.5 seconds; the delays were 0.0 seconds, 0.27 seconds, and 3.2 seconds; and the display conditions were (a) a continuous view, and (b) an interrupted view lasting 0.6 seconds at

intervals of 4.3 seconds. The subjects had received considerable training with all the different experimental conditions before data were taken.

During this phase of the experiment, the maximum velocity in the x and y directions was 0.23 inches/second. Two of the restrictions were also absent. The fingers had not restriction as to the squeeze they could exert on the block, and they were permitted to touch the ground.

The somewhat arbitrary arrangement of knobs and switches caused the subjects some trouble during the initial part of their training period. The difficulty appeared to be remembering which switch controlled which motion. After about four hours work, the subjects appeared to have adjusted themselves to the arrangement of the controls. A similar adjustment was noted by Crawford (13). In his experiments, the subjects' performance after practice while using lever controls approached their performance using a joystick controller.

Two subjects were unable to detect the 0.27 second delay, declaring that they did not believe that there was in fact a delay. Initially several errors occurred because the subjects could not distinguish between the effects of "mass" (time constant) and delay. The 1.0 second time constant did not seem to cause any difficulties to the subjects, but the 8.5 second time constant caused difficulties and was considered difficult at first. With this time constant, the gravity field exerted a large force on the block and jaws combined. This altered the maximum speed attainable in the vertical direction by 25%, thus making the ratio between upward and

downward speeds 75/125, i. e., 0.6:1.0. The effect of intermittent vision varied between subjects. One (the author) disliked this intensely, and his performance was impaired, while the other two appeared to adjust reasonably well to this condition although considering it harder.

People watching the experiment for the first time ask whether subjects try to "trade-off" the number of commands (the variable of interest) against time, which is supposedly of no interest. A policy of moving exceedingly slowly should enable a subject to avoid any miscalculations and thereby perform the task with a minimum of commands.

During their first few runs most subjects try this, but they abandon this policy soon, as they succumb to a desire to "get things done". The subjects in general used the maximum velocity available, except when putting the block down. For several runs the subjects tend to use the controls continuously as they try to "steer" the objects. After some runs with an apparent delay, however, the subjects adapted the "move and wait" strategy noticed by Ferrell (10).

(Classical instability was noticed once when an inexperienced operator, not a regular subject, was attempting to maneuver the block with a 3.2 second delay and 8.5 second time constant.)

The subjects also tended to avoid controlling the x and y motions simultaneously. At the end of this set of experiments, the task had become a repetitive and easy one with little interest for the subjects.

The results of Phase I of the experiment are shown in Tables 1, 2 and 3 where the results for each subject and each experimental

condition are listed. The listed figures are the mean and standard deviation (corrected for small samples) of 10 good experimental runs, obtained when the subjects behavior had stabilized. Also listed are the mean and standard deviation obtained by summing over the three subjects. The average number of commands used by the three subjects is plotted against delay in Figure 14 for continuous vision, Figure 15 for intermittent vision, Figure 16 for both combined.

It is difficult to draw any clear conclusions from these results. Some trends may be noted, however. For continuous vision, the larger mass (time constant) required fewer commands than the smaller ones. One possible reason for this is that the larger mass required more concentration, whereas the smaller one, being easy, imposed no evident penalties on sloppy performance by the operator.

The times taken under varying conditions are plotted in Figures 17, 18 and 19. These show that increasing delay time and increasing the time constant both result in increased time to completion. The time taken increases linearly with delay, as was found by Ferrell (10). No noticeable difference occurs between the completion time for the two smaller time constants, when the subjects had a continuous visual display (Fig. 17), but with an intermittent display, the times for the three time constants are notably different (Fig. 18).

The "fuel" used while completing the task is plotted in Figures 20, 21 and 22. The data in these figures has been normalized by dividing by the amount used for no delay, 0.27 second time constant, and continuous display. The purpose of this normalization was to permit a comparison of the effects of delay and

COMMANDS

Time Constant (secs)	Vision	Delay (secs)	Subject			3 Subjects
			B.F.	D.B.	S.M.	Combined
0.27	C	0.0	18.7 (1.7)	18.7 (1.3)	19.7 (4.7)	19.1 (3.1)
		0.27	18.6 (1.2)	18.4 (2.5)	17.4 (1.5)	18.1 (1.8)
		3.2	19.1 (2.2)	21.4 (2.0)	20.2 (2.1)	20.2 (2.2)
	I	0.0	19.2 (1.7)	22.4 (3.6)	17.8 (2.1)	19.8 (3.1)
		0.27	16.6 (1.6)	19.6 (3.2)	20.1 (1.7)	18.7 (2.8)
		3.2	17.1 (1.4)	22.7 (1.3)	22.8 (3.0)	20.9 (3.3)
1.0	C	0.0	18.0 (1.4)	20.7 (2.8)	17.2 (1.7)	18.6 (2.5)
		0.27	19.4 (1.9)	17.3 (1.8)	17.0 (1.8)	17.9 (2.0)
		3.2	22.2 (2.4)	20.2 (3.5)	16.0 (1.3)	19.5 (3.8)
	I	0.0	17.2 (2.9)	21.3 (1.9)	18.6 (2.2)	19.4 (2.8)
		0.27	17.5 (2.3)	23.0 (2.7)	19.0 (2.3)	19.8 (3.3)
		3.2	19.1 (2.4)	23.6 (1.5)	19.7 (1.5)	20.8 (2.7)
8.5	C	0.0	17.3 (1.3)	14.9 (1.3)	16.9 (2.0)	16.4 (1.8)
		0.27	19.4 (1.8)	15.7 (1.7)	16.5 (1.7)	17.2 (2.5)
		3.2	16.2 (2.8)	17.4 (1.7)	20.8 (3.2)	18.1 (3.2)
	I	0.0	19.2 (1.4)	19.1 (2.0)	20.7 (3.4)	19.6 (2.4)
		0.27	20.6 (3.2)	19.4 (3.0)	24.1 (2.5)	21.4 (3.5)
		3.2	21.2 (2.4)	21.4 (3.1)	22.0 (3.2)	21.5 (2.8)

- Note 1. C indicates continuous visual display.
 2. I indicates intermittent visual display.

The tabulated figures are the mean and standard deviation for 10 completed experimental runs for each subject. The standard deviations have been corrected for small sample size.

Table 1. Effect of Delay, Lag and Intermittent Vision on Number of Commands.

TIME
(Seconds)

Time Constant (secs)	Vision	Delay (secs)	Subject			3 Subjects
			B.F.	D.B.	S.M.	Combined
0.27	C	0.0	62.8 (6.4)	65.9 (3.6)	54.7 (4.1)	61.1 (6.6)
		0.27	64.2 (4.4)	89.6 (8.7)	61.5 (5.4)	71.0 (14.0)
		3.2	96.2 (9.0)	93.1 (10.4)	86.0 (3.5)	90.0 (10.0)
	I	0.0	87.7 (8.4)	86.1 (4.7)	67.1 (3.3)	80.3 (10.9)
		0.27	88.2 (5.0)	86.4 (1.6)	82.6 (6.6)	85.7 (5.3)
		3.2	118.5 (7.0)	130.6 (8.0)	93.6 (6.3)	114.2 (16.7)
1.0	C	0.0	61.4 (3.5)	70.4 (7.3)	57.5 (2.7)	64.0 (7.0)
		0.27	74.3 (7.1)	64.7 (3.4)	59.4 (3.7)	66.1 (7.7)
		3.2	108.5 (10.5)	95.9 (10.1)	71.2 (4.6)	91.9 (17.5)
	I	0.0	92.6 (13.6)	96.1 (3.3)	76.5 (8.3)	88.5 (12.7)
		0.27	105.7 (11.3)	101.5 (11.5)	78.3 (4.5)	95.1 (15.1)
		3.2	140.7 (11.4)	134.3 (4.5)	116.5 (8.3)	130.5 (13.4)
8.5	C	0.0	102.5 (14.1)	75.5 (3.7)	78.6 (11.5)	85.5 (16.1)
		0.27	106.0 (10.3)	86.0 (2.7)	77.2 (8.9)	89.7 (14.3)
		3.2	134.1 (24.1)	100.9 (6.4)	115.0 (17.0)	116.6 (21.9)
	I	0.0	112.3 (11.1)	91.7 (4.0)	108.5 (13.1)	104.1 (13.1)
		0.27	122.3 (14.1)	95.5 (17.9)	120.0 (10.4)	112.6 (18.4)
		3.2	152.9 (11.1)	116.7 (8.0)	142.3 (12.1)	137.3 (18.3)

- Note 1. C indicates continuous visual display.
2. I indicates intermittent visual display.

The tabulated figures are the mean and standard deviation for 10 completed experimental runs for each subject. The standard deviations have been corrected for small sample size.

Table 2. Effect of Delay, Lag and Intermittent Vision on Completion Time.

FUEL
(Arbitrary Units)

Time Constant (secs)	Vision	Delay (secs)	Subject			3 Subjects
			B.F.	D.B.	S.M.	Combined
0.27	C	0.0	261 (12)	275 (49)	321 (62)	287 (51)
		0.27	265 (16)	170 (25)	293 (11)	242 (56)
		3.2	289 (52)	259 (34)	635 (17)	394 (64)
	I	0.0	235 (10)	243 (13)	337 (57)	271 (57)
		0.27	230 (9)	173 (37)	362 (39)	255 (85)
		3.2	518 (3)	528 (24)	390 (58)	479 (72)
1.0	C	0.0	688 (50)	660 (84)	763 (38)	704 (71)
		0.27	623 (38)	588 (77)	758 (45)	656 (89)
		3.2	621 (21)	843 (121)	886 (91)	783 (143)
	I	0.0	588 (35)	578 (77)	779 (67)	649 (101)
		0.27	556 (35)	523 (13)	879 (100)	652 (174)
		3.2	869 (19)	900 (124)	1026 (169)	932 (137)
8.5	C	0.0	3600 (102)	4604 (448)	4415 (66)	4206 (509)
		0.27	3880 (77)	4412 (441)	4288 (66)	4193 (340)
		3.2	4042 (151)	4970 (562)	4690 (172)	4567 (519)
	I	0.0	3612 (13)	4027 (111)	4000 (44)	3888 (210)
		0.27	3842 (565)	4490 (726)	4342 (268)	4225 (603)
		3.2	3829 (59)	4363 (241)	4316 (242)	4169 (310)

- Note 1. C indicates continuous visual display.
2. I indicates intermittent visual display.

The tabulated figures are the mean and standard deviation for 10 completed experimental runs for each subject. The standard deviations have been corrected for small sample size.

Table 3. Effect of Delay, Lag and Intermittent Vision on Fuel Used.

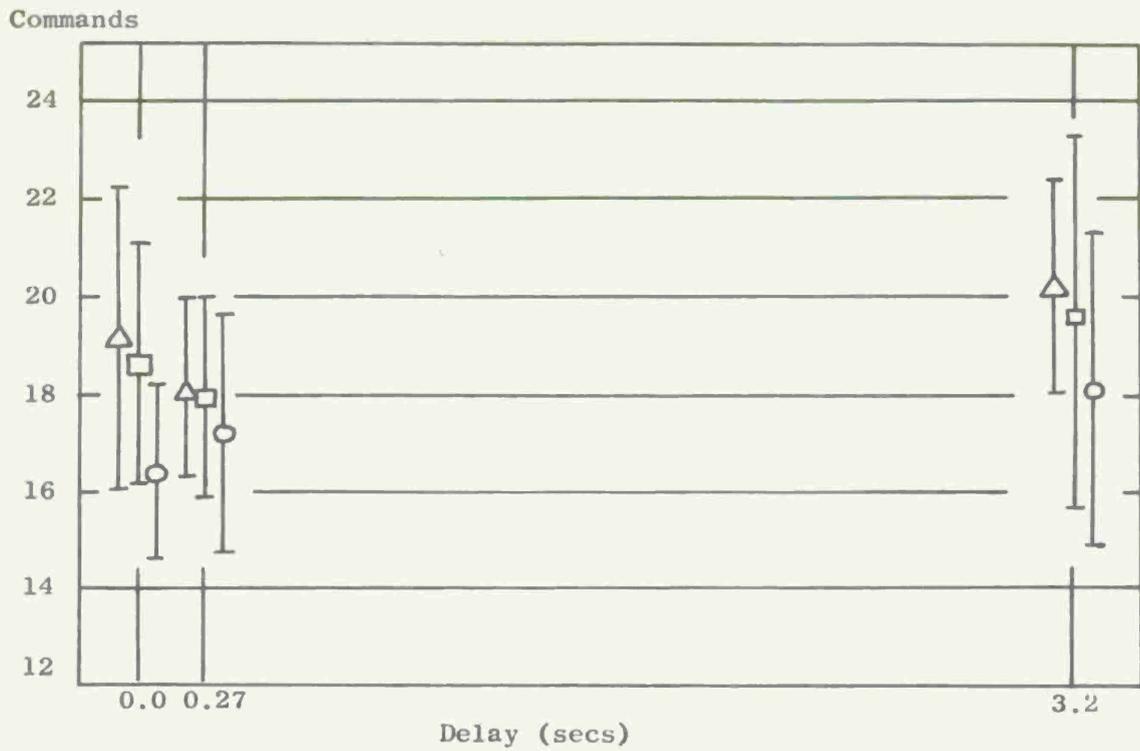


Fig. 14. Effect of Delay and Lag on Number of Commands used (Continuous Vision).

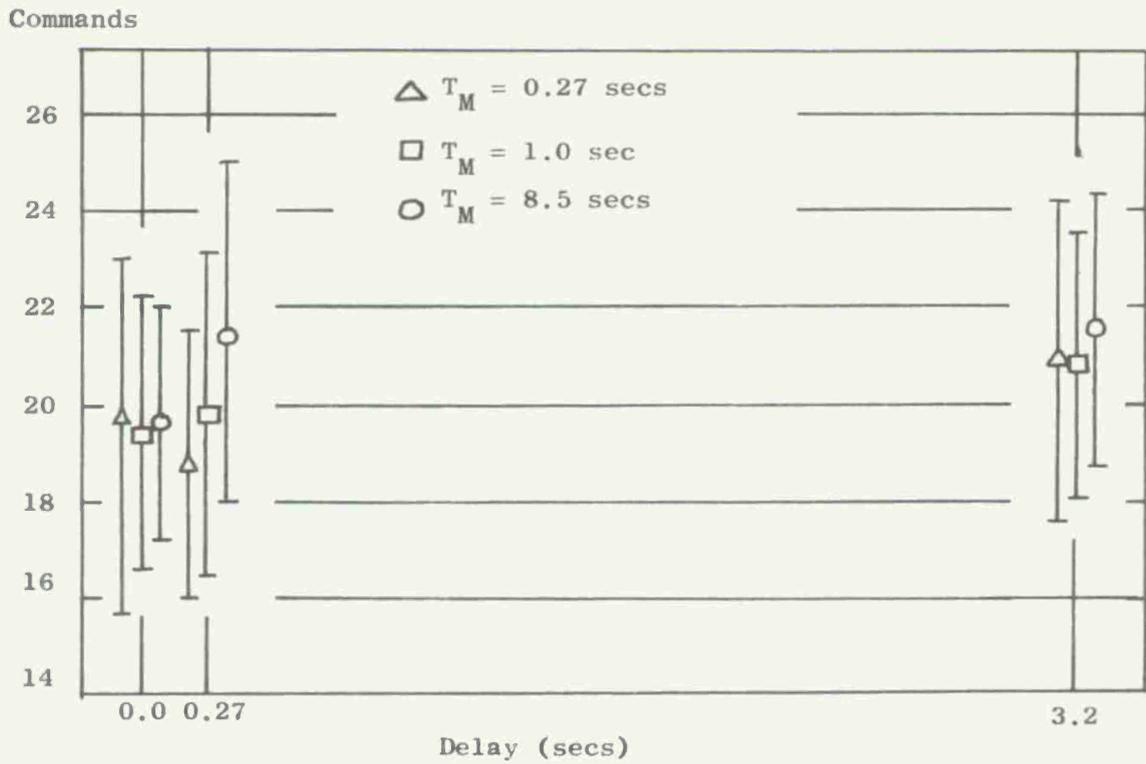


Fig. 15. Effect of Delay and Lag on Number of Commands used (Intermittent Vision).

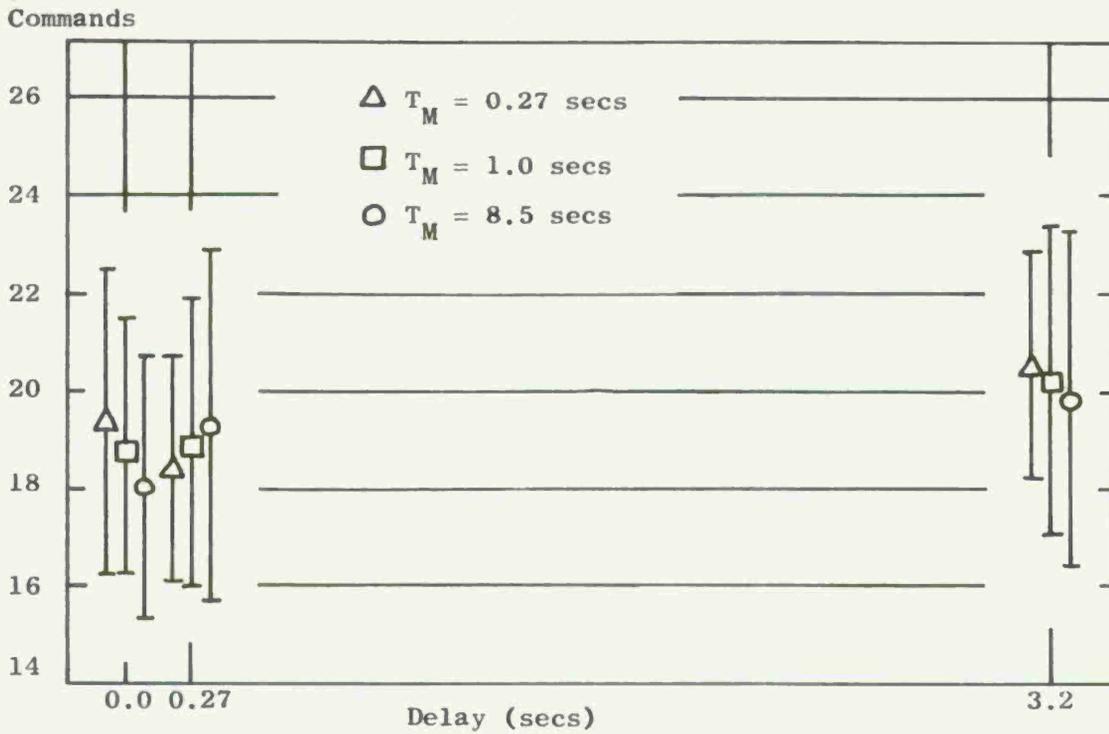


Fig. 16. Effect of Delay and Lag on Number of Commands used (Continuous and Intermittent Vision Combined).

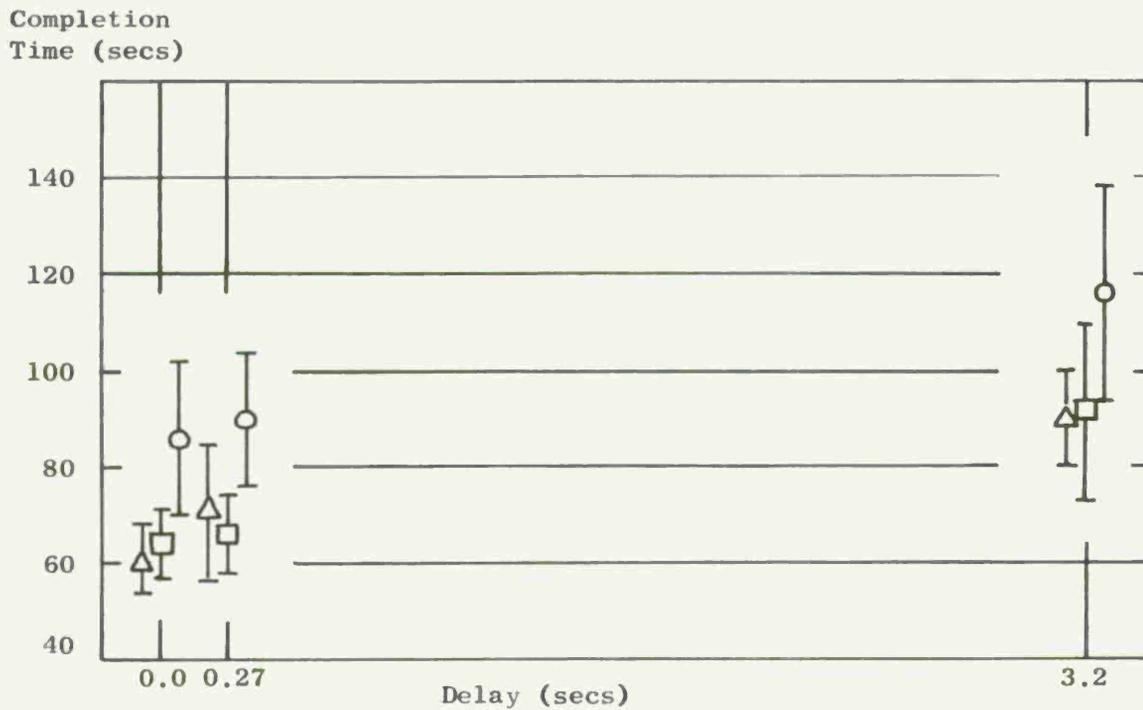


Fig. 17. Effect of Delay and Lag on Completion Time (Continuous Vision).

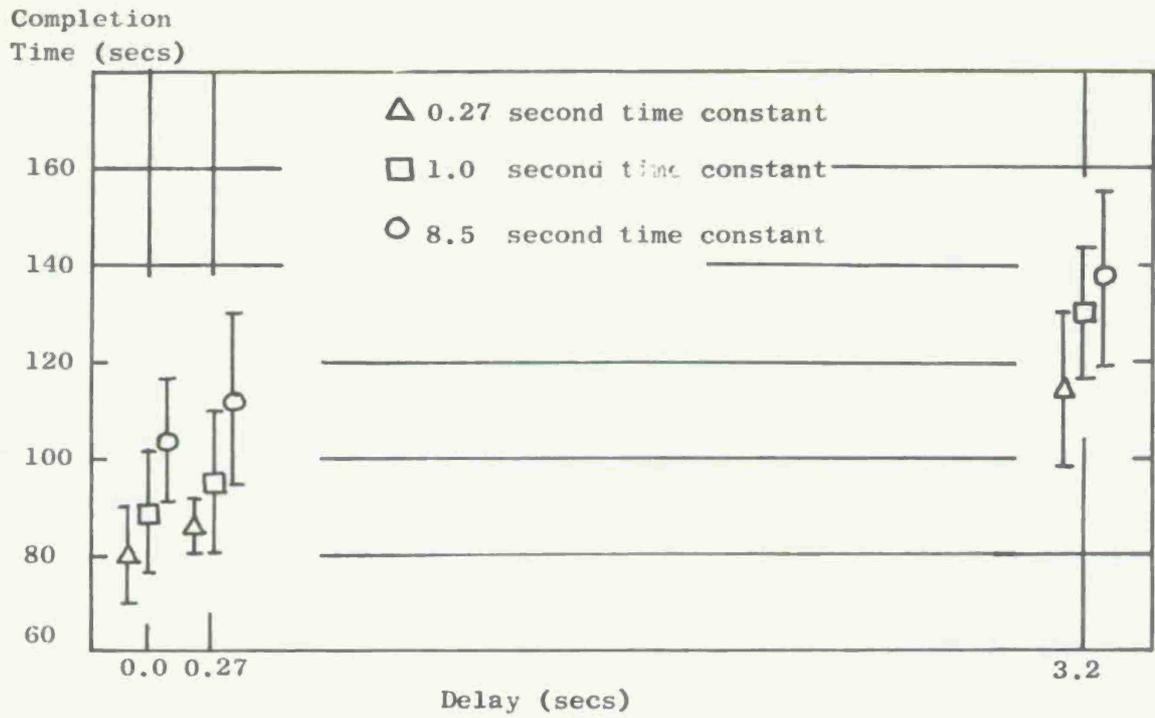


Fig. 18. Effect of Delay and Lag on Completion Time (Intermittent Vision).

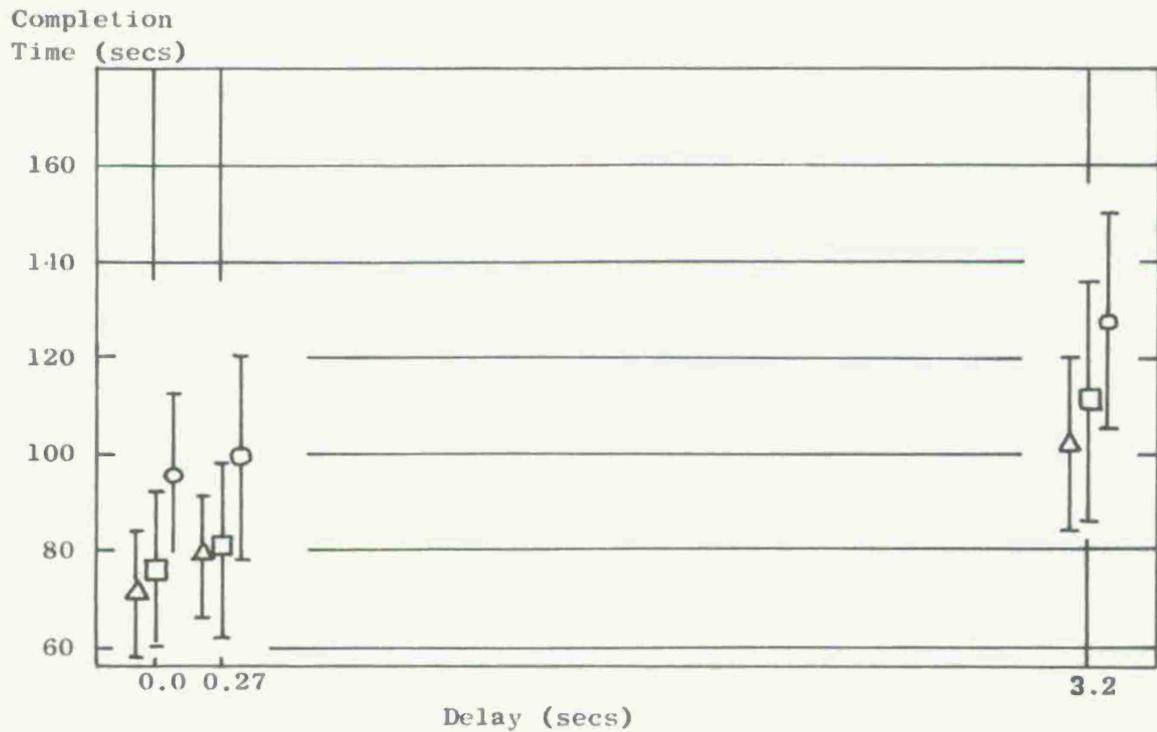


Fig. 19. Effect of Delay and Lag on Completion Time (Continuous and Intermittent Vision Combined).

Fuel Used (normalised)

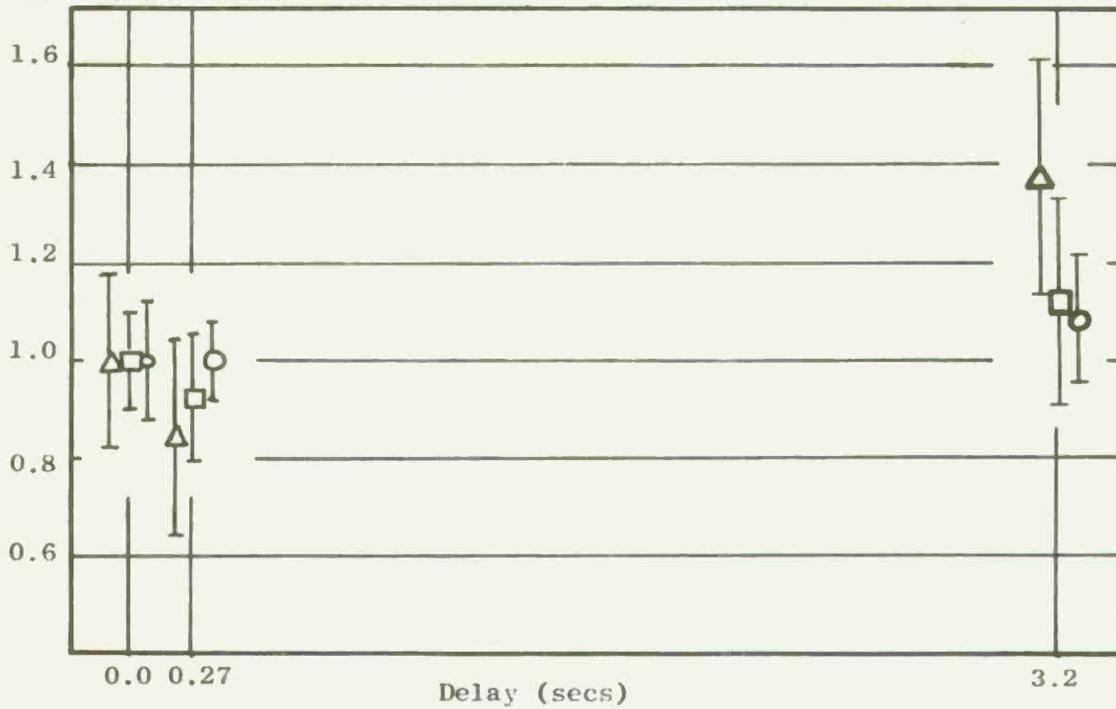


Fig. 20. Effect of Delay and "Delay plus Lag" on Fuel used (Continuous Vision).

Fuel Used (normalised)

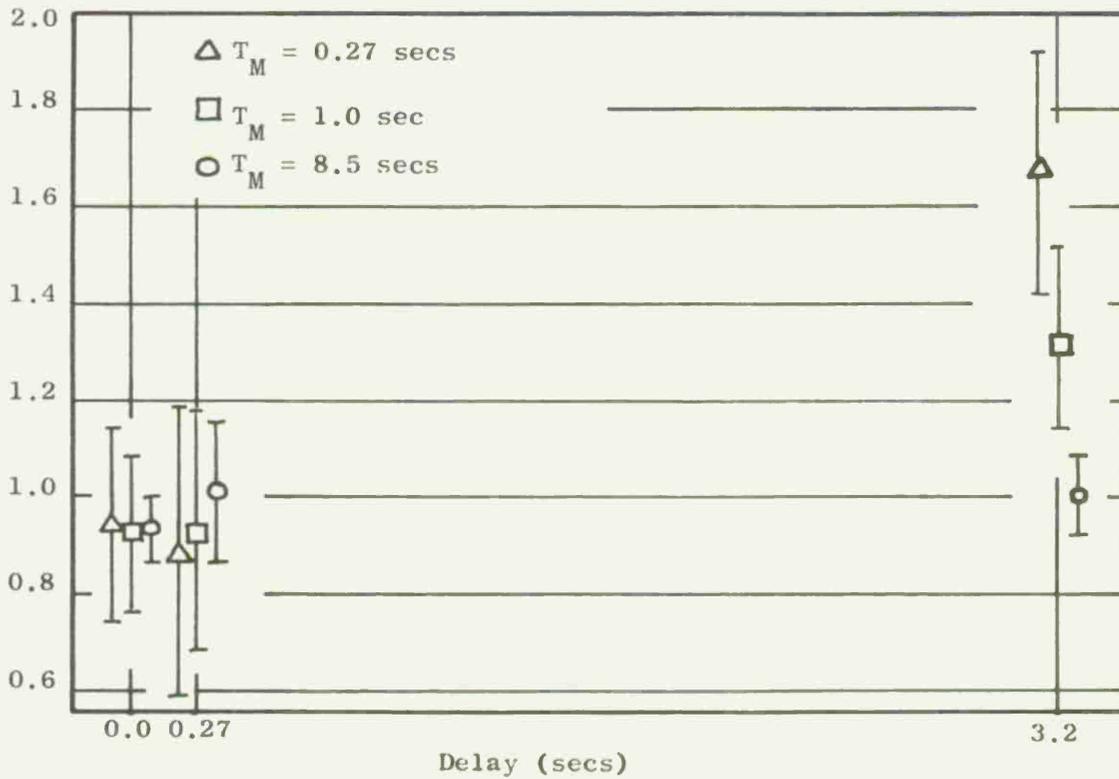


Fig. 21. Effect of Delay and "Delay plus Lag" on Fuel used (Intermittent Vision).

Fuel Used
(normalised)

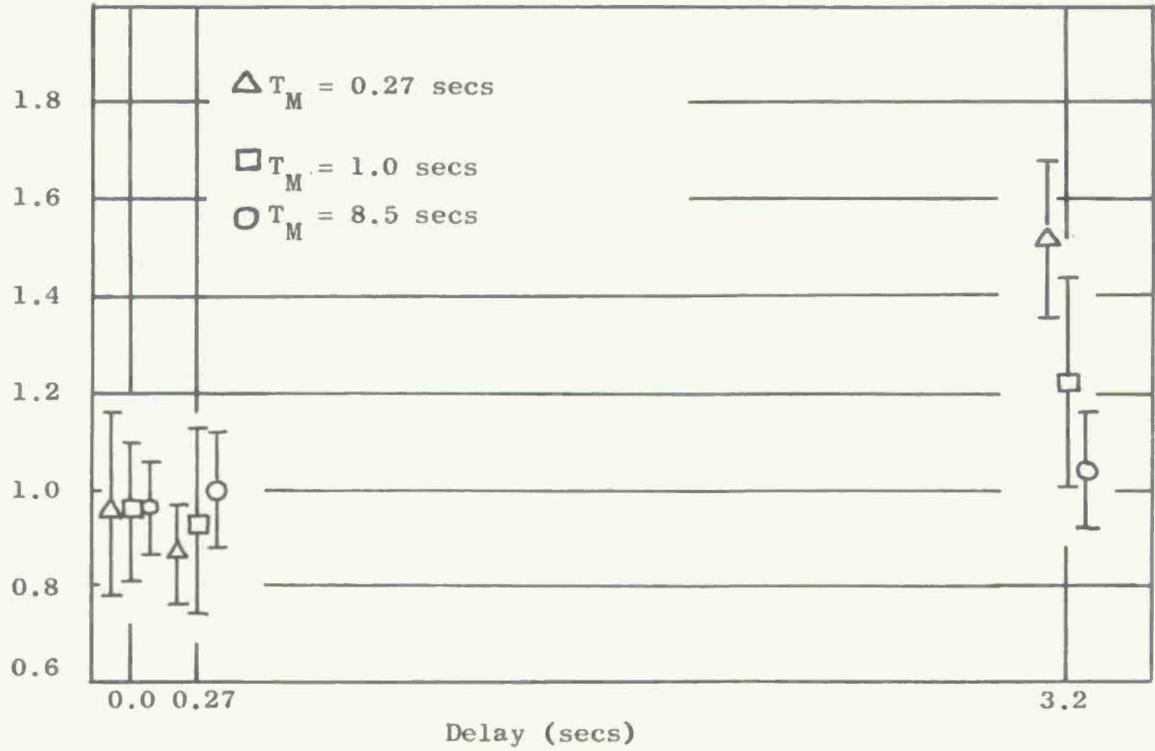


Fig. 22. Effect of Delay and "Delay plus Lag" on Fuel used
(Combined Continuous and Intermittent Vision).

intermittent vision. A large mass will evidently require more "fuel" than a small one if moved in the same manner between the same two points.

With the small dynamic lag, there appears to be a considerable increase in fuel required when the delay was 3.2 seconds. A proportional increase is not found for the large dynamic lag. No explanation is offered for this difference.

5.3 Effect of Lack of Motion Cues on Performance

During Phase II of the experiment, four experiments were run. Three of these were designed to answer questions raised during Phase I of the experiment, while the fourth was an investigation into the usefulness of some degree of automatic control at the "remote" end of a man-machine system.

One question to be answered was, "How would the operator perform if the intermittent picture presented to him provided no velocity information?" During the intermittent vision experiments of Phase I, subjects had been able to perform accurate control actions during blackout periods by extrapolating from previous visual information. If the operator of a remote machine did not have a television-type display, but instead was seeing a succession of built-up pictures, he might be unable to predict as accurately, and therefore require more commands.

The subject was told to complete the same task as in the previous experiment. There were two display conditions: (1) a view of the continuous display, lasting 0.6 seconds at 4.2 second intervals and otherwise occluded, and (2) a static "snapshot type" picture displayed for 0.6 seconds at 4.2 second intervals and otherwise occluded.

The first subject for this experiment was inexperienced in this task. The results obtained when he performed this task with a 3.2 second delay and 0.27 second time constant are tabulated below.

<u>Display</u>	<u>Time (secs)</u>	<u>Commands</u>	<u>No. of Errors</u>
Static	176 (21.2)	28.3 (3.0)	3
Moving	140 (11.8)	27.3 (1.4)	0

The tabulated figures are the mean and standard deviation for 10 completed runs.

Table 4. Effect of "Static" Vision on Inexperienced Subject's Performance

The ten "static" runs were completed before starting the "moving" runs. The subject (an experienced observer) stated that he could detect no difference in difficulty between the two conditions (he did not see the experimental printout).

A student's t test shows the difference between the times to be significant at the 0.1% level. The F test for variance ratio shows the difference between the times is significant at the 5% level, and the difference between the commands is significant at the 1% level. These results suggest that this subject did use the motion cues obtained from a TV-like picture, although some learning may have occurred during the experiment.

Further tests were made using two subjects. One (D.B) was experienced, having been tested during Phase I of the experiment, while the other (K.C.) was inexperienced, having had less than 10 hours training prior to the experiment. Subject D.B. was tested under four conditions: (a) no delay and 8.5

second time constant, and (b) 3.2 seconds delay and 0.27 second time constant ; each of these with the same two display conditions, static or moving, lasting 0.6 seconds at 4.2 second intervals.

The results are tabulated below.

Time Constant (secs)	Delay (secs)	Vision Time (secs)	Commands	No. of Errors
8.5	0.0	Moving 109 (19.5)*	26.0(4.4)	5
8.5	0.0	Static 115 (13.3)*	26.8(4.9)	1
0.27	3.2	Moving 127 (24.3)**	29.3(5.2)	7
0.27	3.2	Static 128 (13.9)**	28.0(3.5)	5

The tabulated figures are the mean and standard deviation for 16 completed runs at each condition.

Table 5. Effect of Static Vision on Experienced Subject's Performance.

** Significant at 2 1/2% level (F test)
 * Significant at 10% level (F test)

These figures are the mean and standard deviations for 16 completed runs. The subject completed four runs under one condition and then changed to another condition. The order of the conditions was varied.

The differences between the means for static versus moving display are not significant at the 5% level (t-test). The F-test for the ratio of the variances showed significant differences between the static and moving conditions (see Table 5).

The other subject, K. C., was tested under one condition, no delay and 8.5 second time constant. His results are tabulated below.

Display	No. of Runs	Time (seconds)	Commands	No. of Errors
Moving	10	105.7 (10.6)	25.9 (3.9)	6
Static	12	110.7 (8.4)	25.4 (3.7)	7

Table 6. Effect of Static Vision on Inexperienced Subject's Performance.

The differences between these results are not significant.

From these results, it appears that the subjects did not need to motion cues that could be obtained from a TV-type picture lasting 0.6 seconds. The experienced subject (D. B.) stated that he preferred the static picture because it was less confusing. The inexperienced subject (K. C.) stated that he had no preference for either type of display. It therefore seems possible that the operator of a remote manipulator will experience little difficulty in using a static picture that is updated at intervals.

5.4 Effect of Speed on Operator Performance

The next experiment attempted to discover what effect, if any, the speed of travel of the fingers had on operator performance. One subject (K. C.) was used, with one condition, no delay, 8.5 second time constant, continuous vision. Four speeds were used: 0.23 inches/second, 0.46 inches/second, 0.92 inches/second, and 1.85 inches/second. The subject had 20 runs at each speed. He did them in groups of 5 runs in varying order. The results of this experiment are tabulated below.

Speed (in/sec.)	Time (secs.)	Commands	Errors
0.23	100.7 (9.2)	20.0 (3.4)	6
0.46	74.1 (8.6)	21.0 (3.9)	4
0.92	67.6 (12.4)	23.2 (3.3)	4
1.85	62.0 (12.9)	21.3 (3.4)	9

Table 7. Effect of Speed on Subject's Performance.

These results are plotted in Figure 23. The times appear to have a linear relation to the inverse of velocity, which might be expected.

The subject considered that the high velocity was more difficult, and this was evident to the experimenter. The number of errors at this speed is not, however, shown to be significant by a chi-squared test.

5.5 Effect of Increased Delay on Performance

The third experiment investigated longer delays than those used in Phase I of this work. Three subjects were used (one of them the author) with 4 delays, 0.0 seconds, 3.2 seconds, 8.0 seconds, and 12.8 seconds. The time constant was 8.5 seconds. In order to increase the task difficulty, the oversize of the target hole was reduced from 0.21 inches to 0.07 inches, and limitations were placed on the use of the jaws. If the jaws hit the ground, an error was called; and if they gripped the block too hard, an error was called. The task difficulty was increased in order to hold the subjects' interest and to prevent boredom. The constraints, especially with 12.8 seconds delay, require a large amount of effort from the subject. (One subject, D.B., received a round of applause from a visiting audience after completing a run.) The maximum velocity was changed to 0.46 inches/second.

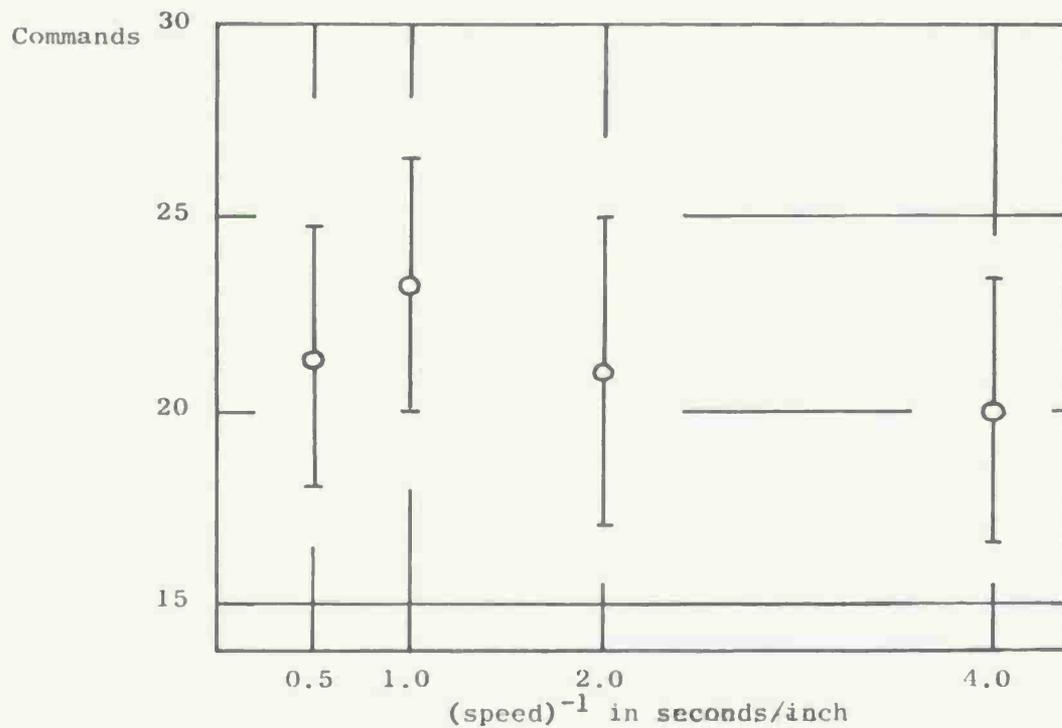
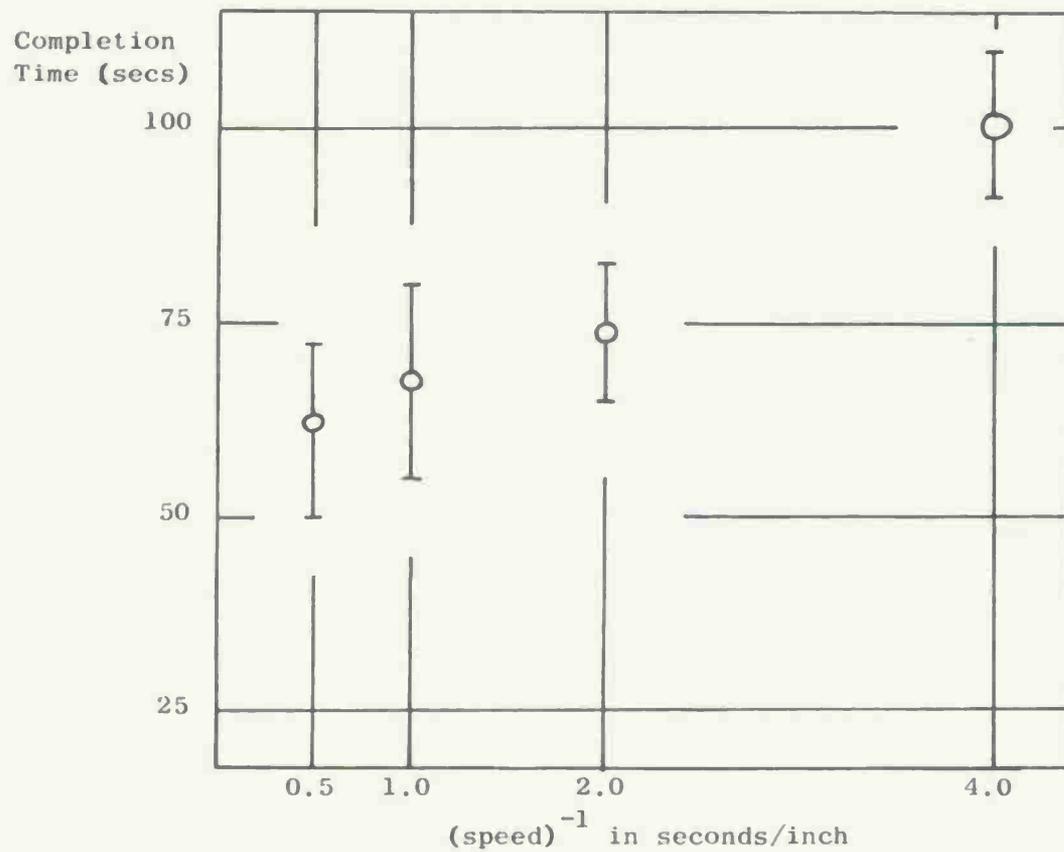


Fig. 23. Effect of Speed on Operator Performance.

The subjects were given the same instructions as before.
 They each completed ten experimental runs for each delay.

The results are tabulated below.

Delay secs.	Subject D.B.	Subject K.C.	Subject S.M.
	TIME (secs.)		
0.0	90.4 (6.5)	90.7 (13.2)	72.4 (8.4)
3.2	119.0 (24.4)	126.8 (17.5)	120.4 (25.0)
8.0	173.9 (28.0)	198.4 (25.7)	167.3 (26.5)
12.8	260.0 (38.2)	230.4 (24.8)	287.0 (86.3)

COMMANDS

0.0	20.0 (2.9)	22.0 (2.6)	21.5 (3.7)
3.2	27.4 (3.6)	22.3 (2.2)	27.9 (4.0)
8.0	30.4 (3.6)	24.9 (2.0)	30.0 (3.5)
12.8	32.2 (5.4)	24.2 (1.2)	34.9 (8.7)

ERRORS

0.0	0	1	3
3.2	3	5	5
8.0	6	10	6
12.8	4	6	5

The tabulated figures are the mean and standard deviation for 10 completed experimental runs for each subject.

The errors are the number of unsuccessful runs made while making 10 completed runs.

Table 8. Effect of Long Delay on Performance.

This data is plotted in Figures 24 and 25. It can be seen that completion time increases approximately linearly with delay. The number of commands also increases with delay for two of the subjects, whereas there is no such evident trend for the third.

One subject, D.B., altered his strategy from using the maximum available velocity for large motions to using about half the available velocity. The other two used the maximum velocity for all large motions.

There is no obvious reasons why the number of commands should increase with delay. This trend was not evident in the first set of experiments, possibly because the task was much easier. The long delays were so long that all moves were "open loop" for the two subjects using maximum velocity, whereas D.B., using half maximum velocity, was able to obtain some visual cues from initial motion. It can be seen that the results for D.B. and S.M. are very similar. It may well be that the irritation caused by a long delay added to the long settling time for the large time constant caused a deterioration in their performance.

The number of errors appears to increase to 8.0 seconds, and then decrease with increasing delay, which seems very unlikely. A chi-squared test shows that these differences are significant at the 10% level.

5.6 Supervisory Control

The final experiment attempted to discover how effective the special subroutines would be to the operator. Two subjects

Commands

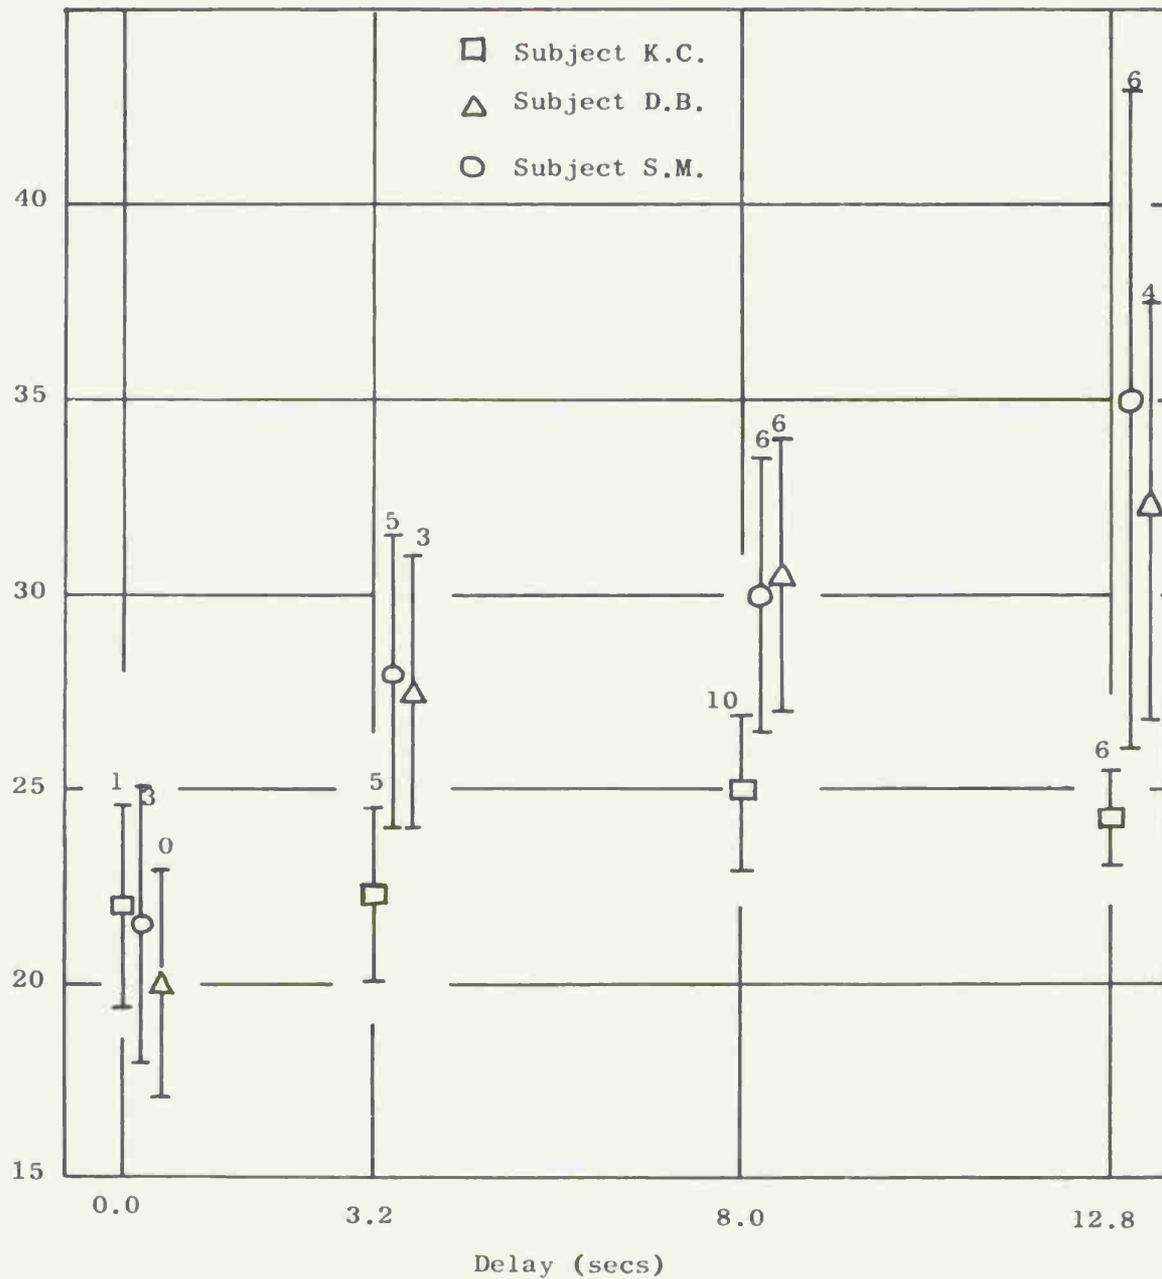


Fig. 24. Effect of Long Delay on Commands Used.

Note: The figures at the top of the standard deviation bars indicate the number of errors made per 10 completed runs.

Completion
Time (secs)
400

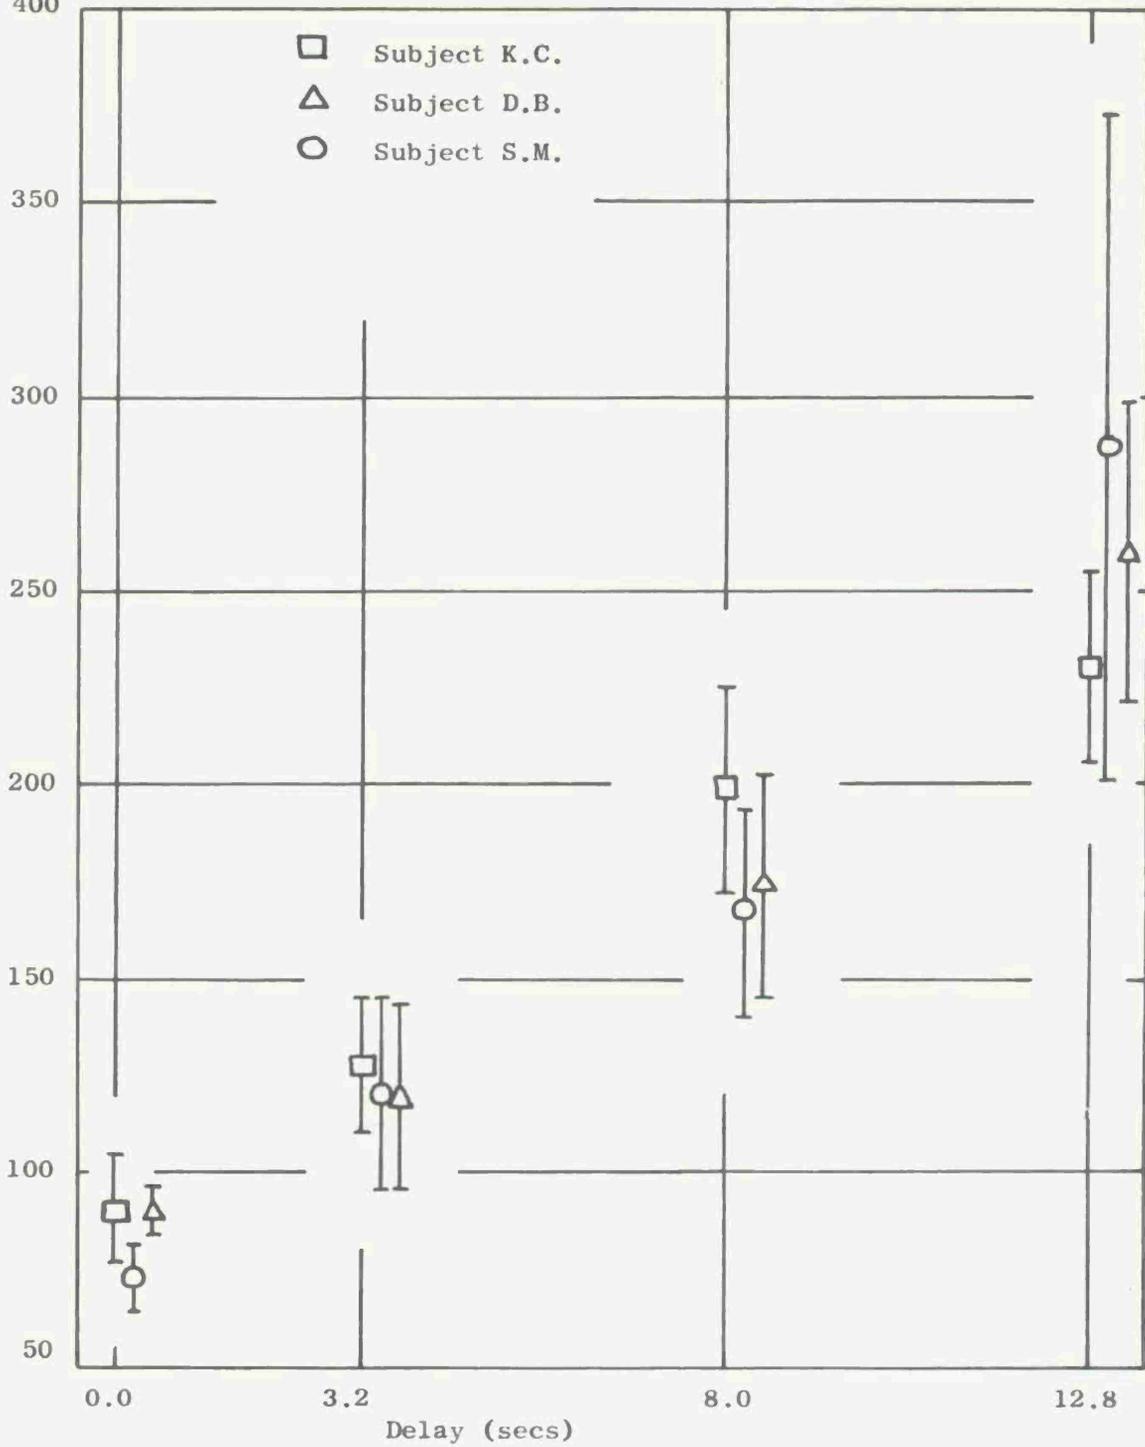


Fig. 25. Effect of Long Delay on Completion Time.

were used under two conditions, no delay and 12.8 second delay. They were told to use the subroutines to pick up the block, locate it in the hole, and to lower and release it. These subroutines were initiated by the subject by using Switches No. 12, 13, and 14 on the control panel.

In their initial arrangement, the subroutines were slightly unreliable. This was mainly due to the difficulty of programming an adequate simulation of elastic collisions between bodies. The amount of rebound, and hence the size of the step, varied widely from run to run. A velocity feedback loop inserted in the subroutine solved that problem. The subroutines stopped all motion before proceeding. However, the large time constant present in the system sometimes allowed the block to drift a long way out of position before stopping.

The subjects thought that because the job was now automated, they merely had to press switches, whereas judgment of time durations and estimations of distances and rates was still necessary, although the precision required was far less.

Some preliminary results show that the use of these subroutines seemed to offer little advantage. These results are tabulated here.

Subject	Delay (secs.)	Time (secs.)	Commands
K. C.	12.8	264 (34.5)	24.6 (3.5)
K. C.	0.0	152 (39.5)	22.9 (2.6)
D. B.	0.0	117 (28.3)	19.1 (1.4)

Table 9. Preliminary Results Using Subroutines

The figures show no great improvement over those obtained without using the automatic subroutines.

The subjects were told to perform the same task as before, using for one set of runs all the subroutines, and for the other set using only two of the three, omitting the first subroutine. As before, there were two delays used. One subject, D.B., also repeated doing the task with no subroutines.

These results are tabulated in Table 10 (page 50).

These results are plotted on Figures 26 and 27.

It can be seen from Table 10 that fewer commands were needed when the subroutines were used. An F test showed significance at the 5% level for subject K. C. for both delays, and significance at the 1% level for the 12.8 second delay for subject D. B. A Students' t-test showed differences significant at the 0.1% level for these subjects and delays. The F and t tests show no significant differences between subject D. B. 's earlier and later performance with no delay.

A chi-squared test showed no significant difference between the errors made with or without subroutine use.

Both subjects commented that the subroutines were very useful at the 12.8 second delay. They found the task much easier, and appeared less strained. They did not consider the subroutines useful for the no delay condition. It can be seen from the table that the average completion time with no delay was about 50% more with the subroutine than without them. This added time irritated the subjects.

Commands

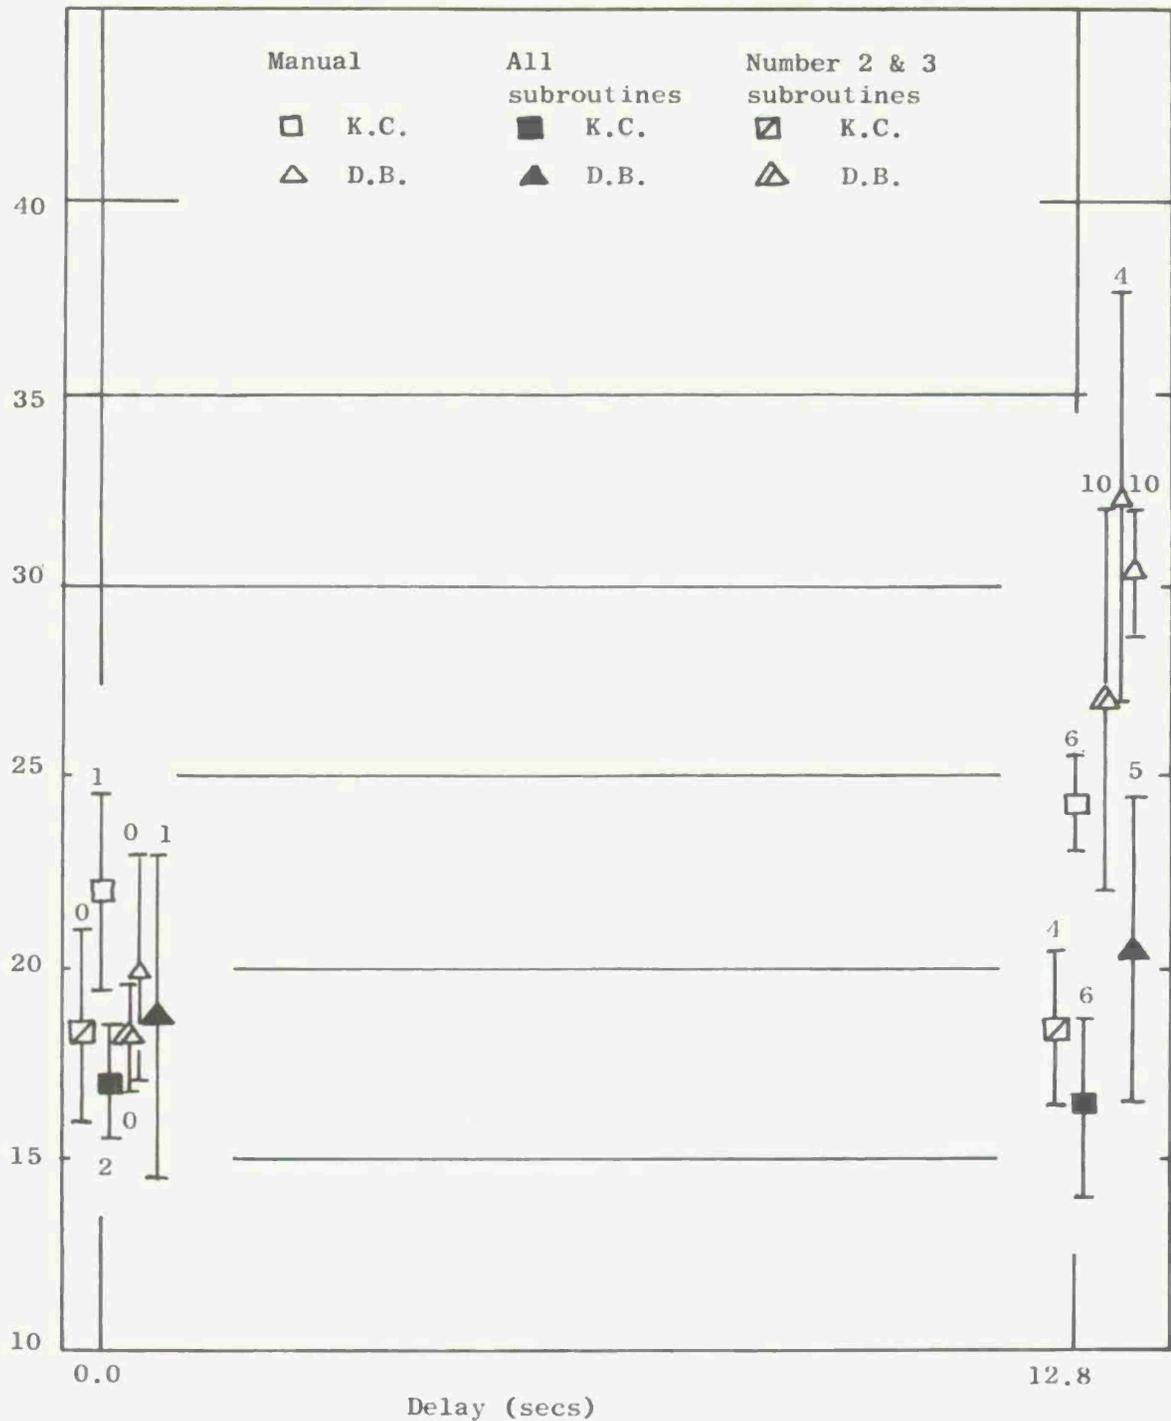


Fig. 26. Effect of Automatic Subroutine Use on Commands Used.

Note: The figures at the end of a standard deviation bar indicate the number of errors made per 10 completed runs.

Completion
Time (secs)

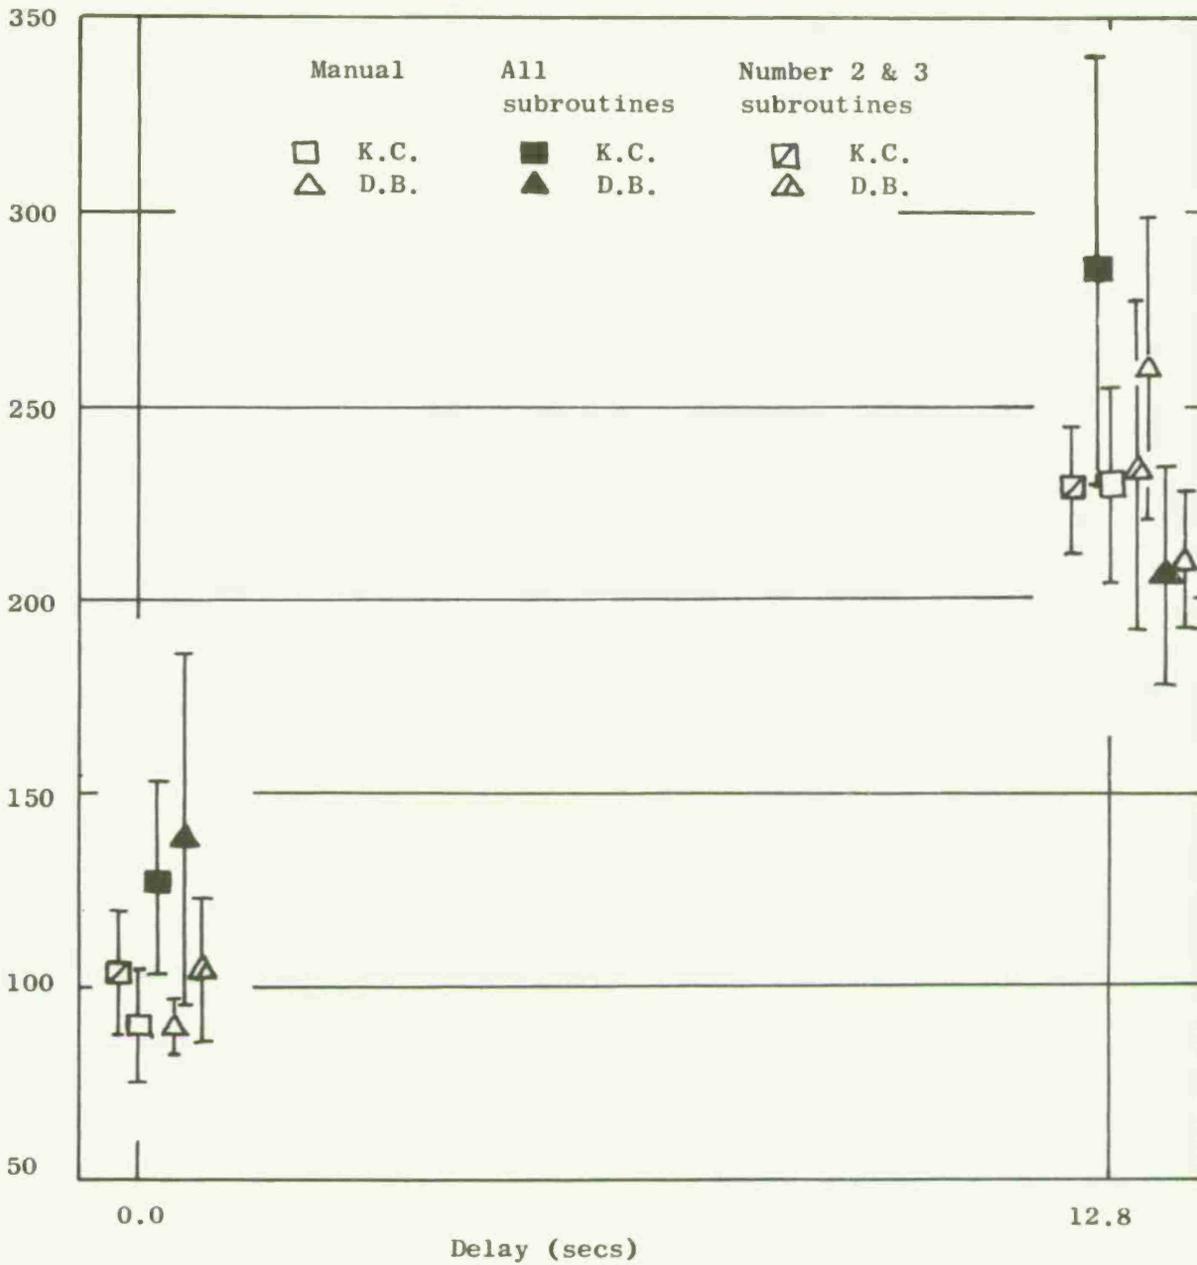


Fig. 27. Effect of Automatic Subroutine Use on Completion Time.

Subject D. B. objected to performing the task without subroutines with a 12.8 second delay, after he had become used to using the subroutines. His performance, however, was slightly better on this occasion (see Table 10).

With a delay of 12.8 seconds, subject D. B. used notably more commands when he was deprived of the use of subroutine no. 1. He used an average of 6.6 more commands per run. He used 10.1 (1.9)¹ commands to complete the grasp and lift operation when he was allowed to use subroutine no. 1, and 16.2 (2.3)¹ commands when he could not use this subroutine. The difference between these corresponds to the over-all difference of 6.6 commands. When not allowed to use any subroutine at all, he used 17.2 (1.2) commands to reach the same point. These figures suggest that this subject's strategy is close to optimal, whereas earlier tests had suggested that the availability of automatic subroutines had made him careless (see Table 9). The error scores are, however, some evidence that subjects are more careless when using the subroutines.

1. Mean and standard deviation

6. CONCLUSIONS

The experiments described in this report support Ferrell's prediction (12) that delayed manipulation is possible using a continuous rate controlled machine, and that operators of such a machine will use a move-and-wait strategy. The time to complete a task increases approximately linearly with delay, at least up to about 12 seconds which was the longest delay used. At the longer delays, however, the subjects' performance measured in terms of errors and of commands needed, appeared to deteriorate. The subjects considered a delay of 12 seconds a difficult task. Note that the delay is not in the evaluation of response, as reinforcement in a learning experiment. It is a delay of any knowledge of results whatsoever.

The provision of relatively low-level feedback and decision making ability to the remote machine made the task much easier for the subject when working with a long delay. The number of commands used with supervisory control was significantly fewer than without it. The supervisory control mode might be expected to reduce the completion time for the long delay condition, by eliminating the numerous waiting periods which occur while the operator waits for confirmation that one move was successful before making the next. The results of the supervisory control experiments do not show this. The operator still waited, but with an obviously decreased perceptual burden.

The use of a "static" displayed picture instead of a continuous television type display did not seem to impair the subjects' performance. This suggests that a small capacity visual

feedback channel might provide enough information for the operator of a remote manipulator through a succession of static "snapshots". Anecdotal evidence suggested that the operators would prefer occasional "snapshots" during the execution of a subroutine to assure themselves that the correct action was being taken and that time was not being wasted.

The design and use of this program shows that a small, high-speed computer can be used to provide a moderately interesting experiment. In the real work, however, objects are not always rectilinear, nonslippery and almost indestructible. Manipulators do not have uncoupled motions and infinite room to maneuver. They are not always on a stable platform, and they work in a three-dimensional world. Further development of this work should include some of these difficulties.

The automatic subroutines, while adequate for their immediate purpose, might be replaced by a larger set of simpler decision making logical steps. The operator would decide the order of these and then transmit this to the machine.

The advantages of a computer with high-speed input-output facilities and user-compatible software capabilities as compared to laboratory hardware are illustrated by the following example. The addition of a feedback servo loop to one part of the program took 30 minutes. This includes designing the program modification, modifying the program on-line, assembling the modified program, testing the program, and punching out the modified program on paper tape.

Appendix I. Operation of the Program

This appendix describes the procedure for using the program. This procedure is correct on 11 May 1966; however, changes are made to the PDP-1 programming system from time to time, and any user should confirm from R. L. E. staff that this procedure will work.

The program uses the time-sharing facilities of the PDP-1, but requires "infinite quantum", that is to say, the computer's entire continuous attention, for useful experimental results. Debugging and revision do not require infinite quantum. Infinite quantum is only available at night and during the weekend. Specific permission must be obtained from the Research Laboratory of Electronics to use the PDP-1 during these times.

The instructions below cover the following activities:

(a) Loading the Program; and (b) Using the Program.

(a) Loading the Program.

Switch on a console. (The typewriter should type "hello" back.)

Type "edit", then "carriage return".

Push down Sense Switches on your console.

Load the tape into the reader with the sprocket holes nearer the machine. Arrange the leader in the left hand box.

Switch on the reader.

Type "r", then "carriage return".

Watch the tape and riffle it.

When it is all read in, turn off the reader.

Provided that it was read in correctly, proceed to assemble.

Type "j", then "carriage return".

Type "N".

Type "s".

The computer should then type "JA WS - pass1".

Wait for a completion pulse.

Type "s".

The computer should then type "JA WS - pass2".

Wait for a completion pulse.

Type "s".

Type "b", then "carriage return".

The computer should then type "dismissed".

Type "ddt", then "carriage return".

Type "2T".

Wait.

After an interval, the computer will type something like (op 7) .

Type "lU".

The program is now loaded.

(b) Using the Program .

Push up sense switches 2, 3, 6.

Type "4G", then carriage return".

The computer will then type several lines and punch some tape, then type "Punching completed", then wait for either the experimenter or the subject to do something. If the subject were to press Switch No. 3 on his panel, an experimental run would start. At this point, however, the experimenter wishes to change some parameters. In order to do this, first touch the "call" button on the console. The current location and its contents will be typed out. Ignore these.

Suppose, for example, that the experimenter wants to change the contents of register "mss" to 3.

He types "mss/".

The computer types "bg2+l7" (say).

He types "=".

The computer types "77".

He types "3", then "carriage return".

The complete line of typescript looks like this:

mss/ bg2+l7 = 77 3

In order to change the subject's initials, the procedure is

Type sjt/

The computer types "2l4522" say,

Type " ~".

The computer types "sgm".

Type (say) "jqp", then "carriage return".

The typescript line looks like

sjt/ 2l4522 sgm jqp"

sjt is the only register that has to be altered in this way.

The experimental parameters that can be carried in this way include:

- mss, the mass or time constant
- spd, the gain between knob setting and steady state velocity.
- dly, the transmission delay between the knobs and the system.
- tol, the horizontal tolerance available for fitting the block into the slot.
- eps, the vertical tolerance on overlap.

tm 1, these are time settings.
 tm 2, to determine the nature.
 tm 4, of the display presented to the operator.
 co 1, the cost of time.
 co 2, the cost of display.
 co 3, the cost of fuel.
 co 4, the cost of commands.
 gty, the gravity field.

The parameters mss and spd are used as shifting instructions in the program. They may have the following values:

mss, 2, 3, 7, 17, 37, 77, 177, 377
 (do not use mss = 1)
 spd, 5001, 5003, 5007, ... 5377
 (The 500 is part of the shift instruction.)

The parameters tol and eps are simple linear dimensions.

The parameters dly, tm 1, tm 2, and tm 4 depend on the program cycling speed, which is 17 octal cycles per second. Therefore, if register dly contains 17, there will be a transmission delay of 1 second. The use of registers tm 21, tm 2, and tm 4 is better understood if the display control and coordinate transfer sections of the program are understood. The constraints on the contents of these registers are:

$$\begin{aligned}
 0 &< \text{dly} < 400 \\
 1 &< \text{tm } 1 < \text{tm } 2
 \end{aligned}$$

Examples: tm 1 = 100, tm 2 = 101, tm 4 = 0 gives a continuous display of the task.

tm 1 = 16, tm 2 = 17, tm 4 = 170 gives an interrupted display of the task, with a cycle time of 9 seconds with the display on for one second.

tm 1 = 2, tm 2 = 17, tm 4 = 36 gives a snapshot-type display which is on for 1 second every 3 seconds.

The registers co 1, co 2, co 3, and co 4, may be used to contain "costs" of various "expenditures" incurred while performing the task. Suggested values are: co 1 = 10, co 2 = 10, co 3 = 1000, co 4 = 10. These are all linear multipliers.

The registers run, dte, mth, yr are useful for bookkeeping. The register run is indexed after each run.

After setting the content of these registers, the subject may start a run by pressing Button No. 3. The computer will type "knobs" if any switch except No. 9, 16, 17 is 'on', or if knobs No. 0, 3 are not set at the zero point.

The subject operates the jaws through these controls (see Fig. 4):

L. H. Knob	x velocity
R. H. Knob	y velocity
No. 9 Switch	lets the computer see the velocity knobs
No. 8 Switch	opens or closes the jaws
No. 17 Switch	leave open
No. 16 Switch	down for open, up for close jaws
No. 5 Switch	finishes the run

No. 2 Switch	will provide a brief display
No. 11 Switch	provides a continuous display
No. 12 Switch	starts subroutine No. 1
No. 13 Switch	starts subroutine No. 2
No. 14 Switch	starts subroutine No. 3

At the finish of a run, the program will produce typeout and punchout under control of sense switches No. 2, 3, 6. With all of these up, a complete set of output is produced. Pushing No. 3 down shortens the typeout. Pushing No. 2 down removes the punched output. Pushing No. 6 down eliminates all output. The punched tape may be read and typed out by the flexowriters used for off-line tape generation.

This typeout is a coded and timed list of the subject's "commands" during the run. The first two digits identify the command, the last four tell the time when the command was given.

The command identifying codes are:

01	start subroutine No. 3
02	start subroutine No. 2
04	start subroutine No. 1
(Note: these three may be "anded" together.)	
05	no subroutine on
21	increase x velocity
22	decrease x velocity
31	decrease y velocity
32	increase y velocity
41	close jaws
43	open jaws
45	stop opening or closing jaws
51	demand vision
53	demand vision

The last four digits are generated by the program cycle counter, shifted so that each increment represents approximately one half second.

An example of the typeout is given in Fig. 13. An explanation of the coded information follows:

Type 60D30

First digit 6 shows that the register mss contains 6 bits, i. e., $mss = 77$;
Second digit 0 indicates continuous vision;
Second digit 1 indicates intermittent vision;
Third character D indicates a non-zero delay;
The remainder is half the number contained in the register dly.

The instructions given above are sufficient to load and run the program, provided that no fault occurs. It is unlikely, however, that no error will ever occur during extended use of this program. A knowledge of the basic time-sharing system may be obtained from the note, "An Introduction to the PDP-1 Time-Sharing System Programs. PDP-29-1. E. E. Dept. M. I. T." which is written for a beginning user.

Note: The user will become familiar with the time that the time-sharing system takes to carry out the activities ordered by "N", "S", "LU", "2T", etc. If, on any occasion, these times vary widely, something has gone wrong. Particular note should be taken of the time taken to do "2T", after modifying the symbolic text. If this takes about 3 seconds, it may be necessary to return to your text, punch out, and start again from the beginning.

REFERENCES

1. Goertz, R. C. Mechanical Master Slave Manipulator. Nucleonics. November 1954.
2. Johnsen, E. G. The Case for Localized Control Loops for Remote Manipulators. Paper presented at I.E.E.E. Human Factors Group Symposium, Boston, May 1965.
3. Yeršov, A.P. One View of Man-Machine Interaction. Paper presented at a Seminar on Automation of Thinking Processes under the auspices of the Scientific Council of Cybernetics of the Academy of Sciences of the Ukrainian Soviet Socialist Republic. Kiev 1963. Translation published in Journal of the Association for Computing Machinery. July 1965.
4. Woodhouse, T. Jacquards and Harnesses. MacMillan and Co., London, 1923.
5. Ernst, H. A. MH1 - A Computer-Operated Mechanical Hand. Sc.D. Thesis (E.E.), Massachusetts Institute of Technology, 1961.
6. Dunne, M. J. The Industrial Robot as a System Component. Paper prepared for the Joint Automatic Control Conference, Rensselaer Polytechnic Institute, Troy, N.Y. Paper XXIV-4. June 1965.
7. Proceedings of the 1964 Seminars on Remotely Operated Special Equipment. United States Atomic Energy Commission reports CONF-640508 and CONF-641120.
8. Kappl, J. J. A Sense of Touch for a Mechanical Hand. S.M. Thesis (Mech. Eng.), Massachusetts Institute of Technology, 1963.
9. Strickler, T. G. Design of an Optical Touch Sensor for a Remote Manipulator. S.M. Thesis (Mech. Eng.), Massachusetts Institute of Technology, 1966.
10. Ferrell, W. R. Remote Manipulation with Transmission Delay. Ph.D. Thesis (Mech. Eng.), Massachusetts Institute of Technology, 1964.

REFERENCES

(Continued)

11. Smith, K. U. Delayed Sensory Feedback and Behavior.
W. B. Saunders Co., Philadelphia, 1962.
12. Ferrell. *ibid.*, p. 112.
13. Crawford, B. M. Joy Stick vs. Multiple Levers for Remote Manipulation Control. Wright-Patterson Air Force Base report AMRL-TR-65-76. April 1965.
14. Digital Equipment Corporation. Programmed Data Processor - 1 Manual. Maynard, Mass., 1962.

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1 ORIGINATING ACTIVITY (Corporate author) ENGINEERING PROJECTS LABORATORY Department of Mechanical Engineering Massachusetts Institute of Technology		2a REPORT SECURITY CLASSIFICATION UNCLASSIFIED
		2b GROUP N/A
3 REPORT TITLE A Computer Simulation Experiment of Supervisory Control of Remote Manipulation		
4 DESCRIPTIVE NOTES (Type of report and inclusive dates) Final Report		
5 AUTHOR(S) (Last name, first name, initial) T. B. Sheridan S. G. McCandlish		
6 REPORT DATE April 1967	7a TOTAL NO. OF PAGES 72	7b NO. OF REFS 14
8a CONTRACT OR GRANT NO. AF 19(628)-3317	8a. ORIGINATOR'S REPORT NUMBER(S) ESD-TR-67-290	
b. PROJECT NO. 7682		
c. Task 768204	8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) DSR 9960-5	
10. AVAILABILITY/LIMITATION NOTICES Distribution of the document is unlimited		
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY Decision Sciences Laboratory Electronic Systems Division L. G. Hanscom Field, Mass. 01730
13 ABSTRACT <p>The long term aim of this work is the modeling of the process by which the human commands and controls a real-time information system containing automatic subroutines which may be used to accomplish portions of the task. Remote manipulation is believed to have all the typical attributes of such a system yet be simple enough to be amenable to laboratory investigation.</p> <p>The replacement of men by remotely operated manipulators is desirable in hazardous task environments such as undersea or interplanetary space. The problems associated with remote operation show that there may be advantages in substituting supervisory control for direct continuous control by the human. This supervisory control requires some low-level intelligence at the remote manipulator.</p> <p>This report describes a computer simulation of a remote manipulation task and rate-controlled manipulator; into the latter was built some low-level automatic decision making ability which could be used at the operator's discretion to augment his direct continuous control.</p> <p>Under experimental investigation were the effect of transmission delay, dynamic lag and intermittent vision on human manipulative ability. The results of these support earlier work which suggested that delay would not make remote manipulation impossible. They also showed that intermittent visual feedback, and the absence of rate information in the display presented to the operator do not seem to impair the operator's performance. These results suggest that a small-capacity visual feedback channel may be sufficient for remote manipulation tasks, or that one channel might be time-shared between several operators.</p> <p>This report describes further experiments in which the operator called in sequence various on-site automatic control programs of the machine, and thereby acted as a supervisor. The results suggest that the supervisory mode of operation has some advantages when the task to be performed is difficult for a human controlling directly. Results show the supervisory mode to require more training than the direct mode. Anecdotal evidence suggested that the operator tended to want some visual feedback during the automatic subroutines portions of the task simply to maintain his confidence that the subroutines were performing as he had intended. Results also indicate that use of subroutines served more to ease the perceptual burden on the operators than to decrease completion time.</p>		

DD FORM 1473
1 JAN 64

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.
- 2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.
- 8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).
10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.
12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.
13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

DEPARTMENT OF THE AIR FORCE
HEADQUARTERS ELECTRONIC SYSTEMS DIVISION (AFSC)
LAURENCE G. HANSCOM FIELD, BEDFORD, MASSACHUSETTS 01730



REPLY TO
ATTN OF:

ESLFE (Dr Sylvia Mayer/75-2168/S 10)

29 JAN 1960

SUBJECT:

Outstanding Technical Report (Ref ESTI ltr dtd 15 JAN 69)

TO:

ESTI (TSgt Noble)

1. ESD-TR-67-290, A Computer Simulation Experiment of Supervisory Control of Remote Manipulation was published and distributed by the contractor in accordance with the Decision Sciences Laboratory mailing list.
2. Eighteen extra copies of this report have been located and are being forwarded to you for your use.

A handwritten signature in cursive script, reading "William F. Heisler", is positioned above the typed name.

WILLIAM F. HEISLER, Colonel, USAF
Chief, Command Systems Division
Directorate of Planning & Technology

2 107 88

EDITOR'S CHECKLIST FOR TECHNICAL REPORT FORMAT

ESD TDR NUMBER

ESD-TR-67-290

DATE

9 May 1967

FRONT COVER

- NO DISCREPANCIES
- COVER OMITTED
- CLASSIFICATION MARKING OMITTED
- ESD IDENTIFICATION OMITTED
- IMPROPER COVER STOCK
- IMPROPER FORMAT

- DATE OMITTED
- OTHER

**Photo ready Mock-up cover attached.
See Item 1, Remarks.**

SPECIAL NOTICES (Inside Front Cover)

- NO DISCREPANCIES
- ALL SPECIAL NOTICES OMITTED
- AVAILABILITY NOTICE OMITTED
- DISSEMINATION NOTICE OMITTED
- DISPOSITION NOTICE OMITTED

- LEGAL NOTICE OMITTED
- OTHER

Legal notice now included on reverse of cover. Special notices now on cover.

TITLE PAGE (First right-hand page)

- NO DISCREPANCIES
- AUTOMATIC DOWNGRADING NOTICE OMITTED
- ESPIONAGE NOTICE OMITTED
- CLASSIFICATION NOTICE OMITTED
- TITLE PAGE OMITTED

- TITLE OMITTED
- OTHER

Front of Mock-up cover will be used as Title page.

FOREWORD (Reverse of Title page)

- NO DISCREPANCIES
- FOREWORD PAGE OMITTED
- SYSTEM, PROJECT OR TASK NUMBER OMITTED
- CONTRACTOR'S NAME AND ADDRESS OMITTED
- DISTRIBUTION LIMITATION REASON OMITTED
- CONTRACT NUMBER OMITTED

- DATE OMITTED
- CAPTION OMITTED
- OTHER numbering of pages

Prefatory pages will be numbered in lower case Roman numerals and centered at bottom of the page.

APPROVAL STATEMENT (Last para of Foreword)

- NO DISCREPANCIES
- APPROVAL STATEMENT OMITTED

- OTHER

ABSTRACT (Next right-hand page)

- NO DISCREPANCIES
- ABSTRACT OMITTED
- EXCESSIVE LENGTH

- OTHER

**Prefatory pages will be numbered in lower case Roman numerals and centered at bottom of the page.
See Item 2, Remarks.**

(Continued on reverse side)

TEXT

- NO DISCREPANCIES
 NOT DIVIDED INTO SECTIONS
 CLASSIFICATION MARKING OMITTED
 PAGE NUMBERING OMITTED
 PAGE NUMBERS IMPROPERLY PLACED
 PAGES PRINTED ONE SIDE ONLY

- DOUBLE SPACING
 IMPROPER FOLDOUTS
 OTHER

See Item 3, Remarks.

DD FORM 1473 (Last printed page)

- NO DISCREPANCIES
 FORM 1473 OMITTED
 INCOMPLETE

- OTHER

See Item 4, Remarks.

BACK COVER

- NO DISCREPANCIES
 COVER OMITTED
 CLASSIFICATION MARKINGS OMITTED

- OTHER

110 lb commercial weight plain cover, no trade marks or other markings. (Ref: para 6, Atch 2, AFSCR 80-20).

BINDING

- NO DISCREPANCIES
 IMPROPERLY BOUND

- OTHER

See Item 5, Remarks.

ADDITIONAL REMARKS

Item 1. Use Mock-up Cover attached. (Ref: para 4, Atch 2, AFSCR 80-20).

Item 2. The "ABSTRACT" caption will appear centered at the top of the page and the text will begin three spaces below the caption. The text will be single spaced in one solid paragraph and usually will be 150 to 250 words. (Ref: para 11, Atch 2, AFSCR 80-20). The "ABSTRACT" will be on the right hand page following the "FORWORD".

Item 3. Pages will be printed head to head, except where an illustration must be set the length of the page because of space requirements. Pages will be printed both sides unless so stated within AFSCR 80-20. (Ref: para 30a, Atch 2, AFSCR 80-20). Text will be single spaced with double spacing between paragraphs. (Ref: para 30, Atch 2, AFSCR 80-20). Page numbers for text will be centered at bottom of pages. Prefatory pages will be numbered in lower case Roman numerals and centered at bottom of the page. (Ref: para 30b & 30d, Atch 2, AFSCR 80-20). A Table of contents, List of Figures, etc. are recommended so compliance with para's 12, 13, 30f & 30g, Atch 2, AFSCR 80-20 will be followed.

Item 4. Items 7a, 7b, 13 and 14, DD Form 1473 has to be completed and this form will be the last printed page of this report. (Ref: para 22, Atch 2, AFSCR 80-20).

Item 5. Reports will be side-wired or saddle wired with two or three staples in the left or other authorized bindings. (Ref: para 33, Atch 2, AFSCR 80-20).

Item 6. Suitability for further reproduction: TR's are subject to further reproduction by the DDC and Govt Agencies. Final copy should be block characters on white opaque 60lb stock. This report is not acceptable as a final copy, however, it is realized it is a draft and is acceptable as such. (Ref: para 31, 32, Atch 2, AFSCR 80-20).

Continuation of Remarks, ESD-TR-67-290, ESD Form O-40, dated 9 May 67.

Item 7. This office is to receive 23 copies of completed Report for deposit with DDC, AUL and ESTI TR files.

THOMAS E. RICHARDS, SSG, USAF
Chief Editor, ESTI, Ext 4535



