
OCEAN DUMPING REPORT FOR CALENDAR YEAR 1983 DREDGED MATERIAL(U) CORPS OF ENGINEERS FORT BELVOIR VA WATER RESOURCES SUPPORT CENTER JUL 84 WRSC-83-SR-1 F/G 13/2 AD-A149 438 1/3 UNCLASSIFIED NL



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS 1963-A





Summary Report 84-SR-4

> 1984 JULY

UNITED STATES OF AMERICA

Ocean Dumping Report for Calendar Year

1983

DREDGED MATERIAL



This document has been approved for public release and sale; its distribution is unlimited.

007 85 04

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM		
1. REPORT NUMBER 2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER		
WRSC Summary Report 84-SR-4	38		
4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED		
Ocean Dumping Report for Calendar Year 1983	Summary CY 1983		
	6. PERFORMING ORG. REPORT NUMBER		
	84-SR-4		
7. AUTHOR(*) Dredging Division, Water Resources Support Center	B. CONTRACT OR GRANT NUMBER(*)		
Casey Building			
Ft. Belvoir, VA 22060			
9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS		
U. S. Army Corps of Engineers Water Resources Support Center, Casey Building			
Ft. Belvoir, VA 22060			
11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE		
U. S. Army Corps of Engineers	July 1984		
Water Resources Support Center, Casey Building Ft. Belvoir, VA 22060	13. NUMBER OF PAGES		
14. MONITORING AGENCY NAME & ADDRESS(II different from Controlling Office)	254 15. SECURITY CLASS. (of this report)		
	Unclassified		
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE Unclassified		
16. DISTRIBUTION STATEMENT (of this Report)			
Unlimited			
Gillinited			
17 DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different tro	m Report)		
Unlimited			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse elde if necessary and identify by block number) Disposal From Federal Projects			
Disposal Under Section 103			
Ocean Disposal Site Designation			
Regulatory Activities			
20. ABSTRACT (Continue on reverse side H recovery and identity by block number) The following Summary Report contains 90 Internat:	ional Maritime Organization		
(IMO) reports. These reports were prepared by nur	merous Corps of Engineers		
employees in 20 Corps districts and divisions which have coastal boundaries.			
There are 40 reports which represent the CY 1983 permitted dredged material ocean disposal activities conducted under authority of Section 103 of the Marin			
Protection Research and Sanctuaries Act of 1972.	ty or Section 103 of the Marin The remaining 50 reports ro-		
present the CY 1983 Corps of Engineers dredged mat			
authorized by the United States Congress.			

UNCLASSIFIED

38

PAGE

FIELD/GROUP PROPER E ONCLASSIFIED TITLE

CALENDAR YEAR 1983. DREDGED MATERIAL OCEAN DUMPING REPORT FOR ABSTRACT

PARED BY NUMEROUS CORPS OF ENGINEERS EMPLOYEES IN 20 CORPS DISTRICTS AND DIVISIONS WHICH HAVE COASTAL BOUNDARIES. THERE PARED BY NUMEROUS CORPS OF ENGINEERS EMPLOYEES IN 20 CORPS DISTRICTS AND DIVISIONS WHICH HAVE COASTAL BOUNDARIES. THERE ARE 40 REPORTS WHICH REPRESENT THE CY 1983 PERMITTED DREDGED MATERIAL OCEAN DISPOSAL ACTIVITIES CONDUCTED UNDER AUTHOR ITY OF SECTION 103 OF THE MARINE PROTECTION RESEARCH AND SANCTUARIES ACT OF 1972. THE REMAINING 50 REPORTS REPRESENT THE CY 1983 CORPS OF ENGINEERS DREDGED MATERIAL DISPOSAL ACTIVITIES AS AUTHORIZED BY THE UNITED STATES CONGRESS.

POSTING TERMS ASSIGNED

COASTAL REGIONS COASTAL BOUNDARIES USE BOUNDARIES

CORPS OF ENGINEERS EMPLOYEES
USE ARMY CORPS OF ENGINEERS
PERSONNEL

DREDGED MATERIAL USE DREDGED MATERIALS

MARINE PROTECTION RESEARCH USE OCEANOGRAPHY PROTECTION

OCEAN DUMPING USE OCEAN WASTE DISPOSAL

UNITED STATES CONGRESS
USE CONGRESS
UNITED STATES

PHRASES NOT FOUND DURING LEXICAL DICTIONARY MATCH PROCESS

ACT OF 1972 1983 CORPS 40 REPORTS 90 INTERNATIONAL MARITIME ORGANIZATION

SECTION 103 20 CORPS DISTRICTS 50 REPORTS

UNCLASSIFIED

UNITED STATES OF AMERICA

OCEAN DUMPING

REPORT FOR

CALENDAR YEAR

1983

DREDGED MATERIAL

OTIC GOPY INSPECTED

Prepared by the U. S. Army Corps of Engineers

Water Resources Support Center

Casey Building

Ft. Belvoir, VA 22060-5586

Al

Copies may be purchased from:

National Technical Information Service U. S. Department of Commerce Springfield, Virginia 22151

This report is not to be construed as necessarily representing the views of the Federal Government nor of the U. S. Army Corps of Engineers.

Background

Under the authority of the International Maritime Organization (IMO), the United States and all other contracting nations to the Convention on the Prevention of Marine Pollution by Dumping of Wastes and Other Matter are required to submit an annual report for each ocean disposal operation. The U.S. Army Corps of Engineers has been tasked with preparing the dredged material portion of these IMO Ocean Dumping Reports.

Reports Numbering System

The following microfiche contain all 90 U. S. prepared CY 1983 IMO dredging Material Ocean Disposal Reports. They are numbered as follows:

- (1) Reports P-1 through P-40 represent the 40 CY 1983 permitted dredged material ocean disposal activities conducted under authority of Section 103 of the Marine Protection Research and Sanctuaries Act of 1972.
- (2) Reports C-1 through C-50 represent the 50 CY 1983 Corps of Engineers dredge material ocean disposal activities as authorized by the United States Congress.

Summary of Data

During CY 1983, the U. S. ocean disposed 44,265,978 cubic meters of dredged material of which: 2,990,609 cubic meters were disposed under Section 103 authority, and 41,275,369 cubic meters were disposed under Corps project authority.

Geographical distribution of the U. S. CY 1983 ocean disposal dredged material was as follows:

Area Cubic Meters		IMO Report References	
Atlantic Ocean	9,579,127	P-1 through P-30, C-1 through C-21	
Gulf of Mexico Pacific Ocean	28,667,442 6,019,409	C-22 through C-35 P-31 through P-40, C-36 through C-50	

Authorship

The enclosed 90 IMO Ocean Dumping Reports were prepared by numerous Corps of Engineers employees in 20 Corps districts and divisions which have coastal boundaries. For additional information concerning this report, the central point of contact in the United States Government is:

Water Resources Support Center (WRSC-D) Corps of Engineers Casey Building Ft. Belvoir, VA 22060-5586

C-31	Calcasieu River and Pass, LA (Gulf Approach Channel)	204
C-32	Gulf Intracoastal Water - Trib. Ch. to Port Mansfield, TX	206
C-33	Freeport Harbor, TX	208
C-34	Sabine-Neches Waterway, TX	210
C-35	Brazos Island Harbor, TX	212
C-36	San Francisco Harbor, Main Ship Channel	214
C-37	Humboldt Harbor, Bar & Entrance Channel	216
C-38	Humboldt Harbor, Bar & Entrance Channel	218
C-39	Humboldt Harbor, Interior Channels	220
C-40	Cresecent City Harbor, Inner Channel	222
C-41	Chetco River, OR	224
C-42	Coos Bay, OR	226
C-43	Coquille River, OR	228
C=44	Columbia River at Mouth, OR & WA	230
C-45	Rogue River, OR	232
C-46	Siuslaw River, OR	234
C=47	Umpqua River, OR	236
C-48	Yaquina Bay & Hrb, OR	238
C-49	Nome, AK	240
C=50	Nawiliwili Harbor, Kauai,HI, Maint.	242

Report of Ocean Dumping Permits - CY 1983

1. Issuing Authority:

Division New England District N/A

2. Permit start date/expire date:

Permittee: Bath Iron Works

Date issued: 7 July 1982 Permit No. 82-228

Start Date: 7 July 1982 Expiry Date: 31 Dec. 1985

- 3. Country of origin of wastes and port of loading:
 - a. United States of America
 - b. Portland Harbor, Maine
- 4. Specification of dredged material and process from which derived:
- a. Description: Dark-gray to black organic mud; very fine brownish gray sandy mud, shell & organic material; glacial-fluvial clay interbedded with silts & sands mostly gray with some brown coloration.
 - b. Mode of dredging: Clamshell-Bucket
 - c. Mode of transportation: Scow
- 5. Form in which dredged material is presented for disposal: Saturated cohesive & non-cohesive material
- 6. Total quantity (cubic meters): 91,400m³
- 7. Expected frequency of dumping (for reporting period):
 - a. Twice daily, seven days a week
 - b. Actual start: <u>l Jan 1983</u>
 - c. Actual completion: 4 Feb 1983

8. Chemical composition:	Average: 9 stations at top, middle, b
<u>Liquid Phase Test Results</u>	Bulk Sediment Test Results
Metals (ppm) Organics	Metals (ppm, dry wt.)
As < 0.05 PCB 5(ppb) V < 0.01 Gil & Grease 2% Cd < 0.006 Cr < 0.01 Cu < 0.01 Pb < 0.05 Hg < 0.0002 Ni < 0.01 Zn < 0.23	As 2.71 Cd 1.82 Cr 25.10 Cu 132 Hg 0.66 Ni 25.6 Pb 159 Zn 321 Organics (dry wt.) PCB 1.65 (ppb) Oil & Grease 1.50% Other Vol. solids 10.5%
9. Properties of dredged materi	
a. Solubility (% water)	G A 6
a. Solubility (% water)	
b. Density (gm/cc)	
c. pH	
d. % sand % silt	% clay

- 10. Method of packaging:
- 11. Method of release: The scow releases the dredged material through hydraulically operated doors upon coming to a halt at the dumping point.
- 12. Procedure and site for tank washing: Normally, scows are washed down at either the dredge or dump site.

- 13. Approved dumping site: Portland Disposal Area
 - a. Geographical position (latitude and longitude):
 _430_34.1/N_
 _700_02.0'W
 - b. Depth of Water (meters): 50m
 - c. Distance from nearest coast (kilometers): 14km
- 14. Additional information: No significant effect indicated by bioassay or bioaccumulation tests.

This dumpsite is subject to monitoring studies under the disposal area monitoring system (DAMOS) program. The program is designed to identify and evaluate impacts resulting from the disposal of dredged materials at designated dump sites. The DAMOS program continually contributes to the development of new monitoring methodologies that reflect on the efficiency of field observations and logistics, as well as time.

This program is designated to comply with sections 228.9 and 228.10 of the ocean dumping act relative to dump site monitoring and the evaluation of disposal.

Report	οf	Ocean	Dumping	Permits	- CY	1983
			~~p_1,1,9		— .	- /

1.	Issuing Authority:
	Division New England District N/A
2.	Permit start date/expire date:
	Permittee: Roger Hale
	Date issued:5_April_1982_ Permit No82-104_
	Start Date:5_April_1982 Expiry Date:31_Dec4985
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Portland Harbor, Maine
4. der	Specification of dredged material and process from which ived:
	a. Description: Clay & gravel
	b. Mode of dredging: Clamshell
	c. Mode of transportation: Scow
5. Coh	Form in which dredged material is presented for disposal: esive & non-cohesive saturated material
6.	Total quantity (cubic meters): 574m ³
7.	Expected frequency of dumping (for reporting period):
	a. 1 load

b. Actual start: 27 March 1983

c. Actual completion: 27 March 1983

Liquid Phase Test Results

Bulk Chemical Analysis

None

Metals (mg/kg)

	East Side	West Side
Cadmium	3.58	2.87
Lead	266.0	487.0
Zinc	120.6	363.0
Copper	97.7	112.0
Mercury	0.35	9.0
Organics		
% Oil & Greas	e 0.00137	0.00149

- 9. Properties of dredged material: N/A
 - a. Solubility (% water)
 - b. Density (gm/cc)
 - c. pH
 - d. % sand _____ % silt ____ % clay
- 10. Method of packaging: See 4c
- 11. Method of release: Six bottom doors operated hydraulically, material is released intermittently while the scow is held at a complete hault.
- 12. Procedure and site for tank washing: The washing of scow is done either at dredge or disposal site.

- 13. Approved dumping site: Portland Disposal Area
 - a. Geographical position (latitude and longitude): 43° 34'6.8"N_ 70° 01'54.7"W
 - b. Depth of Water (meters): 50m
 - c. Distance from nearest coast (kilometers): 14km
- 14. Additional information: No significant effect indicated by bioassay or bioaccumulation tests.

This dumpsite is subject to monitoring studies under the disposal area monitoring system (DAMOS) program. The program is designed to identify and evaluate impacts resulting from the disposal of dredged materials at designated dump sites. The DAMOS program continually contributes to the development of new monitoring methodologies that reflect on the efficiency of field observations and logistics, as well as time.

This program was designated to comply with sections 228.9 and 228.10 of the Ocean Dumping Act relative to dump site monitoring and the evaluation of disposal impacts.

Report of Ocean Dumping Permits - CY 1983

1. Issuing	Authority:
------------	------------

Division New England District N/A

Permit start date/expire date:

Date issued: 13 May 1981 Permit No. 81-157 Start Date: 13 May 1981 Expire Date: 31 Dec. 1984

3. Country of origin of wastes and port of loading:

- a. United States of America
- b. Portland Harbor, Maine
- 4. Specification of dredged material and process from which derived:
- a. Description: Primarily gray organic sandy silt. Some clay
 - b. Mode of dredging: Clamshell
 - c. Mode of transportation: Scow
- 5. Form in which dredged material is presented for disposal: Saturated cohesive & non-cohesive material
- 6. Total quantity (cubic meters): 30,000m³
- 7. Expected frequency of dumping (for reporting period):
 - a. 2 loads per day
 - b. Actual start: 27 June 1983
 - c. Actual completion: 28 October 1983

Bulk_Chemical_Analysis

Metals (mg/kg)

	May 1981	Jan 1980
Zn	92.2	62.5
Pb	9.9	25.0
Hg	0.2	<1.0
Cr	18.6	19.0
Cu	34.0	29.5
Ni	29.2	19.0
Cd	0.06	<1.4
V	22.2	72.5

Organics

٧.	Oil & Grease	0.008	0.00175
7.	Vol. Solids	0.7	3.2

- 9. Properties of dredged material:
 - a. Solubility (% water): 24%
 - b. Density (gm/cc)
 - c. pH: 18% Fines

d.	% sand	 % silt		% clay
			~~~~~	'

- 10. Method of packaging:
- 11. Method of release: Six bottom doors operated hydraulically. Material is released intermittently while scow is held at complete halt.
- 12. Procedure and site for tank washing: Normally, scows are washed down at either the disposal or dredge site.

- 13. Approved dumping site: Portland Disposal Site
  - a. <u>Geographical position (latitude and longitude):</u> _43°_34.1'N _70°_1.8'W_
  - b. Depth of Water (meters): 50m
  - c. Distance from nearest coast (kilometers): 14km
- 14. Additional information: Piggybacked on Federal project bioassay results.

This dumpsite is subject to monitoring studies under the disposal area monitoring system (DAMOS) program. The program is designated to identify and evaluate impacts resulting from the disposal of dredged materials at the designated dump sites. The DAMOS program continually contributes to the development of new monitoring methodologies that reflect on the efficiency of field observations and logistics, as well as time.

This program was designated to comply with sections 228.9 and 228.10 of the Ocean Dumping Act relative to dump site monitoring and the evaluation of disposal impacts.

# Report of Ocean Dumping Permits - CY <u>1983</u>

1.	Issuing Authority:				
	Division _	New England	District	N/A	
2.	Permit start da	te/expire date:			
	Permittee: _	Antonio DiMillo	<u> </u>		
	Date issued: _	<u>4_Aug. 1981</u>	Permit No.	81-275	
	Start Date: _	<u>4 Aug. 1981</u>	Expire Date:	31 Dec. 1984	
3.	Country of orig	in of wastes and	d port of loadi	ng:	
	a. United Stat	es of Am <b>er</b> ica			
b. Portland, Maine					

- 4. Specification of dredged material and process from which derived:
  - a. Description: Primarily organic silty sand, some clay
  - b. Mode of dredging: Clamshell
  - c. Mode of transportation: Scow
- 5. Form in which dredged material is presented for disposal: Saturated cohesive & non-cohesive material
- 6. Total quantity (cubic meters): 1900m³
- 7. Expected frequency of dumping (for reporting period):
  - a. I load per day
  - b. Actual start: 31 Mar 1983
  - c. Actual completion: 13 May 1983

Bulk Chemical Analysis (mg/kg)

- Cd 1.5 Pb 615 Zn 527 Cu 126 Hg 0.16
- Oil & Grease 987
- 9. Properties of dredged material: N/A
  - a. Solubility (% water)
  - b. Density (gm/cc)
  - c. pH
  - d. % sand ____ % silt ___ % clay
- 10. Method of packaging:
- 11. Method of release: Six bottom doors operated hydraulically. Material is released intermittently while scows held at a complete halt.
- 12. Procedure and site for tank washing: Scows are washed either at the dredge or disposal site.

- 13. Approved dumping site: Portland Disposal Site
  - a. Geographical position (latitude and longitude):

__430_34.1'N __700_1.8'W

- b. Depth of Water (meters): 50M
- c. Distance from nearest coast (kilometers): 14km
- 14. Additional information: Piggybacked on Federal project bioassay results.

This dumpsite is subject to monitoring studies under the disposal area monitoring system (DAMOS) program. The program is designed to identify and evaluate impacts resulting from the disposal of dredged materials at designated dump sites. The DAMOS program continually contributes to the development of new monitoring methodologies that reflect on the efficiency of field observations and logistics, as well as time.

This program was designated to comply with sections 228.9 and 228.10 of the Ocean Dumping Act relative to dump site monitoring and the evaluation of disposal impacts.

# Report of Ocean Dumping Permits - CY 1983

l. Issuina	Authority	:
------------	-----------	---

Division New England District N/A

2. Permit start date/expire date:

Permittee: City of Portland

Date issued: 8 March 1982 Permit No. 82-066

Start Date: 8 March 1982 Expire Date: 31 Dec. 1985

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. Portland Harbor, Maine
- 4. Specification of dredged material and process from which derived:
  - a. Description: Organic mud, silty clay & sand
  - b. Mode of dredging: Clamshell and/or dragline equipment
  - c. Mode of transportation: Scow
- 5. Form in which dredged material is presented for disposal: Saturated cohesive & non-cohesive material
- 6. Total quantity (cubic meters): 72,700m³
- 7. Expected frequency of dumping (for reporting period):
  - a. I load per day
  - b. Actual start: 2 Jan 1983
  - c. Actual completion: 27 June 1983

# Elutriate Data (mg/l)

Metals		
	Site A	Site B
Cd	<0.006	(0.006
Cr .	<0.02	<0.02
РЬ	0.05	0.05
Hg	<0.0002	<0.0002
Ni	0.02	0.02
Zn	0.3B	0.42
As	<0.05	<0.05
V	<0.01	<0.01

Organics

Oil & Grease 6.86 15.07

# Bulk Chemical Test

# Metals

	Site A	Site B
Cd	0.64	0.24
Cr	42.4	56.2
Pb	3.6	2.8
Hg	28.2	21.6
Ni	24.2	30.4
Zn	207.9	173.3
As	84.2	63.5
V	51.8	54.2

Organics

Oil & Grease 0.24% 0.22%

All concerntrations are average values in ppm.

- 9. Properties of dredged material: N/A
  - a. Solubility (% water)
  - b. Density (gm/cc)
  - c. pH
  - d. % sand ____ % silt ____ % clay ____

# 10. Method of packaging:

- 11. Method of release: Six bottom doors operated hydraulically. Material is released intermittently while scow is held at a complete halt.
- 12. Procedure and site for two washing: Mormally, scows are washed down at dredge or disposal lite.
- 13. Approved dumping site: Portland Disposal Site
- a. Geographical position (latitude and longitude): _43°_34.1'N _ 70°_1.8'W
  - b. Depth of Water (meters): 50m
  - c. Distance from nearest coast (kilometers): 14km
- 14. Additional information: This project utilized results of Federal project data from Portland (piggyback).

Additional testing information may be obtained by looking at Federal project in Portland, Maine.

This dumpsite is subject to monitoring studies under the disposal area monitoring system (DAMOS) program. The program is designed to identify and evaluate impacts resulting from the disposal of dredged materials at designated dump sites. The DAMOS program continually contributes to the development of new monitoring methodologies that reflect on the efficiency of field observations and logistics, as well as time.

This program was designated to comply with sections 228.9 and 228.10 of the Ocean Dumping Act relative to dump site monitoring and the evaluation of disposal impacts.

Report	αf	Ocean	Dumping	Permits	-	CY	1983	

1.	Issuing Autho	ority:		
	Division	New England	District	N/A
2.	Permit start	date/expire date:		
	Permittee:	Maine DOT		
	Date issued:	9 March 1983	Permit No.	83-042
	Start Date:	9_March_1983_	Expire Date:	31_Dec1986_
3.	Country of or	rigin of wastes an	d port of load	ing:

- - a. United States of America
  - b. Stonington, Maine
- Specification of dredged material and process from which derived:
  - a. Description: Silty sand
  - b. Mode of dredging: Clamshell
  - c. Mode of transportation: Scow
- Form in which dredged material is presented for disposal: Saturated cohesive & non-cohesive material
- Total quantity (cubic meters): 19,000m³
- Expected frequency of dumping (for reporting period): 7.
  - a. I load per day
  - Actual start: 26 June 1983
  - c. Actual completion: 9 Sept. 1983

Project utilized Federal project test data

- 9. Properties of dredged material: N/A
  - a. Solubility (% water)
  - b. Density (gm/cc)
  - c. pH
  - d. % sand _____ % silt ____ % clay
- 10. Method of packaging:
- ll. Method of release: Six bottom doors operated hydraulically. Material is released intermittently while scow is at a complete halt.
- 12. Procedure and site for tank washing: Hoppers are washed at an authorized disposal site.

- 13. Approved dumping site: St. Helena Island
- a. <u>Geographical position (latitude and longitude):</u>
  __44°_08.1'N
  __58°_39.1'W
  - b. Depth of Water (meters): 30m
  - c. Distance from nearest coast (kilometers): 2km
- 14. Additional information:
  Liquid Phase Bioassay: Significant mortality one species;
  however, LPC not exceeded.

<u>Suspend Particulate Phase Bioassay:</u> Significant mortality one species; however LPC not exceeded.

Solid Phase Bioassay: No significant effect

Bioaccumulation: Significant uptake of Cd one species

Report of Ocean Dumping Fermits - CY <u>1983</u>

1.	Issuing Authori	ty:		
	Division _	New England	Matrict	N/A
2.	Permit start da	te/expire date:		
	Permittee: _	Curtis_Heanss	er	
	Date issued: _	_24_Jan. 1983_	Permit No.	83-020
	Start Date:	_24_Jan. 1983_	Expire Date:	_01_Dec1983
₹.	Country of orig	in of wastes and	d port of loadi	ng:
	a. United Stat	es of America		
	b. Deer Island	l, Maine		
	Specification ived:	of dredged m	aterial and pro	cess from which
	a. Description	o: Silts & sand		
	b. Mode of dre	edging: Clamshe	11	
	c. Mode of tra	ansportation: S	COW	
	Form in which ourated cohesive	<del>-</del>	•	or disposal:
6.	Total quantity	(cubic meters):	1721m ³	
7.	Expected freque	ency of dumping	(for reporting	period):
	a. 1 load per	day		
	b. Actual star	t: <u>March 198</u>	<u>3</u>	
	c. Actual comp	oletion:		

# Bulk Chemical Test

#### Metals

Arsenic 5.23 Cadmium 0.386 Chromium 24.1 8.65 Copper 17.1 Lead

All values in mg/kg unless otherwise noted.

Mercury ug/g

dry wt. <0.5 Nickel 10.1 14.1 Vanadium 36.2 Zinc

#### Organics

Oil & Grease total recoverable dry wt. % 0.013

Total solid, wt. % 75.3

Total volatile solids % dry wt. 2.2

- 9. Properties of dredged material:
  - a. Solubility (% water)
  - b. Density (gm/cc)
  - c. pH
  - d. % sand ____ % silt ___ % clay ____
- 10. Method of packaging:
- Method of release: Six bottom doors open hydraulically. Material is released intermittently while scow is held at a complete halt.
- 12. Procedure and site for tank washing: The washing of scows is done either at dredge or disposal site.

- 13. Approved dumping site:
- a. Geographical position (1.4) tude and longitude):
  __440_08.1'N
  __680_39.1'W
  - b. Depth of Water (meters): 30m
  - c. Distance from nearest coast (kilometers): 2km
- 14. Additional information: Exempt from biological testing due to clean nature of the material.

# Report of Ocean Dumping Permits - CY __1983___

1.	Issuing Authority:				
	Division	New England	District	N/A	
2.	Permit start	date/expire date:			
	Permittee:	Boston_Edison_	Company		
	Date issued:	_27_Aug_1982	Permit No.	82-280	
	Start Date:	27_Aug_1982	Expire Date:	31_Dec <u>1</u> 985_	

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. Everett, Massachusetts
- 4. Specification of dredged material and process from which derived:
  - a. Description: Primarily sand, some silt, clay & gravel
  - b. Mode of dredging: Clamshell
  - c. Mode of transportation: Scow
- 5. Form in which dredged material is presented for disposal: Saturated cohesive & non-cohesive material
- Total quantity (cubic meters): 65,375m³
- 7. Expected frequency of dumping (for reporting period):
  - a. I load per day
  - b. Actual start: 11 Feb 83
  - c. Actual completion: 4 May 93

# Bulk Chemical Analysis

Metals (mg/kg)

	1976 PE-6	1978	1980	1980
	PE-6	GEB-2	PE-6	PE-6
	0.0-0.17	Surface	0.0-0.25	1.35′-1.60′
Нд ррм	1.24	1.4	1.3	0.7
Cd "	7.3	10.9	6.0	12.0
Pb "	249	555.1	137	111
As "	23	26.5	22	31
Cr "	234	277.5	70	66
CW "	244	446.5	116	30
Ni "	78	132.7	27	37
Zn "	436	711.2	224	257

# 9. Properties of dredged material: N/A

- a. Solubility (% water)
- b. Density (gm/cc)
- c. pH
- d. % sand _____ % silt ____ % clay

## 10. Method of packaging:

- 11. Method of release: Six bottom doors operated hydraulically. Material is released intermittently while the scow is held at a complete halt.
- 12. Procedure and site for tank washing: Hopper is washed at an authorized disposal area.

# 13. Approved dumping site:

- a. <u>Geographical position (latitude and longitude):</u>
  ___42⁰_25.7'N
  ___70⁰_34.0'W
  - b. Depth of Water (meters): 77m
  - c. Distance from nearest coast (kilometers): 18.3km
- 14. Additional information: No significant effect as indicated by bioassay or bioaccumulation tests performed for Mystic River Federal project.

This dumpsite is subject to monitoring studies under the disposal area monitoring system (DAMOS) program. The program is designed to identify and evaluate impacts resulting from the disposal of dredged materials at designated dump sites. The DAMOS program continually contributes to the development of new monitoring methodologies that reflect on the efficiency of field observations and logistics, as well as time.

This program was designated to comply with sections 228.9 and 228.10 of the Ocean Dumping Act relative to dump site monitoring and the evaluation of disposal impacts.

Report of Ocean Dumping Formits - CY __1983___

<ol> <li>Issuing Authority</li> </ol>	suing Authori	thority:
---------------------------------------	---------------	----------

Division New England Strict N/A

Permit start date/expire date:

Permittee: DEQE

Date issued: 15 Dec. 1982 Fermit No. 82-371

Start Date: 15 Dec. 1982 Expire Date: 31 Dec. 1985

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. Neponset River
- 4. Specification of dredged material and process from which derived:
  - a. Description: Silty sand
  - b. Mode of dredging: Clamshell
  - c. Mode of transportation: Scow
- 5. Form in which dredged material is presented for disposal: Saturated cohesive & non-cohesive material
- 6. Total quantity (cubic meters): 24,350m³
- 7. Expected frequency of dumping (for reporting period):
  - a. I trip per day
  - b. Actual start: 10 Sept. 1983
  - c. Actual completion: 9 Dec. 1983

ELUTRIA	TE (mg/l)	Station 1	Station 2	Station 3
Nutrient				
	TKN	2.35	2.48	1.97
	COD	190.3	202.6	310.3
		2,000	202.0	210.3
Metals:				
	Cd	0.006	0.006	0.006
	Cr	0.34	0.02	0.02
	Cu	0.01	0.01	0.76
	Hg (ug/1)	0.02	0.02	0.05
	Zn	0.01	0.15	0.08
	Pb	0.05	0.05	0.05
	V	0.05	0.25	0.05
	As	0.035	0.032	0.023
	N1	0.02	0.02	0.02
				3.0 <u>2</u>
Organics	•			
	Oil and Grease	2.1	72.0	72.0
	% Vol. Solids	17.8	17.9	18.1
	Chlorinated Hydro-			
	carbon Pesticides	5 ug/kg	5 ug/ <b>kg</b>	5 ug/kg
	pcb	3 ug/kg	3 ug/kg	3 ug/kg
	DIMENT (mg/kg	- 3. 3	0/0	3 -6/ NB
Metals				
	Cd	1.72	8.04	9.56
	Cr	249.20	233.50	258.71
	Cu	179.38	165.18	172.05
	Pb	13.96	40.65	38.23
	Hg (ug/kg	0.782	0.388	0.353
	Zn	397.43	366.68	407.82
	V	160	139	178
	As	0.009	0.056	0.028
	Ni	32.22	35.46	25.49
Organics	•			
	011 and Grease	10,839.04	6695.18	8096.20
	COD	177,369.2	230,381.8	200,553.0
	% Vol. Solids	12.22	8.62	13.19
	PCB's	3(ug/kg)	3 (ug/kg)	$3 \left( \frac{\text{ug}}{\text{kg}} \right)$
	Chorinated Hydro-		. 3 0,	\ O'O/
	carbon Pesticides	5 (wg/kg)	5 (ug/ <b>kg</b> )	3 (ug/kg)
				( ) <del>( ) ( )</del>
Other	<b>8 8 8 8 8</b>			
	% Solids	<b>35.</b> 13	36.92	33.50
	TKN	4502.7	3807.5	4502.7

- 9. Properties of dredged material:
  - a. Solubility (% water)
  - b. Density (gm/cc)
  - c. pH
  - d. % sand ____ % silt ___ % clay ____
- 10. Method of packaging:
- 11. Method of release: Six bottom doors open hydraulically. Material is released intermittently while scow is held at a complete halt.
- 12. Procedure and site for tank washing: Hopper is washed at an authorized disposal area.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude):

__42⁰_25.7′N

- b. Depth of Water (meters): 77m
- c. Distance from nearest coast (kilometers): 18.3km
- 14. Additional information: No significant effect indicated by bioassay or bioaccumulation tests.

This dumpsite is subject to monitoring studies under the disposal area monitoring system (DAMOS) program. The program is designed to identify and evaluate impacts resulting from the disposal of dredged materials at designated dump sites. The DAMOS program continually contributes to the development of new monitoring methodologies that reflect on the efficiency of field observations and logistics, as well as time.

This program was designated to comply with sections 228.9 and 228.10 of the Ocean Dumping Act relative to dump site monitoring and the evaluation of disposal impacts.

### Report of Ocean Dumping Permits - CY <u>1983</u>

1. Issuing Authority:

Division New England District N/A

2. Permit start date/expire date:

Permittee: Pittston Petrulem, Inc.

Date issued: 29 Sept. 1982 Permit No. 82-308

Start Date: 29 Sept. 1982 Expire Date: 31 Dec. 1985

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. Mystic River, Chelsea, Mass.
- 4. Specification of dredged material and process from which derived:
  - a. Description: Silty clayey material
  - b. Mode of dredging: Clamshell
  - c. Mode of transportation: Scow
- 5. Form in which dredged material is presented for disposal: Saturated cohesive & non-cohesive material
- 6. Total quantity (cubic meters): 10,557m³
- 7. Expected frequency of dumping "for reporting period):
  - a. I load per day
  - b. Actual start: 21 Sept. 1933
  - c. Actual completion: 31 Dec. 1985

### 8. Chemical composition:

### Bulk Sediment Test (mg/kg)

	<u>A</u>	B	C.	<u>D</u>	<u>E</u>
Cd	485	22.5	4.0	0.5	75
Cu	250	260	200	80	47
РЪ	1,100	400	$t_{s} \sim \frac{\pi}{3}$	1,200	450
Hg	1960	3160	2310	5760	140ر 1
Ni	36.0	47.7	36	35.5	16.5
Zn	86.250	29.5	7.5	465	175
As	3.0	1.3	1.25	1.6	1.1

### Organics:

Oil and Gre	ease				
	10.382	3.115	880	542.3	31.44
% Vol. Sol	ids				
	12.74	4.88	7.31	3.14	2.09
PCB's	0.5	0.5	0.5	0.5	0.5
Other:					
% Moisture	49.77	57.90	49.64	21.81	31.10
% Solid	12.74	4.88	7.31	79.19	68.90
Kjeldahl	4.620	4060	3920	4760	3920
C.O.D.	165,700	68.900	92.500	25.500	34.000

### 9. Properties of dredged material:

- a. Solubility (% water)
- b. Density (gm/cc)
- c. pH
- d. % sand ____ % silt ____ % clay ____

### 10. Method of packaging:

- 11. Method of release: Six bottom doors open hydraulically. Material is released intermittently while scow is held at a complete halt.
- 12. Procedure and site for tank washing: The washing of scows is done either at dredge or disposal site.

### 13. Approved dumping site: Foul area

a. Geographical position (latitude and longitude):

- b. Depth of Water (meters): 77m
- c. Distance from nearest coast (kilometers): 18.3km

#### 14. Additional information:

<u>Liquid Phase Bioassay:</u> Significant mortality one species; however, LPC not exceeded.

Suspend Particulate Phase Bioassay: Significant mortality one species; however, LPC not exceeded.

Solid Phase Bioassay: No analysis needed (96.7% for treatment survival vs. 95.3% survival for reference)

<u>Bioaccumulation:</u> Significant uptake of Petroleum Hydrocarbon two species.

This dumpsite is subject to monitoring studies under the disposal area monitoring system (DAMOS) program. The program is designed to identify and evaluate impacts resulting from the disposal of dredged materials at designated dump sites. The DAMOS program continually contributes to the development of new monitoring methodologies that reflect on the efficiency of field observations and logistics, as well as time.

This program was designated to comply with sections 228.9 and 228.10 of the Ocean Dumping Act relative to dump site monitoring and the evaluation of disposal impacts.

Report of Ocean Dumping Promits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

Permit start date/expire date: 2.

Permittee: Port Authority of New York & New Jersey

Date issued: 22 Apr 75

Permit No. 9232

Start Date: 22 Apr 75

Expiry Date 22 Apr 85

3. Country of origin of wastes and port of loading:

a. United States of America

b. Newark Bay, New Jersey

Specification of dredged material and process from which derived: 4.

a. Description: silty clay

b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock

c. Mode of transportation: towed barge; 4,000 cy capacity

- Form in which dredged material is presented for disposal: slurry-noncohesive 5. character.
- Total quantity (cubic meters):  $163,500 \text{ cy} = 125,000 \text{ m}^3$ 6.
- Expected frequency of dumping (for reporting period): 7.
  - a. 2 trips/day

  - b. Actual start: 25 Jan 83 c. Actual completion: 23 Sep 83

8. Chemical of in ppb	•		Site Water (S.D.)		Elutriate (S.D.)	
Petrol. Hy PCB Hg	/dro.	<	0.0 (-) 0.01 (-) 0.2 (-)	< 29 < <	00.0 (-) 0.01 (-) 0.2 (-)	
Cd DDT			0.1 (-) 0.05 (-)	< <	0.01 (-) 0.05 (-)	

9. Properties of dredged material:

a. Solubility (% water)

66.5

b. Density (gm/cc)

Not Available

c. pH

Not Available

d. % sand 15.75 % silt 66.02 % clay 18.23

10. Method of packing: None

11. Method of release: Immediate release from bottom opening doors.

12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.

13. Approved dumping site:

a. <u>Geographical position (latitude and longitude:</u> 40° 22'N; 73° 51'W

b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. <u>Liquid Phase Bioassay</u> (EC50 or LC50 each test species)@ 96 hrs.

Skeletonema costatum	> 100%
Mysidopsis bahia	> 100%
Menidia menidia	> 100%

b. Suspended Particulate Phase Bioassay CC50 or LC 50 per test species)@ 96 hrs.

Skeletonema costatum	43%
Mysidopsis bahia	>100%
Menidia menidia	>100%

c. <u>Solid Phase Bioassay</u> (% mortality difference with respect to control)

Palamonetes sp.	-1.0	Negative indicates greater
Mercenaria mercenaria	3.0	mortality in Control
Nereis virens	4.0	

(* statistical significance, 95% confidence leve

# 10-day Bioaccumulation Test Data:

Petrol. Hydro. were statistically significant in <u>Palaemonetes</u> sp. (0.14 ppm), <u>Mercenaria</u> sp. (025 ppm) and <u>Nereis</u> sp. (0.31 ppm).

PCB's were statistically significant in Mercenaria sp. (0.05 ppm).

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Mobil Oil Corp.

Date issued: 6 Dec 82

Permit No. 12697

Start Date: 6 Dec 82

Expiry Date 6 Dec 85

3. Country of origin of wastes and port of loading:

- a. United States of America
- b. Arthur Kill, New York
- 4. Specification of dredged material and process from which derived:
  - a. Description: silty clay
  - b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock
  - c. Mode of transportation: towed barge; 4,000 cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters):  $3,600 \text{ cy} = 2,800 \text{ m}^3$
- 7. Expected frequency of dumping (for reporting period):
  - a. 2 trips/day
  - b. Actual start: 1 Mar 83
- c. Actual completion: 1 Mar 83

8.	Chemical composition: in ppb	Site Water (S.D.)	Elutriate (S.D.)	
	Petrol. Hydro. PCB	50.0 (-) 0.1 (-)	< 50.0 (-) < 0.1 (-)	
	Hg Cd	0.2 (-) 0.1 (-)	< 0.2 (-) < 0.1 (-)	
	DDT	0.05 (-)	< 0.05 (-)	

9. Properties of dredged material:

- a. Solubility (% water)b. Density (gm/cc)Not Availablec. pHNot Available
- d. % sand 47.6 % silt 32.6 % clay 19.8
- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters): 20 m.
  - c. <u>Distance from nearest coast (kilometers):</u> 9 Km.
- 14. Additional information: See attached.

a. Liquid Phase Bioassay (EC50 or LC50 for each test species)@ 96 hrs.

Skeletonema costatum	12.8%
Mysidopsis bahia	48.0%
Menidia menidia	> 100.0%

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	70.0%
Mysidopsis bahia	57.0%
Menidia menidia	55.0%

c. <u>Solid Phase Bioassay</u> (% mortality difference with respect to control)

Palamonetes sp.	2.70	Negative indicates greater
Mercenaria mercenaria	1.00	mortality in control.
Nereis virens	-4.00	

(* statistical significance, 95% confidence level)

# 10-day Bioaccumulation Test Data:

Petrol. Hydro. were statistically significant in  $\underline{\text{Mercenaria}}$  sp. (0.33 ppm) and  $\underline{\text{Nereis}}$  sp. (0.24 ppm).

Report of Ocean Dumping 1 mits - CY 83

Issuing Authority: 1.

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: B. P. Oil Co.

Date issued: 11 Dec 81

Permit No. 12200

Start Date: 11 Dec 81

Expiry Date 11 Dec 84

- Country of origin of wastes and port of loading: 3.
  - a. United States of America
  - b. Arthur Kill, New Jersey
- Specification of dredged material and process from which derived: 4.
  - Description: silty clay
  - b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock
  - c. Mode of transportation: towed barge; 4,000 cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- Total quantity (cubic meters):  $10,800 \text{ cy} = 8,300 \text{ m}^3$ 6.
- Expected frequency of dumping (for reporting period): 7.
  - 1 trip/day

  - b. Actual start: 24 Feb 83 c. Actual completion: 1 Mar 83

0.05

8. Chemical composition: Site Water (S.D.)

Petrol. Hydro.

PCB

Hg

Cd

Site Water (S.D.)

Site Water (S.D.)

Site Water (S.D.)

Flutriate (S.D.)

Column (-)

Column (S.D.)

Flutriate (S.D.)

Site Water (S.D.)

Site Water (S.D.)

Site Water (S.D.)

Site Water (S.D.)

Column (S.D.)

Site Water (S.D.)

- 9. Properties of dredged material:
  - a. Solubility (% water)

40.2

b. Density (gm/cc)

Not Available

c. pH

DDT

Not Available

- d. % sand 46.7 % silt 33.7 % clay 40.2
- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. Liquid Phase Bioassay (EC50 or LC50 to each test species)@ 96 hrs.

Skeletonema costatum		13.0%
Mysidopsis bahia	>	100.0%
Menidia menidia	>	100.0%

b. Suspended Particulate Phase Bioassay (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa		28.0%
Mysidopsis bahia	>	100.0
Menidia menidia	>	100.0%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	0	Negative indicates greater
Mercenaria mercenaria	1.0	mortality in control
Nere is virens	-2.0	

(* statistical significance, 95% confidence leve

## 10-day Bioaccumulation Test Data:

Petrol. Hydro. were statistically significant in Nereis sp. (1.275 ppm).

Report	of	0cean	Dumping	Permits	- CY	83	
cpo. o	Ψ.	occu.	oump mg		٠.	00	

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Port Authority of New York & New Jersey

Date issued: 13 Aug 75

Permit No. 9372

Start Date: 13 Aug 75

Expiry Date: 13 Aug 85

3. Country of origin of wastes and port of loading:

a. United States of America

b. Hudson River, New York

4. Specification of dredged material and process from which derived:

a. Description: silty clay

b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock

c. Mode of transportation: towed barge; 4,000 cy capacity

- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters):  $269,000 \text{ cy} = 205,700 \text{ m}^3$
- 7. Expected frequency of dumping (for reporting period):
  - a. 3 trips/day
  - b. Actual start: 5 Mar 83
- c. Actual completion: 7 oct 83

8. Chemical composition: Site Water (S.D.) Elutriate (S.D.) in ppb

DDT Not Available < 0.05 (-) < 0.1 (-) < 0.2 (-) < 0.1 (-)Cd < 0.1 (-)

- 9. Properties of dredged material:
  - a. Solubility (% water) 63.8
  - b. Density (gm/cc)

Not Available

c. pH

Not Available

- d. % sand 11.26 % silt 63.03 % clay 25.71
- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal sit
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. Liquid Phase Bioassay (EC50 or LC50 for each test species)@ 96 hrs.

Skeletonema costatum	>100%
Mysidopsis bahia	>100%
Menidia menidia	87%

b. Suspended Particulate Phase Bioassay (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa		27%
Mysidopsis bahia	>	100%
Menidia menidia	>	100%

c. <u>Solid Phase Bioassay</u> (% mortality difference with respect to control)

Palamonetes sp.	05	Negative indicates greater
Mercenaria mercenaria	-1.0	mortality in control
Nereis virens	2.0	

(* statistical significance, 95% confidence level)

### 10-day Bioaccumulation Test Data:

Petro. Hydro. were statistically significant in Mercenaria sp. (0.27 ppm), Palaemonetes sp. (0.27 ppm) and Nereis sp. (0.23 ppm).

PCB's were statistically significant in Mercenaria sp. (0.09 ppm).

LONDON DUMPING

INVENTION

Report of Ocean Dumping : ts - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Perth Amboy Dry Dock

Date issued: 5 June 81

Permit No. 11945

Start Date: 5 June 81

Expiry Date 5 June 84

3. Country of origin of wastes and port of loading:

- a. United States of America
- b. Arthur Kill, New Jersey
- 4. Specification of dredged material and process from which derived:
  - a. Description: silty clay
  - b. Mode of dredging: clamshell dredge; Warren Disch Contractor
  - c. Mode of transportation: towed barge; 2000 cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- Total quantity (cubic meters):  $38,000 \text{ cy} = 29,100 \text{ m}^3$ 6.
- 7. Expected frequency of dumping (for reporting period):
  - a. 1 trip/day
  - b. Actual start: 4 Apr 83
- c. Actual completion: 14 May 83

8. Chemical composition: Elutriate (S.D.) Site Water (S.D.) in ppb Petrol. Hydro. 100.0 < 100.0 PCB 0.1 0.1 Hg Cd 0.2 0.2 0.1 0.1 < DDT 0.05(-)0.05(-)

- 9. Properties of dredged material:
  - a. Solubility (% water) 64.2
  - b. Density (gm/cc)

Not Available

c. pH

Not Available

- d. % sand 44.2 % silt 40.8 % clay 15.0
- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters):

20 m.

c. <u>Distance from nearest coast (kilometers)</u>:

9 Km.

a. <u>Liquid Phase Bioassay</u> (EC50 or LC50 · reach test species)@ 96 hrs.

Skeletonema costatum 82%

Mysidopsis bahia 100%

Menidia menidia 100%

b. Suspended Particulate Phase Bioassay (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa 34% Mysidopsis bahia > 100% Menidia menidia > 100%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetessp.4.0Mercenaria1.0Nereis virens1.0

(* statistical significance, 95% confidence lev

# 10-day Bioaccumulation Test Data:

Petro. Hydro. were statistically significant in Nereis sp. (1.98 ppm).

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: NYC Department of Ports and Terminals

Date issued: 2 Apr 83

Permit No.

Start Date: 2 Apr 83

Expiry Date 2 Apr 86

3. Country of origin of wastes and port of loading:

a. United States of America

b. East River, New York

Specification of dredged material and process from which derived:

Description: silty clay

Mode of dredging: clamshell dredge; Weeks Dredging Company

c. Mode of transportation: towed barges; 4000 and 2000cy capacity

5. Form in which dredged material is presented for disposal: slurry-noncohesive character.

Total quantity (cubic meters): 8000cy = 6100 m³ 6.

Expected frequency of dumping (for reporting period): 7.

a. 1 trip/day

b. Actual start: 14 Apr 83 c. Actual completion: 26 Apr 83

8. Chemical composition: in ppb		Site Water (S.D.)	Elutriate (S.D.)	
	Petrol. Hydro.	< 50.0 (-)	< 50.0 (-)	
	PCB	< 0.1 (-)	< 0.1 (-)	
	Hg	< 0, ○ (-)	< 0.2 (-)	
	Cď	< 0.1 (-)	< 0.1 (-)	
	DDT	$\langle 0, 15 \rangle (-1)$	< 0.05 (-)	

9. Properties of dredged material:

a. Solubility (% water)

47.14

b. Density (gm/cc)

No Available

c. pH

Not Available

d. % sand 55.35 % silt 30.63

% clay 14.02

10. Method of packing: None

11. Method of release: Immediate release from bottom opening doors.

12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.

13. Approved dumping site:

a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W

b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. Liquid Phase Bioassay (EC50 or LC50 for each test species)@ 96 hrs.

Skeletonema costatum	> 100%
Mysidopsis bahia	> 100%
Menidia menidia	> 100%

b. Suspended Particulate Phase Bioassay (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	37%
Mysidopsis bahia	31%
Menidia menidia	43%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	4.0	Negative indicates greater
Mercenaria mercenaria	-1.0	mortality in control.
Nereis virens	4.0	

(* statistical significance, 95% confidence level

10-day Bioaccumulation Test Data: There was no statistically significant bioaccumulation of contaminants in any test species.

NOTE: All Bioassay and Bioaccumulation Data is that for sediment at the Port Authority (
NY and NJ project, Permit #9466. Due to the close proximity of the projects and the
chemical similarity of the sediment, this data was used to characterize the Ports and
Terminals sediment.

Report of Ocean Dumping Posmits - CY ___83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Port Authority of NY and NJ

Date issued: 15 Oct 75

Permit No. 9466

Start Date: 15 Oct 75

Expiry Date 15 Oct 85

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. Gowanus Bay, NY
- 4. Specification of dredged material and process from which derived:
  - a. Description: silty clay
  - b. Mode of dredging: clamshell dredge; Great Lakes Dredge and Dock
  - c. Mode of transportation: towed barge; 4000cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters): 154,840cy = 118,400 m³
- 7. Expected frequency of dumping (for reporting period):
  - a. 3 trips/day
  - b. Actual start: 1 Jun 83
- c. Actual completion: 10 Oct 83

in ppb	Site water (S.D.)	Elutriate (S.D.)		
Petrol. Hydro. PCB Hg Cd DDT	300.0 (0) < 0.1 (-)     0.27 (0.12) < 0.1 (-) < 0.05 (-)	500.0 (0)* < 0.1 (-)     0.53 (0.29) < 0.1 (-) < 0.05 (-)		

(* statistical significance, 95% confidence leve

Properties of dredged material:

a. Solubility (% water) 60.9%

b. Density (gm/cc)

Not Available

c. pH

Not Available

d. % sand 25.7 % silt 44.7

% clay 29.6

10. Method of packing: None

11. Method of release: Immediate release from bottom opening doors.

12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.

13. Approved dumping site:

a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W

b. Depth of water (meters):

20 m.

c. <u>Distance</u> from nearest <u>coast</u> (kilometers):

9 Km.

a. Liquid Phase Bioassay (EC50 or LC50 for each test species)@ 96 hrs.

Skeletonema costatum	5 1to a
Mysidopsis bahia	S 1000
Menidia menidia	> 100

b. Suspended Particulate Phase Bioassay (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	37
Mysidopsis bahia	31
Menidia menidia	43

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	4.0			
Mercenaria mercenaria	-1.0	Negative	indicates	greater
Nereis virens	4.0	mortality	/	•

(* statistical significance, 95% confidence level

10-day Bioaccumulation Test Data: There was no statistically significant bioaccumulation of contaminants in any test species.

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: NYC Dept. of Sanitation

Date issued: 9 Mar 83

Permit No. 12807

Start Date: 9 Mar 83

Expiry Date: 9 Mar 86

3. Country of origin of wastes and port of loading:

a. United States of America

b. Arthur Kill (Fresh Kills), NY

4. Specification of dredged material and process from which derived:

a. Description: silty clay

b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock

c. Mode of transportation: towed barge; 4,000 cy capacity

5. Form in which dredged material is presented for disposal: slurry-noncohesive character.

6. Total quantity (cubic meters):  $248,400 \text{ cy} = 190,000 \text{ m}^3$ 

7. Expected frequency of dumping (for reporting period):

a. 2 trips/day

b. Actual start: 27 Jun 83

c. Actual completion: 17 Aug 83

8.	Chemical composition: in ppb	Site Water (S.D.)	Elutriate (S.D.)
	Petrol. Hydro.	< (a).0 (-)	< 50.0 (-)
	PCB	< 0.1 (-)	< 0.1 (-)
	Hg	< 0.2 (-)	< 0.2 (-)
	Cd	< 0.1 (-)	< 0.1 (-)
	DDT	< 0.05 (-)	< 0.05 (-)

- 9. Properties of dredged material:
  - a. Solubility (% water) 28.0
  - b. Density (gm/cc) Not Available
  - c. pH Not Available
  - d. % sand <u>79.9</u> % silt <u>10.7</u> % clay <u>9.4</u>
- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters): 20 m.
  - c. Distance from nearest coast (kilometers): 9 Km.
- 14. Additional information: See attached.

a. Liquid Phase Bioassay (EC50 or LC50 for each test species) @ 96 hrs.

Skeletonema costatum	> 100%
Mysidopsis bahia	. 77%
Menidia menidia	> 100%

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	> 100%
Mysidopsis bahia	> 100%
Menidia menidia	> 100%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	5.6
Mercenaria mercenaria	2.0
Nereis virens	0.0

(* statistical significance, 95% confidence level)

10-day Bioaccumulation Test Data: Petroleum Hydro. were statistically significant in Nereis sp. (0.879 ppm).

Report of Ocean Dumping Partits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Exxon Corporation - Pier 6, North

Date issued: 2 Jun 83

Permit No. 12908*

Start Date: 2 Jun 83

Expiry Date 2 Jun 86

3. Country of origin of wastes and port of loading:

a. United States of America

b. Kill Van Kull, NJ

4. Specification of dredged material and process from which derived:

a. Description: sandy silt

b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock

c. Mode of transportation: towed barge; 4,000 cy capacity

- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters):  $115,602 \text{ cy} = 88,400 \text{ m}^{3*}$

* Note: The volume shown for this pier is the total volume dredged under this permit number for all piers. The work under this permit is divided into 4 pier areas, each of which is represented by separate testing and is shown in a separate London Dumping Convention Report.

- 7. Expected frequency of dumping (for reporting period):
  - a. 2 trips/day
  - b. Actual start: 1 Aug 83
- c. Actual completion: 7 Oct 83

8. Chemical in ppb	composition:	Site Water (S.D.)	Elutriate (S.D.)
Petrol. H	ydro.	900.0 (-)	< 50.0 (-)
PCB		< 0.1 (-)	< 0.1 (-)
Hg		< 0.2 (-)	< 0.2 (-)
Cd		< 0.1 (-)	< 0.1 (-)

- 9. Properties of dredged material:
  - a. Solubility (% water)b. Density (gm/cc)c. pHNot Available
  - d. % sand 25.4 % silt 58.6 % clay 16.0
- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters): 20 m.
  - c. Distance from nearest coast (kilometers): 9 Km.
- 14. Additional information: See attached.

a. <u>Liquid Phase Bioassay</u> (EC50 or LC50 · each test species)@ **96 hrs.** 

Skeletonema costatum
Mysidopsis bahia
Menidia menidia

b. <u>Suspended Particulate Phase Bioassa</u> (EC50 or LC 50 per test species) @ 96 hrs.

Acartia tonsa	> 100%
Mysidopsis bahia	<b>7</b> 5%
Menidia menidia	<b>7</b> 5%

c. <u>Solid Phase Bioassay</u> (% mortality difference with respect to control)

Palamonetes sp.	1.0
Mercenaria mercenaria	0.0
Nere is virens	4.0

(* statistical significance, 95% confidence level)

10-day Bioaccumulation Test Data: Petro Hydro were statistically significant in Nereis sp. (0.906 ppm).

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Exxon Corporation - Pier 7

Date issued: 2 Jun 83

Permit No. 12908*

Start Date: 2 Jun 83

Expiry Date 2 Jun 86

3. Country of origin of wastes and port of loading:

a. United States of America

b. Kill van Kull, NJ

4. Specification of dredged material and process from which derived:

a. Description: sand

- b. Mode of dredging: clamshell dredge; Great Lakes Dredge and Dock
- c. Mode of transportation: towed barge; 4,000cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters): 115,602cy = 88,400 m³*

*Note: The volume shown for this pier is the total volume dredged under this permit number for all piers. The work under this permit is divided into 4 pier areas, each of which is represented by separate testing and is shown in a separate London Dumping Convention Report.

- 7. Expected frequency of dumping (for reporting period):
  - a. 2 trips/day
  - b. Actual start: 1 Aug 83

Actual completion: 7 Oct 83

8.	Chemical composition: in ppb	Site W (S.D.)	Elutriate (S.D.)
	Petrol. Hydro. PCB	233.3 (317.5) < 0.1 (-)	< 50.0 (-) < 0.1 (-)
	Hg	< 0.2 (-)	< 0.2 (-)
	Cď	< 0.1 (-)	< 0.1 (-)

- 9. Properties of dredged material:
  - a. Solubility (% water) 44.5
  - b. Density (gm/cc) Not Available
  - c. pH Not Available
  - d. % sand 58.9 % silt 28.2 % clay 12.9
- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. Liquid Phase Bioassay (EC50 or LC50 for each test species) @ 96 hrs.

Skeletonema costatum	> 100%
Mysidopsis bahia	> 100%
Menidia menidia	> 100%

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	> 100%
Mysidopsis bahia	> 100%
Menidia menidia	> 100%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	3.0
Mercenaria mercenaria	1.0
Nereis virens	3.0*

(* statistical significance, 95% confidence level)

10-day Bioaccumulation Test Data: Petro. Hydro were statistically significant in Nereis sp. (1.50 ppm).

Report of Ocean Dumping F lits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Exxon Corporation - Pie , South

Date issued: 2 Jun 83 Permit No. 12908*

Start Date: 2 Jun 83 Expiry Date 2 Jun 86

3. Country of origin of wastes and port of loading:

a. United States of America

b. Kill van Kull, NJ

4. Specification of dredged material and process from which derived:

a. Description: sand

- b. Mode of dredging: clamshell dredge; Great Lakes Dredge and Dock
- c. Mode of transportation: towed barge; 4,000cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters): 115.602cy = 88.400 m³*

*Note: The volume shown for this pier is the total volume dredged under this permit number for all piers. The work under this permit is divided into 4 pier areas, each of which is represented by separate testing and is shown in a separate London Dumping Convention Report.

- 7. Expected frequency of dumping (for reporting period):
  - a. 2 trips/day
  - b. Actual start: 1 Aug 83
- c. Actual completion: 7 Oct 83

8. Chemical composition: Site Water (S.D.) Elutriate (S.D.)

Petrol. Hydro. < 50.0 (-) < 50.0 (-)PCB < 0.1 (-) < 0.1 (-)Hg < 0.2 (-) < 0.2 (-)Cd < 0.1 (-) < 0.1 (-)

9. Properties of dredged material:

- a. Solubility (% water) 33.91
- b. Density (gm/cc) Not Available
- c. pH Not Available
- d. % sand 74.05 % silt 17.21 % clay 8.74
- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W

20 m.

- b. Depth of water (meters):
- c. Distance from nearest coast (kilometers): 9 Km.
- 14. Additional information: See attached.

a. <u>Liquid Phase Bioassay</u> (EC50 or LC50 each test species) @ 96 hrs.

Skeletonema costatum	12%
Mysidopsis bahia	> 100%
Menidia menidia	> 100%

b. <u>Suspended Particulate Phase Bioassay</u> EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	> 100%
Mysidopsis bahia	> 100%
Menidia menidia	> 100%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	1.0
Mercenaria mercenaria	1.0
Nereis virens	6.0*

(* statistical significance, 95% confidence level

10-day Bioaccumulation Test Data: Petro. Hydro were statistically significant in Mercenaria sp. (1.215 ppm) and Nereis sp. (1.353 ppm).

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Exxon Corp. - Pier 1

Date issued: 2 Jun 83

Permit No. 12908*

Start Date: 2 Jun 83

Expiry Date 2 Jun 86

3. Country of origin of wastes and port of loading:

a. United States of America

b. Kill Van Kull, NJ

4. Specification of dredged material and process from which derived:

a. Description: sandy silt

b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock

c. Mode of transportation: towed barge; 4,000 cy capacity

5. Form in which dredged material is presented for disposal: slurry-noncohesive character.

6. Total quantity (cubic meters): 115,602 cy = 88,400 m^{3*}

* Note: The volume shown for this pier is the total volume dredged under this permit number for all piers. The work under this permit is divided into 4 pier areas, each of which is represented by separate testing and is shown in a separate London Dumping Convention Report.

7. Expected frequency of dumping (for reporting period):

a. 2 trips/day

b. Actual start: 1 Aug 83

. Actual completion: 7 Oct 83

8.	Chemical composition: in ppb	Site Water (S.D.)	Elutriate (S.D.)
	Petrol. Hydro.	<5(.0) (-)	<50.0 (-)
	PCB	< 0.1 (-)	< 0.1 (-)
	Hg	< 1.2 (-)	< 0.2 (-)
	Cd	< 1 (-)	< 0.1 (-)

- 9. Properties of dredged material:
  - a. Solubility (% water)

6 . . .

b. Density (gm/cc)

Not Available

c. pH

Not Available

d. % sand 41.4

% silt <u>45.1</u>

% clay <u>13.5</u>

- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N, 73° 51'W
  - b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. Liquid Phase Bioassay (EC50 or LC50 for each test species) @ 96 hrs.

Skeletonema costatum	>	100%
Mysidopsis bahia	>	100%
Menidia menidia	>	100%

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	>	100%
Mysidopsis bahia	>	100%
Menidia menidia	>	100%

c. <u>Solid Phase Bioassay</u> (% mortality difference with respect to control)

Palamonetes sp.	2.0
Mercenaria mercenaria	3.0
Nereis virens	2.0

(* statistical significance, 95% confidence level)

10-day Bioaccumulation Test Data: There was no statistically significant bioaccumulation of contaminants in any test species.

Report of Ocean Dumping F wits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: NYC Department of Sanitation

Date issued: 2 Aug 83

Permit No. 12976

Start Date: 2 Aug 83

Expiry Date 2 Aug 86

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. New York Harbor, NY
- 4. Specification of dredged material and process from which derived:
  - a. Description: sand
  - b. Mode of dredging: clamshell dredge; Great Lakes Dredge and Dock
  - c. Mode of transportation: towed barge; 4,000cy capacity
- 5. Form in which dredged material is presented for disposal: slurrynoncohesive character.
- Total quantity (cubic meters): 14,400cy = 11,000 m³ 6.
- 7. Expected frequency of dumping (for reporting period):
  - a. 1 trip/day

  - b. Actual start: 5 Aug 83 c. Actual completion: 26 Aug 83

8.	Chemical composition: in ppb	Site Water (S.D.)	Elutriate (S.D.)
	Petroi. Hydro.	< 50.0 (-)	51.7 (2.9)
	PCB	< 0.1 (-)	< 0.1 (-)
	Hg	< 0.2 (-)	< 0.2 (-)
	Cd	< 0.1 (-)	< 0.1 (-)

- 9. Properties of dredged material:
  - a. Solubility (% water) 48.3%
  - b. Density (gm/cc)

Not Available

c. pH

Not Available

d. % sand 60.0

% silt 11.3

% clay 28.7

- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. <u>Liquid Phase Bioassay</u> (EC50 or LC50 · each test species) @ 96 hrs.

Skeletonema costatum	18%
Mysidopsis bahia	100%
Menidia menidia	100%

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	29%
Mysidopsis bahia	> 100%
Menidia menidia	> 100%

c. Solid Phase Bioassay (% mortality difference with respect to control)

<u>Palamonetes</u> sp.	O Negative indicates greater
Mercenaria mercenaria	O mortality in control.
Nereis virens	-3.0

(* statistical significance, 95% confidence level)

10-day Bioaccumulation Test Data: There was no statistically significant bioaccumulation of contaminants in any test species.

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Exxon Co., USA

Date issued: 5 May 83

Permit No. 12883

Start Date: 5 May 83

Expiry Date 5 May 86

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. Arthur Kill, NJ
- 4. Specification of dredged material and process from which derived:
  - a. silt
  - b. Mode of dredging: clamshell dredge; Weeks Dredging Co.
  - c. Mode of transportation: towed barge; 4,000cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters):  $12,000 \text{cy} = 9,200 \text{ m}^3$
- 7. Expected frequency of dumping (for reporting period):
  - a. 1 trip/day
  - b. Actual start: 17 Aug 83

c. Actual completion: 19 Aug 83

8.	Chemical composition: in ppb	Site Wate: (S.D.)	Elutriate (S.D.)
	Petrol. Hydro. PCB	< 50.0 < 0.1	< 50.0 (-) < 0.1 (-)
	Hg Cd	15.13 (16) < 0.1	5.60 (0.38) < 0.1 (-)

- 9. Pr perties of dredged material:
  - a. Solubility (% water) 71.2
  - b. Density (gm/cc) Not Available

Pg 40 of 59

c. pH

Not Av able

d. % sand 11.0

% silt 4.0

% clay 14.7

- 10. Method of packing: None
- 11. Method of release: Immediate releas from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters):

20 m.

c. <u>Distance from nearest coast (kilometers)</u>:

9 Km.

a. Liquid Phase Bioassay (EC50 or LC50 for each test species) @ 96 hrs.

Skeletonema costatum > 100% Mysidopsis bahia > 100% Menidia menidia > 100%

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa 54%

Mysidopsis bahia > 100%

Menidia menidia > 100%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp. -0.7 Negative indicates greater Mercenaria mercenaria 0.0 mortality in control. 2.0

(* statistical significance, 95% confidence level)

10-day Bioaccumulation Test Data: There was no statistically significant bioaccumulation of contaminants in any test species.

Report of Ocean Dumping Promits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Celanese Chemical Company

Date issued: 30 Dec 74

Permit No. 9118

Start Date: 30 Dec 74

Expiry Date 30 Dec 84

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. Passaic River, NJ
- 4. Specification of dredged material and process from which derived:
  - a. Description: silt
  - b. Mode of dredging: clamshell dredge; Weeks Dredging Company
  - c. Mode of transportation: towed barge; 4,000cy capacity
- 5. Form in which dredged material is presented for disposal: slurrynoncohesive character.
- Total quantity (cubic meters): 23,100cy = 17,700 m³ 6.
- 7. Expected frequency of dumping (for reporting period):
  - a. 2 trips/day

  - b. Actual start: 25 Aug 83 c. Actual completion: 27 Aug 83

8.	Chemical composition: in ppb	Site Water (S.D.)	Elutriate (S.D.)
	DDT PCB Hg Cd	Not Available	< 0.05 (-) 0.16 (0.03) 0.3 (0) < 0.1 (-)

9. Properties of dredged material:

a. Solubility (% water)

54.0%

b. Density (gm/cc)

Not Available

c. pH

Not Available

d. % sand 5.2

% silt 68.7

% clay 26.1

10. Method of packing: None

11. Method of release: Immediate release from bottom opening doors.

12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.

13. Approved dumping site:

a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W

b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. Liquid Phase Bioassay (EC50 or LC50 or each test species) @ 96 hrs.

Skeletonema costatum	84
Mysidopsis bahia	> 100
Menidia menidia	> 100

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	64
Mysidopsis bahia	94
Menidia menidia	> 100

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	0.0
Mercenaria mercenaria	0.0
Nereis virens	0.0

(* statistical significance, 95% confidence level)

10-day Bioaccumulation Test Data: Petrol. Hydro. were statistically significant in Palaemonetes sp. (1.49 ppm), Mercenaria sp. (0.27 ppm), Nereis sp. (4.63 ppm).

PCB's were statistically significant in Nereis sp. (0.24 ppm).

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Getty Refining & Marketing Co.

Date issued: 12 Sept 83

Permit No. 13013

Start Date: 12 Sept 83

Expiry Date 12 Sept 86

3. Country of origin of wastes and port of loading:

a. United States of America

b. Passaic River, New Jersey

4. Specification of dredged material and process from which derived:

a. Description: silty clay

b. Mode of dredging: clamshell dredge; Weeks Dredging Co.

c. Mode of transportation: towed barge; 4,000 cy capacity

5. Form in which dredged material is presented for disposal: slurry-noncohesive character.

7. Total quantity (cubic meters):  $23,100 \text{ cy} = 17,700 \text{ m}^3$ 

7. Expected frequency of dumping (for reporting period):

a. 2 trips/day

b. Actual start: 4 Oct 83

. Actual completion: 6 Oct 83

Chemical composition: #lutriate (S.D.) 8. Site Water (S.D.) in ppb Petrol. Hydro. < 50.0 < 50.0 (-) PCB < 0.1 < 0.1 (-) < 0.2 < 0.2 (-) Hq Cď < 0.1 0.1(-)

- 9. Properties of dredged material:
  - a. Solubility (% ater)

b. Density (gm/cc)

Not Av · lable

c. pH

Not Available

d. % sand 11.5

% silt 61.7

% clay 26.8

- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. Liquid Phase Bioassay (EC50 or LC50 for each test species) @ 96 hrs.

Skeletonema costatum	10%
Mysidopsis bahia	48%
Menidia menidia	75%

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	86%
Mysidopsis bahia	25%
Menidia menidia	> 100%

c. <u>Solid Phase Bioassay</u> (% mortality difference with respect to control)

Palamonetes sp.	1.0	Negative indicates greater
Mercenaria mercenaria	1.0	mortality in control.
Nereis virens	-1.0	

(* statistical significance, 95% confidence level)

## 10-day Bioaccumulation Test Data:

Petrol. Hydro. were statistically significant in <u>Palaemonetes</u> sp. (0.31 ppm), Mercenaria sp. (0.72 ppm) and <u>Nereis</u> sp. (2.24 ppm).

Report of Ocean Dumping mits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Amoco Oil Co.

Date issued: 13 Oct 83

Permit No. 13036

Start Date: 13 Oct 83

Expiry Date 13 Oct 86

Country of origin of wastes and por' of loading: 3.

- a. United States of America
- b. Arthur Kill, New Jersey
- 4. Specification of dredged material and process from which derived:
  - Description: silty clay
  - Mode of dredging: clamshell dredge; Weeks Dredging Co.
  - c. Mode of transportation: towed barge; 4,000 cy capacity
- 5. Form in which dredged material is presented for disposal: slurrynoncohesive character.
- Total quantity (cubic meters):  $18,000 \text{ cy} = 13,800 \text{ m}^3$ 6.
- 7. Expected frequency of dumping (for reporting period):
  - a. 1 trip/day

  - b. Actual start: 17 Oct 83 c. Actual completion: 21 Oct 83

Elutriate (S.D.) 8. Chemical composition: Site Water (S.D.) in ppb Petrol. Hydro. < 50.0 (-) < 50.0 (-) 0.1 (-) PCB 0.1(-)0.2(-)0.2(-)Hg Cq 0.1(-)0.1(-)

9. Properties of dredged material:

a. Solubility (% water)

65.5

b. Density (gm/cc)

Not Available

c. pH

Not Available

d. % sand 30.7

% silt 26.0

% clay 43.3

10. Method of packing: None

11. Method of release: Immediate release from bottom opening doors.

12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.

13. Approved dumping site:

a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W

b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. <u>Liquid Phase Bioassay</u> (EC50 or LC50 · · · each test species) @ 96 hrs.

Skeletonema costatum		22%
Mysidopsis bahia	>	100%
Menidia menidia	>	100%

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa		68%
Mysidopsis bahia	>	100%
Menidia menidia	>	100%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	0.0
Mercenaria mercenaria	2.0
Nere is virens	0.0

(* statistical significance, 95% confidence level

## 10-day Bioaccumulation Test Data:

Petrol. Hydro. were statistically significant in <u>Palaemonetes</u> sp. (1.05 ppm) and <u>Nereis</u> sp. (0.41 ppm).

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Coastal Dry Dock and Repair Co. - Pier G

Date issued: 17 Jun 81

Permit No. 11969*

Start Date: 17 Jun 81

Expiry Date 17 Jun 84

3. Country of origin of wastes and port of loading:

a. United States of America

b. East River, New York

4. Specification of dredged material and process from which derived:

a. Description: silt

b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock

c. Mode of transportation: towed barge; 4,000 cy capacity

- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters):  $108,000 \text{ cy} = 82,600 \text{ m}^3*$

*Note: The volume shown for this area is the total volume dredged from all areas under this permit number. The work under this permit is divided into 3 areas, each of which is represented by separate testing and is shown in a separate London Dumping Convention Report.

- 7. Expected frequency of dumping (for reporting period):
  - a. 4 trips/day
  - b. Actual start: 3 Nov 83

. Actual completion: 15 Dec 83

Elutriate (S.D.) 8. Chemical composition: Site Water (S.D.) in ppb DDT < 0.05 < 0.05 (-) PCB < 0.1 0.15(0.03)*06) 0.37 0.2(0)Hq Cď 7.80 .39) 3.17 (0.29)

(* statistical significance - 95% lb. 1)

- 9. Properties of dredged material:
  - a. Solubility (% water)

56.

b. Density (gm/cc)

Not Available

c. pH

Not Available

d. % sand 5.3

% silt 68.5

% clay 27.2

- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

a. <u>Liquid Phase Bioassay</u> (EC50 or LC50 for each test species) @ 96 hrs.

Skeletonema costatum	63%
Mysidopsis bahia	> 100%
Menidia menidia	> 100%

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

.cartia tonsa	40%
Mysidopsis bahia	68%
Menidia menidia	> 100%

c. <u>Solid Phase Bioassay</u> (% mortality difference with respect to control)

Palamonetes sp.	2.0
Mercenaria mercenaria	1.0
Nere is virens	1.0

(* statistical significance, 95% confidence level)

## 10-day Bioaccumulation Test Data:

Petrol. Hydro were statistically significant in <u>Palaemonetes</u> sp. (12.77 ppm), <u>Merenaria</u> sp. (1.49 ppm) and <u>Nereis</u> sp. (30.35 ppm).

PCB's were statistically significant in <a href="Nereis">Nereis</a> sp. (0.39 ppm).

Report of Ocean Dumping wits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: Coastal Dry Dock and Repair Co. - Pier J

Date issued: 17 Jun 81

Permit No. 11969*

Start Date: 17 Jun 81

Expiry Date 17 Jun 84

3. Country of origin of wastes and port of loading:

a. United States of America

b. East River, New York

4. Specification of dredged material and process from which derived:

a. Description: silt

- b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock
- c. Mode of transportation: towed barge; 4,000 cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters):  $108,000 \text{ cy} = 82,600 \text{ m}^3$

* Note: The volume shown for this area is the total volume dredged from all areas under this permit number. The work under this permit is divided into 3 areas, each of which is represented by separate testing and is shown in a separate London dumping Convention Report.

- 7. Expected frequency of dumping (for reporting period):
  - a. 4 trips/day
  - b. Actual start: 3 Nov 83
- c. Actual completion: 15 Dec 83

8.	Chemical composition: in ppb	Site Water (S.D.)	Elutriate (S.D.)	
	TOO	< 0.05 (-)	< 0.05 (-)	
	PCB	0.14 (0.02)	0.18 (0.02)	
	Hg	0.43 (0.06)	0.3 (0.0)	
	Cq	7.80 (0.17)	2.73 (0.06)	

9. Properties of dredged material:

- a. Solubility (% water) 61.0
- b. Density (gm/cc) Not Available
- c. pH Not Available
- d. % sand 9.0 % silt 62.0 % clay 29.0
- 10. Method of packing: None

Ę

- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters): 20 m.
  - c. Distance from nearest coast (kilometers): 9 Km.
- 14. Additional information: See attached.

a. <u>Liquid Phase Bioassay</u> (EC50 or LC50 — each test species) @ 96 hrs.

Skeletonema costatum		74%
Mysidopsis bahia		70%
Menidia menidia	,2	100%

b. <u>Suspended Particulate Phase Bioassay</u> EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	51%
Mysidopsis bahia	> 100%
Menidia menidia	> 100%

c. <u>Solid Phase Bioassay</u> (% mortality difference with respect to control)

Palamonetes sp.	1.0
Mercenaria mercenaria	3.0 *
Nere is virens	0.0

(* statistical significance, 95% confidence level)

## 10-day Bioaccumulation Test Data:

Petrol Hydro were statistically significant in <u>Palaemonetes</u> sp. (2.51 ppm), <u>Mercenaria</u> sp. (0.39 ppm) and Nereis sp. (11.90 ppm).

PCB's were statistically significant in Nereis sp. (0.18 ppm).

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic District New York

2. Permit start date/expire date:

Permittee: Coastal Dry Dock & Repair Co. - Site D

Date issued: 17 Jun 81

Permit No. 11969*

Start Date: 17 Jun 31

Expiry Date 17 Jun 84

Country of origin of wastes and port of loading: 3.

a. United States of America

b. East River, New York

4. Specification of dredged material and process from which derived:

a. Description: silt

b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock

c. Mode of transportation: towed barne; 4,000 cy capacity

- Form in which dredged material is presented for disposal: slurrynoncohesive character.
- * Note: The volume shown for this area is the total volume dredged from all areas under this permit number. The work under this permit is divided into 3 areas, each of which is represented by separate testing and is shown in a separate London Dumping Convention Report.
- Total quantity (cubic meters):  $108.000 \text{ cy} = 82.600 \text{ m}^3 \star$
- Expected frequency of dumping (for mo. thing period):
  - a. 4 trips/day

b. Actual start: 3 Nov 33 Actual completion: 15 Dec 83

8. Chemical composition:

Site War (S.D.)

Elutriate (S.D.)

in ppb

Petrol. Hydro.

See no: -: 14.

PCB

Hg Cd

- 9. Properties of dredged material:
  - a. Solubility (% water) See note at 14.

b. Density (gm/cc)

Not Avallable

c. pH

Not Available

d. % sand 6.5

% silt 57.2

% clay 26.3

- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters):

20 m.


c. Distance from nearest coast (kilometers):

9 Km.

14. Additional information:

Note: Chemical, bioassay and bioaccumulation testing done for the other areas covered by this permit were used as being representative of this area.

OCEAN DUMPING REPORT FOR CALENDAR YEAR 1983 DREDGED MATERIAL(U) CORPS OF ENGINEERS FORT BELVOIR YA WATER RESOURCES SUPPORT CENTER JUL 84 WRSC-83-SR-1 F/G 13/2 AD-A149 438 2/3 UNCLASSIFIED NL



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

# LONDON DUMPING CONVENTION Report of Ocean Dumping Permits - CY 83

1.	Issuing Authority:
	Division: South Atlantic District: Savannah
2.	Permit start date/expire date:
	Permittee: Latex Construction Company
	Date Issued: 23 April 1980 Permit No.: 074 OYN 004072
	Start Date: 23 February 1983 Expire Date: 28 February 1983
3.	Country of origin of wastes and port of loading:
	a. United States of America
MTT	b. Thunderbolt Marina, Wilmington River, (Atlantic Intracoastal Waterwoods), Chatham County, Georgia.
4.	Specification of dredged material and process from which derived:
	a. Description: silt.
	b. Mode of Dredging: Clam bucket.
	c. Mode of Transportation: Bottom dump scow.
5.	Form in which dredged material is presented for disposal: Slurry
6.	Total quantity (cubic meters): 1,440 CY
7.	Expected frequency of dumping (for reporting period):
	a. 1 load/day - 4 days total.
	b. Actual start: 23 February 1983
	c. Actual completion: 27 February 1983
8.	Chemical composition: N/A
9.	Properties of dredged material:
	a. Solubility (% water): N/A
	b. Density (gm/cc): 1.8 gm/cc
	c. pH: N/A
	A 7 and M/A 7 ailt M/A 7 clas M/A

- 10. Method of packaging: Hydraulic Dredging Hopper.
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: At site.
- 13. Approved dumping site: For Savannah Harbor.
  - a. Geographical position (latitude and longitude): 31°56'54" N
    80°45'34" W
  - b. Depth of water (meters): -10.7 to -12.2m (-35 to -40 feet) at mlw.
  - c. Distance from nearest coast (kilometers): 6.9km (3.75 nmi)
- 14. Additional information: N/A

# Report of Ocean Dumping Permits - CY 83

1.	Issuing Authority:				
	Division SOUTH ATLANTIC District JACKSONVILLE				
2.	Permit start date/expire date:				
	Permittee: U.S. Navy				
	Date issued: 8 Feb 74 Permit No. 738-1538				
	Start Date: 8 Feb 74 Expiry Date: 31 Dec 83				
3.	Country of origin of wastes and port of loading:				
	a. United States of America				
	<b>b.</b> Mayport, FL				
۹.	Specification of dredged material and process from which derived:				
	a. Description: Gray and black organic, silty and clay sizes				
	b. Hode of dredging: Hopper Dredge - Suction				
	c. Mode of transportation: Hopper Dredge				
5.	· 5 Jurry, non-conesive				
6.	Total quantity (cubic meters): 84,528.8				
7.	Expected frequency of dumping (for reporting period):				
	a. Daily				
	b. Actual start: 12 Aug 83 c. Actual completion: 19 Aug 83				

8.	Chemical	composition	ı
----	----------	-------------	---

See attached

Additional information:

•	Pros	perties of dredged material:
	٠.	Solubility (\$ water) Not available
	b.	Density (gm/cc): 2600 (Absolute)
	e.	pH Not available
		S send S silt S olay
		Not available
10.	, He	othod of packaging: Not applicable
11.	, He	ethod of release: Bottom Dump
12	. Pr	rocedure and site for tank washing: Hoppers flushed at disposal site
13	. Aç	pproved dumping site:
	<b>a.</b>	Geographical position (latitide and longitude):
		30 ⁰ 21'30", 81 ⁰ 17'26", 30 ⁰ 20'30", 81 ⁰ 17'26" 30 ⁰ 20'30", 81 ⁰ 18'34", 30 ⁰ 21'30", 81 ⁰ 18'34"
	b.	Depth of water (meters):
	a.	Distance from nearest coast (kilometers):

ME		STRATE PA		
REPORTED BY: C PHONE	CAIRE	TESTED DY JL, JN	DM CHECKED BA	
		t		
REMARKS:			•	
		· · ·		
Vanadium .	V. UUZY	0.003¥ ,	<b>0.</b> 0036	Z 0.0003
Selenium	∠ 0.00001 0.0029	< 0.00001 0.0039	<b>40,00001</b>	<pre>&lt; 0.00001</pre>
Copper Beryllium	0.00007	0.00092 0.00011	0.00360 0.00010	∠ 0.00005
Nickel	0.0012 0.00065	0.0019	0.0019	<pre>4 0.0005 0.0003:</pre>
Chromium	0.0020	0.0025	0.0045	∠ 0.0005
Cadmium Arsenic	0.00008 0.00038	0.00010 0.00080	0.00016 0.00040	0.0000 0.0000
Iron	1.2	2.0	1.9	0.042
Soluble Phosphorus as PO4 Total Phosphorus as PO4	0.0010 0.274	0.0023 0.358	0.0030 <b>0.</b> 275	0.0002 0.114
Mercury	∠0.00002	<0.00002	∠0.00002	∠0.0000
Lead Zinc	0.0014 0.0030	0.0026 0.0052	0.0070 0.0152	0.0004 0.0003
Oil and Grease	0.20	0.36	0.64	0.06
Nitrite Nitrogen as NO2 Nitrate Nitrogen as NO2	0.000014 0.00012	0.000022 0.00041	0.000022 0.00036	0.0000 0.0001
Ammonia Nitrogen as NH3	0.008	0.022	0.020	0.002
Nitrogen, Kjeldahl	0.212	0.578	0.318	0.014
C.O.D.	7.28	15.84	13.55	0.12
T.V.S. Formula EC Total Organic Carbon	8.45 1.24	16.84 3.00	14.60 2.62	1.44 < 0.10
Volatile Solids	8.14	17.17	13.52	0.37
Date .	1-17-77	1-17-77	1-17-77	1-17-7
Lab. No. Field Sample No.	3S 308 Mayport 1	3S 309 Mayport 2	3S 310 Mayport 3	3S 311 Naypor
SPECIFICATION			SPECIFICATIONS (	256 pelom)
HEETS	N/A		FAILS	enn h.: 1
Chemical Analysis	(See below)		See below	
ESTED FOR:			28 January	<del></del>
FOR USE AS:			DATE SAMPLE RE	
SOURCE		<del></del>	BASE UNIT COST	
ESCRIPTION Sediment Sample			REVA. NO. 12 Ref. Room.	
	MENT	)	WORK ORDER NO.	·
CEUEDAL T	EST REPORT		DATE REPORTED 7 March 19	77
MARIE. I	I, GEORGIA			
CORPS OF	ENGINEERS	•	Nayport Tu	rning Basi
U. S. ARMY ENGINEER DIVISI	ON LABORATORY,	SOUTH ATLANTIC	FACJECT	
			Jackson	ville
			DISTRICT	

				:
Description: Sediment Samples Tested for: Chamical Analysis (See below) Suce Received: 29 Sept. 1977 Suc Tested: 10 thru 23 October 1977 Ente Reported: 4 Koverber 1977		departert of the arm, south corps of incineers, 611 south	SOUTH ATTAKTIC DIVISION LABURATORY SOUTH WEB DR., HWILLTIA, CA. 30061	Interior: Increasettle Project: Mayout Turning Basis Reqn Nr. 05-120-5:G-35-77 Uork Urder No. 0374 Sef. Reqn ED-77-36
		(SIST). AUC) INDIZH M IKIDNIA	(કાંક્સ્સ સ્પાર્ટ) માલ	
Lab. No.	38-993	38-38	35-995	35-996
field Sample No.	<b>-</b>	м	•	4
1620	0924	. 095.)	0760	0500
	9-27-77	9-21-77	9-27-77	9-27-77
) volatile solids	6.32	17.30	9.61	2,45
T.V.S. Formula CC	5.71	14.71	56.00	
Total Organic Carbon	2.29	3.84	2.11	1.33
, a.c	5.50	13.66	. 8.20	3.54
-	0.130	0,435	0.205	0.104
3	0.0130	0.0436	0.0258	0.0147
7	010000.0	0.00024	0.000013	6,00000
	0.00002	90000	0.0006	0.00002
Cil and Grease	8.0	0.21	0.09	<b>5.</b> 6¢
	0.00061	10.00201	0.00201	0.00061
100	2,0032	0.00%	0.0078	0.0626
	20000°	<b>₹0.0002</b>	<0.00002	.vo. 0c002
Tot es entocideous afcillos	0.00103	0.65962	0.00217	0.00219
Total substances of the second	0.423	0.:.(7	0.459	0.3:.4
	7.0000	1.3		9.74
	<b>500:</b>	< 0.00003	<0.00003	£ 9, 00/05 5
intention in the second of the	0.00026	0.00100	0,00070	0.00016
	0.00215	0.00315	0.00415	0.00165
15751:	0000	0.0010	0.0013	Q.0006
רסטינד	0.00050	0.00250	0.00190	-
ניין ניפון	0.00007	0.00015	0.00013	
Selentur	9.8863	<0.0005	<b>40.0000</b>	2000.02
- Constitution of the Cons	0.0011	0.0010	0.0015	0.0010
				<b>7</b>

# Report of Ocean Dumping Permits - CY 83

1.	Issuing Authority:
	Division SOUTH ATLANTIC District JACKSONVILLE
2.	Permit start date/expire date:
	Permittee: U.S. Navy
	Date issued: 8 Feb 74 Permit No. 738-1538
	Start Date: 8 Feb 74 Expiry Date: 31 Dec 83
3.	Country of origin of wastes and port of loading:
	a. United States of America
ı	b. Mayport, FL
۹.	Specification of dredged material and process from which derived:
	a. Description: Gray and black organic, silty and clay sizes
	b. Mode of dredging: Hopper Dredge - Suction
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Slurry, non-cohesiv
6.	Total quantity (cubic meters): 49,797.6
7.	Expected frequency of dumping (for reporting period):
	• Daily
	b. Actual start: 11 Nov 83 c. Actual completion: 16 Nov 83

Jee accached	
	•
9. Properties of dredged material:	•
a. Solubility (\$ water) Not available	
b. Density (ga/oc) . 2600 (Absolute)	
<b>c.</b> PM Not available	
d. S send S silt S clay	<del></del>
Not available	
10. Method of packaging: Not applicable	
11. Hethod of release: Bottom Dump	
12. Procedure and site for tank washing: Hoppers flushe	a at disposal site
13. Approved dumping site:	,
a. Geographical position (latitide and longitude):	<del></del>
30°21'30", 81°17'26", 30°20'30", 81°17'26" 30°20'30", 81°18'34", 30°21'30", 81°18'34"	
b. Depth of water (meters):	15
c. Distance from nearest coast (kilometers):	9

Chemical composition:

14. Additional information:

•			P-78 ba	76' 1
	ON LABORATORY, ENGINEERS A, GEORGIA	SOUTH ATLANTIC	DISTRICT JACKSON FROJECT Nayport Tu CONTRACT NO.	
_ ·	EST REPORT	)	DATE REPORTED 7 March 19 WORK ORDER NO 0374	77
DESCRIPTION Sediment Sample			REUM. NO. 12 lef. Roon.	
SOMECE		<del></del>	BASE UNIT COS	
FOR USE AS:			DATE SAMPLE &	
TESTED FGR: Chemical Analysis	(See below)		See below	
MEETS SPECIFICATION	N/A S		FAILS SPECIFICATIONS	(See below)
Lab. No. Field Sample No. Date Volatile Solids T.V.S. Formula EC Total Organic Carbon C.O.D. Nitrogen, Kjeldahl Ammonia Nitrogen as NH3 Nitrite Nitrogen as NO2 Nitrate Nitrogen as NO3 Oil and Grease Lead Zinc Mercury Soluble Phosphorus as PO4 Total Phosphorus as PO4 Iron Cadmium Arsenic Chromium Nickel Copper Beryllium Selenium Vanadium	3S 308  Mayport 1 1-17-77 8.14 8.45 1.24 7.28 0.212 0.008 0.000014 0.00012 0.20 0.0014 0.0030 0.00002 0.0010 0.274 1.2 0.00008 0.00038 0.0020 0.0012 0.00065 0.00007  0.0029	3S 309 Mayport 2 1-17-77 17.17 16.84 3.00 15.84 0.578 0.022 0.000022 0.00041 0.36 0.0052 0.00052 0.00002 0.0023 0.358 2.0 0.00010 0.00080 0.0025 0.0019 0.00092 0.00011 <0.00091 0.00092 0.00011 <0.00091	3S 310 Mayport 3 1-17-77 13.52 14.60 2.62 13.55 0.318 0.020 0.000022 0.00036 0.64 0.0070 0.0152 <0.00002 0.0030 0.275 1.9 0.00016 0.00040 0.0045 0.0019 0.00360 0.00010 <0.00001 0.0036	35 311 Naypor 1-17-7 0.37 1.44 0.10 0.12 0.014 0.002 0.0000: 0.0001: 0.06 0.0004 0.0003 0.00002 0.114 0.042 0.00005 0.00005 0.00005 0.00005 0.00005 0.00005 0.00005
REMARKS:				<u> </u>
REPORTED ST: C PHONE	Chief.	18 . = 0 <b>8Y</b>	CHECKED D	· ·

Description: Sedimont Samples Tested for: Chamical Analysis (See below) Date Received: 29 Sept., 1977 Cate Tested: 10 thru 25 Occober 1977 Cate Reported: 4 Koverber 1977		TPARTHERT OF THE ARMY, SOUTHERS, 611 SOUTH	Department of the arm, south atlantic divesion laboratory Corps oz lucimeers, 611 south coes dr., Hariltta, Ca. 30061	Project: Macteontille Project: Mayout Turning Be 61 Reqn Nr. 05-120-5:G-35-77 Pork Order No. 0374 30f. Reqn ED-77-36
		ובא עם דאבוספאים	Percent by Maight (one mans)	
Lab. No.	38-993	36-36	35-995	906-31
field Sample No.		•		
11:0	. 0924	360	7 00	* 6
	9-27-77	9-21-77	6-21-77	0000
velatile solids	. 25.9	17.30		7.6
T.V.S. Fortule EC	5.71	14.71	7.07	
Total Organic Carbon	2.29	3.44		n
.c.n.p.	5.50	13.66	1 C	
Mittocea, Mieldahl	0.130	0.435	0 205	
Mitrogen as	0.0130	0.0436	0.0358	2710
•	010000	0.000024	0.000013	\$ COOOO O
Mirrare Mirrones as NO.	0.00002	90003.0	80000 0	0 00003
Cil and Greese	<b>ා</b>	0.21	0.09	
	0.00061	0.00201	0.05201	0 00061
ייייייייייייייייייייייייייייייייייייייי	0,0032	0.0058	0.0076	0.0626
יייניםוג	<0.00002	₹0.0000	< 0,00002	20000
Of an autorideony alculos	0.00103	0.03962	0.00217	0.00219
Total supposed to the second s	0.423	0.:.17	0.459	4.1.6
	9.5	1.9	1.9	7. C
	5000	< 0.0000\$	<0.00003	₹0,0000\$
	0.00026	0.00100	0,000	9,000,0
	0.00Z1S	0.00315	0.00415	0.00165
	0.0007	0.0010	0.0013	9,000
	0.00050	0.00280	0.00100	0.00110
	0.0000	0,00015	0.00013	0.0000\$
	5.0003	<0.00003	<0.00005	Z 0, U0005
	0.0011	0.0010	\$100.0	0.0010
				-

1.	Issuing Authority:
	Division SUUTH ATLANTIC District JACKSONVILLE
2.	Permit start date/expire date:
	Permittee: JACKSONVILLE SHIPYARDS, INC.
	Date issued: 14 August 1980 Permit No. 80H-1161
	Start Date: 14 August 1980 Expiry Date: 14 August 1986
3-	Country of origin of wastes and port of loading:
	a. United States of America
•	b. East Bay Terminal, St. John's River, Jacksonville, F da
۹.	Specification of dredged material and process from which ~ ed:
	a. Description: River Silt
	b. Hode of dredging: Bucket
	c. Mode of transportation: Bottom Dump Barge
5	Material as dredged, not treated
6	
7	. Expected frequency of dumping (for reporting period):
	a. twice annually
	b. Actual start: Jan 83 c. Actual completion: Dec 83
	Jan-June 83 and Dec 1-De < 0.83

B.	Chemical	compositions
----	----------	--------------

SEE ATTACHED

- 9. Properties of dredged material:
  - a. Solubility (% water) Not a Hicable
  - b. Density (ga/ca) .
  - e. pH
  - d. % sand ____ % silt ___ % clay ____

- 10. Hethod of packaging: not applicable
- 11. Method of release: Bo-tom dump barge
- 12. Procedure and site for tank washing:
- 13. Approved dumping site: Off Jacksonville Harbor
  - a. Geographical position (latitide and longituded: 30 21 45 N

81 18 00 W

b. Depth of water (meters):

16 meters

c. Distance from nearest coast (kilometers):

4.2 nautical miles

14. Additional information:

TABLE 34. Results of chemical analyses of sediments collected from the proximity of an Atlantic Ocean disposal site (reference site) and dredged material collected from three stations of Jacksonville Shipyard, Jacksonville, FL.

		centration;	mg/l (ppm)	
	Reference	Dr	edged materi	al
Chemical constituent	site sediment	Station 1	Station 2	Station 3
Cadmium	<0.56	1.2	1.8	2.0 ·
Lead	<0.01	0.16	0.33	1.3
Mercury	0.06	0.33	0.22	0.15
Zinc	<4.8	710	1,600	6,100
Petroleum hydrocarbons:				
Fraction 1, aliphatics	<0.2	<0.4	11.0	<0.4
Fraction 2, aromatics	<0.3	<1.2	0.1	<0.8
Polychlorinated biphenyls (as Aroclore 1254)	<0.05	<0.05	<0.05	1.7
Pesticides:				
Aldrin	<0.05	<0.05	<0.05	<0.05
Lindane	<0.05	<0.05	<0.05	<0.05
Heptachlor	<0.05	<0.05	<0.05	<0.05
p,p'DOD	<0.05	<0.05	<0.05	<0.05
o,p'DDE	<0.05	<0.05	<0.05	<0.05
p,p'DOT	<0.05	<0.05	<0.05	<0.05
Chordane	<0.05	<0.05	<0.05	<0.05
Dieldrin	<0.05	<0.05	<0.05	<0.05
Endrin	<0.05	<0.05	<0.05	<0.05
Toxaphene	<0.05	<0.05	<0.05	<0.05
Mirex	<0.05	<0.05	<0.05	<0.05
Methoxychlor	<0.05	<0.05	<0.05	<0.05

1.	Issuing Authority:	
	Division SOUTH ATLANTIC	District JACKSONVILLE
2.	Permit start date/expire date:	
	Permittee: Jacksonville Shipyan	Inc.
	Date issued: 14 August 1980	Permit No. 80H-1162
	Start Date: 14 August 1980	Expiry Date: 14 August 1986
3.	Country of origin of wastes and po	ort of loading:
	a. United States of America	
	<b>b.</b> Bellinger Shipyards, Atlantic	Intercoastal Waterway, Jacksonville, Florid
4.	Specification of dredged material	and process from which derived:
	a. Description: Silt	
	<ul><li>b. Mode of dredging: Bucket</li><li>c. Mode of transportation: Bot</li></ul>	tom Dump Barge
5.	. Form in which dredged material is	presented for disposal: As dredged
6	. Total quantity (cubic meters):	7646 m ³ (10,000 cy)
7	. Expected frequency of dumping (fo	er reporting period):
	<ul><li>one time annually</li></ul>	
	b. Actual start: August 1983	c. Actual completion: August 1983

9. Proper	rties	of	dredged	material:
-----------	-------	----	---------	-----------

a. Solubility (\$ water)

NOT APPLICABLE

b. Density (ga/co) .

c. pli

d. \$ sand ____ \$ silt \$ clay

- 10. Method of packaging: NOT APPLICABLE
- 11. Method of release: BOTTOM DUMP
- 12. Procedure and site for tank washing:
- 13. Approved dumping site: OFF JACKSONVILLE HARBOR
  - a. Geographical position (latitide and longitude): 30 21 45 N

81 18 00 W

b. Depth of water (meters):

16 meters

c. Distance from nearest coast (ki : meters):

4.2 nautical miles

14. Additional information:

TABLE 34. Results of chemical analyses of sediments collected from the proximity of an Atlantic Ocean disposal site (reference site) and dredged material collected from three stations of Jacksonville Shipyard, Jacksonville, FL.

		centration;	mg/l (ppm)	
	Reference		edged materi	al
Chemical constituent	site sedim	Station 1	Station 2	Station 3
Cadmium	<0.56	1.2	1.8	2.0 `
Lead	<0.01	0.16	0.33	1.3
Mercury	0.06	0.33	0.22	0.15
Zinc	<4.8	710	1,600	6,100
Petroleum hydrocarbons:				
Fraction 1, aliphatics	<0.2	<0.4	11.0	<0.4
Fraction 2, aromatics	<0.3	<1.2	<b>Q1.1</b>	<0.8
Polychlorinated biphenyls	<0.05	<0.05	<0.05	1.7
(as Aroclore 1254)				
Pesticides:				
Aldrin	<0.05	<0.05	<0.05	<0.05
Lindane	<0.05	<0.05	<0.05	<0.05
Heptachlor	<0.05	<0.05	<0.05	<0.05
p,p'DOD	<0.05	<0.05	<0.05	<0.05
o,p'DDE	<0.05	<0.05	<0.05	<0.05
p,p'DDT	<0.05	<0.05	<0.05	<0.05
Chordane	<0.05	<0.05	<0.05	<0.05
Dieldrin	<0.05	<0.05	<0.05	<0.05
Endrin	<0.05	<0.05	<0.05	<0.05
Toxaphene	· <0.05	<0.05	<0.05	<0.05
Mirex	<0.05	<b>&lt;0.05</b>	<0.05	<0.05
Methoxychlor	<0.05	<0.05	<0.05	<0.05

### LONDON DUMPING -NTION

1.	. Issuing Authority:	
	Division South Pacific District Los	Angeles
2.	Permit start date/expire date:	•
	Permittee: Atkinson Marine Corporation	
	Date issued: 19 May 1983 Permit No.	82-88-RA
	Start Date: 19 May 1983 Expiry Date:	19 May 1986
3.	3. Country of origin of wastes and port of loading:	
	a. United States of America	
	<b>b.</b> San Diego Harbor, California	
<b>4.</b>	4. Specification of dredged material and process fr	om which derived:
	a. Description: silt, Sand	
	b. Mode of dredging: Clamshell	
	c. Mode of transportation: Barge	
5.	5. Form in which dredged material is presented for	disposal: Slurry
6.	6. Total quantity (cubic meters): 680,000 cubic yar	ds
7.	7. Expected frequency of dumping (for recoting per	iod):
	a. Daily during maintenance dredgin	
	b. Actual start: Actual	completion:

8.	Chemical composition:	.α
	Copper	
	Lead	
	Zinc Cadmium	
	Silver	
9.	Properties of dredged material:	
	a. Solubility (* water)	
	b. Density (gm/cc)	
	e. pH	
	d. % sand % silt % clay	
10.	. Method of packaging:	
11.	. Method of release: Bottom Dumping from Barge	
12.	. Procedure and site for tank washing: Hosing down at approved site	
13.	. Approved dumping site: LA-5	
	a. Geographical position (latitide and longitude): 32°36'50"N, 117°20'	'40"W
		<del></del>
,	b. Depth of water (meters): 100 fathoms	<del></del>
	c. Distance from nearest coast (kilometers): 7.7 nautical mi	<u>le</u> s
14.	. Additional information:	

#### LONDON DUMPING ( ,ENTION

1.	Issuing Authority:
	Division South Pacific District Los Angeles
2.	Permit start date/expire date:
	Permittee: City of Newport Beach
	Date issued: 28 January 1983 Permit No. 82-112-RA
	Start Date: 28 January 1983 Expiry Date: 28 January 1986
3.	Country of origin of wastes and port of loading:
	a. United States of America
	<b>b.</b> Newport Harbor, California
4.	Specification of dredged material and process from which derived:
	a. Description: Silt, Sand
	b. Mode of dredging: Suction
	c. Mode of transportation: Barge
5.	Form in which dredged material is presented for disposal: Slurry
6.	Total quantity (cubic meters): 20,000 hubic yards
7.	Expected frequency of dumping (for recrting period):
	a. Daily during maintenance dredging
	b. Actual start: 28 March 1983 Actual completion:

Properties of dredged material:  a. Solubility (% water)  b. Density (gm/cc)  c. pH  d. % sand60 % silt35 % clay	5
<pre>Method of packaging:</pre>	
Method of release: Bottom Dumping from Barge	
Procedure and site for tank washing: Hosing down at	approved site
Approved dumping site: LA-3	
a. Geographical position (latitide and longitude):	33 [°] 31'42"N, 117 [°] 54'48"h
<ul> <li>b. Depth of water (meters):</li> <li>c. Distance from nearest coast (kilometers):</li> <li>Additional information:</li> </ul>	250 fathoms  4.0 nautical miles from harbor mouth
	Properties of dredged material:  a. Solubility (\$ water)  b. Density (gm/cc)  c. pH  d. \$ sand60

8. Chemical composition:

1.	Issuing Authority:
	Division South Pacific District Los Angeles
2.	Permit start date/expire date:
	Permittee: National Steel and Shipbuilding Company
	Date issued: 4 March 1983 Permit No. 82-193-RA
	Start Date: 4 March 1983 Expiry Date: 4 March 1986
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. San Diego Harbor, California
4.	Specification of dredged material and process from which derived:
	a. Description: Silt, Sand
	<ul><li>b. Mode of dredging: Clamshell</li><li>c. Mode of transportation: Barge</li></ul>
5.	Form in which dredged material is presented for disposal: Slurry
6.	Total quantity (cubic meters): 300,000 cubic yards
7.	Expected frequency of dumping (for reporting period):
	a. Daily during maintenance dredging
	b. Actual start: 4 April 1983 . Actual completion: 1 May 1983

P	-33	PJ	2.f2
---	-----	----	------

8.	Chemical composition:	12-33 pg 20
	Cadmium Lead Chromium Zinc Copper Petroleum hydo-carbons Mercury	
9.	Properties of dredged material:	
	a. Solubility (* water)	
	b. Density (gm/cc) '.	
	e. pH	
	d. % sand 23 % silt 70 % clay	7
10.	Method of packaging:	
11.	Method of release: Bottom Dumping from Barge	
12.	Procedure and site for tank washing: Hosing down a	at approved site
13.	Approved dumping site: LA-5	
	a. Geographical position (latitide and longitude):	32 [°] 36'50"N, 117 [°] 20'40"W
	b. Depth of water (meters):	100 fathoms
	c. Distance from nearest coast (kilometers):	7.7 nautical miles

Additional information:

1.	Issuing Authority:
	Division South Pacific District Los Angeles
2.	Permit start date/expire date:
	Permittee: National Steel and Shipbuilding Company
	Date issued: 20 April 1983 Permit No. 82-167-RA
	Start Date: 20 April 1983 Expiry Date: 20 April 1986
3.	Country of origin of wastes and port of loading:
	a. United States of America
	<b>b.</b> San Diego Hurkor, California
4.	Specification of dredged material and process from which derived:
	a. Description: Silt, Sand
	b. Mode of dredging: Clamshell
	c. Mode of transportation: Barge
5.	Form in which dredged material is presented for disposal: Slurry
6.	Total quantity (cubic meters): 17,00 cubic yards
7.	Expected frequency of dumping (for regrating period):
	a. Daily during maintenance dredgin
	b. Actual start: 26 April 1984 Actual completion: 10 Tap 1984

8.	Chemical composition:	P-34 pg
	Cadmium Mercury Lead Chromium Zinc Copper Petroleum hydo-carbons	·
9.	Properties of dredged material:	
	a. Solubility (% water)	
	b. Density (gm/cc).	
	е. рН	
	d. % sand 12 % silt 76 % clay 12	
	d. % sand 12 % silt 76 % clay 12	
10.		
10.	Method of packaging:	
	<pre>Method of packaging: Method of release: Bottom Dumping from Barge</pre>	roved site
11.	Method of packaging:  Method of release: Bottom Dumping from Barge  Procedure and site for tank washing: Hosing down at appropriate the stank washing of the	roved site
11.	Method of packaging:  Method of release: Bottom Dumping from Barge  Procedure and site for tank washing: Hosing down at approach dumping site: LA-5	roved site 6'50"N, 117 ⁰ 20'
11.	Method of packaging:  Method of release: Bottom Dumping from Barge  Procedure and site for tank washing: Hosing down at approved dumping site: LA-5  a. Geographical position (latitide and longitude): 32036	

#### LONDON DUMPING C ITION

1.	Issuing Authority:
	Division South Pacific District Los Angeles
2.	Permit start date/expire date:
	Permittee: U.S. Naval Facilities Engineering Command
	Date issued: 10 December 1982 Permit No. 82-139-RA
	Start Date: 10 December 1982 Expiry Date: 10 December 1985
3.	Country of origin of wastes and port of loading:
	a. United States of America
	San Diego Harbor, California
4.	Specification of dredged material and process from which derived:
	a. Description: Silt, Sand
	b. Mode of dredging: Clamshell
	c. Mode of transportation: Barge
5.	Form in which dredged material is presented for disposal: Slurry
6.	Total quantity (cubic meters): 355,00 cubic yards
7.	Expected frequency of jumping (for reacting period):
	a. Daily during maintenance dredging
	b. Actual start: 14 May 1985 Actual completion: 5 July 1983

P-35	P.9	2.	of	2
------	-----	----	----	---

	•	~ ~ ~ ~ ~ (
8.	Chemical composition:	D-35 pg 2.of
	Cadmium Chromium Copper Mercury	
9.	Properties of dredged material:	
	a. Solubility (\$ water)	
	b. Density (gm/cc) .	
	c. pH	
	d. % sand % silt % clay	
	34% Silt/Clay (Sediment type: Fine Sand) 76% Silt/Clay (Sediment type: Sand-Silt-Clay)	
	Method of packaging:	
11,		
12.	Procedure and site for tank washing: Hosing down at app	proved site
13.	Approved dumping site: LA~5	
	a. Geographical position (latitide and longitude): 3.	(117 [°] 20'40"W
	b. Depth of water (meters):	100 fathoms
	c. Distance from nearest coast (kilometers):	7.7 nautical miles
1 4	Additional informations	from shore

14. Additional information:

# LONDON DUMPING C PRITION

1.	Issuing Authority:		
	Division South Pacific District Los Angeles		
2.	Permit start date/expire date:		
	Permittee: Southwest Marine, Inc.		
	Date issued: 20 May 1983 Permit No. 82-197-RA		
	Start Date: 20 May 1983		
3.	Country of origin of wastes and port of loading:		
	a. United States of America		
	b. San Diego Harbor, California		
4.	Specification of dredged material and process from which derived:		
	a. Description: Silt, Sand		
	b. Mode of dredging: Clamshell		
	c. Mode of transportation: Barge		
5.	Form in which dredged material is presented for disposal: Slurry		
6.	. Total quantity (cubic meters): 410,000 cubic yards		
7.	Expected frequency of dumping (for regarding period):		
	a. Daily during maintenance dredging		
	b. Actual start: 24 May 1983 Actual completion: 30 May 1984		

٥.	Chemical composition:
	Lead Copper
9.	Properties of dredged material:
•	a. Solubility (* water)
	b. Density (gm/cc)
	e. pH
	d. % sand 24 % silt 69 % clay 7
10.	Method of packaging:
11.	Method of release: Bottom Dumping from Barge
12.	Procedure and site for tank washing: Hosing down at approved site
13.	Approved dumping site: LA~5
	a. Geographical position (latitide and longitude): 32°36'50"N, 117°20'40"W
	b. Depth of water (meters):
	c. Distance from nearest coast (kilometers): 7.7 nautical miles
14.	Additional information: from shore

#### LONDON DUMPING C /ENTION

1.	Issuing Authority:
	Division South Pacific District Los Angeles
2.	Permit start date/expire date:
	Permittee: San Diego Unified Port District
	Date issued: 26 January 1983 Permit No. 80-253-RA
	Start Date: 26 January 1983 Expiry Date: 26 January 1986
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. San Diego Harbor, California
4.	Specification of dredged material and process from which derived:
	a. Description: Silt, Sand
	<ul><li>b. Mode of dredging: Clamshell</li><li>c. Mode of transportation: Barge</li></ul>
5.	Form in which dredged material is presented for disposal: Slurry
6.	Total quantity (cubic meters): 28,700 cubic yards
7.	Expected frequency of dumping (for reporting period):
	a. Daily during maintenance dredging
	b. Actual start: 22 February 198 Actual completion: 18 June 1983

3. Chemical composition:

copper

P-37 fg 20f2

- 9. Properties of dredged materia
  - a. Solubility (\$ water)
  - b. Density (gm/cc) .
  - c. pH

area <b>d</b>	sand_	silt_	1 clay
Switzer Creek	70	15	15
West Basin	75	10	15
Fitth Ave. Marina	35	35	30

- 10. Method of packaging:
- 11. Method of release: Bottom Dumping from Barge
- 12. Procedure and site for tank washing: Hosing down at approved site
- 13. Approved dumping site: LA-5
  - a. Geographical position (latitude and longitude):  $32^{13}6450$  %,  $117^{12}20440$  %
  - b. Depth of water (meters):

100 fathoms

c. Distance from nearest coast (kilometers):

7.7 nautical miles

14. Additional information:

1.	Issuing Authority:
	Division South Pacific District Los Angeles
2.	Permit start date/expire date:
	Permittee: San Diego Unified Port District
	Date issued: 4 February 1983 Permit No. 81-55-RA
	Start Date: 4 February 1983 Expiry Date: 4 February 1986
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. San Diego Harbor, California
4.	Specification of dredged material and process from which derived:
	a. Description: Silt, Sand
	<ul><li>b. Mode of dredging: Clamshell</li><li>c. Mode of transportation: Barge</li></ul>
5.	Form in which dredged material is presented for disposal: Slurry
6.	Total quantity (cubic meters): 71,140 - ubic vards
7.	Expected frequency of dumping (for reporting period):
	a. Daily during maintenance dredgi:
	b. Actual start: 22 February 198 Actual completion: 18 June 1983

8. Chemical composition:

P-38 pg 2 of 2

Copper

- 9. Properties of dredged mater.i.:
  - a. Solubility (\$ water)
  - b. Density (gm/cc) '.
  - c. pH

area d.	1 sand	1 % silt	≴ clay
F	10	55	35
G	15	45	40
Н	20	45	35

- 10. Method of packaging:
- 11. Method of release: Bottom Dumping from Barge
- 12. Procedure and site for tank washing: Hosing down at approved site
- 13. Approved dumping site: LA-5
  - a. Geographical position (latitide and longitude): 32°36'50"N, 117°20'40" W
  - b. Depth of water (meters):

100 fathoms

c. Distance from nearest coast (kilometers):

7.7 nautical miles
from shore

14. Additional information:

P-39 M 10f2

Report of Ocean Dumping Permits - CY 1983

1. Issuing	Authority:
------------	------------

Division South Facific District Los Angeles

2. Permit start date/expire date:

Permittee: Port of Los Angeles

Date issued: 27 October 1982 Permit No. 82-111-AA

Start Date: 27 October 1982 Expiry Date: 27 October 1985

3. Country of origin of wastes and port of loading:

a. United States of America

5. Los Angeles Harbor, California

4. Specification of dredged material and process from which derived:

a. Description: Silt, Sand

b. Mode of dredging: Clamshell

c. Mode of transportation: Barge

- 5. Form in which dredged material is presented for disposal: slurry
- 6. Total quantity (cubic meters): 800 cm.ic yards
- 7. Expected frequency of dumping (for reporting period):
  - a. Daily during maintenance dredging
  - b. Actual start: 24 January 1983 . Actual completion: 28 January 1983

P-39 18	2	.+2
---------	---	-----

100 fathoms

from shore

5.3 nautical miles

8.	Chemical composition: Cadmium Copper Lead Mercury	P-39	13 2 of 3
9.	Properties of dredged material:  a. Solubility (% water)  b. Density (gm/cc) '.  c. pH		
	d. \$ sand 84 \$ silt 12 \$ clay 4		
11	<ul> <li>Method of packaging:</li> <li>Method of release: Bottom Dumping from Barge</li> <li>Procedure and site for tank washing: Hosing down at app</li> </ul>	proved si	te
13	<ul> <li>Approved dumping site: LA-2</li> <li>a. Geographical position (latitide and longitude): 3303</li> </ul>	37'06"N,	118 ⁰ 17'24"

b. Depth of water (meters):

14. Additional information:

c. Distance from nearest coast (kilometers):

Dredging of Magazine Loch

Pearl Harbor, Hawaii

### LONDON DUMPING CONVENTION

1.	Issuing Authority:
	Division Pacific Ocean District Honolulu
2.	Permit start date/expire date:
	Permittee: U. S. Navy
	Date issued: 15 June 1932 Permit No. PODCO-0 1657-D
	Start Date: Expiry Date: 31 Dec 84
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Pearl Harbor, Hawaii
4.	Specification of dredged material and process from which derived:
	a. Description: Silt, Sand, Coral
	b. Mode of dredging: Clamshell
	c. Mode of transportation: Barge
5.	Form in which dredged material is presented for disposal: Crushed
6.	Total quantity (cubic meters): 54,620 -3
7.	Expected frequency of dumping (for re; ring period):
	a. 674 m ³ /day
	b. Actual start: Aug 82 Actual completion: May 83

8.	Che	mical composition: N/A		
9•	Pro	perties of dredged mater	ial:	
	а.	Solubility (% water)	64 percent	
	b.	Density (gm/cc)	N/A	
	c.	рН	N/A	
	d.	% sand % silt	% clay	
10.	Me	thod of packaging: N/A		
11.	Me	thod of release: Bottom	Dump	
12.	Pr	ocedure and site for tan	k washing:	
13.	Ap	proved dumping site: Ma	mala Bay	
	а.	Geographical position (	latitide and longitude):	21 ⁰ 15' 10" N 157 ⁰ 56' 50" W
	b.	Depth of water (meters)	<u>:</u> .	100 m
	c.	Distance from nearest o	oast (kilometers):	7.4 m

14. Additional information:

An environmental assessment and ecological assessment (bioassay testing) was completed in February 1982 by AECOS, Inc., for the Pacific Division, Naval Facilities Engineering Command. The February 1982 states:

"The proposed action is not anticipated to have a significant environmental impact nor be environmentally controversial. Bioassay testing on test sediment from three sites within the proposed dredged area showed no evidence of toxic effects. Dredging will occur within Pearl Harbor in an area entirely under U. S. Navy control. Environmental conditions in this part of the Harbor are not conducive to high biological productivity or diversity. Disposal will occur at an offshore site designated by EPA."

	_					
Report	of	Ocean	Dumping	Permits	- CY	1983

1.	Issuing Authority:					
	Division New England District N/A	· <del></del>				
2.	Permit start date/expire date:					
	Permittee: Pres. Roads Fed. Project	. —				
	Date issued: N/A Permit No.					
	Start Date: N/A Expire Date: April 1983					
3.	Country of origin of wastes and port of loading:					
	a. United States of America					
	b. Boston, Mass.					
	4. Specification of dredged material and process from which derived:					
	a. Description: Clayey organic silt.					

Mode of dredging: Clamshell

- c. Mode of transportation: Scow
- 5. Form in which dredged material is presented for disposal: Saturated cohesive & non-cohesive material
- 6. Total quantity (cubic meters): 114,750m³
- 7. Expected frequency of dumping (For reporting period):
  - a. 2-3 loads per day
  - b. Actual start: January 1937
  - c. Actual completion: <u>April 1933</u>

# 8. Chemical composition:

5.	l u	tr	ı	۵.	٠	Ģ.

C-1 Pg. 2 of 3

	Sample A	Sample B	Sample C
Nutrients:			
Nitrite Nitrogen ppm Nitrate Nitrogen ppm Ammonia Nitrogen ppm Sulfate (So ₄ ) ppm	0.005 0.02 2 2740	0.005 0.02 5 2550	0.00 <b>5</b> 0.03 3.0 2700
Phosphorous Ortho, ppm total, ppm	0.94 0.94	0.42 0.44	0.02 0.05
Metals:			
Mercury ppb Lead ppb Zinc ppb Arsenic ppb Cadmium ppb Chromium ppb Copper ppb Nickel ppb Silver ppb Vanadium ppb Cadmium ionic ppm	0.9 14 18 3.8 0.5 4 <2 17 <90 <40 3.6	0.5 19 57 5.6 <0.5 <4 <2 13 <80 <40 4.7	0.5 15 37 1.2 42 44 42 48 480 440 3.4
Organics:			
Oil & Grease Total PCB ppb Total DDT ppb	<0.8 0.32 <0.001	<0.8 	0.8

# 9. Properties of dredged material:

- a. Solubility (% water)
- b. Density (gm/cc)
- c. pH
- d. % sand _____ % silt ____ % clay _____

# 10. Method of packaging:

- 11. Method of release: Six bottom doors open hydraulically. Material is released intermittently while scow is held at a complete halt.
- 12. Procedure and site for tank washing: The washing of scow is done either at dredge or disposal site.

15. Approved haping aite:

- a. <u>Geographical position (latitude and longitude):</u> 42° 25.7'N 70° 34.0'W
  - b. Depth of Water (meters): "Th
  - c. Distance from nearest coast (Filometers): 18.7km
- 14. Additional information:

Liquid Phase Bioassay: LPC not exceeded

Suspend Particulate Phase Bipassay: LFC not exceeded

Solid Phase Bioassay: LPC not exceeded

<u>Bioaccumulation:</u> No significant effect. Elevated levels of Hg and PHC in mercenaria.

This dumpsite is subject to monitoring studies under the disposal area monitoring system (DAMCS) program. The program is designed to identify and evaluate impacts resulting from the disposal of dredged materials at designated dump sites. The DAMOS program continually contributes to the development of new monitoring methodologies that reflect on the efficiency of field observations and logistics, as well as time.

This program was designated to comply with sections 228.9 and 228.10 of the Ocean Dumping Act relative to dump site monitoring and the evaluation of disposal impacts.

#### 8. Chemical composition:

ELUTRIATE ANALYSIS Constituent

#### Nutrients:

Nitrate (N)  $_{\rm R}$  g/1 0.024 Nitrate (No) mg/1 0.19 Sulfate (So₄) mg/1 1450 Phosphorus (P) Ortho mg/1 0.135 Total mg/1 0.158

#### Metals:

Mercury (Hg) ug/l 0.5 Lead (Pb) u g/l 0.123 Zinc (Zn) mg/l 0.11 Arsenic (As) mg/l (0.007 Cadmium (Cd) mg/l (0.001 Chromium (Cr) mg/l (0.035) Copper (Cu) mg/l (0.036) Nickel (Ni) mg/l (0.036) Vanadium (V) mg/l (0.129)

Oil & Grease mg/l 6
Total PCB ug/l 33
Total DDT ug/l <0.1

#### Bulk Sediment Analysis

#### Metals

		1	2	3	4	5	6
ppm	Mercury	1.1	1.0	1.2	1.3	2.2	1.8
ppm	Lead	208.0	51.0	150.0	128.0	129.0	230.0
ppm	Zinc	419.0	263.0	304.0	271.0	330.0	336.0
ppm	Arsenic	11.0	12.0	11.0	9.0	9.0	10.0
ppm	Cadmium	8.8	3.7	4.3	5.6	5 <b>.5</b>	7.7
ppm	Chromium	92.0	41.0	100.0	99.0	87.0	84.0
ppm	Copper	137.0	59.0	144.	125.0	118.0	166.0
ppm	Nickel	73.0	44.0	<b>70.</b> 🤈	73.0	63.0	46.0
ppm	Vanadium	260.0	140.0	350.0	210.0	100.0	170.0

#### Organic

ppm Oil & Grease 4800.0 598.0 4680. 2800.0 2990.0 5750.0

- 7. Properties of dradged material:
- C-2 Pg. 3 of 3

- a. Solubility (% water)
- b. Density (gm/cc)
- c. pH
- d. % sand _____ % silt ____ % clay
- 10. Method of packaging:
- 11. Method of release: Six bottom doors open hydraulically. Material is released intermittently while scow is held at a complete halt.
- 12. Procedure and site for tank washing: Hopper is rinsed at either the approved dredge or disposal site.
- 13. Approved dumping site: Foul area
  - a. Geographical position (latitude and longitude):

__42⁰_25.7'N __70⁰_34.0'W

- b. Depth of Water (meters): 77m
- c. Distance from nearest coast (kilometers): 18.3km
- 14. Additional information: No significant effect indicated by bioassay or bioaccumulation tests.

This dumpsite is subject to monitoring studies under the disposal area monitoring system (DAMOS) program. The program is designed to identify and evaluate impacts resulting from the disposal of dredged materials at designated dump sites. The DAMOS program continually contributes to the development of new monitoring methodologies that reflect on the efficiency of field observations and logistics, as well as time.

This program was designated to comply with sections 228.9 and 228.10 of the Ocean Dumping Act relative to dump site monitoring and the evaluation of disposal impacts.

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: New York District

Adopted 1933

Date issued: Permit 18 Jun 81

Permit No. Fed Proj #63; NY & NJ Channels

Start Date: 8 Jun 81

Expiry Date: completed

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. Perth Amboy Anchorage, NJ
- 4. Specification of dredged material and process from which derived:
  - a. Description: silty clay
  - b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock
  - c. Mode of transportation: towed barge; 4000cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters):  $120,900 \text{ cy} = 92,400 \text{ m}^3$
- 7. Expected frequency of dumping (for reporting period):
  - a. 2 trips/day
  - b. Actual start: 3 Jan 83

. Actual completion: 12 Jan 83

8.	Chemical composition: in ppb	Site water (S.D.)	Elutriate (S.D.)		
	Petrol. Hydro. PCB Hg Cd DØT Pb	< 2(n0 (-) < (n1 (-) <	< 200.0 (-) < 0.1 (-) < 0.2 (-) < 0.1 (-) < 0.05 (-) < 10.0 (-)		

9. Properties of dredged material:

a. Solubility (% water) N * Available

b. Density (gm/cc)

N Available

c. pH

N Available

d. % sand 22.8 % silt 3 % clay 38.4

10. Method of packing: None

11. Method of release: Immediate release from bottom opening doors.

12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.

13. Approved dumping site:

a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W

b. Depth of water (meters):

20 m.

c. <u>Distance from nearest coast (kilometers):</u>

9 Km.

14. Additional information: See attached.

## Bioassays and Bioassessment Evaluations

a. Liquid Phase Bioassay (EC50 or LC50 for each test species)@ 96 hrs.

Skeletonema costatum	>	100%
Mysidopsis bahia	>	100%
Menidia menidia	>	100%

b. Suspended Particulate Phase Bioassay (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	>	100%
Mysidopsis bahia	>	100%
Menidia menidia	>	100%

c. <u>Solid Phase Bioassay</u> (% mortality difference with respect to control)

Palamonetes sp.	0	
Mercenaria mercenaria	0	negative number indicates
Nereis virens	-4.0	greater mortality in control

(* statistical significance, 95% confidence level)

10-day Bioaccumulation Test Data: There was no statistically significant bioaccumulation of contaminants in any of the test species shown for the Solid Phase Bioassay.

Report of Ocean Dumping Figure 33

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: New York District

Adapted 1922

Fed. Proj. #64,

Date issued: Permit - 14 Mar 83

Permit No.: Newark Bay, Hackensack

and Passaic Rivers

Start Date: 14 Mar 83

Expiry Date: Completed

- Country of origin of wastes and port of loading: 3.
  - a. United States of America
  - b. Port Newark Pierhead Channel, NJ
- Specification of dredged material and process from which derived: 4.
  - a. Description: silty clay
  - b. Mode of dredging: clamshell dredge; Weeks Dredging Co.
  - c. Mode of transportation: towed barge; 4,000 cy capacity
- Form in which dredged material is presented for disposal: slurry-noncohesive 5. character.
- Total quantity (cubic meters): 468,400cy = 356,100 m³ 6.
- 7. Expected frequency of dumping (for reporting period):
  - a. 2 trips/day

b. Actual start: 24 May 83 c. Actual completion: 15 Jul 83

8.	Chemical composition: in ppb	Site Water (S.D.)	Elutriate (S.D.)
	Petrol. Hydro. PCB	< 50.0 (-) < 0.1 (-)	< 50.0 (-) < 0.1 (-)
	Hg Cd	< 0.2 (-)	< 0.2 (-) < 0.2 (-)

9. Properties of dredged material:

a. Solubility (% water)

31.1

b. Density (gm/cc)

Not Available

c. pH

Not Available

d. % sand 15.8

% silt 37.6

% clay 42.8

10. Method of packing: None

11. Method of release: Immediate release from bottom opening doors.

12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.

13. Approved dumping site:

a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W

b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

14. Additional information: See attached.

NOTE: This project was "capped" with material from the Passaic River Project (see pp. 7-9) and the Red Hook Anchorage Project (see pp. 10-12).

### Bioassays and Bioassessment Evaluations

a. Liquid Phase Bioassay (EC50 or LC50 for each test species)@ 96 hrs.

Skeletonema costatum	9.6%
Mysidopsis bahia	55 <b>.0%</b>
Menidia menidia	57 <b>.0%</b>

b. Suspended Particulate Phase Bioassay (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	100 <b>.0%</b>
Mysidopsis bahia	98 <b>.0%</b>
Menidia menidia	> 100.0%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	11.3*
Mercenaria mercenaria	0.0
Nere is virens	4.3

(* statistical significance, 95% confidence level

10-day Bioaccumulation Test Data: Petroleum Hydrocarbons were statistically significant in Mercenaria sp. (.695 ppm) and Nereis sp. (.733 ppm).

NOTE: Solid Phase Data is "blocked" data for an original set of testing and a final set which was divided into 3 sections.

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: New York District

Adopted 1907

Date issued: Permit: 3 Aug 82

Permit No.: Fed. Proj. # 64, Passaic River

Start Date: 3 Aug 82 Expiry Date: Completed

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. Passaic River, New Jersey
- 4. Specification of dredged material and process from which derived:
  - a. Description: silty clay
  - b. Mode of dredging: clamshell dredge; Weeks Dredging Co.
  - c. Mode of transportation: towed barge; 4000 cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters):  $702,400 \text{ cy} = 537,100 \text{ m}^3$
- 7. Expected frequency of dumping (for reporting period):
  - a. 3 trips/day
  - b. Actual start: 15 Jul 83
- c. Actual completion: 14 Oct 83

8.	in ppb		composition: Sith water (3.D.)		Elutriate (5.0.)	
	Pb		10.0	(-)	10.0 (-)	
	PCB		0.01 0.2	(-)	0.01 (-) 0.2 (-)	
	Hg Cd		0.1	(-)	0.2 (-)	
	DDT		0.5	(-)	0.05 (-)	

- 9. Properties of dredged material:
  - a. Solubility (% water)

Not Available

b. Density (gm/cc)

Not Available

c. pH

Not Available ·

d. % sand 8.7 % silt 56.3 % clay 35.0

NOTE: Grain size data is from 17 Aug 1978 data.

- 10. Method of packing: None
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W
  - b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km. ____

14. Additional information: See attached.

## Bioassays and Bioassessment Evaluations

a. <u>Liquid Phase Bioassay</u> (EC50 or LC50 for each test species)@ 96 hrs.

Skeletonema costatum	33.0%
Mysidopsis bahia	40.0%
Menidia menidia	52.0%

b. <u>Suspended Particulate Phase Bioassay</u> (EC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa	26.0%
Mysidopsis bahia	35.0%
Menidia menidia	28.0%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	2.0	Negative Number indicates
Mercenaria mercenaria	0.0	greater mortality in control
Nereis virens	-1.0	

(* statistical significance, 95% confidence level)

### 10-day Bioaccumulation Test Data:

Petroleum Hydrocarbons were statistically significant in Mercenaria sp. (.65 ppm) and Nereis sp. (.75 ppm).

PCB's were statistically significant in Mercenaria sp. (.11 ppm) and Nereis sp. (.12 ppm).

Report of Ocean Dumping Permits - CY ___83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: New York District

Adopted 1965

Date issued: Permit 9 Apr 81

Permit No. Fed. Proj. #62; NY Harbor

Start Date: 9 Apr 81

Expiry Date: Completed

3. Country of origin of wastes and port of loading:

- a. United States of America
- b. Red Hook Anchorage, NY
- 4. Specification of dredged material and process from which derived:
  - a. Description: silty clay
  - b. Mode of dredging: clamshell dredge; Great Lakes Dredge & Dock
  - c. Mode of transportation: towed barges; 4000 & 2000 cy capacity
- 5. Form in which dredged material is presented for disposal: slurry-noncohesive character.
- 6. Total quantity (cubic meters): 749,000cy = 572,700 m³
- 7. Expected frequency of dumping (for reporting period):
  - a. 4 trips/day
  - b. Actual start: 10 Oct 83
- c. Actual completion: 20 Dec 83

8.	Chemical composition: in ppb	Site Water (S.D.)	Elutriate (S.D.)
	Petrol. Hydro.	< 50.0 (-)	< 50.0 (-)
	PCB	< 0.1 (-)	< 0.1 (-)
	Hg	< 0.2 (-)	< 0.2 (-)
	Cd	< 0.1 (-)	< 0.1 (-)

9. Properties of dredged material:

a. Solubility (% water)

72.0

b. Density (gm/cc)

Not Available

c. pH

Not Available

d. % sand 56.8

% silt 27.8

% clay 15.4

10. Method of packing: None

11. Method of release: Immediate release from bottom opening doors.

12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.

13. Approved dumping site:

a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W

b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

14. Additional information: See attached.

### Bioassays and Bioassessment Evaluations

a. Liquid Phase Bioassay (EC50 or LC50 to each test species)@ 95 h.s.

Skeletonema costatum	* 7	114
Mysidopsis bahia	>100	257
Menidia menidia	90,	14

b. Suspended Particulate Phase Bioassay ACC50 or LC 50 per test species)@ 96 hrs.

Acartia tonsa		71.0%
Mysidopsis bahia	>	100.0%
Menidia menidia	>	100.0%

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	1.0	
Mercenaria mercenaria		negative number indicates
Nereis virens	-1.0	greater mortality in control.

(* statistical significance, 95% confidence level)

10-day Bioaccumulation Test Data: Petro. Hydro. were statistically significant in Mercenaria sp. (.722 ppm) and Nereis sp. (1.721 ppm).

#### LONDON DUMPING ( : VENTION

Report of Ocean Dumping Permits - CY 83

1. Issuing Authority:

Division North Atlantic

District New York

2. Permit start date/expire date:

Permittee: New York District

Adopted 1962

Fed. Proj. #9, Flushing Bay

Date issued: Permit- 4 Aug 81

Permit No: & Creek

Start Date: 4 Aug 81

Expiry Date: Completed in Jan 84

- 3. Country of origin of wastes and port of loading:
  - a. United States of America
  - b. Flushing Bay, NY
- Specification of dredged material and process from which derived: 4.
  - a. Description: silty clay
  - b. Mode of dredging: clamshell dredge; Weeks Dredging Company
  - c. Mode of transportation: towed barge; 4000cy capacity
- Form in which dredged material is presented for disposal: slurry-noncohesive character.
- Total quantity (cubic meters):  $910,800 = 696,400 \text{ m}^3$ 6.
- 7. Expected frequency of dumping (for reporting period):
  - a. 4 trips/day

  - b. Actual start: 26 Oct 83 c. Actual completion: 28 Dec 83

8.	Chemical composition: in ppb	Site Water (S.D.)	Elutriate (S.D.)
	Petrol. Hydro. PCB Hg Cd Pb DDT	< 200.0 (-) < 0.1 (-) < 0.1 (-) < 0.1 (-) < 0.1 (-) < 0.1 (-) < 0.1 (-)	< 200.0 (-) < 0.1 (-) < 0.2 (-) < 0.1 (-) < 10.0 (-) < 0.05 (-)

9. Properties of dredged material:

a. Solubility (% water) 63.3

b. Density (gm/cc)

Not Available

c. pH

Not Available

d. % sand 7.33 % silt 48.50 % clay 44.17

10. Method of packing: None

11. Method of release: Immediate release from bottom opening doors.

12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.

13. Approved dumping site:

a. Geographical position (latitude and longitude: 40° 22'N; 73° 51'W

b. Depth of water (meters):

20 m.

c. Distance from nearest coast (kilometers):

9 Km.

14. Additional information: See attached.

## Bioassays and Bioassessment Evaluations

a. <u>Liquid Phase Bioassay</u> (EC50 or LC50 f each test species)@ 96 hrs.

Skeletonema costatum	> 100.0
Mysidopsis bahia	> 100.0
Menidia menidia	48.0

b. Suspended Particulate Phase Bioassay (EC50 or LC50 per test species)@ 96 hrs.

Acartia tonsa	> 100.0
Mysidopsis bahia	> 100.0
Menidia menidia	42.0

c. Solid Phase Bioassay (% mortality difference with respect to control)

Palamonetes sp.	1.0	
Mercenaria mercenaria	-1.0	Negative number indicates
Nereis virens	-1.0	greater mortality in control.

(* statistical significance, 95% confidence le  $\pm$ 

10-day Bioaccumulation Test Data: Petroleum hydrocarbons were statistically significant in Mytilus sp. (4.12 ppm). PCB's were statistically significant in Nereis sp. (0.05 ppm)

Report of Ocean Dump. ? Permits - CY 83

1. Issuing Authority:

North Atlantic Division

District Norfolk

2. Permit start date/expire date: NA

Permittee: NA, Federal Project

Date issued: NA

Permit No. NA

Start Date: NA

Expiry Date: NA

3. Country of origin of wastes and port of loading:

- a. United States of America
- b. Chincoteague, Virginia
- 4. Specification of dredged material and process from which derived:
  - a. Description: Clean, medium sand
  - b. Mode of dredging: Cutter Suction Dredge
  - c. Mode of transportation; Pipeline
- 5. Form in which dredged material is presented for disposal: slurry, 12 % sand, 88 % water
- 6. Total quantity (cubic meters): 50,600
- 7. Expected frequency of dumping (for reporting period):
  - a. 14 hours per day
  - b. Actual start: 7 August
  - c. Actual completion: 26 September
- 8. Chemical composition: NA
- 9. Properties of dredged material:
  - a. Solubility (% water) NA
  - b. Density (gm/cc) NA

C-8 pg. 2

- c. pH NA
- d. % sand 99 % silt 1 % clay 0
- 10. Method of packaging: NA
- 11. Method of release: NA
- 12. Procedure and site for tank washing: NA
- 13. Approved dumping site:
  - a. Geographical position (latitude and longitude): 37°51'30"N, 75°25'30"W
  - b. Depth of water (meters):

6

c. Distance from nearest coast kilometers):

1

14. Additional information: NA

WANG 0337r/fh

# Report of Ocean Dumping Permits - CY 83

1.	Issuing Authority:	
	Mivision South Atlantic	District Wilmington
2.	Permit start date/expire date:	
	Permittee: Non-Permit Wilmington	rict
	Date issued:	Permit No.
	Start Date:	Expiry Date:
3.	Country of origin of westes and por	t of loading:
	a. United States of America	•
	• Morehead City Harbor	
4.	Specification of dredged material	and process from which derived:
	8. Description: Sand, water slurn Maintenance Dredged Material	ту
	b. Mode of dredging: Hopper	
	c. Mode of transportation: Hopper	•
5-	. Form in which dredged material is	presented for disposal: Slurry
6.	. Total quantity (cubic meters): 64	9,094 cu m
7.	Expected frequency of dumping (for	reporting period):
	a. 14 loads per day	
	b. Actual start: 8 June 1983	c. Actual completion: 30 August 1983

8.	Chemical	composit	ion
----	----------	----------	-----

9.	Pro	perties of dredged material:
		Solubility (\$ water)

- b. Density (gm/cc) . 1900
- Unknown
- d. S sand 95 S atlt 3 S clay 2

- 10. Method of packaging:
- 11. Method of release: Bottom dump hopper dredge
- 12. Procedure and site for tank washing:
- 13. Approved dumping site:

34°37.2'N

Geographical position (latitide and longitude): 76°43.0'W

b. Depth of water (meters):

c. Distance from nearest coast (kilometers):

13 m

4.9 km

14. Additional information:

## Report of Ocean Dumping Permits - CY 83

1.	Issuing Authority:
	Division South Atlantic District Wilmington
2.	Permit start date/expire date:
	Permittee: Non Permit
	Date issued: Permit No.
	Start Date: Expiry Date:
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Wilmington, NC
4.	Specification of dredged material and process from which derived:
	a. Description: Sand, silt, clay slurry
· ·	<ul> <li>b. Mode of dredging: Hopper Dredge</li> <li>c. Mode of transportation: Hopper Dredge</li> </ul>
5.	Form in which dredged material is presented for disposal: Slurry
6.	Total quantity (cubic meters): 779,005 cu m
7.	Expected frequency of dumping (for reporting period):
	17 loads per day; 16,500 cu m/day
	b. Actual start: 8 September 1983 c. Actual completion: 17 October 1984

O. Champager composition	ical composition	Chemical	8.
--------------------------	------------------	----------	----

- Solubility (% water) Unknown
- Density (gm/co) . 1500 to 1950
- pH Unknown
- **S.** sand  $\frac{45}{1}$  **S.** silt  $\frac{35}{1}$  **S.** clay  $\frac{20}{1}$

- 10. Method of packaging:
- 11. Method of release: Bottom dump Hopper Dredge
- 12. Procedure and site for tank washing:
- 13. Approved dumping site:

33°48'30"N 78°02'54"W a. Geographical position (latitide and longitude):

b. Depth of water (meters):

c. Distance from nearest coast (kilometers):

5 kma

13 m

14. Additional information:

## Report of Ocean Dumping Permits - CY 1983

١.	Issuing Authority:						
	Division SOUTH ATLANTIC Pistrict CHARLESTON						
2.	Permit start date/expire date:						
	Permittee: None required for US Army Corps of Engineers						
	Date issued: N/A Permit No. N/A						
	Start Date: N/A Expiry Date: N/A						
3.	Country of origin of wastes and port of loading:						
	a. United States of America, South Carolina						
	b. Charleston, SC						
4.	Specification of dredged material and process from which derived:						
	a, Description: Primarily calcium carbonite shell-rich quartz with small amounts of sandy clayey silt poor in calcium carbonate.						
	b. Mode of dredging: Hopper Dredge						
	c. Mode of transportation: Hopper Dredge (SUGAR ISLAND)						
5.	Form in which dredged material is presented for disposal: Slurry, non-cohesiv						
6.	Total quantity (cubic meters): 397092 M3						
7.	Expected frequency of dumping (for reporting period):						
	a. Average 20 loads daily, seven days per week						
	b. Actual start: 1 Nov 83 c. Actual completion: 14 Dec 83						

See attached, Figure 1, Table A-7, and Ta A-8.

#### 9. Properties of dredged material:

- a. Solubility (* water) Has not been determined
- b. Density (gm/cc) '.Specific gravity = 1.67
- o. pH 7.0 7.3
- d. \$ sand ___ \$ silt __ \$ clay ____ (see attached table 86 & Figure 2)

- 10. Hethod of packaging: N/A
- 11. Method of release: Direct release from Hopper into water.
- 12. Procedure and site for tank washing: N/A
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude): See attached.
  - b. Depth of water (meters):

9.80 - 1520 Meters

c. Distance from nearest coast (kilometers):

6.95 Kilometers

#### 14. Additional information:

See attached "Summary and Conclusions"

#### PART I. SUMMARY AND CONCLUSIONS

- 1. Sediments from four sites (Fig. 1) in the entrance to Charleston Harbor, South Carolina, were bioassayed following Federal guidelines as outlined in the EPA/CE Manual*. All four sediments fully comply with regulations for sate ocean disposal.
- 2. Suspended particulate and liquid phases meet all bioassay and dilution criteria. No limiting permissible concentration (LPC) would be approached during this disposal.
- 3. There were no indications of toxicity in any of the solid phase bioassays.
- 4. Chemical analyses of the liquid phase found no constituents to be greatly elevated over seawater controls, and no LPC would be approached except that for cadmium. Seawater and the liquid phases had the same cadmium content, but the seawater content is fourteen times the limiting permissible concentration. No pesticides or PCB's were detectable in any of the samples.
- 5. Laboratory experiments found no tendencies for any bioaccumulation of petroleum hydrocarbons, chlorinated hydrocarbons, mercury or cadmium from any of the test sediments.
- 6. The disposal vessel, traveling at 1.5 m/sec, will require 800 seconds to empty a full capacity load of  $1600 \text{ m}^3$ . The median water depth at the disposal site is 12.5 m (10-15 m). These figures yield a calculated dilution factor of 0.00032 or 0.032% after the four-hour initial mixing period.

Environmental Protection Agency/Corps of Engineers Technical Committee on Criteria for Dredged and Fill Material, "Ecological Evaluation of Proposed Discharge of Dredged Material into Ocean Waters; Implementation Manual for Section 103 of Public Law 92-532 (Marine Protection, Research, and Sanctuaries Act of 1972)," July 1977, Environmental Effects Laboratory, U.S. Army Engineer Waterways Experiment Station, Vicksburg, Mississippi.

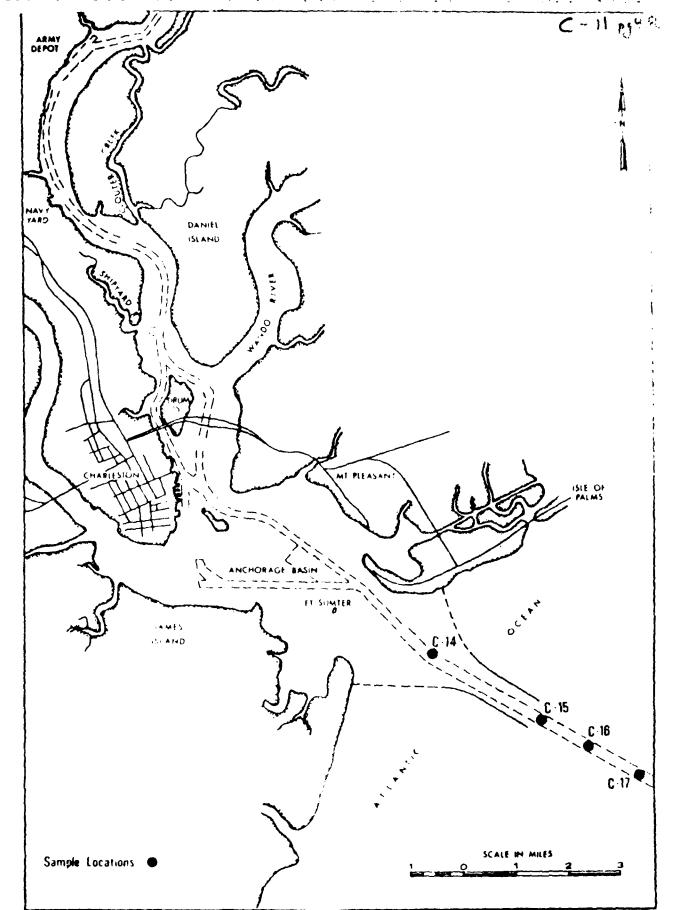


FIGURE 1. Sample locations for sediments used in tests.

Table A-7

Metals and Nutrients Ana and of Liquid Phase Samples

(Values are in milligrams por a re [= ppm] except as noted.)

Constituent	Disposi Site k.	C-14	C-15	C-16	C-17
NO ₂ -N ¹	< 0.01	0.23	. 0.01	0.04	1.1
NO ₃ -N ¹	< .05	< .05	< .05	< .05	< .05
NH ₃ -N ¹	< 0.1	5.6	7.4	4.9	3.4
TKN-N1	0.56	6.5	9 <b>.6</b>	6.8	4.5
OP-PO, 1	< 0.2	< 0.2	0.84	< 0.2	0.21
TP-PO41	0.77	0.77	1.4	0.90	1.0
TOC-C	10	7.5	18	12	7.5
Oil and Grease ²	13	14	13	11	69
As ¹	< .03	< .03	0.08	< .03	< .03
Be ¹	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3
Cd ³	0.07	0.06	0.07	0.07	0.07
Cr1	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3
Cu ⁴	0.09	0.07	0.06	0.07	0.07
Hg 5 micrograms per litre	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
N1 ⁶	0.42	0.40	0.40	0.40	0.43
Pb 6	0.50	0.57	0.52	0.53	0.69
Se ⁶ micrograms per litre	< 2	< 2	< 2	< 2	< 2
Zn ⁶	0.13	0.17	0.15	0.11	0.17

Marine standards suggested by U.S. EPA 1976 Quality Standard for Water (EPA-440/9/76/023) are: ¹none suggested; ²0.01 times the 96 hour LC₅₀ in flowing water bioassays; ³5.0  $\mu$ g/litre; ⁴0.1 times the 96 hour LC₅₀; ⁵0.10  $\mu$ g/litre; ⁶0.01 times the 96 hour LC₅₀.

Tabl
Pesticide and PCB Analyse Liquid Phase Samples

Constituent	Disposal Site Wa <b>ter</b>	C-14	C15	C-16	C-17
Salinity PPT	29.8	29.9	29.9	30.0	30.8
рН	7.5	7.2	7.2	7.3	7.0
	No pesticide	es or PCE	d's were	detectab	le in
	any of the s	samples.	Detecti	on limit	s in
	micrograms p	oer litre	e (= ppb)	are:	
PCB's (as Arochlor 1254)	< 1				
Heptachlor	< .05				
DDE	< .05				
DDD	< 0.2				
DDT	< 0.2				
Endrin	< 0.2				
Dieldrin	< 0.1				
ВНС	< .05				
Mitrex	< 0.3				
Methoxychlor	< 1				
Chlordane	< 0.5				
Toxaphene	< 5				

 $A_{+} =$ 

Table 64. Sottom endiment compositiving and quartz grain size distributions for Charleston Entrance Channel samples.

QUARTZ CAAIM SIZE DISTRIBUTIONS

		(wight 1)	110		<b>93</b> 34040		101		j			-			•			
STATION	2,14	85.1	\$110	Clay	Phoe Fend Fend Fend Fend Fend Fend Fend Fen	5	SD (# unite)	SD Skeve' K	Eurots 1g*	1	SD (4 walte)	Sample	<b>1</b>	Sp (# unite)	Z of Sample	1	80 (6 mites)	Z of
1-1	7.8	22				2.16	\$15.	1115	7.880	3. Jb	.25	165	1.88	.62	117			
7-3	7.1	53				2.33	787	. 560	1.997	\$7.5	11.	781	1.89	\$9.	222			
FC- 3	3.	\$2				2.16	719	107	2.708	2.43	ż	141	1.43	ŋ <b>8</b> ∵	361			
\$-03	\$9	?				U. 88	1.333	0.037	-0.854	0. Se	5	205	2.59	35	ć	-0.84	79.	<b>2</b> 07
4.3	ŝ	5.				7. ))	8×C.	169	2 334	7.		797	€0.:	3.	ະດເ	2.94	70.	7.77
\$C-0	10	-				2.53	795	771.	1.481	7.60	15	352	7.90	01.	152	2.20	<b>Q</b> .	201
1-34	"	97				7.71	1.061	729	1. 705	2.82	31.	\$32	9.	96.	<b>7</b> 07	2.83	.00	17.
R: 3	3	4				4. 46	7 (8)	-1.049	5.213	1.12	38	757	2 85	<b>3</b> 5	312	1.4.1	70.1	142
EC-9	3		ı	~		89.7	(1)	0 % 2	6.4.80	2.64	3,	27.9	7.81	Ξ.	3.32			
Ft - 10	ä	~	90	9,		96 /	315	-1.529	18.219	3.05	3.	289	16.5	· 0·	271			
Et-11	æ	~	2	2		3.41	. 349	-1.566	22.766	3.53	12.	84.3	2.87	.14	161			
: ä	;	υ	<b>9</b>	=		3.45	114	-1.079	13.645	3.54	۶.	881	58 7	.11	1/1			
f - 1		4	25	87		3. 36	403	-1.026	12.420	3.54	. 20	812	2 85	.11	161			
EC-14	7.1	=	2	٠		3.04	105	(11)	3.555	3.04	97.	8 32	2.84	£ 0.	7/ 1			
EC- 15	6/	6	-	-		2. 13	.337	763	8.309	7.40	ş.	3.13	17.7	97.	217			
91 37	09	0,				1.48	.602	1.071	10.384	2.19	7.	109	06.1	76.	20 <b>1</b>			
Ec. 17	04	38			2	1.4.	995.	8/8 -	9.012	2.52	Ŝ,	13.5	7.10	<b>S</b>	157			
EC-18	*	Ţ			7	7.09	. 663	380	.941	2.45	<b>3</b> .	20%	1.75	4	\$n.			
<b>F</b> C-19	*	52			96	7.82	795.	613	6.027	2.84	59	789	2.88	.12	375			
BC-30	;	*				7.01	. 702	520	2.588	1.89	17	707	7.24	. 26	ZO.			
EC-21	נג	\$0			11	2.42	. 763	-1.010	9.515	2.53	и.	259	2.38	91.	351		,	

a' 0.00 skavenes is Caussien; -akevnese indicates a costae tail, tekeness a fine tail b' 0.00 kurtosis is Caussian a' anomalously lov standerd deviation

Navigation Chart No. Area Local Navigational Aids. Material Type

OD0410 Charleston Harbor, SC

Approved	Dumping	Site

1

# Geo: Ohical Position

Charleston	Harbor
------------	--------

Lat. 32°40'42"N Lat. 32°38'06"N Long 79°47'30"W Long. 79°41'57"W

Lat. 32°39'04"N Lat. 32°36'28"N Long 79°49'21"W Long. 79°43'48"W

#### Georgetown Harbor

Lat. 33°11'18"N Lat. 33°11'18"N Long. 79°07'20"W Long. 79°05'23"W

Lat. 33°10'38"N Lat. 33°10'38"N Long. 79°07'21"W Long. 79°05'24"W

Port Royal

Lat. 32°10'10"N Lat. 32°08'41"N Long. 80°36'00"W Long. 80°35'49"W

Lat. 32°10'06"N Lat. 32°08'38"N Long. 80°36'35"W Long. 80°36'23"W

# LONDON DUMPING CONVENTION Report of Ocean Dumping Permits - CY 83

1.	Issuing Authority:			
	Division: South Atlantic District: Savannah			
2. Permit start date/expire date:				
	Permittee: U.S. Army Engineer District, (Brunswick Harbor), Savannah			
	Date Issued: - Permit No.: (DACW21-83-C-0069)			
	Start Date: - Expire Date: -			
3.	Country of origin of wastes and port of loading:			
	a. United States of America			
	b. Brunswick Harbor			
4.	Specification of dredged material and process from which derived:			
	a. Description: sand, predominatly.			
n av	b. Mode of Dredging: Trailing hopper dredge ( horized Federal igation channel maintenance).			
	c. Mode of Transportation: Hooper Dredge "DODGE ISLAND"			
5.	Form in which dredged material is presented for disposal:			
6.	Total quantity (cubic meters): 531.781m ³ (695,502 CY)			
7.	Expected frequency of dumping (for reporting period):			
	a. 10 loads/day - 7 days/week for 36 days.			
	b. Actual start: 10 July 1983 c. Actual completion: 14 August 1983			
8.	Chemical composition: N/A			
9.	Properties of dredged material:			
	a. Solubility (% water): N/A			
	b. Density (gm/cc): 1.8 gm/cc			
	c. pH: N/A			
	d. X sand N/A X silt N/A X clav N/A			

- 10. Method of packaging: Hydraulic dredging hopper.
- 11. Method of release: Immediate release from bottom opening doors.
- 12. Procedure and site for tank washing: At site.
- 13. Approved dumping site: For Brunswick Harbor.
  - a. Geographical position (latitude and longitude): 31°01'33" N 81°17'05" W
  - b. Depth of water (meters): -8.5 tp -12/2m (-28 to -40 feet) at mlw.
  - c. Distance from nearest coast (kilometers): 10.65 km (5.75nmi)
- 14. Additional information: N/A

# LONDON DUMPING CONVENTION Report of Ocean Dumping Permits - CY 83

1.	lesuing Authority:
	Division: South Atlantic District: Savannah
2.	Permit start date/expire date:
	Permittee: U.S. Army Engineer District, Savannah (DACW21-83-C-0006)
	Date Issued: - Permit No.: (DACW21-83-C-0091)
	Start Date: Expire Date:
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Savannah Harbor
4.	Specification of dredged material and process from which derived:
	a. Description: sand and silt.
nav	b. Mode of Dredging: Trailing hopper dredge (authorized Federal rigation channel maintenance).
	c. Mode of Transportation: Hooper Dredge "DODGE ISLAND"
5.	Form in which dredged material is presented for disposal: Slurry and sand
6.	Total quantity (cubic meters): 1,096,967m ³ (1,434,694 CY)
7.	Expected frequency of dumping (for reporting period):
	a. 11 labor days - 7 days/week for 17 + 30 days.
	b. Actual start: 20 April 1983 c. Actual completion: 6 June 1983
	d. Actual start: 10 November 1983 e. Actual completion: 9 December 1983
8.	Chemical composition: N/A
9.	Properties of dredged material:
	a. Solubility (% water): N/A
	b. Density (gm/cc): N/A
	c. pH: N/A
	d. % sand 0 % silt 100 % clay 0

- 10. Method of packaging: Calm bucket dredging.
- 11. Method of release: Bottom release (bottom dumap scou).
- 12. Procedure and site for tank washing: Sea water pump, at site.
- 13. Approved dumping site: For Savannah Harbor.
  - a. Geographical position (latitude and longitude): 31°56'54" N 80°45'34" W
  - b. Depth of water (meters): -10.7 to -12.2m (-35 to -40 feet) at mlw.
  - c. Distance from nearest coast (kilometers): 6.9km (3.75 nmi)
- 14. Additional information: N/A

## Report of Ocean Dumping Permits - CY 83

1.	Issuing Authority:					
	Division SOUTH ATLANTIC District JACKSONVILLE					
2.	Permit start date/expire date:					
	Permittee: U.S. Army Corps of Engineers					
	Date issued: November 1984 Permit No. 05-22308					
	Start Date: 30 Nov 1982 Expiry Date: 1 Feb 1985					
3.	Country of origin of wastes and port of loading:					
	a. United States of America					
	b. Canaveral Harbor, Florida					
4. Specification of dredged material and process from which derived:						
	a. Description: Material is poorly graded sand with a trace of gravel size shell fragments.					
	b. Mode of dredging: Hopper Dredge - Suction					
	c. Mode of transportation: Hopper Dredge					
5.	Form in which dredged material is presented for disposal: Slurry, non-cohesive					
6.	Total quantity (cubic meters): 165,477					
7.	Expected frequency of dumping (for reporting period):					
	a. Daily					
	b. Actual start: 6 February 1983 c. Actual completion: 28 February 1983					

. Chem:	ical composition: Elutriate test results:								
α.	(1) Nutrients: mg/l Range NH4-N	(2)	Continued: N1						
	(2) <u>Metals</u> : mg/l Range Pb1.1 - 2.8 Zn18 - 77		Mn						
9. Proj	Fe1.6 - 16 perties of dredged material:	(3)	<u>Organics</u> : Oil & Grease 0.2. PCB's mg/l - <2						
٠.	Solubility (\$ water) Not available								
<b>b.</b>	Density (pa/cc) 1.2514 (Absolute)								
G.	c. pH Not available								
d.	\$ send \$ silt \$	clay							
	Not available								
	thod of packaging: Not applicable								
	ocedure and site for tank washing: Hoppe	r flushed	lat disposal site						
	proved dumping site:								
	Geographical position (latitide and long 28°19'53", 80°31'08", 28°18'50", 80°29'40'28°17'35", 80°30'52", 28°18'38", 80°32'20'38'38", 80°32'20'38'38", 80°32'20'38'38", 80°32'20'38'38'38'38'38'38'38'38'38'38'38'38'38'	0"	•						
b.	Depth of water (meters):		12						
c.	Distance from nearest coast (kilometers)	):	6.7						
18. Ad	ditional information:								

## Report of Ocean Dumping Permits - CY 83

1.	Issuing Authority:
	Division SOUTH ATLANTIC District JACKSONVILLE
2.	Permit start date/expire date:
	Permittee: U.S. Army Corps of Engineers
	Date issued: Nov 82 Permit No. 05-22308
	Start Date: 30 Nov 82 Expiry Date: 1 Feb 85
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Canaveral Harbor, Florida
4.	Specification of dredged material and process from which derived:
	a. Description: Material is poorly graded sand with a trace of gravel size shell fragments.
	b. Mode of dredging: Hopper Dredge - Suction
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Slurry, non-cohesive
6.	Total quantity (cubic meters): 300,797.5
7.	Expected frequency of dumping (for reporting period):
	a. Daily
	b. Actual start: 31 March 83 c. Actual completion: 9 May 83

9.	a.	Composition:   Elutriate test results:		Continued Mn
	٠.	Solubility (% water) Not available		
	٥.	Density (ga/co) .2514 (Absolute)		
	a.	pH Not available		
	đ.	S send S silt S cl	.ay	
		Not available		
10	) <b>. M</b>	<b>thod of packaging:</b> Not applicable		
11	ı. H	thod of release: Bottom dump		
12	2. P	ocedure and site for tank washing: Hoppers	flushed	at disposal site
13	3. A	oproved dumping site:		
	٠.	Geographical position (latitide and longity 28019'53", 80031'08", 28018'50", 80029'40" 28017'35", 80030'52", 28018'38", 80032'20"	ude):	
	b.	Depth of water (meters):	_	12
	a.	Distance from nearest coast (kilometers):	_	6,7
11	h A	iditional information:		

1.	Issuing Authority:			
	Division SOUTH ATLANTIC District JACKSONVILLE			
2.	Permit start date/expire date:			
	Permittee: U.S. Army Corps of Engineers			
	Date issued: July 1982 Permit No. 560391089			
	Start Date: 9 July 1982 Expiry Date: 25 June 1987			
3.	Country of origin of wastes and port of loading:			
	a. United States of America			
•	b. Fort Pierce Harbor, FL			
4.	Specification of dredged material and process from which derived:			
	a. Description: Sand and shell			
	·			
	b. Mode of dredging: Barge with Dragline			
	c. Mode of transportation: Scows			
5.	Form in which dredged material is presented for disposal:			
6.	Total quantity (cubic meters): 80,914.6			
7.	Expected frequency of dumping (for reporting period):			
	• Daily			
	b. Actual start: 1 Jan 83 c. Actual completion: 22 Apr 83			

8.	Chemical	compositions
----	----------	--------------

none obtained

<ol><li>Properties of dredged mater</li></ol>	rial:
-----------------------------------------------	-------

- a. Solubility (\$ water) not available
- b. Density (ga/ca) · 2720 (Absolute)
- c. pH Not available

d.	\$ 1	sand	\$ silt	S clay	

Not available

- 10. Method of peckaging: Not applicable
- 11. Method of release: Bottom dump.
- 12. Procedure and site for tank washing: Flushed at disposal site.
- 13. Approved dumping site:
  - 27⁰28'30", 80⁰12'33", 27⁰28'30", 80⁰11'37" 27⁰28'30", 80⁰11'27", 27⁰27'30", 80⁰12"33"
  - b. Depth of water (meters):

15.2

c. Distance from nearest coast (kilometers):

6.4

١.	Issuing Authority:
	Division SOUTH ATLANTIC District JACKSONVILLE
2.	Permit start date/expire date:
	Permittee: U.S. A. Corps of Engineers
	Date issued: May 80 Permit No. 50-30390
	Start Date: 9 May 80 Expiry Date: May 85
3.	Country of origin of wastes and port of loading:
	a. United States of America
•	<b>b.</b> Palm Beach Harbor, FL
۹.	Specification of dredged material and process from which derived:
	a. Description: Fine to course, clean quartz sand, shell fragments, and limestone pebbles.
	b. Mode of dredging: Hopper Dredge - SUCTION
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Slurry, non-cohesive
6.	Total quantity (cubic meters): 140,736.1
7.	Expected frequency of dumping (for reporting period):
	a. Daily
	b. Actual start: Mar 83 c. Actual completion: 22 Apr 83

5.4

8. Chemical composition:	None	obtained
--------------------------	------	----------

9.	Proj	perties of dredged material:	
	٠.	Solubility (* water) Not Available	
	<b>b.</b>	Density (gm/cc) · .2710 (absolute)	
	a.	pH Not Available	•
	d.	\$ sand \$ silt \$ clay	
		Not available	
10.	Me	bethod of packaging: Not Applicable	
11.	Me	ethod of release: Bottom dump	
12.	Pr	rocedure and site for tank washing: Hoppers flushed at	disposal site.
13.	Ąŗ	pproved dumping site:	
	<b>a.</b>	Geographical position (latitide and longitude):  26°46'00", 79°58'55", 26°46'00", 79°57'47"  26°45'00", 79°57'47", 26°45'00", 79°58'55".	<del></del>
	b.	Depth of water (meters):	160

Distance from nearest coast (kilometers):

1.	Issuing Authority:
	Division SOUTH ATLANTIC District JACKSONVILLE
2.	Permit start date/expire date:
	Permittee: U. S. Army Corps of Engineers
	Dete issued: 9 Jul 82 Permit No. 450389679
	Start Date: 9 Jul 82 Expiry Date: 25 Jun 87
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Fernandina Harbor, FL
4.	Specification of dredged material and process from which derived:
	a. Description: Gray and black organic - silty and clay sizes
	b. Mode of dredging: Hopper Dredge - Suction
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Slurry, non-cohesiv
6.	Total quantity (cubic meters): 116,300.2
7.	Expected frequency of dumping (for reporting period):
	a. Daily
	b. Actual start: 17 May 83 c. Actual completion: 24 May 83

/n	8.	Chem a.	Eluti	Hg0.0001 (3 Mn0.0008 - 0.0080 Pb(0.0002	(2) Continued Se
a. Solubility (\$ water) Not available b. Density (gm/cc) .2590 (Absolute) c. pH Not available d. \$ sand				Fe0.0080 - 0.0180	
b. Density (gm/cc) · .2590 (Absolute)  c. pH Not available  d. \$ sand	9.	Pro	pert1	es of dredged material:	
c. pH Not available  d. S sand S silt S clay  Not available  10. Method of packaging: Not applicable  11. Method of release: Bottom dump  12. Procedure and site for tank washing: Hoppers flushed at disposal site.  13. Approved dumping site:  a. Geographical position (latitide and longitude):  30°42'00", 81°19'05", 30°42'00", 81°17'55" 30°41'00", 81°17'55", 30°41'00", 81°19'05"  b. Depth of water (meter ': 10.7		٠.	Solu	bility (\$ water) Not available	
Not available  Not applicable  Not applicable  Not applicable  Hethod of release: Bottom dump  Recorded and site for tank washing: Hoppers flushed at disposal site.  Approved dumping site:  a. Geographical position (latitide and longitude):  30°42'00", 81°19'05", 30°42'00", 81°17'55"  30°41'00", 81°17'55", 30°41'00", 81°19'05"  b. Depth of water (meter ': 10.7		b.	Dens	ity (gm/cc) 1.2590 (Absolute)	
Not available  10. Method of peckaging: Not applicable  11. Method of release: Bottom dump  12. Procedure and site for tank washing: Hoppers flushed at disposal site.  13. Approved dumping site:  a. Geographical position (latitide and longitude): 30°42'00", 81°19'05", 30°42'00", 81°17'55" 30°41'00", 81°17'55", 30°41'00", 81°19'05"  b. Depth of water (meter ': 10.7		Q.	рĦ	Not available	·
10. Method of peckaging: Not applicable  11. Method of release: Bottom dump  12. Procedure and site for tank washing: Hoppers flushed at disposal site.  13. Approved dumping site:  a. Geographical position (latitide and longitude): 30°42'00", 81°19'05", 30°42'00", 81°17'55", 30°41'00", 81°19'05"  b. Depth of water (meter ': 10.7		d.	1 34	nd \$ silt \$ clay	
11. Method of release: Bottom dump  12. Procedure and site for tank washing: Hoppers flushed at disposal site.  13. Approved dumping site:  a. Geographical position (latitide and longitude):  30°42'00", 81°19'05", 30°42'00", 81°17'55" 30°41'00", 81°17'55", 30°41'00", 81°19'05"  b. Depth of water (meter ': 10.7				Not available	
12. Procedure and site for tank washing: Hoppers flushed at disposal site.  13. Approved dumping site:  a. Geographical position (latitide and longitude):  30°42'00", 81°19'05", 30°42'00", 81°17'55" 30°41'00", 81°17'55", 30°41'00", 81°19'05"  b. Depth of water (meter ': 10.7	10	. Me	thod	of peckaging: Not applicable	
13. Approved dumping site:  a. Geographical position (latitide and longitude):  30°42'00", 81°19'05", 30°42'00", 81°17'55" 30°41'00", 81°17'55", 30°41'00", 81°19'05"  b. Depth of water (meter ': 10.7	11	. Me	thod	of release: Bottom dump	
a. Geographical position (latitide and longitude):  30°42'00", 81°19'05", 30°42'00", 81°17'55" 30°41'00", 81°17'55", 30°41'00", 81°19'05"  b. Depth of water (meter ': 10.7	12	. Pr	oc ed	are and site for tank washing: Hoppers fl	ushed at disposal site.
30°42'00", 81°19'05", 30°42'00", 81°17'55" 30°41'00", 81°17'55", 30°41'00", 81°19'05" b. Depth of water (meter ': 10.7	13	. Aş	PFOY	ed dumping site:	
b. Depth of water (meter ': 10.7		<b>a.</b>	Geo	graphical position (latitide and longitude	·):
			30°4	2'00", 81 ⁰ 19'0 <b>5",</b> 30 ⁰ 42'00", 81 ⁰ 17'55" 1'00", 81 ⁰ 17'55", 30 ⁰ 41'00", 81 ⁰ 19'05"	
c. Distance from nearest coast (kilometers): 10.5		b.	Dep	th of water (meter ':	10.7
		c.	Dis	tance from nearest coast (kilometers):	10.5

1.	Issuing Authority:
	Division SOUTH ATLANTIC District JACKSONVILLE
2.	Permit start date/expire date:
	Permittee: U.S. Army Corps of Engineers
	Date issued: 30 Nov 82 Permit No. 05-22308
	Start Date: 30 Nov 82 Expiry Date: 01 Feb 85
3.	Country of origin of wastes and port of loading:
	a. United States of America
•	<b>b.</b> Canaveral Harbor, FL
4.	Specification of dredged material and process from which derived:
	a. Description: Material is poorly graded sand with a trace of gravel size shell fragments
	b. Mode of dredging: Hopper Dredge - Suction
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Slurry, non-cohesive
6.	Total quantity (cubic meters): 698,894.9
7.	Expected frequency of dumping (for reporting period):
	a. Daily
	b. Actual start: 19 Aug 83 c. Actual completion: 14 Oct 83

8.	Che	mical composition:	Cu				
	a.	Elutriate test results:	Mn0.5				
		(1) Nutrients: mg/l Range NH4-N	Ag(0, Hg(0, Se(5)				
		0-P04, P	•				
9.			Organics: 011 & Grease 0.2 - 9.4 PCB's mg/1 - <2				
7•	a.	Solubility (\$ water) Not available					
	<b>b.</b>	Density (pa/cc) 2514 (Absolute					
	c.	pH Not available					
	đ.	1 sand 5 silt 5 cl	lay				
		Not available					
10.	. H	ethod of packaging: Not applicable					
11.	. н	ethod of release: Bottom dump					
12	. Pi	rocedure and site for tank washing: Hoppers	s flushed at disposal site				
13	3. Approved dumping site:						
	2.	Geographical position (latitide and longit	ude):				
		28 ⁰ 19'53", 80 ⁰ 31'08", 28 ⁰ 18'50", 80 ⁰ 29'40" 28 ⁰ 17'35", 80 ⁰ 30'52", 28 ⁰ 18'38", 80 ⁰ 32'20"					
	b.	Depth of water (meters):	12				
	٥.	Distance from nearest coast (kilometers):	6.7				
14.	, A	ditional information:					

1.	Issuing Authority:
	District JACKSONVILLE
2.	Permit start date/expire date:
	Permittee: U.S. Army Corps of Engineers
	Date issued: 9 Jul 82 Permit No. 450389679
	Start Date: 9 Jul 82 Expiry Date: 25 Jun 87
3.	Country of origin of wastes and port of loading:
	a. United States of America
	• Fernandina Harbor, FL
4.	Specification of dredged material and process from which derived:
	a. Description: Gray and black organic with silty and clay sizes
	b. Mode of dredging: Hopper Dredge - Suction
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Slurry, non-cohesiv
6.	Total quantity (cubic meters): 475,492.5
7.	Expected frequency of dumping (for reporting period):
	• Daily
	b. Actual start: 14 Oct 83 c. Actual completion: 30 Nov 83

8.	Ches a.		riate test results: Nutrients: mg/l Range NH4-N0.25 - 0.26	Pb
			Ortho-P0.04 - 0.08	Fe0.0080 - 0.0150 Se
		(2)	Metals: Hg<0.0001	Cd0.155 - 0.325 Cu0.0003 - 0.0014
			Mn0.0008 - 0.0080	Ag0.0002 N10.0238 - 0.0450
				(3) <u>Organics</u> :
9.	Pro	perti	les of dredged material:	PGB - None detected
	٩.	Solu	<b>bility (\$ water)</b> Not Available	
	b.	Dena	sity (ga/ca) . 2710 (Absolute)	
	a.	pH	Not Available	
	đ.	\$ 84	and \$ silt \$ cl	ay
		Not	Available	
10	. н	ethod	of peckaging: Not applicable	
11	. H	ethod	of release: Bottom dump	
12	. Р	roced	wre and site for tank washing: Hoppers	flushed at disposal site
13	. A	pprov	ed dumping site:	
	<b>a.</b>	300	graphical position (latitide and longitude) 42'00", 81°19'05", 30°42'00", 81°17'55" 41'00", 81°19'05"	ude):
	b.	Dep	th of water (meters):	10.7
	a.	Dis	tance from nearest coast (kilometers):	10.5
			and defermations	

1.	Issuing Authority:
	Division SOUTH ATLANTIC District JACKSONVILLE
2.	Permit start date/expire date:
	Permittee: ILS Army Corps of Engineers
	Date issued: 11 .1u1 80 Permit No. 16-27215
	Start Date: 11 Jul 80 Expiry Date: 1 Jul 85
3.	Country of origin of wastes and port of loading:
	a. United States of America
	• Jacksonville Harbor, FL
4.	Specification of dredged material and process from which derived:
	a. Description: Sand with some shell and silt
	b. Mode of dredging: Hopper Dredge - Suction
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Slurry, non-cohesiye
6.	
7.	Expected frequency of dumping (for reporting period):
	•• Daily
	b. Actual start: 10 Nov 83; 30 Nov 83 c. Actual completion: 18 Dec 83

#### 8. Chemical composition:

a. Elutriate test results:

(1) Nutrients:	Receiving Water	Elutriate
Nitrogen, Ammonia, ppm Soluable Orthophosphate, (	0.13-0.16 0.02-0.04 0.08-0.13	0.04-0.08 <0.01 0.06-0.28

Receiving Water	<u>Elutriate</u>	
0.0002-0.0004	0.0002-0.00041	
	0.011-0.043	
	0.012-0.015	
	0.024-0.216	
	0.09-0.276	
	0.034-0.045	
	0.010-0.025	
	<0.01	
0.0045-0.0084	0.0045-0.0084	
	Water  0.0002-0.0004 0.0095-0.017 0.002-0.018 0.016-0.018 0.222-0.302 0.020-0.080 0.020-0.080 <0.01	

- 9. Properties of dredged material:
  - a. Solubility (\$ water) Not available
  - b. Density (ga/ca) . 2500 (Absolute)
  - c. pH Not available

d.	\$ sand	silt silt	1 clay

Not available

- 10. Hethod of packaging: Not applicable
- 11. Method of release: Bottom dump
- 12. Procedure and site for tank washing: Hoppers flushed at disposal site
- 13. Approved dumping site:

<b>a.</b>	Geographical position	(latitide	and longitude):	
	30 ⁰ 21'30", 81 ⁰ 17'26",	30020'30",	81 ⁰ 17'26"	
	30°20'30", 81°18'34",	30°21'30",	81 ⁰ 18'34"	

b.	Depth of water (meters):	15
	•	

d. Distance from nearest coast (kilometers):

1.	Issuing Authority:				
	Division South Atlantic District Mobile				
2.	Permit start date/expire date:				
	Permittee: Corps of Engineers (Not 103)				
	Date issued: 11 Jan 77 Permit No. 40 CFR 228.12 (A) (III) (H)				
	Start Date: 11 Jan 77 Expiry Date: 31 Jan 85				
3.	Country of origin of wastes and port of loading:				
	a. United States of America				
	<b>b.</b> Mobile Harbor, Alabama - Bar Channel				
4.	Specification of dredged material and process from which derived:				
	a. Description: Maintenance dredged material, sand.				
	•				
	b. Hode of dredging: Hopper, Dragarms, Suction				
	c. Mode of transportation: Hopper on board dredge				
•					
5.	Form in which dredged material is presented for disposal: Liquid				
6.	Total quantity (cubic meters): 100,856				
7.	Expected frequency of dumping (for reporting period):				
	8. 20 times daily				
	b. Actual start: 1 Jan 83 c. Actual completion: 7 Jan 83				

3.	Chemical.	composition:	See	attached
----	-----------	--------------	-----	----------

C-2	2	FA	
-----	---	----	--

, f 7

9. Properties of dredged mat	eri	al:
------------------------------	-----	-----

- a. Solubility (% water) Not available
- b. Density (gm/cc) 1.983
- c. pH not obtained
- d. \$ sand 86 \$ silt 9 \$ clay 5

- 10. Method of packaging: Not packaged
- 11. Method of release: Bottom dump
- 12. Procedure and site for tank washing: Dredge hopper is flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude): 30° 09' N, 88° 07' W
  - b. Depth of water (meters):

10

c. Distance from nearest coast (kilometers):

6.7

#### 8. Chemical Composition

# BULK ANALYSES OF ENTRANCE CHANNEL SEDIMENT SAMPLES COLLECTED FROM PENSACOLA HARBOR, FLORIDA

		Total	Ammonia	Oil and				 [race	Metal	s (me	ˈkg)		
Sample	TCC	Phosphate	Nitrogen	Grease						<u> </u>	<u> </u>		1.1
Number	(mg/kg P	(mg/kg N)	(mg/kg N)	(mg/g)	Hg	As	Cu	2n_	Cd	Pb	N1	Cr	Fe
PB-1	1.66	67.00	9.0	0.41	0.12	0.5	4.9	128.4	< 0.1	< 0.5	<0.5	43.5	<0.3
PB-2	0.36	7.00	27.4	0.36	0.10	0.5	<0.3	1.0	< 0.1	< 0.5	k0.5	1.0	<0.3
PB-3	1.44	11.25	75.00	0.31	0.18	1.1	.≤0.3	32.4	< 0.1	< 0.5	4.3	5.9	<0.3

Note: Stations located from inner portion of channel near Santa Rosa Island (PB-3) to outer portion (seaward) of channel (PB-1); mg/kg = ppm


# ELUTRIATE ANALYSES OF SEDIMENT AND WATER SAMPLES FOR CHEMICAL AND HEAVY METALS CONSTITUENTS COLLECTED FROM PENSACOLA HARBOR, FLORIDA


Parameter	Dilution	Standard Elutriate
Total organic carbon (ppm)	11.2	20.6
Ammonia nitrogen (ppm)	1.08	0.21
Phosphorus (ppm)	0.025	0.123
На	8.28	8.13
Mercury (ppb)	< 0.3	< 0.3
Arsenic (ppb)	21.0	21.0
Copper (ppb)	< 0.2	<0.2
Zinc (puter	32.0	40.0
Cadmitum (ppb)	0.2	< 0.2
Lead (pph)	< 0.5	< 0.5
Nickel Caba	< 0.5	< 0.5
Chromatum (; pb)	< 0.5	< 0.5
Iron (ppl)	<10.0	<10.0

ppm = mg/liter
ppb = ug/liter

Note: Sediment sample number: PB-2; Water sample number:

PB-2; Collected: 21 August 1974

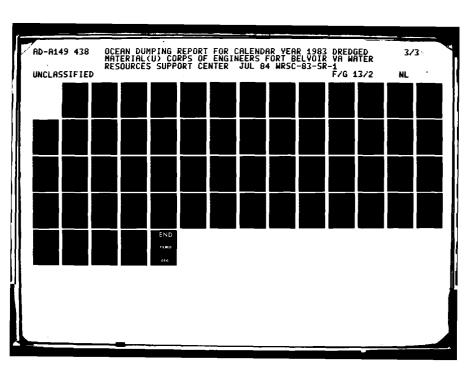



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

1.	Issuing Authority:				
	Division South Atlantic District Mobile				
2.	Permit start date/expire date:				
	Permittee: Corps of Engineers (Not 103).				
	Date issued: 11 Jan 77 Permit No. 40 CFR 228.12 (A) (III) (H)				
	Start Date: 11 Jan 77 Expiry Date: 31 Jan 85				
3.	Country of origin of wastes and port of loading:				
	a. United States of America				
	Pascagoula Harbor, Mississippi - Bar Channel				
4.	Specification of dredged material and process from which derived:				
	Description: Maintenance dredged material, sand.				
	• • • • • • • • • • • • • • • • • • •				
	b. Hode of dredging: Hopper, Dragarms, Suction.				
	c. Mode of transportation: Hopper on board dredge.				
5.	Form in which dredged material is presented for disposal: Liquid				
6.	Total quantity (cubic meters): 377,081.				
7-	Expected frequency of dumping (for reporting period):				
	a. 17 times daily				
	b Actual start: 9 Nov 83 c. Actual completion: 10 Dec 83				

8. Chemical composition: See Attached

C-23 M. 2 of3

9_	Properti	es of	dredged	material:
7.	TIONE CI	TO OI	UI CUK WU	Material.

- a. Solubility (\$ water) Not obtained
- b. Density (gm/cc) Not obtained
- e. pH Not obtained
- d. S sand 60 S silt 20 S clay

- 10. Method of packaging: Not packaged.
- 11. Method of release: Bottom Dump
- 12. Procedure and site for tank washing: Dredge hopper is flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude): 30° 11 N, 88° 30 W
  - b. Depth of water (meters):

12

10

c. Distance from nearest coast (kilometers):

16.6

#### CHEMICAL COMPOSITION

# BULK SEDIMENT ANALYSES PASCAGOULA HARBOR, BAR CHANNEL, JULY 1974 (U.S. Corps of Engineers, 1975)

ARAMETER	RANGE OF VALUES	UNITS
JTRIENTS		
TOC Oil & Grease	1.78 - 12.6 45 - 615	mg/Kg x 10 ³ mg/Kg
Total Phosphorus	10.5 - 59.2	mg/Kg as P
TKN	151 ~ 1305	mg/Kg as N
Ammonia Nitrogen	23.5 - 89.6	mg/Kg as N
EAVY METALS		
Arsenic	0.7 - 1.0	mg/Kg
Cadmium	<0.1 - 0.77	mg/Kg
Chromium	11.1 - 761.7	mg/Kg
Copper	<0.3 - 4.8	mg/Kg
Iron (Fe ⁺² )	<0.3	mg/Kg
Lead	<b>⊲0.5 - 36.5</b>	mg/Kg
Mercury	0.03 - 0.46	mg/Kg
Nickel	<0.5 - 34.2	mg/Kg
Zinc	12.4 - 109.7	mg/Kg
FSTICIDES/PCB's2		
Dieldrin	0.996	քքե
DDT/DDE/DDD PCB Isomers	N.D. ³	ppb
rub isomers	N.D 12.097	ppb

Dry Weight Basis

Other pesticides which were analyzed but were consistently below detectable limits: Aldrin, Chlordane, Endrin, Heptachlor, Heptachlor Epoxide, Lindane, Methoxychlor, Mirex, Toxaphene, Diazinon, Guthion, Malathion, Methyl Parathion, Parathion

Non-Detectable

C-24 pg 1 of 3

1.	Issuing Authority:
	Division South Atlantic District Mobile
2.	Permit start date/expire date:
	Permittee: Corps of Engineers (Not 103)
	Date issued: Jan 11, 1977 Permit No. 40 CFR 228.12(A)(III)(H)
	Start Date: Jan 11, 1977
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Pensacola Harbor, Florida, Entrance Channel
۹.	Specification of dredged material and process from which derived:
	Description: Maintenance dredged material, sand.
	-
	b. Mode of dredging: Hopper, Dragarms, Suction
	c. Mode of transportation: Hopper on board dredge
	G. Fode of the approach to the control of the contr
•	Form in thich dredged metarical is progented for disposal. Liquid
5.	Form in which dredged material is presented for disposal: Liquid
6.	Total quantity (cubic meters): 87,189
7.	Expected frequency of dumping (for reporting period):
	a. 19 times daily
	b. Actual start: 13 Dec 83 c. Actual completion: 23 Dec 83

8.	Chemical	composition:	Se <b>e</b>	Attached
----	----------	--------------	-------------	----------

C-24 pg 200

9.	Properties	l of	dredged	material .
, -		•	ar carea	- Belefileli

- a. Solubility (\$ water) not obtained
- b. Density (gm/cc) . not obtained
- e. pH not obtained
- d. \$ sand 93 \$ silt 3

\$ clay 4

- 10. Hethod of packaging: Not packaged
- 11. Hethod of release: Bottom dump
- 12. Procedure and site for tank washing: Dredge hopper is flushed at authorized disposal site
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude): 30°16'N, 87°19'W
  - b. Depth of water (meters):

9.5

c. Distance from nearest coast (kilometers):

4.6

#### 8. Chemical Composition

# BULK ANALYSES OF ENTRANCE CHANNEL SEDIMENT SAMPLES COLLECTED FROM MOBILE HARBOR, ALABAMA

,		Total	Ammonia	011 and				Trace	Metal	s (mg/	kg)		
Sample	TOC	Phosphate	Nitrogen	Grease									
Number	(mg/g)	(mg/kg P)	(mg/kg N)	(mg/g)	Hg	<u>RA</u>	Cu	Zn_	Cd_	Pb	N1_+	Cr Fe	_
MB-1	0.76	18.25	39.8	0.44	0.24	0.8	4.5			<0.5			
MB-2	1.18	60.00	33.6	0.51	1.11	1.3	2.6	1.1	<0.1	<0.5	5.3	∠2.7 < 0.	. 3
MB-3	8.61	34.50	44.8	0.74	0.31	1.8	7.0	5.57	<0.1	<0.5	4.0	17.0 0	.8_

Note: Stations located from inner portion of channel within Mobile Bay (MB-3) to outer portion (seaward) of channel (MB-1); mg/kg = ppm

# ELUTRIATE ANALYSES OF SEDIMENT AND WATER SAMPLES FOR CHEMICAL AND HEAVY METALS CONSTITUENTS COLLECTED FROM MOBILE HARBOR, ALABAMA

Parameter	Dilution	Standard
	Water	Elutriate
Total Organic carbon (ppm)	7.2	16.5
Ammonia nitrogen (ppm)	0.04	1.05
Phosphorus (ppm)	0.085	0.340
pH	7.50	7.82
Mercury (ppb)	<0.3	<0.3
Arsenic (ppb)	<10.0	10.0
Copper (ppb)	0.9	1.0
Zinc (ppb)	25.1	22.4
Cadmium (ppb)	0.2	0.2
Lead (ppb)	2.9	2.3
Nickel (ppb)	2.8	3.1
Chromium (ppb)	< 0.5	<0.5
Iron (ppb)	22.0	22.0

ppm = mg/liter
ppb = ug/liter

Note: Sediment sample number: MB-2; water sample number:

MB-2; collected 28 July 1974

# Report of Ocean Dumping Permits - CY 83

1.	Issuing Authority:	
	Division Lower Miss. Valley Distr	ict New Orleans
2.		
	Permittee: New Orleans District, Corps of	Engineers
	15 0 93	t No.
		y Date: 18 June 83
3.	· · · ·	.oading:
	a. United States of America	
	<b>b.</b> Mississippi River, Baton Rouge to the	Gulf of Mexico, La. (Southwest Pass)
ц,		
	a. Description: Medium to fine grain s	and, silt and clay.
	b. Mode of dredging: Hopper dredge	
	c. Mode of transportation: Hopper dred	ge
5.	Form in which dredged material is presen	ted for disposal: Noncohesive slurry
6.	Total quantity (cubic meters): 6,409,13	6m ³
7.	Expected frequency of dumping (for repor	ting period):
	a. 12 dumps per day, 7 days per week	
	b. Actual start: 23 Jan 83 c.	Actual completion: 18 June 83
8.	Chemical composition: (Elutriates)	
	a. Nutrients: (mg/1) c.	Organics: (ug/1)
	Nitrogen (NH, dissolved) 2.2 Di	mols: 14.0 azinon 0.02 4-D 0.01
	b. Metals: (ug/l) As 3.0 Ni 3.0 Cr 12.0 Zn 20.0 Mn 2,200	

192

.01

Hg

8.	'Chemical	composition:	(Sediments)
----	-----------	--------------	-------------

a. Metals: (ug/1) b. Organics: (ug/1)	c. Other: (mg/kg)
As 9.0 Ni 15.0 Phenols 5.0 Cr 10.0 Zn 45.0 Cu 14.0 Pb 20.0 Mn 500.0 Hg 0.05	Cod 32,000 Oil and Grease .0

#### 9. Properties of dredged material:

- a. Solubility (1 water) 60
- b. Density (gm/cc) . 1.651
- c. pH Not measured
- d. \$ sand 70 \$ silt 15 \$ clay 15

- 10. Method of packaging: N/A
- 11. Method of release: Bottom dump
- 12. Procedure and site for tank washing: Hopper flushed with seawater twice daily at disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude):

    28° 53 15 N, 89° 26 30 W
  - b. Depth of water (meters):
     c. Distance from nearest coast (kilometers):

- a. Liquid Phase Bioassay: No effect
- b. Suspended Particulate Phase Bioassay: No effect
- c. Solid Phase Bioassay: No effect

1.	Issuing Authority:	
	Division Lower Miss. Valley	DistrictNew Orleans
2.	Permit start date/expire date:	
	Permittee: New Orleans District,	Corps of Engineers
	Date issued: 14 Apr 83	Permit No.
	Start Date: 30 Jan 83	Expiry Date: 6 May 83
3.	Country of origin of wastes and po	
	a. United States of America	
	<b>b.</b> Mississippi River-Gulf Outlet,	La. (Gult Approach Channel)
4.	Specification of dredged material	and process from which derived:
	a. Description: Medium to line gra	ain sand and silt
	b. Mode of dredging: Hopper dred	Ige
	c. Mode of transportation: Hopp	per dredge
5.	Form in which dredged material is	presented for disposal: Noncohesive slurry
6.	Total quantity (cubic meters): 5,4	50,062m ³
7.	Expected frequency of dumping (for	reporting period):
	a. 10 dumps per day, 7 days per w	reek
	b. Actual start: 30 Jan 83	c. Actual completion: 6 May 83
8	Chemical composition: (Elutriates)	
	Nutwinster ( /)	. Organics: (ug/1)
	KJD 3.8	Diazinon 0.17
	NH ₄ 3.7 COD 630	2, 4-D 0.02
	b. Metals: (ug/1)	
	As 3.0 Hg	0.1 Mn 690
	Cd 1.0 ag	0.1 Mn 690 20.0
		• • • •

8.	Chemical	composition:	(Sediments)			•
	a. Metals	: (ug/l)	b. Organics	: (mg/kg)	c. Other	
	As	6.0	KJD 4810		None	
	Cr	9.0	Oil and Great	se ().()		
	Cu	14.0	$Ch \ lorodane$	10.0		
	Pb Mn	.'0.0 570	PCB	3.0		
	Hg	0.03				
	Ni	16.0				
9.	Zn <b>Properti</b>	40.0 es of dredged	l material:			
•	•	bility (% wat				
	b. Dens	sity (gma/cc) ·	. 1.543			
	c. pH	Not measured				
	d. \$ sa	and 85	S silt 7	<pre>\$ clay</pre>	8	
10	. Method	of packaging of release:	Bottom dump			
12	• Proced	ure and site	for tank washing:	Wash with sea each day.	awater at disposal	site or
13	. Approv	ed dumping si	te:			
	a. Geo	graphical pos	ition (latitide a	nd longitude):		
			, 88° 59′ 30″w			<del></del>
	b. <u>Dep</u>				12	
		29 [°] 24 ['] 55 ^{''} N		meters):	<u>12</u> 27	
1 11	c. Dis	29° 24 55 N th of water (	meters): arest coast (kilo	meters):		
14	c. Dis	29° 24' 55'N  th of water (  tance from ne  onal informat	meters): arest coast (kilo			
14	c. <u>Dis</u> . Additio	29° 24 55 N  th of water (  tance from ne  onal informat  quid Phase Bio	meters): arest coast (kilo ion: assay: No effect			
14	c. Dis  Additional Lie  b. Su	29° 24 55 N  th of water (  tance from ne  onal informat  quid Phase Bio	meters): arest coast (kilo ion: assay: No effect ate Phase Bioassa	y: No effect		

١.	133ding Adenority:								
	Division Lower Miss. Valley	District New Orleans							
2.	Permit start date/expire date:								
	Permittee: New Orleans District,	Corps of Engineers							
	Date issued: 9 Feb S3	Permit No.							
	Start Date: 26 Jun 83	Expiry Date: 11 Jul 83							
3.	Country of origin of wastes and p	cort of loading:							
	a. United States of America								
	<b>b.</b> Mississippi River Outlets, Ven	nice, La. (Tiger Pass)							
4.	Specification of dredged material	. and process from which derived:							
	a. Description: Medium to fine g	grain sand, silt and clay							
	b. Mode of dredging: Hydraulic	cutterhead dredge							
	c. Mode of transportation: Float	ing pipeline							
5.	Form in which dredged material is	s presented for disposal: Noncohesive slurr							
6.	Total quantity (cubic meters): 4	322,652M ³							
7.	Expected frequency of dumping (for								
	<b>a.</b>								
	b. Actual start: 26 June 83	nately 22 hours per day, 7 days per week  c. Actual completion: 11 July 83							
8.	Chemical composition: (Elutriates)								
	i Nutrients:	c. Organics: (mg/1)							
	Sitrogen (K.fio) 300 ng/T	.ns(c < 0.0? ppr < 0.0?							
	b. Metals: (ug/l)	БВНС < 0.0? MIX < 0.01 НРТ < 0.02 MOC < 0.03							
	$As = 12.0 \qquad Cu = 5.0$	CLD < 0.05 TOX < 0.1 DDE < 0.02 PCB < 0.1							
	Cd < 0.5 Pb ≤ 1.0	DEL <0.02							
	Cr <10.0 Hg < 0.1	DDD < 0.02 END < 0.02							
	Ni 74.0 Zn 107.0	END < 0.02							

}.	Chemical composition: (Sediments)  a. Metals: (mg/kg)  b. Organics: (ug/kg)	c. Other: (mg/kg)
9.	As 20.0 aBHC < 0.1 END < 0.5 Cd < 0.5 bBHC < 0.1 DDT < 0.5 Cr 11.0 CLD 20.0 MOC < 0.5 Pb 30.0 DDE < 0.5 TOX < 0.1 Ni 30.0 DDD < 0.5 Zn 104.0  Properties of dredged material:	Oil and Grease 3
	a. Solubility (% water) 80	
	b. Density (gm/cc) 1.6	
	c. pH Not measured	
	d. \$ sand 70 \$ silt 15 \$ clay 15	
10. 11.	. Method of release: Floating pipeline	
13.	. Approved dumping site:	
	a. Geographical position (latitide and longitude):	
	29° 08′ 15″N, 89° 26′ 22″W	
	b. Depth of water (meters):	15
	c. Distance from nearest coast (kilometers):	5
14.	. Additional information:	
	a. Liquid Phase Bioassay: No effect	
	b. Suspended Particulate Phase Bioassay: No effect	
	- Calid Phace Ricassay: No effect	

#### Report of Ocean Dumping Permits - CY 83

1.	Issuing Authority:	
	Division Lower Miss. Valley	District New Orleans
2.	Permit start date/expire date:	
	Permittee: New Orleans District, Co	rps of Engineers
	Date issued: 25 May 83	Permit No.
	Start Date: 4 August 83	Expiry Date: 11 October 83
3.	Country of origin of wastes and por	
	a. United States of America	
	<b>b.</b> Barataria Bay Waterway, La. (Gul	f Approach Channel)
4.	Specification of dredged material a	nd process from which derived:
	a. Description: Medium to fine gra	in sand, silt and clay
	<b>b. Mode of dredging:</b> Hydraulic cu	itterhead dredge
	c. Mode of transportation: Floating	ig pipelinė
5.	Form in which dredged material is p	resented for disposal: Noncohesive slurr
6.	Total quantity (cubic meters): 706	,795m ³
7.	Expected frequency of dumping (for	
	a. Continuous, averaging approximat	ely 22 hours per day, 7 days per week.
	b. Actual start: 4 August 83	c. Actual completion: 11 October 83
8.		<del></del>
	a. Nutrients:	c. Organics: (ug/1)
	Nitrogen (KJD) 2,530 ug/l	Chlordane < .05 Toxaphone < .10
	b. Motals: (ug/1)	DDD < .02 JBHC < .02 DDE < .02 BBHC < .02
	As 3.0 Pb 7.0	DDT < .02 PCB < .10 Dieldrin < .02
	Cd < .5 Hg 0.6	Endrin <.02

Mirex

Heptachlor

Methoxychlor <.03

Νi

Ζn

Cr < 10.0

Cu < 1.0

61.0

8.0

<.02

<.01

6. Chemical composition: (Sediments)

a. <u>Metals</u> : (ug/g)	b. <u>0</u>	organics: (	ug/kg)	•		Other:	
As 33.2 Hg Cd 0.64 Ni Cr 20.2 Zn Cu 14.0 Pb 12.9	14.4 DDD 8.6 DDE DDT	) / / / / / / / / / / / / / / / / / / /	.5 .5	Toxaphene aBHC	<pre>&lt;.5 or&lt;.5 &lt;5 &lt;1 &lt;1 &lt;1 &lt;1</pre>	0il and 139	Grease mg/ky

- 9. Properties of dredged material:
  - a. Solubility (\$ water) 80
  - b. Density (gm/cc) . 1.5
  - c. pH Not measured
  - d. \$ sand 50 \$ silt 30 \$ clay 20

- 10. Method of packaging: N/A
- 11. Method of release: Floating pipeline
- 12. Procedure and site for tank washing: N/A
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude): 29° 15° 26° N,89° 55° 24° W
  - b. Depth of water (meters): 18
  - c. Distance from nearest coast (kilometers): 6
- 14. Additional information:
  - a. Liquid Phase Bioassay: No effect
  - b. Suspended Particulate Phase Bioassay: No effect
  - c. Solid Phase Biossay: No effect

## Report of Ocean Dumping Permits - CY 83

١.	Issuing Authority:
	Division Lower Miss. Valley District New Orleans
2.	Permit start date/expire date:
	Permittee: New Orleans District, Corps of Engineers
	Date issued: 18 May 83 Permit No.
	Start Date: 7 July 83 Expiry Date: 20 August 83
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Houma Navigation Canal, La. (Cat Island Pass)
۹.	Specification of dredged material and process from which derived:
	a. Description: Medium to fine sand, silt and clay
	b. Mode of dredging: Hydraulic cutterhead dredge
	c. Mode of transportation: Floating pipeline
5.	Form in which dredged material is presented for disposal: Noncohesive sluri
6.	Total quantity (cubic meters): 581,096M ³
7.	Expected frequency of dumping (for reporting period):
	a. Continuous, averaging approximately 22 hours per day, 7 days per week
	b. Actual start: 7 July 83 c. Actual completion: 20 August 83
8.	Chemical composition: (Elutriates)
	a. Nutrients: (mg/1) c. Organics: (ug/1)
	Nitrogen (KJD) 1.3 Phenols 6.0 Nitrogen (Dissolved $NH_4$ ) .84 $2,4-D$ .0
	b. Metals: (ug/l)
	As .0
	Cd .0 Cr .0
	Mn 50 Hg .2 200
	· · · · · · · · · · · · · · · · · · ·

												-27	PA
8.	Che	mical	compo	sition	<b>:</b> (S	edimen							•
	а.	Meta]	<u>ls</u> : (mg	g/kg)		ъ.	Organic	<u>s:</u> (mg/	/kg)	c. <u>0</u>	ther:	(mg/kg	()
		As Cd Cr Cu Pb	5.0 1.0 6.0 12.0 20.0	Ni 1	.07 0.0 7.0		Phenols	.0		COD Oil	14, and G		1.0
9.	Pro	perti	es of	dredge	d mat	erial:							
	a.	Solu	bility	/ (\$ wa	ter)	80							
	ь.	Dens	sity (g	gma/cc)	٠.	1.8							
	c.	pН	Not m	easured	i								
	d.	<b>4</b> 93	and	95	<b>4</b> 411	<b>t</b> 2		<b>5</b> cl	ay	3			
10.	М	ethod	of pac	ckagin	<b>s:</b> N/	'A							
11.	M	ethod	of re	lease:	Floa	iting p	ipeline						
12.	P	rocedi	ure and	d site	for t	ank wa	shing: N	I/A					
13.	A			ping s									
	а.	Geo	graphi	cal pos	sition	(lati	tide and	longitu	ide):	29° 02	45 N,9	90° 34	40 W
	b.	Dept	th of	water	(meter	3):				6	· · · · · · · · · · · · · · · · · · ·		
	c.	Dis	tance	from n	earest	coast	(kilomet	ers):		18			
14.	A	dditid	onal i	nformat	ion:								
	a	. <u>Li</u> g	uid Ph	ase Bi	oassay	: No e	effect						
	b	. Sus	pended	Parti	culate	Phase	Bioassay	: No ef	ffect				

c. Solid Phase Bioassay: No effect

1.	Issuing Authority:								
	Division Lower Miss. Valley	District New Orleans							
2.	Permit start date/expire date:								
	Permittee: New Orleans District,	Corps of Engineers							
	Date issued: 17 March 83	Permit No.							
	Start Date: 5 Aug 83	Expiry Date: 1 Nov 83							
3.	Country of origin of wastes and								
	a. United States of America								
	<b>b.</b> Atchafalava River, Bayous Cl	nene, Boeuf and Black, La. (Bar Channel)							
4.	Specification of dredged materia	al and process from which derived:							
	a. Description: Medium to fine	grain sand and silt.							
	b. Mode of dredging: Hydraulic	cutterhead dredge							
	c. Mode of transportation: Flo	oating pipeline							
5.	Form in which dredged material	is presented for disposal: Noncohesive slurr							
6.	Total quantity (cubic meters): 8	3,161,771m ³							
7.	Expected frequency of dumping (	for reporting period):							
	a. Continuous, averaging approxim	mately 22 hours per day, 7 days per week							
	b. Actual start: 5 Aug 83	c. Actual completion: 1 Nov 83							
8.	Chemical composition: (Elutriate	28)							
	a. Nutrients: (mg/1)	c. Organics: (ug/1)							
	Nitrogen (KJD) 2.8 Nitrogen (dissolved NH ₄ ) 2.3	Phenols 3.0 Diazinon 0.02 PCB 0.1							
	b. Metals: (ug/l)	2,4-D 0.01							
	As 3.0 Ni 13 Cr 4.0 Zn 10								
	Cr 4.0 Zn 10 Cu 1.0 Mn 1,200	202							

9.	Chemical	composition:	(Sadiments)
J•	COLUMNICAT	combo 27 croii.	(Searments)

a. Metals: (ug/l) b. Organics: (ug/kg) c. Other: (Mg/kg)

10 Zn 50 As Cr Cu

DDD 0.4 3.0 PCB

Carbon (tot. organic) 3.0

Oil and Grease O 13

15 Pb 450 Hg 0.05 Ni 15

#### 9. Properties of dredged material:

- a. Solubility (% water) 80
- b. Density (gm/cc) 1.45
- c. pH Not measured
- d. S sand 10 S silt 45 S clay 45

- 10. Method of packaging: N/A
- 11. Method of release: Floating pipeline
- 12. Procedure and site for tank washing: N/A
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude): 29° 16' 06'N, 91° 27' 49'W
  - b. Depth of water (meters):

5 10

### c. Distance from nearest coast (kilometers):

- a. Liquid Phase Bioassay: no effect
- b. Suspend Particulate Phase Bioassay: no effect
- c. Solid Phase Bioassay: no effect

1.	. Issuing Authority:					
	Division Lower Miss, Valley Distr	ict New Orleans				
2.	. Permit start date/expire date:					
	Permittee: New Orleans District, Corps of Engineers					
	Date issued: 31 Jan 83 Permi					
	Start Date: 23 Mar 83 Expir	y Date: 24 May 83				
3.	. Country of origin of wastes and port of					
	a. United States of America					
	<b>b.</b> Calcasieu River and Pass La. (Gulf Ap	proach Channel)				
4.	. Specification of dredged material and pro	ocess from which derived:				
	a. Description: Fine grain sand, silt and organic material					
	b. Mode of dredging: Hopper dredge					
	c. Mode of transportation: Hopper dred	ge				
5.	·					
6.	5. Total quantity (cubic meters): 4,252,0	55M ²				
7.	7. Expected frequency of dumping (for repor	ting period):				
	a. Continuous agitation and/or 10 dumps	per day, 7 days per week				
	b. Actual start: 23 Mar 83 c.	Actual completion: 24 May 83				
8.	8. Chemical composition: (Elutriates)					
		ganies: (ug/1) azinon 0.04				
	Nitrogen (KJD) 4 1.8 2,	4~D 0.9				
	b. Metals: (ug/1) As 5.0					
	Cd 1.0 Cr 2.0					
	Mn 540					
	Hg 0.1					

5. Chemical composition: (Sediments)

.1.	Metals: (ug 3)	b. Organics	: (u2.1)	c. Other:
	Cr 4.0	Phenol	2.0	Carbon (tot. organic) '. cw/l
	Cu 3.0	DDD	.), 2	COD 14,000 mg/kg
	Mn 190.0	DDE	1.2	Nitrogen (KJD) 2,600 mg/ka
	Hg .01	PCB	3.0	Phosphorus (tot. PO ₂ ) 0.09 mg
	Zn 10.0			₹
	ca 0.02			

#### 9. Properties of dredged material:

- a. Solubility (1 water) So
- b. Density (gm/cc) 1.1.4
- c. pH Not measured

- 10. Method of packaging: N/A
- 11. **Method of release:** Bottom dump for dredge and haul, continuous overflow during agitation.
- 12. Procedure and site for tank washing: Hopper flushed twice daily with seawater at disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude):

    29° 42° 06° N, 93° 20° 39° W
  - b. Depth of water (meters):
  - c. Distance from nearest coast (kilometers):
- 14. Additional information: Ocean dumping criteria waived.

1.	Issuing Authority:	
	Division Southwestern	District Galveston
2.	Permit start date/expire date:	•
	Permittee:	
	Date issued: 11 Apr 83	Permit No.
		Expiry Date: 5 July 83
3.	Country of origin of wastes as	nd port of loading:
	a. United States of America	
	<b>b.</b> Port Mansfield, Texas	
4.	. Specification of dredged mater	rial and process from which derived:
	a. Description: Sand, silt a	and clay from channel maintenance
	b. Mode of dredging: Hopper	Dredge "MERMENTAU"
	c. Mode of transportation:	Hopper Dredge
5.	·	l is presented for disposal: Slurry - silt, clay and sand in suspension
6.	. Total quantity (cubic meters)	: 285,016
7.	. Expected frequency of dumping	(for reporting period):
	a. 25 daily, 7 days/week	
	b. Actual start: 10 May 83	c. Actual completion: 5 Jul 83

13

8.	Chemical composition:	C-32 pg 2 of
9.	Properties of dredged material:	
	a. Solubility (% water) 80	
	b. Density (gm/cc) . 1.8	
	c. pH N/A	
	d. \$ sand 54 \$ silt 17	\$ clay
10.	Method of packaging:	
11.	Method of release: Bottom release	
12	Procedure and site for tank washing:	Hoppers flushed at authorized disposal site.
13.	Approved dumping site:	3100
	a. Geographical position (latitide a	nd longitude): 26° 34' 07", 97° 15' 35"
		(center coordinates)

b. Depth of water (meters):

14. Additional information:

c. Distance from nearest coast (kilometers):

C-33 pg 10+2

١.	. Issuing Authority:	
	Division Southwestern District Galveston	
2.	. Permit start date/expire date:	
	Permittee:	
	Date issued: 16 May 83 Permit No.	
	Start Date: 9 June 83 Expiry Date: 31 July 83	
3.	·	
	a. United States of America	
	<b>b.</b> Freeport Harbor, Texas	
4,	. Specification of dredged material and process from which deri	ved:
	a. Description: Sand, silt and clay from channel maintenance	<u> </u>
	b. Mode of dredging: Hopper Dredges "MERMENTAU" & "ATCHAFALA" "WHEELER"	AYA"
	c. Mode of transportation: Hopper Dredge	
5.		urry - silt and ay in suspension
6.	1 003 115	ly in suspension
7.	7. Expected frequency of dumping (for reporting period):	
	a. 25 daily, 7 days/week	
	b. Actual start: 9 Jun 83 c. Actual completion:	7 Nov 83

8.	Chemical	composition:
••	~	

<b>a</b> .	Prop	erties	of	dradeed	material:
7.	rrop	al Plas	01	ar eak ea	Merci Tel:

- a. Solubility (\$ water) 80
- b. Density (ga/cc) 1.5
- c. pH N/A
- d. \$ sand 13.4 \$ silt 3.3 \$ clay 83.3

- 10. Method of packaging:
- 11. Method of release: Bottom release
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude): 28° 54', 95° 17' (center coordinates)
  - b. Depth of water (meters):
  - c. Distance from nearest coast (kilometers): 3.2
- 14. Additional information:

1.	1. Issuing Authority:	
	Division Southwestern Distric	Galveston
2.	2. Permit start date/expire date:	
	Permittee:	
	Date issued: Permit	No .
	Start Date: 24 Jul 83 Expiry	Date:
3.	3. Country of origin of wastes and port of loa	ding:
	a. United States of America	
	<b>b.</b> Sabine-Neches Waterway, Texas	
4.	4. Specification of dredged material and proce	ss from which derived:
	a. Description: Silt, sand and clav from	channel maintenance
	b. Mode of dredging: Hopper Dredge "WHEEL	ER"
	c. Mode of transportation: Hopper Dredge	
5.	5. Form in which dredged material is presented	for disposal: slurry - silt, clay and sand in suspension
6.	6. Total quantity (cubic meters): 152,920	
7.	7. Expected frequency of dumping (for reporting	g period):
	a. 6 daily, 7 days week	
	b. Actual start: 24 Jul 83 c. F	Actual completion: 7 Aug 83

a. Chemical composition	8.	Chemical	composition	1
-------------------------	----	----------	-------------	---

- 9. Properties of dredged material:
  - a. Solubility (% water) 80
  - **b.** Density (gm/cc) 1.5
  - c. pH N/A
  - d. \$ sand 6 \$ silt 23 \$ clay 71

- 10. Method of packaging:
- 11. Method of release: Bottom release
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - ## Geographical position (latitide and longitude): 29° 27', 93° 44'

    DA 2 29° 29', 93° 45'

    DA 3 29° 33', 93° 47'

    DA 4 29° 36', 93° 49'

    ## Depth of water (meters): 10

    C. Distance from nearest coast (kilometers): 3.2
- 14. Additional information:

1.	Issuing Authority:
	Division Southwestern District Galveston
2.	Permit start date/expire date:
	Permittee:
	Date issued: 7 Jul 83 Permit No.
	Start Date: 2 Aug 83 Expiry Date: 27 Oct 83
3.	Country of origin of wastes and port of loading:
	a. United States of America
	<b>b.</b> Brazos Island Harbor, Texas
١.	Specification of dredged material and process from which derived:
	a. Description: Silty sand from channel maintenance
	b. Mode of dredging: Hopper Dredge "STUYVESANT"
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Slurry - Sand and
6.	Total quantity (cubic meters): 677,698
7.	Expected frequency of dumping (for reporting period):
	a. 10 daily 7 days/week
	b. Actual start: 2 Aug 83 c. Actual completion: 8 Sep 83

9.	Pro	perties of dr	ed E eq	mater	-ial:
	<b>a.</b>	Solubility (	S wate	er)	80

b. Density (gm/cc)  $\cdot$  .  $^{2.0}$ 

c. pH N/A

d. \$ sand ____ \$ silt ___ \$ clay ____

- 10. Method of packaging:
- 11. Method of release: Bottom release
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude): 26° 04', 97° 07'

    (center coordinates)
  - b. Depth of water (meters):

    13

    c. Distance from nearest coast (kilometers):

    3.5
- 14. Additional information:

1.	Issuing Authority:
	Division South Pacific District San Francisco
2.	Permit start date/expire date:
	Permittee: U.S. Army Corps of Engineers
	Date issued: 5 Jan 1983 Permit No
	Start Date: 5 Jan 1984 Expiry Date: 5 Apr 1983
3.	Country of origin of wastes and port of loading:
	a. United States of America, California
	<b>b.</b> San Francisco Harbor, Mainship Channel
4.	Specification of dredged material and process from which derived:
	a. Description: Fine sand with trace of silt Sand 95% Silt 5%
	b. Mode of dredging: Frailing Hopper Dredge
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Settled sand
6.	Total quantity (cubic meters): 485,850
7.	Expected frequency of dumping (for reporting period):
	3. 10 loads per day
	b. Actual start: 12 Jan 83 c. Actual completion: 25 Mar 83

8. Chemical composition: Not tested, meets criteria of section 227.13 (6) (1), Ocean dumping rules and regulations F.R. Vol 42, No. 7, 11 Jan 77.

- 9. Properties of dredged material:
  - a. Solubility (% water) 57%
  - b. Density (gm/cc) 1.752
  - c. pH Not tested

- 10. Method of packaging: Free flowing from open Hopper Dredge
- 11. Method of release: Bottom dump
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal sit:
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude):  $37^{\circ}$  45' 06" N  $122^{\circ}$  35' 45" W
  - b. Depth of water (meters): 12.2
    c. Distance from nearest coast (kilometers): 5.2
- 14. Additional information: None

1.	1. Issuing Authority:	
	Division South Pacific District San Francisco	
2.	2. Permit start date/expire date:	
	Permittee: U.S. Army Corps of Engineers	
	Date issued: 29 Mar 1983 Permit No	
	<b>Start Date:</b> 29 Mar 1983	3
3.	3. Country of origin of wastes and port of loading:	
	a. United States of America, California	
	<b>b.</b> Humboldt Harbor, Bar & Entrance Channel	
4.	4. Specification of dredged material and process from which de	rived:
	Description: Fine Sand with Trace of Silt 98% Sand 02% Silt	
	b. Mode of dredging: Trailing Hopper Dredge	
	c. Mode of transportation: Hopper Dredge	
5.	5. Form in which dredged material is presented for disposal:	ETTLED SAMD
6.	6. Total quantity (cubic meters): 146,000	
7.	7. Expected frequency of dumping (for reporting period):	
	a. 21 Loads Per Day	
	b. Actual start: 31 Mar 1983 c. Actual completion	: 29 Apr 33

8. Chemical composition: Not tested, meets criteria of section 227.13(6)(1), Ocean Dumping Rules and Regulations F.R. Vol 42, No.7, 11 Jan 77

- 9. Properties of dredged material:
  - Solubility (% water)

Density (gm/cc) .

1.933

c. pH

Not Tested

 $\mathbf{S}$  clay 00

d. \$ sand 98 \$ silt 02

- 10. Method of packaging: Free flowing from open Hopper Dredge
- 11. Method of release: Bottom Dump
- 12. Procedure and site for tank washing: Hopper Flushed at authorized disposal
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude):  $\frac{40^{\circ}_{0}}{124}$  45' 44" N  $\frac{124^{\circ}}{15'}$  42" W
  - b. Depth of water (meters):

26.0

c. Distance from nearest coast (kilometers):

2.6

14. Additional information: None

1.	Issuing Authority:
	Division South Pacific District San Francisco
2.	Permit start date/expire date:
	Permittee: U.S. Army Corps of Engineers
	Date issued: 06 July 1983 Permit No
	Start Date: 09 July 1983 Expiry Date: 09 September 83
3.	Country of origin of wastes and port of loading:
	a. United States of America, California
	b. Humboldt Harbor, Bar & Entrance Channel
4.	Specification of dredged material and process from which derived:
	a. Description: Fine Sand with Trace of Silt 98% Sand 02% Silt
	b. Mode of dredging: Trailing Hopper Dredge
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Settled Sand
6.	Total quantity (cubic meters): 626.100
7.	Expected frequency of dumping (for reporting period):
	a. 21 Loads per Day
	b. Actual start: 09 Jul 83 c. Actual completion: 12 Aug 83

C-38	Pa	2	•ŧ	2
------	----	---	----	---

8.	Chemical	composi	tior	1:	Not	tes	ted,	meets	сr	iteri	al	of	section	227.13(6)	(1),
Oce	an Dumpin	g Rules	and	Regu	ılat	ions	F.R.	Vol	42.	No.	7.	11	Jan 77.		

<ol><li>Properties of dredged material</li></ol>	y. Properties o	I dredged materi	al
--------------------------------------------------	-----------------	------------------	----

a. Solubility (* water) 45

**Density (gm/cc)** 1.938

рH

Not Tested

1 clay ____00

- 10. Method of packaging: Free flowing from open Hopper Dredge
- 11. Method of release: Botton Dump
- Hopper flushed at authorized 12. Procedure and site for tank washing: disposal site
- 13. Approved dumping site:

a. Geographical position (latitide and longitude): 40° 45' 44"N 124° 15' 42"W

26.0

c. Distance from nearest coast (kilometers):

2.6

14. Additional information: None

b. Depth of water (meters):

1.	Issuing Authority:
	Division South Pacific District San Francisco
2.	Permit start date/expire date:
	Permittee: U.S. Army Corps of Engineers
	Date issued: 5 Apr 83 Permit No
	Start Date: 7 Apr 83 Expiry Date: 28 Apr 83
3.	Country of origin of wastes and port of loading:
	a. United States of America, California
	<b>b.</b> Humboldt Harbor, Interior Channels
<b>4.</b>	Specification of dredged material and process from which derived:
	86% sand and gravel 86% sand 7% gravel 7% silt
	b. Mode of dredging:  Trailing Hopper Dredge
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Settled sand
6.	Total quantity (cubic meters): 1,450.0
7.	Expected frequency of dumping (for reporting period):
	<b>a.</b> 14 loads
	b. Actual start: 7 Apr 83 c. Actual completion: 13 Apr 83

8. Chemical composition: Not tested, meets criteria of section 227.13 (b) (1) Ocean dumping rules & regulations -- F.R. Vol 24, No. 7, 11 Jan 77

- 9. Properties of dredged material:
  - a. Solubility (\$ water) 64
  - b. Density (gm/cc) . 1.619
  - c. pH Not tested

- 10. Method of packaging: Free flowing from open Hopper Dredge
- 11. Method of release: Bottom dump
- 12. Procedure and site for tank washing: Hopper floushed at authorized disposal Site.
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude): 40° 45' 44" N
  - b. Depth of water (meters):

    c. Distance from nearest coast (kilometers):

    26.0

    2.6
- 14. Additional information: None

1.	Issuing Authority:
	Division South Pacific District San Francisco
2.	Permit start date/expire date:
	Permittee: U.S. Army Corps of Engineers
	Date issued: 11 Aug 1983 Permit No
	Start Date: 15 Aug 1983 Expiry Date: 13 Dec 1983
3.	Country of origin of wastes and port of loading:
	a. United States of America , California
	<b>b.</b> Crescent City Harbor, Inner Channel
4.	Specification of dredged material and process from which derived:
	a. Description: Silts, loose sands, gravel, shell fragments, sandstone and rock
	b. Mode of dredging: Clamshell
	c. Mode of transportation: Tug with dump barge
5.	Form in which dredged material is presented for disposal: Settled sand, silts rock fragments
6.	Total quantity (cubic meters): 42,000 (sand, silt) 4-3,800 (rock)
7.	Expected frequency of dumping (for reporting period):
	a. 2 loads per day
	b. Actual start: 15 Aug 83 c. Actual completion: 13 Dec 1983

C	_	40	PZ	2	of	2
_			, •			

	<b>A</b> . 4		_		ſ
5.	Chemical composition:	Tested for the following metals:	Нg,	Cd, Cu,	Zn, and Pb.
	Did not exceed levels	in receiving waters nor did these	leve	ls exceed	state water
	Quality Control Board	criteria.			

9.	Properties	of	dredged	material:
			4. 44 K 44	

- a. Solubility (\$ water) Unknown
- b. Density (gm/cc): varies widely (silt to rock)
- c. pH Not tested
- d. % sand ____ % silt ___ % clay ____

Varies widely (silt to clay)

- 10. Method of packaging: Free flowing from open Hopper Barge
- 11. **Method of release:** Bottom dump
- 12. Procedure and site for tank washing: Hooper flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude): 41° 43' 15" N

124° 12' 10" W

b. Depth of water (meters):

27.0

c. Distance from nearest coast (kilometers):

2.09

14. Additional information:  $_{\mathrm{None}}$ 

٦.	issuing Authority:
	Division North Pacific District Portland
2.	Permit start date/expire date:
	Permittee: N/A
	Date issued: Permit No.
	Start Date: Expiry Date:
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Checco River, Oregon
a.	Specification of dredged material and process from which derived:
	a. Description: Sand (SP) - Entrance Sand & Gravel (GW) - Inside Channel
	b. Mode of dredging: Hopper Dredge YAQUINA
	c. Mode of transportation:
5. 6.	Form in which dredged material is presented for disposal:  Sand & Gravel - Subrounded to Subangular  Total quantity (subic meters): 40,658 cubic meters
7.	Expected frequency of dumping (for reporting period):
	a. 8 loads daily, 1 days per week
	b. Actual start: 3 May 83 c. Actual completion: 15 Sep 83

8.	Cherical composition:  Nutrients - Meets chemical/biological testing exemption criteria.  Metals - Hg0001 mg/1; Pb001 mg/1; Cd001 mg/1; Zn02 mg/1  Organics - None  Other Analysed -  Met 1s - Hg001; Pb01 mg/1; Cd003 mg/1; Zn04 mg/1  Organics - None  Volatile Solids % - 4.2; C.0.D 15,4.0 mg/1; D.0. 6.0 mg/1		
9.	Properties of dredged mate	erial:	
	a. Solubility (1 water)	36% H ₂ °	
	b. Density (gm/cc) .	2.06 gm/cc	
	e. pH 7.6		
	d. \$ sand 90 \$ sil	5 clay	% gravel <u>10</u>
10.	Method of packaging:		
11.	11. Method of release: Bottom release - Immediate		
	<ul><li>12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.</li><li>13. Approved dumping site:</li></ul>		
	a. Geographical position	(latitide and longitude):	
	42° - 02' N(Lat.); 12	4° - 16 ' W (Long.)	
	b. Depth of water (meter:	3):	21.3 meters
	c. Distance from nearest	coast (kilometers):	1.6 kilometers

14. Additional information:

1.	Issuing Authority:
	Division North Pacific District Portland
2.	Permit start date/expire date:
	Permittee: N/A
	Date issued: Permit No.
	Start Date: Expiry Date:
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Coos Bay, Oregon
4.	Specification of dredged material and process from which derived:
	a. Description: Sand (SP)
	b. Mode of dredging: Contract Hopper Dredges  MANHATTAN ISLAND and WESTPORT
	MANGATIAN ISLAMB and WESTIONI
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Sand - Subrounded to Subangular
6.	Total quantity (cubic meters): 701,955 cubic meters
7.	Expected frequency of dumping (for reporting period):
	a. 11 loads daily, 7 days per week
	h Antural stant: 10 Co- 92 a Matural completion: 1/ Dec 83

3. Chemical composition:

C-42 13 20\$2

Nutrients - T.O.C. - 4.7 Mg/ml Metals - Cd - 4.3 mg/ml; 2n - 97 mg/ml; Cu

Metals - Cd - 4.3 mg/ml; 2n - 97 mg/ml; Cu - 8.5 mg/ml; Fe - 70 mg/ml; Mn - 90 mg/ml

Organics - Volatile Solids - .4%

Other Anaylses - Hg - PB - 7 mg/g;  $\gamma = 1.0$  mg/g Zn - 49 mg/g; Cu + 1.1 mg/v Fe - 2500 mg/g; Mn = 45 mg/g

- 9. Properties of dredged material:
  - a. Solubility (% water) 37% H,
  - **b.** Density (gm/cc) 1.94 gm/cc
  - c. pH 7.1
  - d. % sand 100 % silt _____ % clay ____

- 10. Method of packaging:
- 11. Method of release: Bottom release Immediate
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal sites.
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude):
    This project has two authorized disposal sites. Both sites were used in CY 1983 (See # 14 below).
  - b. Depth of water (meters):

See below

c. Distance from nearest coast (kilometers):

See below

#### 14. Additional information:

Disposal Area	Lat Long.	Water Depth	Dist. from Coast
Area E	43° - 21' N 124° - 22' W	17.4 m	2.4 Km
Area F	43° - 22' N 124° - 22' W	24.4 m	2.4 Km

1.	Issuing Authority:	
	Division North Pacific	District Portland
2.	Permit start date/expire date	:
	Permittee: N/A	
	Date issued:	Permit No.
	Start Date:	Expiry Date:
3.	Country of origin of wastes a	and port of loading:
	a. United States of America	
	<b>b.</b> Coquille River, Oregon	
4.	Specification of dredged material and process from which derived:	
	a. Description: Sand (SP)	
	b. Mode of dredging: Hoppe	er Dredge YAQUINA
	c. Mode of transportation:	Hopper Dredge
5. 6.	Sand - Subrounded to Subangul	ar
7.	Expected frequency of dumping	g (for reporting period):
	a. 9 loads daily, 7 days p	per week
	b. Actual start: 28 May 83	c. Actual completion: 16 Jun 83

C-43 pg 2 . f2

3. Chemical composition:

Nutrients - Meets chemical/biological testing criteria,
Metals - Hg, Pb - None; Zn - 0.28; Cd - .003
Organics - None
Other Analyses 
Metals - Hg - .037 ppm; Pb - 5. o mg/kg; Zn - 7.28 mg/kg;
Cd - 1.8 mg/kg
Other - C.O.D. gm/kg; Volatilo So. Lo % - 4.45

- 9. Properties of dredged material:
  - a. Solubility (% water) 37% H₂°
  - b. Density (gm/cc) . 2.06 gm/cc
  - c. pH Unknown
  - d. 1 sand 100 % silt _____ % clay ____

- 10. Method of packaging:
- 11. Hethod of release: Bottom release Immediate
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal sit
- 13. Approved dumping site:
  - Geographical position (latitide and longitude):
    43° 07' N (Lat.); 124° 26' W (Long.)
  - b. Depth of water (meters):

18.3 meters

c. Distance from nearest coast (kilometers):

1.6 kilometers

14. Additional information:

٠.	. Issuing Authority:	
	Division North Pacific Dis	trict Portland
2.	. Fermit start date/expire date:	
	Permittee: N/A	
	Date issued: Per	mit No.
	Start Date: Ext	otry Date:
3.	. Country of origin of wastes and port of	loading:
	a. United States of America	
	<b>b.</b> Mouth of Columbia River, Oregon & Wa	ashington
4.	. Specification of dredged material and p	process from which derived:
	a. Description: Sand (SP)	
	b. Mode of dredging: Hopper Dredge Es	
	contract mopper	Dredge MANHATTAN ISLAND
	c. Mode of transportation: Hopper Dre	edge
5.		ented for disposal:
6.	Sand - Subrounded to Subangular  Total quantity (cubic meters): 1,476,1	.77 cubic meters
7.	. Expected frequency of dumping (for repo	orting period):
	a. Il loads daily, 7 days per week	
	h Ashuri stants ( ) 00	. Actual completions on

8. Chemical composition:

C-44 18 2 0 \$ 2

Nutrients - Meets chemical/biological testing exemption criteria. Metals - Hg, Pb, Cd - None detected; Zn = 0.19 mg/l Organics - None Other Analyses - Metals - Hg = 0.038 ppm; Pb = 6.9% mg/kg; Cd = 0.64 mg/kg; Zn = 9.0 mg/kg Volatile Solids % = 0.72; C.O.C. = 1.73 gm/kg

- 9. Properties of dredged material:
  - a. Solubility (% water) 40% H₂°
  - b. Density (gm/cc) . 1.94 gm/cc
  - c. pH 7.0
  - d. % sand 100 % silt _____ % clay ____

- 10. Method of packaging:
- 11. Method of release: Bottom release Immediate
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude):

This project has five authorized disposal sites. Three were used in 1983 (See #14 below).

b. Depth of water (meters):

See below

c. Distance from nearest coast (kilometers):

See below

#### 14. Additional information:

Disposal Area	Lat Long	Water Depth	Dist. from Coas
Area A	46° - 12' N 124° - 06' W	19.8 meters	4.0 kilometers
Area B	46° - ₁₄ ' N 124° - 10' W	33.5 meters	6.4 kilometers
Area E	46° - 15' N 124° - 05' W	18.3 meters	0.8 kilometers

ì.	Issuing Authority:
	Division North Pacific District Portland
2.	Permit start date/expire date:
	Permittee: N/A
	Date issued: Permit No.
	Start Date: Expiry Date:
3-	Country of origin of wastes and port of loading:
	a. United States of America
	b. Rogue River, Oregon
4.	Specification of dredged material and process from which derived:
	a. Description: Sand (SP)
	b. Mode of dredging: Hopper Dredge YAQUINA
	c. Mode of transportation: Hopper Dredge
5. 6.	Form in which dredged material is presented for disposal:  Sand - Subangular  Total quantity (cubic meters): 108,772 cubic meters
7.	Expected frequency of dumping (for reporting period):
	a. 12 loads daily, 7 days per week
	b. Actual start: 17 May 83 c. Actual completion: 28 Jul 83

wo bur

8. Chemical composition:

C-45 pg 2.+2

Nutrients - None
Metals - Hg-.0001; Pb - .001; Cd - .002; Zn - .012
Organics - None
Other Analyses - None
Oil & Grease - No visible sheen

- 9. Properties of dredged material:
  - a. Solubility (\$ water) 43% H₂°
  - b. Density (gm/cc): 2.01 gm/cc
  - c. pH 7.4
  - d. % sand 100 % silt _____ % clay ____

- 10. Method of packaging:
- 11. Method of release: Bottom release Immediate
- 12. Procedure and site for tank washing:
  Hopper flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude):

42° - 24' N (Lat.); 124° - 27' W(Long.)

b. Depth of water (meters):

<u> 1.83 meters</u>

c. Distance from nearest coast (kilometers):

3.2 kilometers

14. Additional information:

1.	Issuing Authority:
	Division North Pacific District Portland
2.	Permit start date/expire date:
	Permittee: N/A
	Date issued: Permit No.
	Start Date: Expiry Date:
3.	Country of origin of wastes and port of loading:
	a. United States of America
	b. Siuslaw River, Oregon
4.	Specification of dredged material and process from which derived:
	a. Description: Sand (SP)
	b. Mode of dredging: Hopper Dredge YAQUINA
	•
	c. Mode of transportation: Hopper Dredge
5.	Form in which dredged material is presented for disposal: Sand - Subangular to Subrounded
6.	Total quantity (cubic meters): 163,108 cubic meters
7.	Expected frequency of dumping (for reporting period):
	a. 13 loads daily, 7 days per week
	b. Actual start: 17 Jun 83 c. Actual completion: 8 Sep 83

8. Chemical composition:

C-46 pg 2.52

Nutrients - TKN - 1.54 mg/1; TPO  $\frac{1}{4}$  - 0.35 mg/1 Metals - Hg - .0010 ppm; 0.001 ppm (dry) Organics - Volatile Solids - 10,000 mg/kg (dry) C.O.D. - 77.6 mg/1; Suspended Solids - 56 mg/1; T.O.C. - 1.6 mg/1

- 9. Properties of dredged material:
  - a. Solubility (\$ water) 49% H₂°
  - b. Density (gm/cc) . 2.01 gm/cc
  - e. pH 7.0
  - d. % sand 100 % silt _____ % clay ____

- 10. Hethod of packaging:
- 11. Method of release: Bottom release Immediate
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site
- 13. Approved dumping site:
  - 8. Geographical position (latitide and longitude):
    44° 01' N (Lat.); 124° 09' W (Long.)
  - b. Depth of water (meters):

21.3 meters

c. Distance from nearest coast (kilometers):

1.9 kilometers

14. Additional information:

1.	Issuing Authority:
	Division North Pacific District Portland
2.	Permit start date/expire date:
	Permittee: N/A
•	Date issued: Permit No.
÷	Start Date: Expiry Date:
3-	Country of origin of wastes and port of loading:
	a. United States of America
	b. Umpqua River, Oregon
4.	Specification of dredged material and process from which derived:
	a. Description: Sand (SP)
	b. Mode of dredging: Hopper Dredge YAQUINA
	c. Mode of transportation: Hopper Dredge
5-	Form in which dredged material is presented for disposal:
6.	Sand - Subrounded to Subangular  Total quantity (cubic meters): 103,947 cubic meters
7.	Expected frequency of dumping (for reporting period):
	a. 9 loads daily, 7 days per week
	h datual start: 2 Tun 02 a datual completion: 0 Can 02

umpqua

C-47 1 20f2

0.8 kilometers

8.	Chemical composition: Nutrients - Ortho Phosphates - 11-62 ug/1; Phosphate Phosp Metals - Cyanide - 1-3 ug/1 Organics - Volatile Solids - 8500-41,300 mg/ug (dry)	horus-65-88 ug/l
9.	Properties of dredged material:	
,,	a. Solubility (5 water) 36% H ₂ °	
	2.05 87 6.0	
	e. pH 7.1	
	d. \$ sand 100 \$ silt \$ clay	<del></del>
10.	. Method of packaging:	
11.	. Method of release: Bottom release - Immediate	
12.	Procedure and site for tank washing: Hopper flushed at authorized disposal site.	
	a. Geographical position (latitide and longitude):	
	43° - 40' N (Lat.); 124° - 14' W (Long.)	
		27.4 meters

b. Depth of water (meters):

14. Additional information:

c. Distance from nearest coast (kilometers):

1.	Issuing Authority:	
	Division North Pacific District Portland	
2.	Permit start date/expire date:	
	Permittee: N/A	
	Date issued: Permit No.	
	Start Date: Expiry Date:	
3.	Country of origin of wastes and port of loading:	
	a. United States of America	
	b. Yaquina Bay & Harbor, Oregon	
4.	Specification of dredged material and process from which derived:	
	a. Description: Sand (SP)	
	b. Mode of dredging: Hopper Dredge YAQUINA and Contract Hopper Dredge WESTPORT	
	c. Mode of transportation: Hopper Dredge	
5.	Sand - Subrounded to Subangular	
6.	Total quantity (cubic meters): 346,608 cubic meters	
7.	Expected frequency of dumping (for reporting period):	
	a. 13 loads daily, 7 days per week	
	b. Actual start: 19 Aug 83 c. Actual completion: 28 Aug 83	_

C-48 pg 2 of 2

8. Chemical composition:

```
Nutrients - TKN - 0.42 mg/1; T20 \frac{+}{4} - 0.38 mg/1; Orthophosphate -.064 mg/1; T.0.C. - 3.7 mg/1 Metals - Hg = 0.0 mg/1; Mn = 120 mg/1; Cu = 1 mg/1; Cd = 0.88 mg/1; Fb = 0.0 mg/1; Zn = 1.8 mg/1 Organis - Phenols - 9 mg/1
```

- 9. Properties of dredged material:
  - a. Solubility (¶ water) 26% H₂°
  - b. Density (gm/cc) . 2.04 gm/cc
  - e. pH 7.9
  - d. % sand 100 % silt _____ % clay ____

- 10. Method of packaging:
- 11. Method of release: Bottom release Immediate
- 12. Procedure and site for tank washing: Hoppers flushed at authorized disposal site.
- 13. Approved dumping site:
  - a. Geographical position (latitide and longitude):

44° - 36' N (Lat.); 124° - 05' W (Long.)

b. Depth of water (meters):

18.3 meters

c. Distance from nearest coast (kilometers):

l.6 kilometers

14. Additional information:

C-49 M 1 = 12

•	Issuing Authority:			
	Division North Pacific	District Alaska		
2.	Permit start date/expire date:			
	Permittee:			
	Date issued:	Permit No.		
	Start Date:	Expiry Date:		
3.	Country of origin of wastes an	d port of loading:		
	a. United States of America			
	b. Nome, Alaska			
4. Specification of dredged material and process from which		ial and process from which derived:		
	a. Description: Gravelly, sil	lty, sand		
	b. Mode of dredging: Clam she	ell		
	c. Mode of transportation:Ba	rge		
5.	Form in which dredged material	l is presented for disposal: Solid		
6.	Total quantity (cubic meters)	: 10,940		
7.	Expected frequency of dumping	(for reporting period):		
	a. 3 times/day			
	b. Actual start: 1 June 83	c. Actual completion: 30 September 83		

C-49 13 2 of 2

s.	Chentesl	composition:	NIZA
Ç,	mente et	composition:	N/A

<ol><li>Properties of</li></ol>	dredged	material:
---------------------------------	---------	-----------

- a. Solubility (1 water) 10%
- b. Density (gm/cc) 1.6 sm/cc
- c. pH N/A

- 10. Method of packaging: Barge loaded
- 11. Method of release: Washed off of barge
- 12. Procedure and site for tank washing: N/A
- 13. Approved dumping site:

64° 29' 54"N

- a. Geog. aphical position (latitide and longitude): 165°24'41"W
- b. Depth of water (meters):

3-5m

c. Distance from nearest coast (kilometers):

0.6km

#### 14. Additional information:

This is an annual Corps of Engineers Maintenance Dredging Project

#### Periodic Maintenance Dredging Nawiliwili Harbor, Kauai, Hawaii

#### LONDON DUMPING CONVENTION

1.	Issuing Authority:			
	Division Pacific Ocean District Honolulu			
2.	Permit start date/expire date:			
	Permittee: N/A			
	Date issued: Permit No.			
	Start Date: Expiry Date:			
3.	Country of origin of wastes and port of loading:			
	a. United States of America			
	b. Nawiliwili Harbor, Kauai			
4.	Specification of dredged material and process from which derived:			
	a. Description: Poorly graded gravelly sand.			
	b. Mode of dredging: Hopper dredge "YAQUINA"			
	c. Mode of transportation: Hopper dredge "YAQUINA"			
5.	Form in which dredged material is presented for disposal: Slurry, non-cohesive character			
6.	Total quantity (cubic meters): 240,000m ³			
7.	Expected frequency of dumping (for reporting period):			
	a. 14 times daily, 6 days per week			
	b. Actual start: 16 Feb 83 c. Actual completion: 24 Mar 83			

8•	Chemical composition: N/A	
9.	Properties of dredged material:	
	a. Solubility (% water)	
	b. Density (gm/cc) 1.71 gm/cc	
	c. pH	
	d. % sand 95 % silt +clay 5 %	clay
10.	Method of packaging: N/A	
11.	Method of release: Bottom release	
12.	Procedure and site for tank washing: Hopper flushed disposal site	
13.	Approved dumping site:	
	a. Geographical position (latitide and longitude):	21 ^o 55' N (Lat) 159 ^o 17' W (Long)
	b. Depth of water (meters):	1000 m
	c. Distance from nearest coast (kilometers):	6.5 m
4 11	Additional information.	

# END

# FILMED

2-85

DTIC