

NO-A178 692

INSTALLATION RESTORATION GENERAL ENVIRONMENTAL
TECHNOLOGY DEVELOPMENT FIE. (U) WESTON (ROY F) INC WEST
CHESTER PA P J MARKS ET AL. JAN 87


141

UNCLASSIFIED

AMXTH-TE-CR-86091-VOL-1 DAAK11-82-C-0017

F/G 13/2

ML



M11
A...

AD-A178 692

Report No. AMXTH-TE-CR-86091

Installation Restoration General Environmental Technology Development

Contract DAAK 11-82-C-0017 (Task Order 9)

Field Demonstration of Incinerator Feed System For Explosives-Contaminated Soils

Volume 1 - Technical Report

January 1987

**Distribution Unlimited; Approved for Public Release**

Prepared for:

U.S. ARMY TOXIC AND HAZARDOUS MATERIALS AGENCY
Aberdeen Proving Ground (Edgewood Area), Maryland 21010Roy F. Weston, Inc.
West Chester
Pennsylvania 19380

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AMXTH-TE-CR-86091	2. GOVT ACCESSION NO. DAAC 11-82-C-0017	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Installation Restoration General Environmental Technology Development Field Demonstration of Incinerator Feed System for Explosives-Contaminated Soils		5. TYPE OF REPORT & PERIOD COVERED Technical Report June 1984 - January 1987
7. AUTHOR(s) Peter J. Marks John W. Noland, P.E.		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Roy F. Weston, Inc. Weston Way West Chester, PA 19380		8. CONTRACT OR GRANT NUMBER(s) DAAC 11-82-C-0017
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Toxic & Hazardous Materials Agency Aberdeen Proving Ground Edgewood Area, MD 21010		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE January 1987
		13. NUMBER OF PAGES 69 (Excluding Appendices)
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Distribution unlimited; approved for public release.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Contract Project Officer - Ms. Donna L. Koltuniak (AMXTH-TE-D)		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Explosives-Contaminated Soil Cross Conveyor Rotational Speed Incineration Feed Conveyor Screw Conveyor Tongue Feed System Soil Excavation Motor Current Materials Handling Soil Preparation Explosives Concentrations Live Bottom Hopper Soil Feedrate Soil Size Distribution		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report presents the results of field demonstration project to evaluate the suitability of an incinerator feed system for conveying explosives-contaminated soils. The project was conducted at the Louisiana Army Ammunition Plant from 30 June to 10 July 1986. This report presents the test variables, schedule of tests and runs, data analysis, and conclusions and recommendations for future field implementation.		

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

CONTENTS

		<u>Page</u>
Paragraph 1	EXECUTIVE SUMMARY	1
1.1	Background	1
2	INTRODUCTION	2
2.1	Background	2
2.2	Purpose	5
2.3	Objectives	5
2.4	Criteria for successful demonstration	5
2.5	Test site description	5
2.6	Test equipment	7
2.6.1	Live bottom hopper	7
2.6.2	Cross conveyor	11
2.6.3	Feed conveyor	12
3	TEST VARIABLES	13
3.1	Independent variables	13
3.2	Control variables	13
3.2.1	Held constant for all tests	13
3.2.1.1	Soil excavation	13
3.2.1.1.1	LAAP soil	13
3.2.1.1.2	CHAAP soil	16
3.2.1.2	Soil preparation	16
3.2.2	Controlled at various levels	16
3.2.2.1	Soil feed rate	18
3.2.2.2	Duration of testing period	18
3.3	Response variables	18
3.3.1	Rotational speed of screw conveyor ..	18
3.3.2	Screw conveyor torque	19
4	SCHEDULE OF TESTS AND RUNS	20
4.1	Overall test schedule	20
4.2	Test run sequence/schedule of daily activities	20
5	DATA ANALYSIS	27
5.1	Presentation of CHAAP data	27
5.1.1	4,000-lb/hr feed system test (Test Run No. 1)	27
5.1.2	8,000-lb/hr feed system test (Test Runs Nos. 3 and 4)	27
5.1.3	12,000-lb/hr feed system test (Test Run No. 8)	27
5.2	Presentation of LAAP data	27
5.2.1	4,000-lb/hr feed system test (Test Run No. 5)	27
5.2.2	8,000-lb/hr feed system test (Test Run No. 7)	27
5.2.3	12,000-lb/hr feed system test (Test Run No. 6)	27



Distribution/	
Availability Codes	
Dist	Availability or Special
A-1	

CONTENTS

		<u>Page</u>
Paragraph 5.3	Analysis of test data	52
5.3.1	Soil feed rate	52
5.3.2	Soil moisture content and bulk densities	53
5.3.3	Soil size distribution	54
5.3.4	Rotational speed of screw conveyor ..	54
5.3.5	Screw conveyor motor amps	58
5.3.6	LAAP soils explosives concentrations	58
5.4	Physical observations	58
5.4.1	Soil excavation, staging, and feeding to the hopper	58
5.4.2	Live-bottom hopper operation	62
5.4.3	Cross conveyor operation	62
5.4.4	Feed conveyor operation	62
5.4.5	Feed soil characteristics	63
5.4.6	Control system operation	63
5.4.7	Shaft purge system operation	63
6	CONCLUSIONS AND RECOMMENDATIONS	65
6.1	Conclusions	65
6.2	Recommendations	68

FIGURES

FIGURE		Page
1.	Test Site	6
2.	Incinerator feed system	3
3.	Internal view of live bottom hopper ...	9
4.	LAAP lagoon number 4	17
5.	Feed rate during Test Run No. 1, CHAAP soil, 4,000 lb/hr	29
6.	Motor current during Test Run No. 1, CHAAP soil, 4,000 lb/hr	30
7.	Feed rate during Test Run No. 3, CHAAP soil, 8,000 lb/hr, 4-hour test	32
8.	Motor current during Test Run No. 3, CHAAP soil, 8,000 lb/hr, 4-hour test	33
9.	Feed rate during Test Run No. 4, CHAAP soil, 8,000 lb/hr, 8-hour test	36
10.	Motor current during Test Run No. 4, CHAAP soil, 8,000 lb/hr, 8-hour test	37
11.	Feed rate during Test Run No. 8, CHAAP soil, 12,000 lb/hr	39
12.	Motor current during Test Run No. 8, CHAAP soil, 12,000 lb/hr	40
13.	Feed rate during Test Run No. 5, LAAP soil, 4,000 lb/hr	42
14.	Motor current during Test Run No. 5, LAAP soil, 4,000 lb/hr	43
15.	Feed rate during Test Run No. 7, LAAP soil, 8,000 lb/hr, 8-hour test	46
16.	Motor current during Test Run No. 7, LAAP soil, 8,000 lb/hr, 8-hour test	47
17.	Feed rate during Test Run No. 6, LAAP soil, 12,000 lb/hr	50
18.	Motor current during Test Run No. 6, LAAP soil, 12,000 lb/hr	51
19.	Relationship between live bottom hopper screw speed and variable speed drive settings for all types of soil	56
20.	Relationship between conveyor and feed conveyor screw speeds and variable speed drive settings for all types of soil	57
21.	Motor current for CHAAP soil test runs	59
22.	Motor current for LAAP soil test runs	60

TABLES

TABLE		<u>Page</u>
1.	List/description of appendices in Volume II	3
2.	Summary of feed system experimental variables	14
3.	Characteristics of explosives-contaminated soils	15
4.	Schedule of test runs	21
5.	Feed systems operational safety controls upset - and/or failure-mode testing	23
6.	Summary of test data for Test Run No. 1, CHAAP soil, 4,000 lb/hr	28
7.	Summary of test data for Test Run No. 3, CHAAP soil, 8,000 lb/hr, 4-hour test	31
8.	Summary of test data for Test Run No. 4, CHAAP soil, 8,000 lb/hr, 8-hour test	34
9.	Summary of test data for Test Run No. 8, CHAAP soil, 12,000 lb/hr	38
10.	Summary of test data for Test Run No. 5, LAAP soil, 4,000 lb/hr	41
11.	Summary of test data for Test Run No. 7, LAAP soil, 8,000 lb/hr	44
12.	Summary of test data for Test Run No. 6, LAAP soil, 12,000 lb/hr	48
13.	Summary of soil size distribution data for the CHAAP test runs	55
14.	Summary of soil explosives concentrations for the LAAP test runs	61
15.	Recommendations from the ABL's hazards analysis of incinerator feed system (Appendix D)	66

1. EXECUTIVE SUMMARY

1.1 Background. A field demonstration project was conducted at Louisiana Army Ammunition Plant (LAAP) near Shreveport, Louisiana to evaluate the suitability of an incinerator feed system for conveying explosives-contaminated soils. The field demonstration project was conducted from 30 June to 10 July 1986. Explosives-contaminated soils were excavated from Lagoon No. 4 at LAAP for testing. (Total explosives content typically ranged from 10 to 22 percent by weight.) In addition, uncontaminated background soils from Cornhusker Army Ammunition plant (CHAAP) near Grand Island, Nebraska were also excavated and transported to LAAP for testing. Soils discharged from the system were deposited in Lagoon No. 12 at LAAP.

The incinerator feed system consisted of the following three major components:

- (a) Live bottom hopper - The live bottom hopper consisted of a loading bin with four cone metering screws in the bottom to control the soil feed rate.
- (b) Cross conveyor - The soil from the live bottom hopper discharged into a twin-screw cross conveyor which transferred the soil horizontally from the live bottom hopper to the feed conveyor.
- (c) Feed conveyor - In future applications, a water-jacketed twin-screw conveyor will directly feed a rotary kiln incinerator. However, for this testing program, the feed conveyor discharged into an excavation container for transport of the soils back to the lagoon at LAAP.

The field testing evaluated three levels of soil feed rate (i.e., 4,000 lb/hr, 8,000 lb/hr, and 12,000 lb/hr) and two test durations (i.e., 4-hour runs and one 8-hour steady-state run for each soil type). In addition, testing was also performed under upset and/or failure-mode conditions.

This testing program successfully demonstrated the capability of the feed system to consistently deliver 50 percent, 100 percent, and 150 percent of the 8,000 lb/hr design feed rate with two very different soil types. The feed system proved to be capable of conveying solid debris in the soil (i.e., chunks of concrete) up to 6 inches x 6 inches x 6 inches in dimension without jamming the system. The failure mode testing successfully demonstrated that the control system responded as designed to all simulated jams and motor overload conditions.



2. INTRODUCTION

2.1 Background. As a result of past munitions-handling operations, the U.S. Army has numerous lagoons which contain varying amounts of explosives-contaminated sludge. Rotary kiln incineration has been identified and demonstrated as a treatment technology for explosives-contaminated sludge. Prior to the performance of this task order, no safety-approved feed system existed for explosives-contaminated sludge. However, a safety-approved feed system will be required before incineration can be used in the field to decontaminate these sludges.

This report describes the full-scale field demonstration of the safety-approved feed system completed in July 1986. However, the incinerator feed system development was initiated in September 1982 under WESTON's Task Order No. 2 which involved the field demonstration of a pilot scale incineration system for explosives-contaminated soils. To document the chronology of the feed system development, Table 1 presents a list of appendices provided in Volume 2 of this report.

In addition to these appendices, three specific documents directly related to this project were prepared by WESTON and were submitted to USATHAMA. These documents are included by reference only:

Document title	Date submitted to USATHAMA
Test Plan for Propagation and Flame Testing of Explosives-Contaminated Lagoon Soil at Los Alamos National Laboratory (LANL)	March 1985
Safety Plan for a Materials Handling System Test of Explosives-Contaminated Soils at the Louisiana Army Ammunition Plant (LAAP)	June 1985



TABLE 1. LIST/DESCRIPTION OF APPENDICES IN VOLUME II

Appendix	Title/description
A	<p>Title: Summary of Incinerator Feed System Development</p> <p>Letter from P. J. Marks to W. E. Sisk dated 20 February 1985. This letter (with attachments) provides an overview of the various designs considered and describes the planned development and testing activities.</p>
B	<p>Title: Tests for Propagation of Explosions in Explosives-Contaminated Lagoon Soils</p> <p>This report presents the results of propagation testing conducted by Los Alamos National Laboratories (LANL) on explosives-contaminated lagoon soils from Louisiana Army Ammunition Plant (LAAP), Cornhusker Army Ammunition Plant (CHAAP), and Savanna Army Depot Activity (SADA). This testing was performed to determine if the contaminated soils will propagate an explosive event.</p>
C	<p>Title: Flame Testing of Incinerator Feed System Handling Explosives-Contaminated Lagoon Soils</p> <p>This report presents the results of flame testing conducted by LANL on explosives-contaminated lagoon soils from LAAP. The purpose of this testing was to investigate the potential for fire or explosion to occur in the feed system due to exposure to the incinerator environment during upset conditions.</p>



TABLE 1. (CONTINUED)

Appendix	Title/description
D	<p data-bbox="282 443 393 468">Title:</p> <p data-bbox="530 443 1224 499">Hazards Analysis of Incinerator Feed System</p> <p data-bbox="530 533 1298 867">This document presents the results of a Subsystem Hazard Analysis (SSHA) of the incinerator feed system to ensure that the explosives-contaminated lagoon soils can safely be fed to an incinerator while minimizing the risk of injury to operating personnel and equipment damage. This report was supported by sensitivity tests of dried explosives-contaminated lagoon sludges from LAAP, CHAAP, and SADA.</p>

2.2 Purpose. The purpose of this report is to present the results and conclusions of a field demonstration project that evaluated an incinerator feed system for handling explosives-contaminated soils. A description of test conditions and process equipment is contained herein.

2.3 Objectives. The primary objective of the field demonstration project was to evaluate the suitability of the materials handling feed system for feeding explosives-contaminated soils into a rotary kiln incinerator. Secondary objectives included the following:

- (a) Determination of the impact on system performance of varying design parameters (e.g., soil feed rate, soil moisture content, soil composition, and maximum soil topsize).
- (b) Determination of the optimum range of operational parameters.
- (c) Determination of equipment limitations and failure modes to identify a clear envelope of safe and practical system operation.
- (d) Identification of equipment modifications that would improve system performance, reliability, and/or operational safety.

2.4 Criteria for successful demonstration. The success of the field demonstration project was based upon the ability of the materials handling and feed system to safely and reliably process a minimum of 8,000 lb/hr of explosives-contaminated soils from two installations: LAAP and CHAPP.

2.5 Test site description. The field demonstration project was conducted at LAAP in Shreveport, Louisiana. The location of the test site and the pink water lagoons is shown on Figure 1.

Originally, field demonstration projects were also to be conducted at CAAP near Grand Island, Nebraska and SADA near Savanna, Illinois. However, demonstrations at these installations were not conducted for the following reasons:

- (a) Full erection and disassembly of the feed system at each location would be too costly and time-consuming.
- (b) LAAP soils represented "worst case" conditions, as follows:
 - (1) The LAAP soils were the most highly contaminated, exhibiting explosives concentrations as high as 45 percent by weight.
 - (2) The high concentration of explosives made it undesirable to transport LAAP soils to another site for testing.

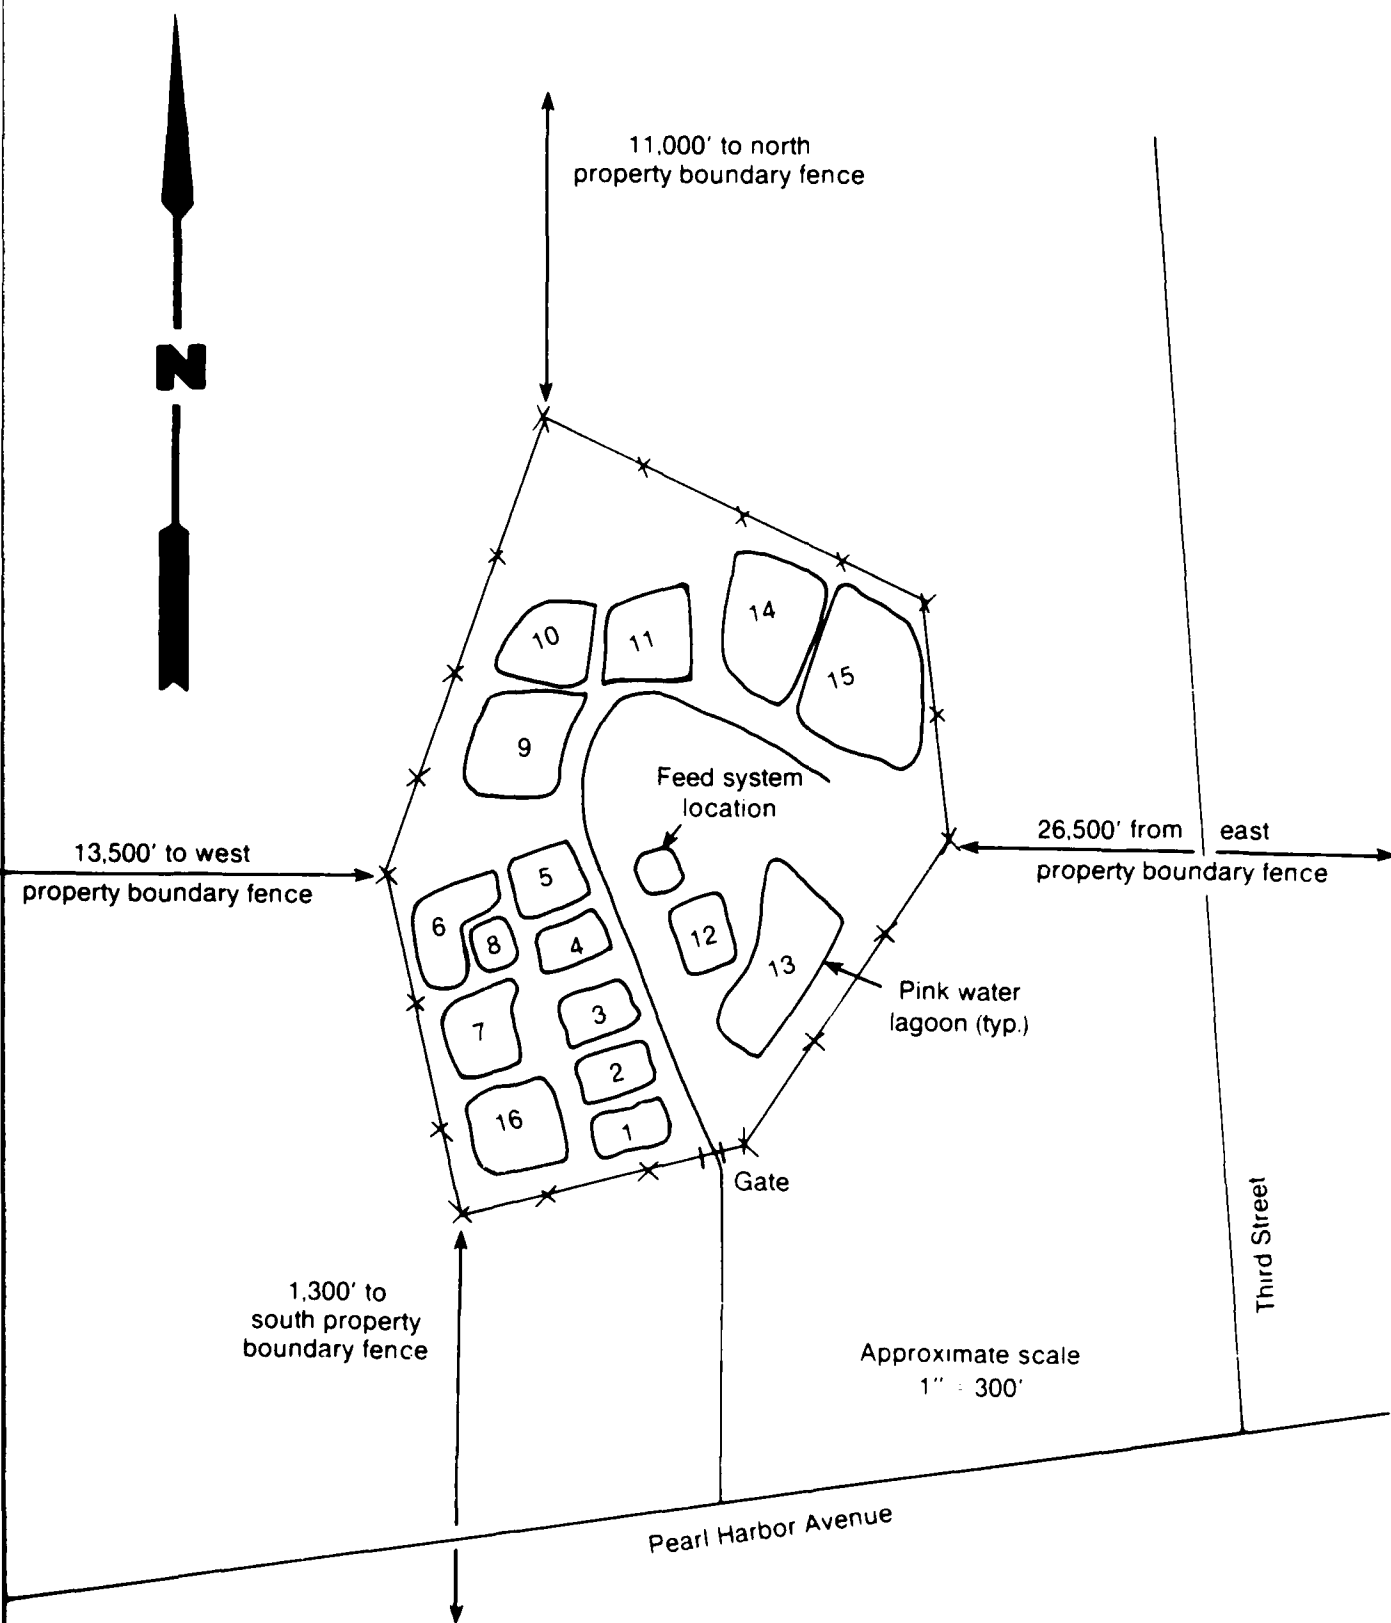


Figure 1. Test Site.

- (3) The physical properties of LAAP soils (i.e., highly plastic clay) presented the greatest materials handling challenge to the feed system.
- (c) Although testing was not to be conducted at CHAAP, soils from CHAAP had to be tested because this installation is an immediate candidate for cleanup via rotary-kiln incineration. However, due to potential regulatory delays involved with transporting explosives-contaminated soils, background (uncontaminated) soils were transported to LAAP for testing.
- (d) SADA soils were not tested because there was no apparent advantage in doing so. SADA soils are sandy; therefore, they would not present a significant materials handling problem (as compared to the highly plastic clay soils at LAAP). In addition, explosives concentrations were much lower than those associated with LAAP soils.

2.6 Test equipment. The incinerator feed system consisted of the following three major components:

- (a) Live-bottom hopper.
- (b) Cross conveyor.
- (c) Feed conveyor.

A photograph of the incinerator feed system installed at LAAP is presented in Figure 2. A description of each component, specifications, and construction details are contained in the following subsections.

2.6.1 Live bottom hopper. Excavated soils were fed to the live bottom hopper using a tracked excavator (see Appendix E). The bottom of the hopper was equipped with four cone metering screws. The cone metering screws were selected because they have been proven in other applications to provide the most consistent and reliable method of feed rate control and to minimize the potential for hopper bridging. The hopper was designed to handle a maximum of 18,000 pounds of soil per hour. A photograph of the four metering screws in the bottom of the live bottom hopper is shown in Figure 3. The specification and construction of the hopper are described as follows:

- Screws were 12 inches in diameter and of the "cone" displacement design with solid flights on the cone and ribbon flights on the balance of the screws. Ribbon flights were selected since they have proven to be the most reliable for handling clay soils. The screw shaft was 5-inch Schedule 120 (1/2-inch wall) bushed to 3 15/16-inch shaft size. The ribbon flights were 2 1/2 inch x 1/2 inch thick; posts were 2 inch x 1/2 inch at 120 degrees around the shaft. The ribbon was hard-faced with stellite on the outer edge and face.

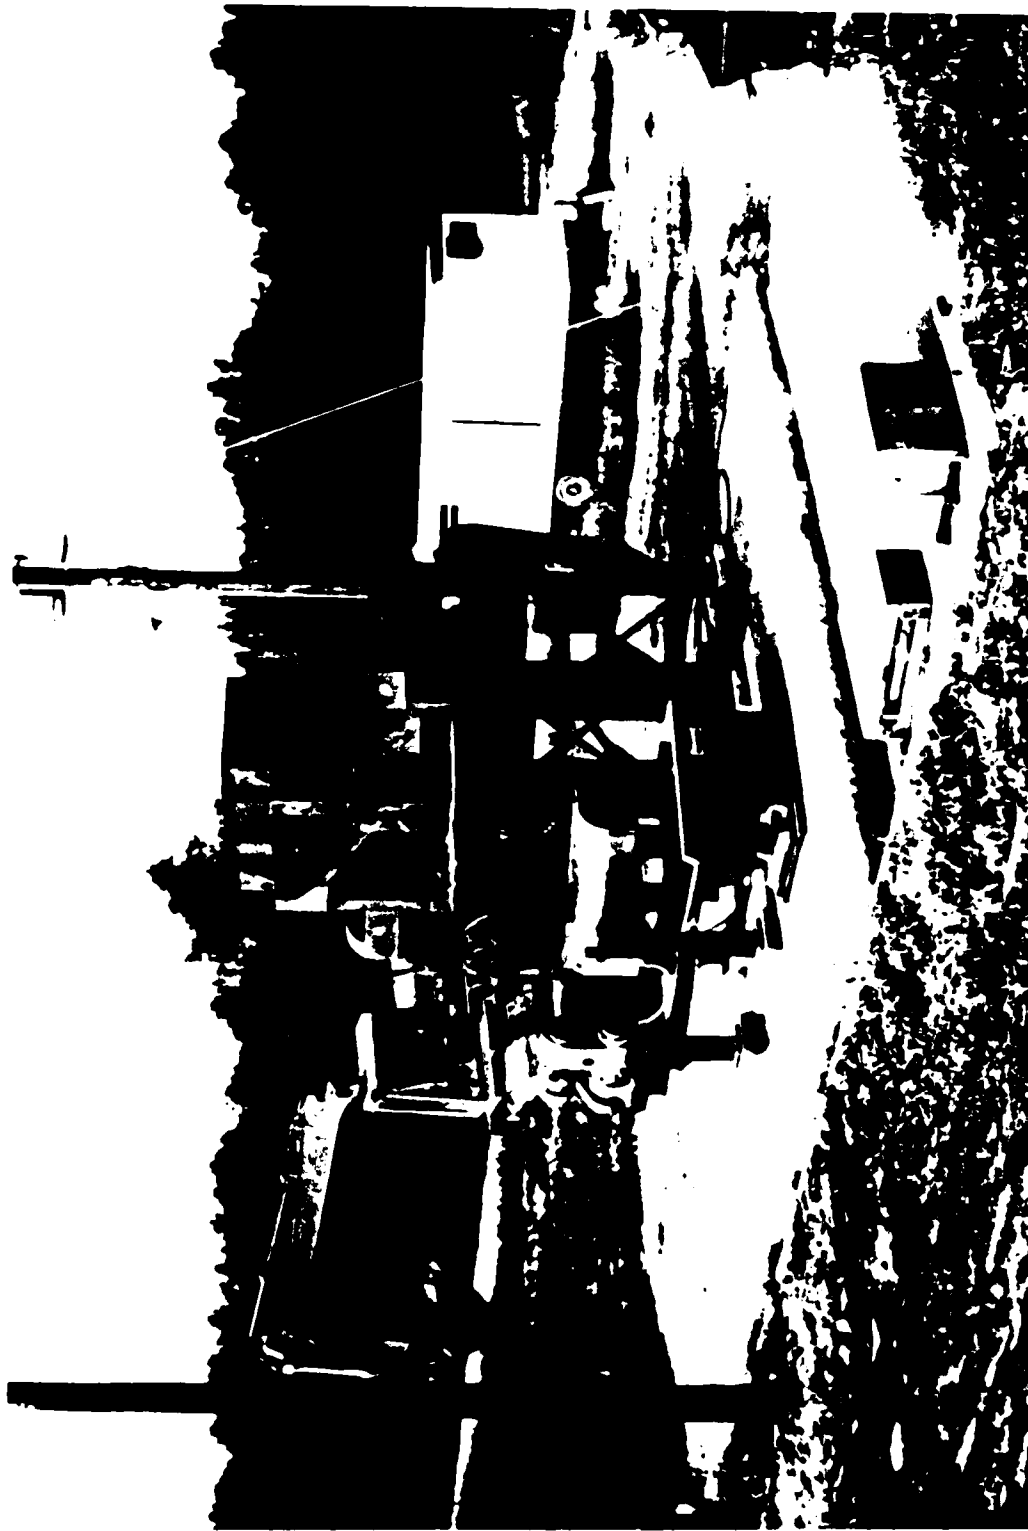


Figure 2. Incinerator feed system.



Figure 3. Internal view of live bottom hopper.

- The screws were counter-rotating, right- and left-hand flighting driven by steel spur gears, No. 3 diametrical pitch (DP) with a 3-inch face mounted on 3 15/16-inch drive shafts. Counter-rotating twin screws were also selected since they have proven to be the most reliable for handling clay soils. Final screw speed was 5 rpm maximum with a 9 to 1 turndown.
- The trough for the quad screw feeder was 1/4-inch plate with external reinforcing ribs and bracing. The inside of the trough had "hip-roof" dividers between the screws.
- The trough ends were 3/8-inch plate, with external pedestals for the bearing supports. The spur gears were straddle-mounted by bearings.
- The drive was a 15-hp, totally enclosed, fan cooled (TEFC) with a 9 to 1 variable speed reducer coupled to an in-line reducer. A chain drive connected the reducer and one of the center feed-screw drive shafts. The drive was mounted directly to the feeder and included all Occupational Safety and Health Act (OSHA) approved guards for the gears and the chain drive.
- A bin was permanently mounted over the top of the four metering screws as part of the live bottom hopper. This bin was 4 feet x 6 feet x 4 feet. The bin walls tapered to provide at least 2 degrees negative pitch to prevent bridging in the hopper. The walls were reinforced by ribbing and by 3-inch x 3-inch x 3/8-inch angles. A "breaker bar" grid was placed near the top of the bin to break large lumps and to protect personnel.



- The entire feeder and bin were mounted on 8-inch x 31 lb H beams that supported this equipment approximately 9 feet above the base plate of the support columns. The support steel was all of bolted construction.
- The equipment was completely assembled and tested in the fabricator's plant prior to shipping. The equipment received one coat of primer and a finish coat of epoxy paint.
- All screw conveyor shaft seals where the shafts penetrated the conveyor housing were oil purged to prevent the migration of explosives into the bearing assemblies.

2.6.2 Cross conveyor. Soils were discharged from the live bottom hopper and dropped approximately 2 feet to the feed end of the cross conveyor. This 2-foot drop at conveyor transfer points was included in the design to preclude the propagation of an explosion from one conveyor to another. The twin screw cross conveyor was equipped with right- and left-hand counter-rotating screws. The screws were 12 inches in diameter and 12-1/2 feet long. The components of the cross conveyor were as follows:

- 12-inch diameter ribbon flights, 2-1/2 inch x 1/2-inch ribbon-mounted on 5-inch Schedule 120 pipe bushed for 3-inch diameter shafts. No internal hanger bearing.
- The screws were driven by steel spur gears, 3-inch DP with a 3-inch face.
- The trough was 1/4-inch plate with a 3/16-inch plate cover.
- Trough ends were 3/8-inch plate, outboard pedestal-bearing supports, and straddle-mounted bearings at the spur gears.
- The drive was a 7 1/2-hp TEFC U.S. Reliance varispeed drive. There was a No. 100 chain drive to the screw conveyor drive shaft. Final top speed of the screw was 15 rpm with a 9 to 1 turndown.
- Complete motor mount was provided and directly fastened to the conveyor. The gearing and the chain drive had OSHA guards.
- All screw conveyor shaft seals where the shafts penetrated the conveyor housing were oil purged to prevent the migration of explosives into the bearing assemblies.



2.6.3 Feed conveyor. Soils discharged from the cross conveyor and dropped approximately 2 feet to the feed end of the feed conveyor. This twin-screw feeder will ultimately feed soils to a rotary kiln incinerator. For the field demonstration program, however, the feed conveyor discharged soils into self-dumping steel hoppers for transport back to the lagoon (see Appendix F). The components of the feed conveyor were as follows:

- The construction and specifications for the feed conveyor are the same as those presented for the cross conveyor (as discussed in Subsection 2.6.2). The unit was 6 feet in length and was fabricated of Inconel 625.
- The inner and the outer housings were 1/4-inch plate. Interior baffles between the inner housing and the outer jacket were designed to direct the water in a circular pattern, starting at the feed end and returning through the inside of the screw shafts from the discharge end of the conveyor.
- The two screws had water-cooled center pipes (the axles). The connection was a Johnson coupling with input and output through the same end. No cooling water was circulated for this project.
- The screws were driven by a 15-hp TEFC varispeed motor and reducer identical to the unit described for the live-bottom hopper, except that the maximum speed was 15 rpm with a 9 to 1 turndown.
- The screws were overhung from the two bearings on the drive end. They also had a stabilizing bearing on the inside of the discharge end which was a dry sleeve bearing made of carbon-ceramic material suitable for very high temperatures. The shaft riding in this sleeve bearing was Inconel 625 with an overlap of stellite. These bearings had renewable inserts and were only for stabilizing the discharge end by absorbing some of the side thrust.
- All screw conveyor shaft seals where the shafts penetrated the conveyor housing were oil purged to prevent the migration of explosives into the bearing assemblies.

3. TEST VARIABLES

The variables of the testing program can be classified as follows:

- (a) Independent variables. Those whose value was fixed for test operations. No attempts were made to modify or control independent variables.
- (b) Control variables. Those whose value was selected and maintained during test operations.
- (c) Response variables. Those whose value was a function of the selected operating conditions.

Table 2 provides a summary of test variables for the incinerator feed system field demonstration program.

3.1 Independent variables. As shown in Table 2, there were two independent variables associated with the field demonstration program at each potential remedial action site: soil explosives concentration and soil composition. A summary of the soil explosives concentrations and compositions for each of the two installations based upon previous data appears in Table 3. Again, although CHAAP soils are contaminated, soils chosen for testing were uncontaminated. Soil physical properties, however, were very similar for both.

3.2 Control variables.

3.2.1 Held constant for all tests. As shown in Table 2, two control variables (soil excavation and soil preparation) were held constant for all of the tests.

3.2.1.1 Soil excavation.

3.2.1.1.1 LAAP soil. The selection of LAAP Lagoon No. 4 for excavation the soil for the testing program was based upon the following criteria:

- LAAP Lagoon No. 4 had free-standing water which ensured that the soil was saturated and minimized the risk of potential functioning of the explosives-contaminated soil during excavation.
- LAAP Lagoon No. 4 had adequate access for excavation operations and an adequate supply of uncontaminated water available nearby for washdown and equipment decontamination.
- LAAP Lagoon No. 4 was located as close as practical to the selected site for installation of the feed system to minimize transportation distances.

TABLE 2. SUMMARY OF FEED SYSTEM EXPERIMENTAL VARIABLES

A. INDEPENDENT VARIABLES

- Soil explosives concentration
- Soil composition

B. CONTROL VARIABLES

- Held constant for all tests
 - Soil excavation
 - Soil preparation
- Controlled at various levels
 - Soil feed rate
 - Duration of test

C. RESPONSE VARIABLES

- Rotational speed of screw conveyors
 - Live-bottom hopper
 - Cross conveyor
 - Feed conveyor
 - Screw conveyor torque (i.e., motor amps)
 - Live-bottom hopper
 - Cros conveyor
 - Feed conveyor
 - Physical observations
-

TABLE 3. CHARACTERISTICS OF EXPLOSIVES-CONTAMINATED SOILS

Description	Cornhusker Army Ammunition Plant ^{1,2} (CHAAP)	Louisiana Army Ammunition Plant ¹ (LAAP)
Soil matrix	Silty clay	Clay
Moisture content	Unknown	25 - 30%
Ash content (as received)	Unknown	54 - 66%
Explosives content (dry basis)		
- TNT	<3.8%	5 - 14%
- RDX	Not detected	3 - 10%
- HMX	Not detected	0.6 - 1.4%
- Other	<0.2%	<0.06%
- Total explosives	<4%	10 - 22%
Heating value	Unknown	600 - 1,200 Btu/lb

¹Based on sampling results from "Cornhusker Army Ammunition Plant," Final Report, Report No. DRXTH-AS-CR-82155, August 1982.

²Note: Uncontaminated soils from CHAAP exhibiting similar physical characteristics were used for testing the feed system.

³Based on sampling results from "Task 2. Incineration Test of Explosives-Contaminated Soils at Savanna Army Depot Activity, Savanna, Illinois," Final Report, Report Number DRXTH-TE-CR-84277, April 1984.

A photograph of LAAP Lagoon No. 4 is shown in Figure 4. the saturated soil was removed from Lagoon No. 4 using a tracked excavator (see Appendix E). The tracked excavator loaded the saturated soil into a 12-cubic yard capacity dump truck. The dump truck bed was elevated at an approximate 20-degree angle to promote draining of free liquid through the tail gate, allowing the liquid to drain directly back into Lagoon No. 4. After allowing adequate time for drainage of free liquid (typically overnight), the truck dumped the excavated soil into the bermed feed soil staging area adjacent to the test site.

3.2.1.1.2 CHAAP Soil. CHAAP soil was excavated and transported to the LAAP site in two 12-cubic yard capacity dump trucks. To avoid potential regulatory delays due to transporting explosives-contaminated soils, uncontaminated background soil was used. The soil was dumped at a staging area near the test site and covered with visquene to minimize moisture loss or gain. Prior to beginning the testing program the soil was loaded into the dump truck using the tracked excavator and transported to a separate bermed staging area adjacent to the test site.

3.2.1.2 Soil preparation. From this point on, the LAAP and CHAAP soils were handled in exactly the same manner. The soils were reclaimed from the feed soil staging area by the tracked excavator. The operator used the bucket of the tracked excavator to sift through the soil and identify any large debris that would require removal. A technician assisted the operator by manually removing any oversized debris. The technician also collected a grab sample from each bucket load to form a composite feed sample for each test run. The purpose of the composite feed sample was to allow analysis of feed soil moisture content, soil size distribution, and explosives content (LAAP soils only).

The tracked excavator then loaded the reclaimed feed soil directly into the live-bottom hopper. Soil spills were quickly washed into a drainage trench using a fire hose. The drainage trench discharged directly into pink water Lagoon No. 12. As an explosion and fire hazard safety precaution, the fire hose was also used to ensure that all mechanical equipment in contact with the explosives-contaminated soil remained wet.

3.2.2 Controlled at various levels. The two variables that were controlled at various levels to evaluate the impact upon system performance were soil feed rate and duration of the testing period.



Figure 4. LAAP lagoon no. 4.

3.2.2.1 Soil feed rate. The design soil feed rate for the materials handling feed system was 8,000 lb/hr. However, to fully evaluate the performance of the system, response variables were also measured at soil feed rates of 50 percent of the design rate (4,000 lb/hr) and 150 percent of the design rate (12,000 lb/hr). This allowed evaluation of system performance over the expected range of operation.

3.2.2.2 Duration of testing period. Generally, the test duration was 4 hours of continuous operation. For both soil types, however, one test run was conducted at the design feed rate (8,000 lb/hr) for 8 hours of continuous operation. The purpose of this longer duration testing was to evaluate how the system would perform over a typical operating shift rotation.

3.3 Response variables. Two response variables were measured separately for each of the three major system components, as shown in Table 2. They were the rotational speed of the screw conveyors and the screw conveyor torques (measured as motor amps) for each of the following:

- (a) Live bottom hopper.
- (b) Cross conveyor.
- (c) Feed conveyor.

3.3.1 Rotational speed of screw conveyors. The rotational speed of the screw conveyors is an important parameter since it relates directly to the conveyor tip speed. Allegany Ballistics Laboratory (see Appendix D) recommended that the conveyor tip speeds be maintained below 2 feet per second when handling explosives-contaminated soils. A summary of the potential rotational speeds and design operating range for each conveyor section of the feed system is provided below:

Description	Live bottom hopper	Cross conveyor	Feed conveyor
Range of settings for variable speed drive	0 - 7	0 - 7	0 - 7

Description	Live bottom hopper	Cross conveyor	Feed conveyor
Conveyor rotation speeds corresponding to the foregoing variable speed drive setting:			
Revolutions per minute (rpm)	0.6 - 4.2	16 - 88	18 - 106
Conveyor tip speed (ft/sec)	0.03 - 0.21	0.8 - 4.4	0.9 - 5.3
Conveyor rotational speeds used during the testing program:			
Revolutions per minute (rpm)	1.0 - 3.2	16 - 26	18 - 32
Conveyor tip speed (ft/sec)	0.03 - 0.17	0.8 - 1.3	0.9 - 1.6

Due to the relatively slow rotational speed of the screw conveyors, this response variable was measured by direct visual observation. Physical observation (i.e., counting the revolutions), combined with use of a stop watch to ensure accurate timing, allowed accurate estimation of screw conveyor rotational speeds.

3.3.2 Screw conveyor torque. Torque for each of the conveyors was measured indirectly by recording the respective drive motor current readings (in amperes) directly from the meters for each drive motor located on the control panel.



4. SCHEDULE OF TESTS AND RUNS

To maximize the information gained and minimize the downtime during the pilot study, the schedule of testing activities was carefully planned. The objective of this section is to outline the following:

- (a) Overall test schedule.
- (b) Test run sequence/schedule of daily activities.

4.1 Overall test schedule. A schedule of test runs and soil type, feed rate, and test duration are shown on Table 4. As shown, test run No. 2 was not completed. During operation, a limit switch on the cross conveyor malfunctioned (i.e., indicated motor amps on cross conveyor were above the set point) and resulted in repeated shutdowns of the hopper conveyor. The reason for the shutdowns was not immediately apparent and much time was spent in investigating the problem. Consequently, there was insufficient time to complete a 4-hour test run. It was decided to rerun this test at the end of the project (as Test Run No. 8). The limit switch was properly adjusted and resulted in no further system shutdowns. In retrospect, although the problem resulted in downtime, it demonstrated the effectiveness of the system for safely discontinuing soil feed in the event of a system failure and the need for panel indicator lights to remain lighted after the warning annunciator is silenced to determine which limit switch caused the shutdown.

Note that a 4-hour test run for LAAP soil was also not completed. Originally, as with the CHAAP soil, two test runs were to be evaluated for the 8,000 lb/hr feed rate, a 4-hour run and an 8-hour steady-state run. The steady-state run presented a greater challenge to the feed system and, since nothing significant was learned when both the short and long duration runs were conducted on CHAAP soil, the short test run for LAAP soil was deleted from the schedule.

4.2 Test run sequence/schedule of daily activities. The typical daily schedule for system testing during the 4-hour test runs was as follows:



TABLE 4. SCHEDULE OF TEST RUNS

Test run number	Date (1986)	Soil type	Feed rate (lb/hr)	Test run duration (hours)	
				Target	Actual
1	June 30	CHAAP	4,000	4	4
2	June 31	CHAAP	12,000	4	2*
3	July 1	CHAAP	8,000	4	4
4	July 2	CHAAP	8,000	8	8
5	July 8	LAAP	4,000	4	5
6	July 8	LAAP	12,000	4	4.5
7	July 9	LAAP	8,000	8	8
8	July 10	CHAAP	12,000	4	4.5

*Test Run No. 2 was not completed. This test was repeated as Test Run No. 8.

Activity	Duration
Feed uncontaminated soil	1 hour
Feed contaminated soil	4 hours
Feed uncontaminated soil	1 hour
Equipment cleanup/decontamination	<u>2 hours</u>
Total	8 hours

The typical daily schedule for system testing during the 8-hour test runs was as follows:

Activity	Duration
Feed uncontaminated soil	1 hour
Feed contaminated soil	8 hours
Feed uncontaminated soil	1 hour
Equipment cleanup/decontamination	<u>2 hours</u>
Total	12 hours

Testing was also performed under upset- and/or failure-mode conditions. The objective of this phase of testing was to check all of the alarm systems.

A summary of the alarm systems tested, the simulated cause of the alarm, the system response, and the appropriate operator response is provided in Table 5.



TABLE 5. FEED SYSTEMS OPERATIONAL SAFETY CONTROLS
UPSET- AND/OR FAILURE-MODE TESTING

Description	Potential cause	System response	Operator response
1. Low motor amps in live bottom hopper	Hopper empty or at very low level. Bridging in hopper.	Alarm.	If hopper is empty or at very low level, feed background soil. If not, shut down system and clear bridging in hopper.
2. High motor amps in live bottom hopper	Hopper overloaded. Partial jamming of screws.	Alarm.	Continue operating without feeding any more soil to hopper. Monitor motor amps closely.
3. High-high motor amps in live bottom hopper	Jam in live bottom hopper screws.	Alarm. Screws will automatically reverse partial revolution and attempt to restart. If jam persists, prior procedures will repeat once, then live bottom hopper will shut down.	If live bottom hopper shuts down, remove access door and clear jam. Restart system and monitor motor amps closely.



TABLE 5. (CONTINUED)

Description	Potential cause	System response	Operator response
4. High motor amps in cross conveyor	Conveyor over-loaded.	Alarm.	Monitor motor amps closely.
	Partial jamming of screws.	Live bottom hopper will shut down.	Restart live bottom hopper once motor amps decrease to acceptable level.
		Live bottom hopper must be manually restarted once cross conveyor motor amps decrease to acceptable level.	
5. High-high motor amps in cross conveyor	Jam in cross conveyor screws.	Alarm	Monitor motor amps closely.
		Live bottom hopper will shut down.	Restart live bottom hopper once motor amps decrease to acceptable level.
		Cross conveyor screws will automatically reverse partial revolution and attempt to restart.	If jam persists and cross conveyor shuts down, shut down system and clear the jam.
		Live bottom hopper must be manually restarted once cross conveyor motor amps decrease to acceptable level.	Restart cross conveyor, then live bottom hopper, and monitor motor amps closely.
		If jam persists, prior procedure will repeat once, then cross conveyor will shut down.	



TABLE 5. (CONTINUED)

Description	Potential cause	System response	Operator response
6. High motor amps in feed conveyor	Conveyor over-loaded.	Alarm.	Monitor motor amps closely.
	Partial jamming of screws.	Live bottom hopper and cross conveyor will shut down. Cross conveyor then live bottom hopper must be restarted manually once feed conveyor motor amps decrease to acceptable level.	Restart cross conveyor, then live bottom hopper once feed conveyor motor amps decrease to acceptable level.
7. High-high motor amps in feed conveyor	Jam in feed conveyor screws.	Alarm.	Monitor motor amps closely.
		Live bottom hopper and cross conveyor will shut down.	Restart cross conveyor, then live bottom hopper once motor amps decrease to acceptable level.
		Feed conveyor screws will automatically reverse partial revolution and attempt to restart. Cross conveyor, then live bottom hopper must be manually restarted once feed conveyor motor amps decrease to acceptable level.	If jam persists and feed conveyor shuts down, shut down system and clear the jam. Restart feed conveyor, then restart cross conveyor and live bottom hopper and monitor motor amps closely.



TABLE 5. (CONTINUED)

Description	Potential cause	System response	Operator response
		If jam persists, prior procedure will repeat once, then feed conveyor will shut down.	
8. Emergency shutdown	Loss of electrical power.	Alarm.	Determine reason for shutdown.
	Operator hits "panic" button.	System will shut down automati- cally. System must be manually re- started once the reason for shutdown has been corrected.	If due to loss of electrical power, ensure that electrical power is reinstated prior to attempting to restart system. If due to operator initiation, ensure that the reason for shutdown has been corrected. Initiate equipment startup procedures.



5. DATA ANALYSIS

5.1 Presentation of CHAAP Data

5.1.1 4,000-lb/hr feed system test (Test Run No. 1). The data for the 4,000-lb/hr CHAAP feed system test (Run No. 1) are summarized in Table 6. Figure 5 is a graphic plot of the variation in actual feed rate during Test Run No. 1 compared to the target feed rate of 4,000 lb/hr. Figure 6 provides a graphic plot of the variation in motor amps for the hopper conveyor, cross conveyor, and feed conveyor during Test Run No. 1.

5.1.2 8,000 lb/hr feed system test (Test Run Nos 3 and 4). The data for the 4-hour, 8,000-lb/hr CHAAP feed system (Run No. 3) are summarized in Table 7. Graphic plots of the variation in actual feed rates and motor amps during Test Run No. 3 are presented in Figures 7 and 8, respectively.

The data for the 8-hour, 8,000-lb/hr CHAAP feed system test (Run No. 4) are summarized in Table 8. Graphic plots of the variation in actual feed rates and motor amps during Test Run No. 3 are presented in Figures 9 and 10, respectively.

5.1.3 12,000-lb/hr feed system test (Test Run No. 8). The data for the 12,000-lb/hr CHAAP feed system test (Run No. 8) are summarized in Table 9. Graphic plots of the variation in actual feed rates and motor amps during Test run No. 8 are presented in Figures 11 and 12, respectively.

5.2 Presentation of LAAP data

5.2.1 4,000-lb/hr feed system test (Test Run No. 5). The data for the 4,000-lb/hr LAAP feed system test (Test Run No. 5) are summarized in Table 10. Graphic plots of the variation in actual feed rates and motor amps are presented in Figures 13 and 14, respectively.

5.2.2. 8,000-lb/hr feed system test (Test Run No. 7). The data for the 8-hour, 8,000-lb/hr LAAP feed system test (Run No. 7) are summarized in Table 11. Graphic plots of the variation in actual feed rates and motor amps during Test Run No. 7 are presented in Figures 15 and 16, respectively.

5.2.3 12,000-lb/hr feed system test (Test Run No. 6). The data for the 12,000-lb/hr LAAP feed system test (Run No. 6) are summarized in Table 12. Graphic plots of the variation in actual feed rates and motor amps during Test Run No. 6 are presented in Figures 17 and 18, respectively.

RUN 1
6/30/86
CHAAP SOIL
TARGET FEED: 4,000 LB/HR

Time (min- utes)	Duration of hopper fill cycle (minutes)	Net weight of soil in hopper (lb)	Feed rate (lb/ hr)	Feed conveyor		Cross conveyor		Live bottom hopper		Feed conveyor		Cross conveyor		Live bottom hopper	
				(%)	Motor amps	(%)	Motor amps	(%)	Motor amps	Drive setting (rpm)	Speed (rpm)	(%)	Drive setting (rpm)	Speed (rpm)	(%)
0				25	10.5	40	6.6	28	11.76	0.4	21	52	0	14.5	36
15				25	10.5	31	6.82	28	11.76	0.4	21	52	0	14.5	36
20	20	1,411	4,233												
30				25	10.5	31	6.82	28	11.76	0.4	21	52	0	14.5	36
40	20	1,405	3,915												
45				25	10.5	31	6.82	28	11.76	0.4	21	52	0	14.5	36
55	15	899	3,596												
60				25	10.5	32	7.04	29	12.18	0.4	21	52	0	14.5	36
75	20	1,337	4,011												
90				25	10.5	31	6.82	28	11.76	0.4	21	52	0	14.5	36
95	20	1,361	4,053												
105				25	10.5	32	7.04	29	12.18	0.4	21	52	0	14.5	36
120	25	1,683	4,039												
135				25	10.5	34	7.48	30	12.6	0.4	21	52	0	14.5	36
147	20	1,214	3,651												
150				25	10.5	33	7.26	30	12.6	0.4	21	52	0	14.5	36
160	20	1,433	4,299												
165				25	10.5	33	7.26	30	12.6	0.4	21	52	0	14.5	36
180	20	1,196	3,588												
195				26	10.92	33	7.26	29	12.18	0.4	21	52	0	14.5	36
200	26	1,248	3,714												
210				25	10.5	38	8.36	28	11.76	1.1	30	75	1.0	26	65
220	20	1,332	4,026												
225				25	10.5	38	8.36	28	11.76	1.1	30	75	1.0	26	65
240	20	1,253	3,759												

(%) indicates percent of full load motor amps. Full load motor amps are as follows: feed conveyor - 42 amps, cross conveyor - 22 amps, and hopper conveyor - 32 amps.

(%) indicates percent of maximum safe conveyor tip speed of 2 feet per second (40 rpm).

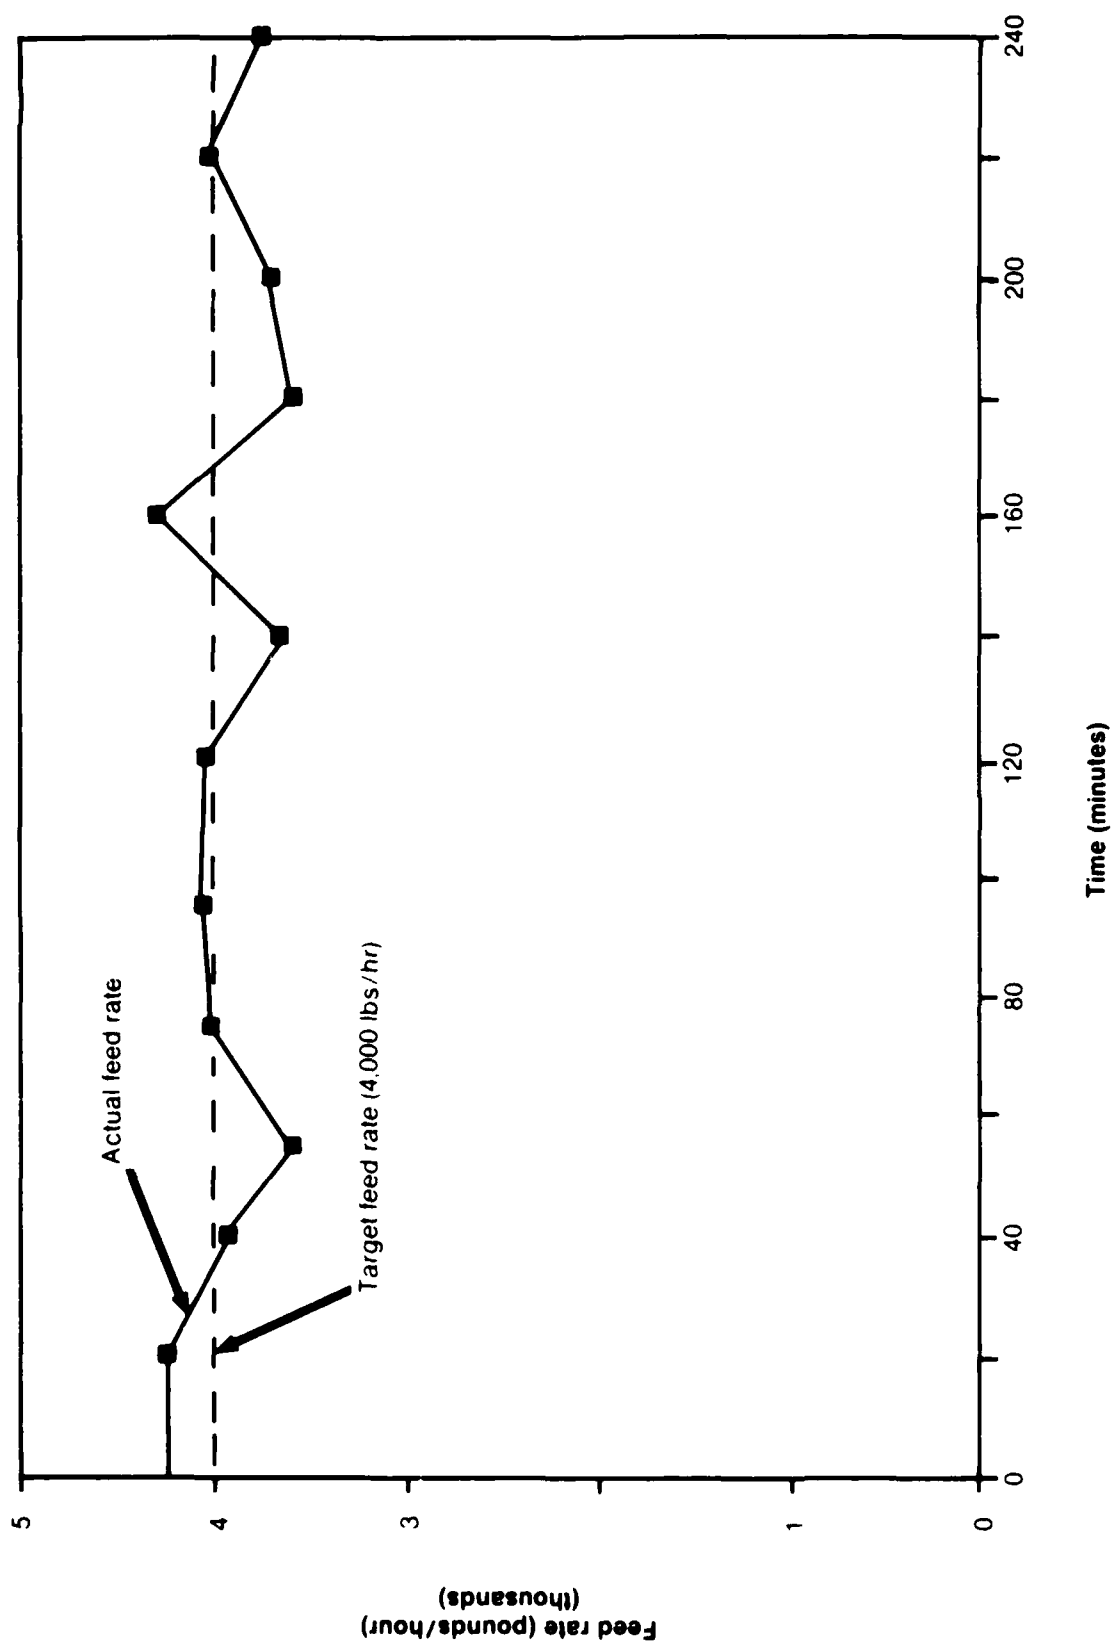


Figure 5. Feed rate during test run no. 1, CHAAP soil, 4,000 lb./hr.

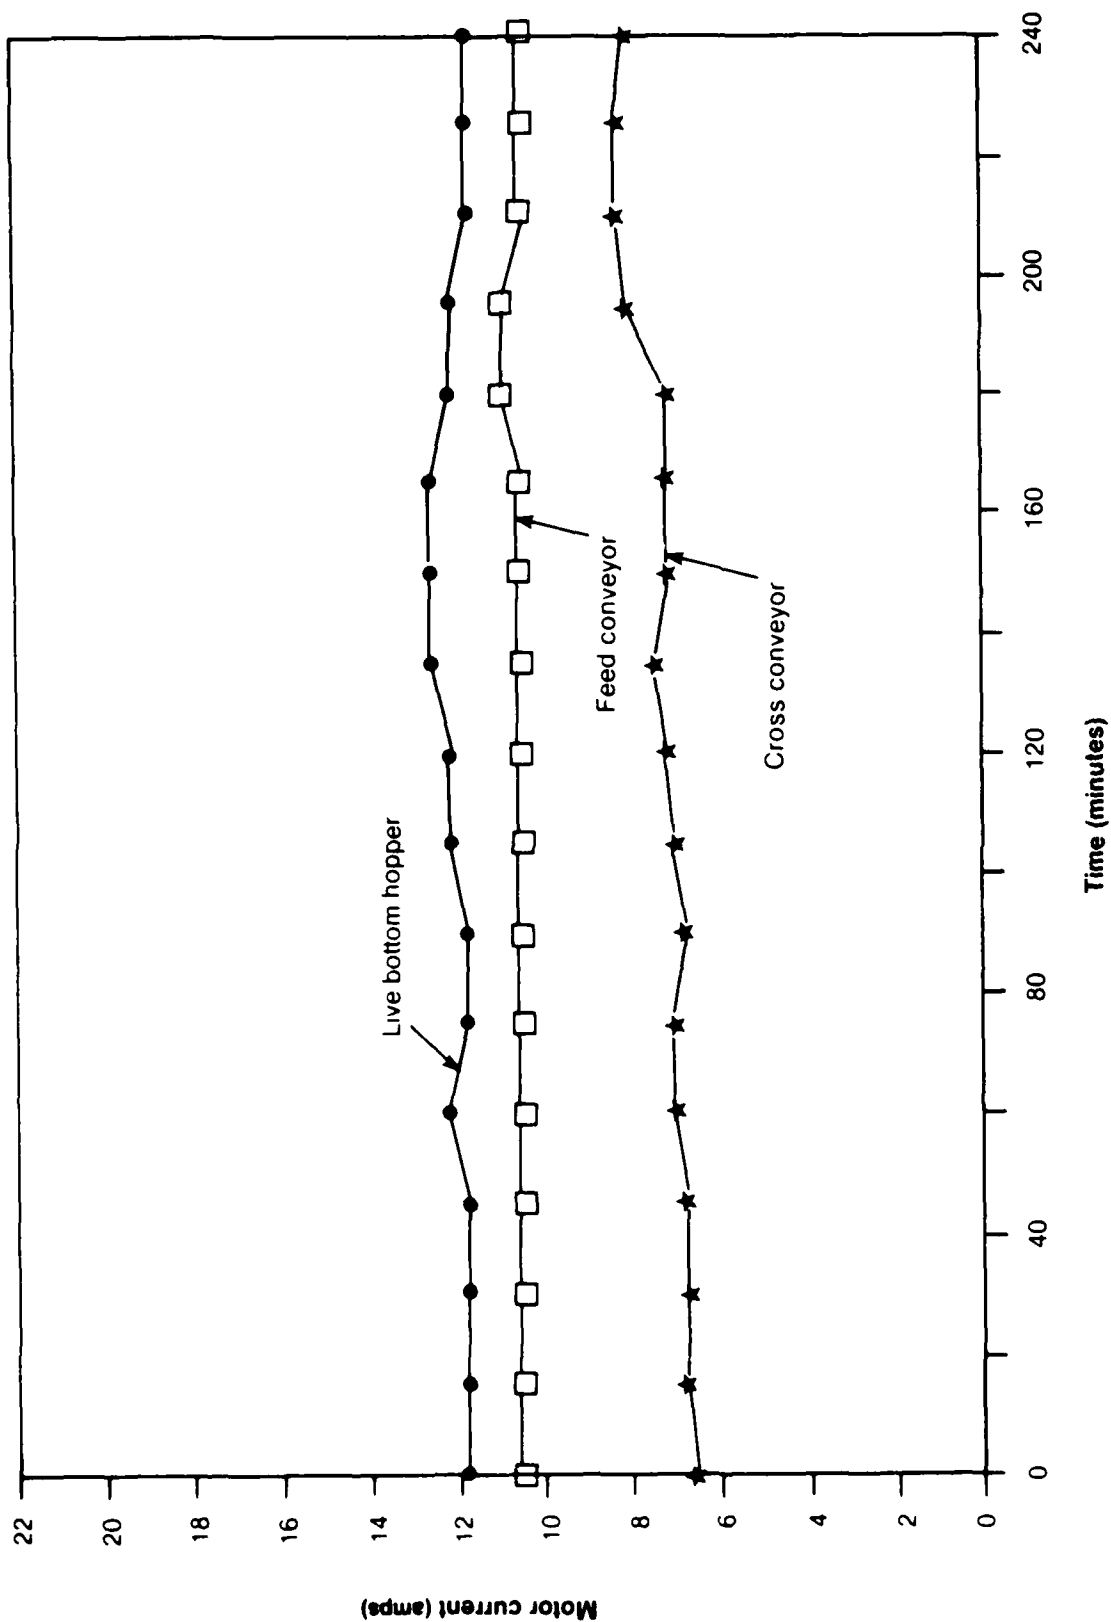


Figure 6. Motor current during test run no. 1, CHAAP soil, 4,000 lb./hr.

RUN 3
7/1/86
CHAAP SOIL
TARGET FEED: 8,000 LB/HR (4-HOUR RUN)

Time (minutes)	Duration of hopper cycle (minutes)	Net weight of soil in hopper (lb)	Feed rate (lb/ hr)	Feed conveyor		Cross conveyor		Live bottom hopper		Feed conveyor		Cross conveyor		Live bottom hopper	
				(%)	amps	(%)	amps	(%)	amps	Drive Speed setting (rpm)	(%)	Drive Speed setting (rpm)	(%)	Drive Speed setting (rpm)	(%)
0				25	10.5	40	8.8	31	13.02	1.1	30	75	1.0	26	65
10	10	1,325	7,950	25	10.5	42	9.24	32	13.44	1.1	30	75	1.0	26	65
15				25	10.5	43	9.46	32	13.44	1.1	30	75	1.0	26	65
20	10	1,374	8,244	25	10.5	40	8.8	30	12.6	1.1	30	75	1.0	26	65
30	10	1,381	8,286	25	10.5	40	8.8	32	13.44	1.1	30	75	1.0	26	65
40	10	1,403	8,418	25	10.5	40	8.8	32	13.44	1.1	30	75	1.0	26	65
45				25	10.5	40	8.8	32	13.44	1.1	30	75	1.0	26	65
50	10	1,326	7,956	25	10.5	40	8.8	32	13.44	1.1	30	75	1.0	26	65
60	10	1,331	7,986	25	10.5	40	8.8	32	13.44	1.1	30	75	1.0	26	65
71	11	1,468	7,920	25	10.5	40	8.8	32	13.44	1.1	30	75	1.0	26	65
75				25	10.5	40	8.8	32	13.44	1.1	30	75	1.0	26	65
80	9	1,195	7,967	25	10.5	40	8.8	32	13.44	1.1	30	75	1.0	26	65
90				25	10.5	40	8.8	32	13.44	1.1	30	75	1.0	26	65
91	11	1,451	7,915	26	10.92	40	8.8	32	13.44	1.1	30	75	1.0	26	65
100	9	1,166	7,773	26	10.92	42	9.24	32	13.44	1.1	30	75	1.0	26	65
105	11	1,457	7,947	26	10.92	42	9.24	32	13.44	1.1	30	75	1.0	26	65
120	10	1,381	8,286	26	10.92	42	9.24	32	13.44	1.1	30	75	1.0	26	65
121	9	1,167	7,780	26	10.92	42	9.24	32	13.44	1.1	30	75	1.0	26	65
135				26	10.92	42	9.24	32	13.44	1.1	30	75	1.0	26	65
140	10	1,223	7,338	26	10.92	41	9.02	32	13.44	1.1	30	75	1.0	26	65
150	10	1,320	7,926	26	10.92	41	9.02	32	13.44	1.1	30	75	1.0	26	65
160	10	1,239	7,434	26	10.92	42	9.24	32	13.44	1.1	30	75	1.0	26	65
165				26	10.92	42	9.24	32	13.44	1.1	30	75	1.0	26	65
170	10	1,320	8,220	26	10.92	41	9.02	32	13.44	1.1	30	75	1.0	26	65
179	9	1,226	8,173	26	10.92	41	9.02	32	13.44	1.1	30	75	1.0	26	65
180	11	1,406	7,669	26	10.92	42	9.24	32	13.44	1.1	30	75	1.0	26	65
195				26	10.92	42	9.24	32	13.44	1.1	30	75	1.0	26	65
200	10	1,321	7,926	26	10.92	43	9.46	32	13.44	1.1	30	75	1.0	26	65
210	10	1,334	8,004	27	11.34	44	9.68	32	13.44	1.1	30	75	1.0	26	65
220	10	1,282	7,692	27	11.34	44	9.68	32	13.44	1.1	30	75	1.0	26	65
225				27	11.34	43	9.46	29	12.18	1.1	30	75	1.0	26	65
230	10	1,384	8,304	27	11.34	43	9.46	29	12.18	1.1	30	75	1.0	26	65
240	10	1,353	8,118	27	11.34	43	9.46	29	12.18	1.1	30	75	1.0	26	65

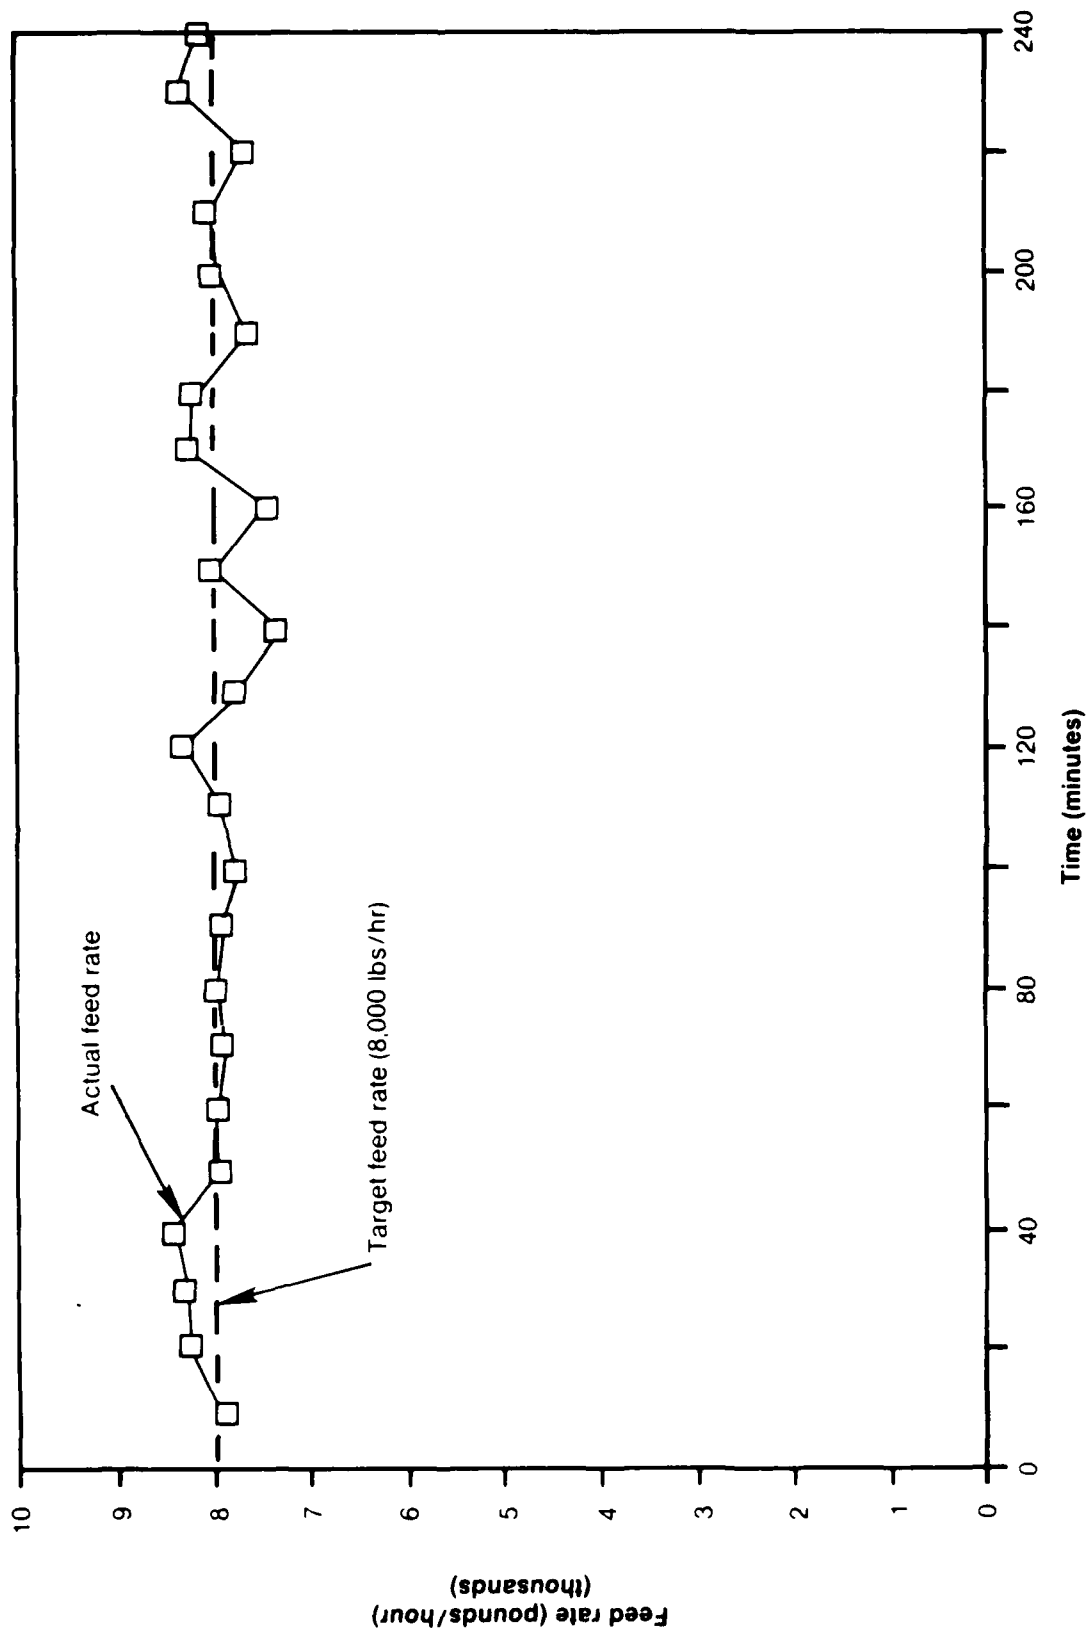


Figure 7. Feed during test run no. 3, CHAAP soil, 8,000 lb./hr., 4-hour test.

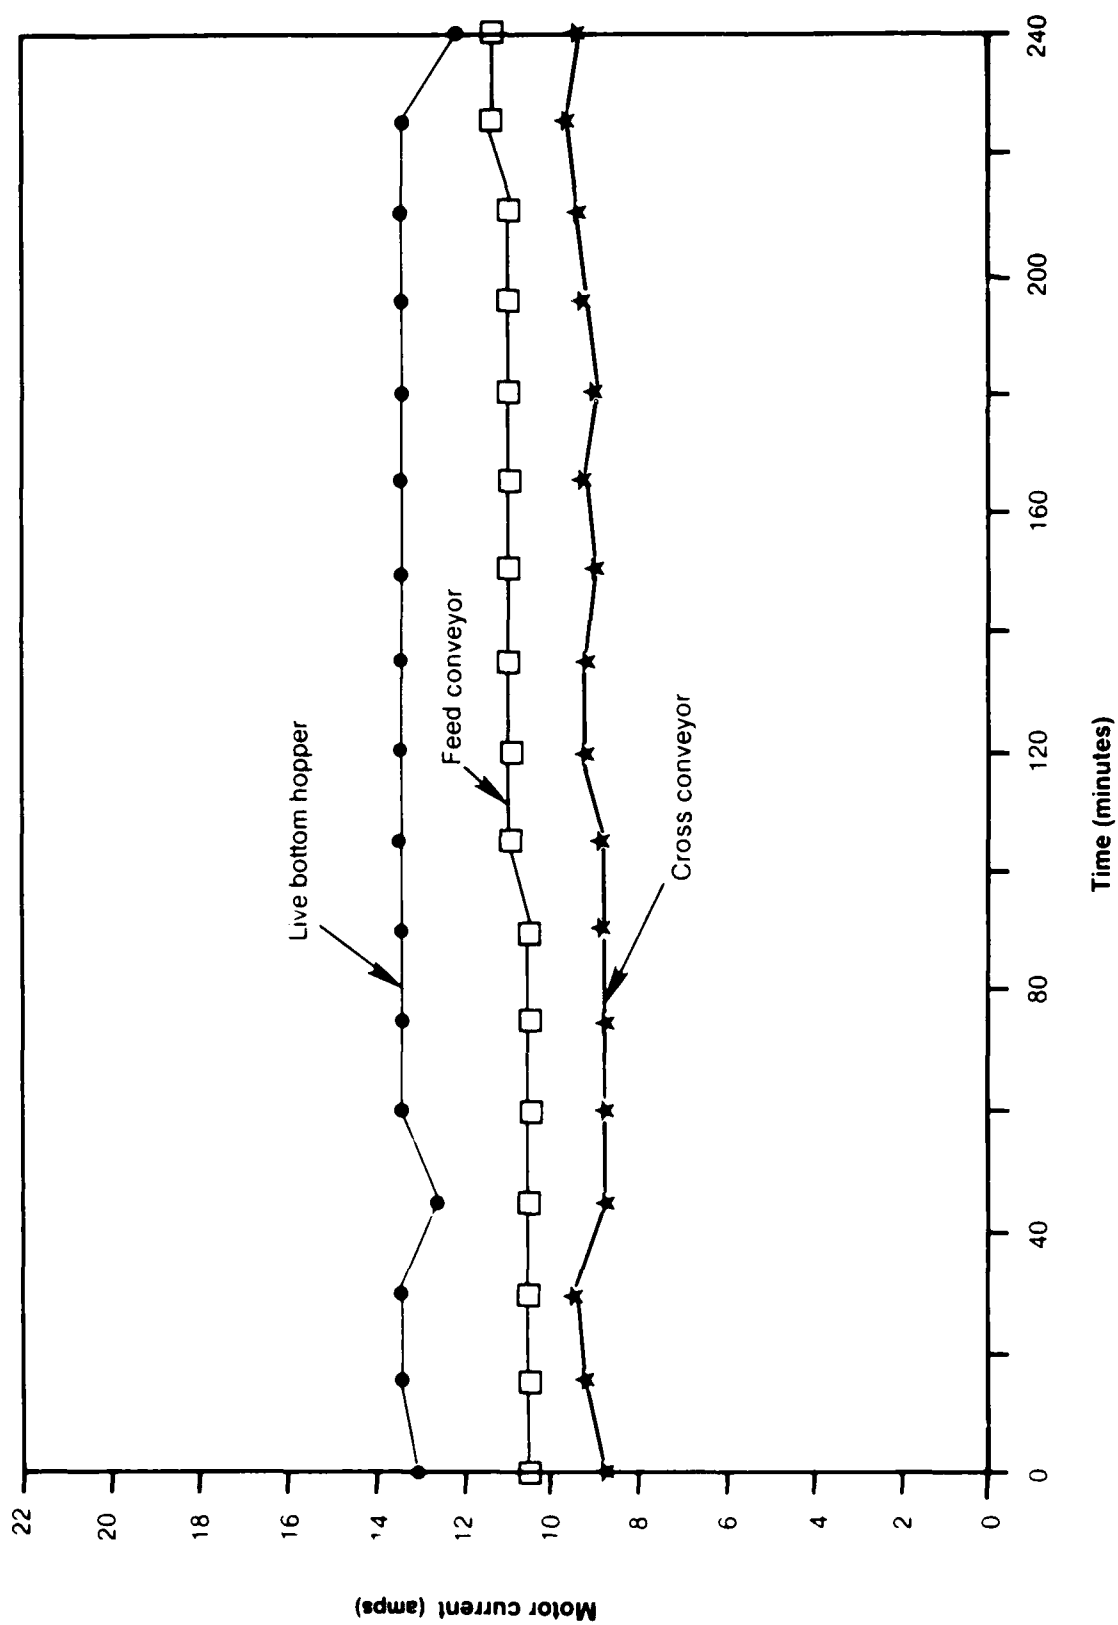


Figure 8. Motor current during test run no. 3, CHAAP soil, 8,000 lb./hr., 4-hour test.

RUN 4
7/2/86
CHAAP SOIL
TARGET FEED: 8,000 LB/HR (8-HOUR RUN)

Time (minutes)	Duration of hopper fill cycle (minutes)	Net weight of soil in hopper (lb)	Feed rate (lb/ hr)	Feed conveyor		Cross conveyor		Live bottom hopper		Feed conveyor		Cross conveyor		Live bottom hopper	
				(%)	amps	(%)	amps	(%)	amps	Drive setting (rpm)	Speed (rpm)	(%)	amps	Drive setting (rpm)	Speed (rpm)
0				25	10.5	45	9.9	30	12.6	1.1	30	75	1.0	26	65
10	10	1,302	7,812	25	10.5	45	9.9	30	12.6	1.1	30	75	1.0	26	65
15				25	10.5	45	9.9	30	12.6	1.1	30	75	1.0	26	65
20	10	1,275	7,650	25	10.5	45	9.9	30	12.6	1.1	30	75	1.0	26	65
30	10	1,378	8,268	25	10.5	45	9.9	30	12.6	1.1	30	75	1.0	26	65
40	10	1,375	8,250	25	10.5	45	9.9	30	12.6	1.1	30	75	1.0	26	65
45				25	10.5	45	9.9	30	12.6	1.1	30	75	1.0	26	65
50	10	1,180	7,080	25	10.5	48	10.56	30	12.6	1.1	30	75	1.0	26	65
60	10	1,241	7,446	25	10.5	50	11.0	30	12.6	1.1	30	75	1.0	26	65
70	10	1,214	7,284	25	10.5	50	11.0	30	12.6	1.1	30	75	1.0	26	65
75				25	10.5	50	11.0	30	12.6	1.1	30	75	1.0	26	65
80	10	1,151	6,906	25	10.5	50	11.0	30	12.6	1.1	30	75	1.0	26	65
90				25	10.5	49	10.78	30	12.6	1.1	30	75	1.0	26	65
91	11	1,427	7,238	25	10.5	50	11.0	32	13.44	1.1	30	75	1.0	26	65
100	9	1,176	7,840	25	10.5	55	12.1	32	13.44	1.1	30	75	1.0	26	65
105				26	10.92	50	11.0	33	13.86	1.1	30	75	1.0	26	65
111	11	1,289	7,030	26	10.92	49	10.78	33	13.86	1.1	30	75	1.0	26	65
120	9	1,053	7,020	26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
130	10	1,417	8,502	26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
135				26	10.92	51	11.22	32	13.44	1.1	30	75	1.0	26	65
138	8	1,281	9,608	26	10.92	50	11.0	33	13.86	1.1	30	75	1.0	26	65
147	9	1,373	9,153	26	10.92	49	10.78	33	13.86	1.1	30	75	1.0	26	65
150				26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
156	9	1,318	8,787	26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
165	9	1,396	9,306	26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
176	11	1,236	7,410	26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
180				26	10.92	51	11.22	32	13.44	1.1	30	75	1.0	26	65
187	11	1,395	7,609	26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
195				26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
198	11	1,202	8,013	26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
207	9	1,200	8,000	26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
210				26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65
216	9	1,156	7,706	26	10.92	50	11.0	32	13.44	1.1	30	75	1.0	26	65

RUN 4
7/2/86
CHAAP SOIL
TARGET FEED: 8,000 LB/HR (8-HOUR RUN)

Time (min- utes)	Duration of hopper fill cycle (minutes)	Net weight of soil in hopper (lb)	Feed rate (lb/ hr)	Feed conveyor		Cross conveyor		Live bottom hopper		Feed conveyor		Cross conveyor		Live bottom hopper	
				(%)	Motor amps	(%)	Motor amps	(%)	Motor amps	Drive setting (ppm)	(%)	Drive setting (rpm)	(%)	Drive setting (rpm)	(%)
225	9	1,086	7,240	27	11.34	52	11.44	29	12.18	1.1	30	75	1.0	26	65
234	9	1,053	7,020	27	11.34	52	11.44	30	12.6	1.1	30	75	1.0	26	65
240	10	1,111	6,666												
244	9	1,102	7,347	26	10.92	55	12.1	30	12.6	1.1	30	75	1.0	26	65
253	9	1,150	7,667	26	10.92	53	11.66	30	12.6	1.1	30	75	1.0	26	65
255	9	1,099	7,326												
262	9	1,060	7,067	26	10.92	55	12.1	31	13.02	1.1	30	75	1.0	26	65
270	9	1,268	7,608	26	10.92	63	13.86	32	13.44	1.1	30	75	1.0	26	65
271	10	1,198	7,188	26	10.92	63	13.86	32	13.44	1.1	30	75	1.0	26	65
280	10	1,170	7,020	26	10.92	63	13.86	32	13.44	1.1	30	75	1.0	26	65
285	10	1,229	7,334	26	10.92	63	13.86	32	13.44	1.1	30	75	1.0	26	65
290	10	1,363	8,178	26	10.92	63	13.86	32	13.44	1.1	30	75	1.0	26	65
300	10	1,486	8,916												
310	10	1,472	8,832	26	10.92	60	13.2	32	13.44	1.1	30	75	1.0	26	65
315	10	1,581	9,486	27	11.34	48	10.56	30	12.6	1.1	30	75	1.0	26	65
320	10	1,314	7,884	28	11.76	53	11.66	32	13.44	1.1	30	75	1.0	26	65
325	10	1,504	9,024	29	12.18	53	11.66	32	13.44	1.1	30	75	1.0	26	65
330	10	1,512	9,072	28	11.76	53	11.66	28	11.76	1.1	30	75	1.0	26	65
340	10	1,437	8,622												
345	10	1,390	8,340	27	11.34	53	11.66	32	13.44	1.1	30	75	1.0	26	65
350	10	1,454	8,724	27	11.34	53	11.66	32	13.44	1.1	30	75	1.0	26	65
360	10	1,431	8,586	27	11.34	54	11.88	33	13.86	1.1	30	75	1.0	26	65
370	10	1,422	8,532												
375	10	1,379	8,274	28	11.76	55	12.1	32	13.44	1.1	30	75	1.0	26	65
380	10	1,303	7,818	29	12.18	55	12.1	30	12.6	1.1	30	75	1.0	26	65
390	10	1,240	7,440	28	11.76	56	12.42	30	12.6	1.1	30	75	1.0	26	65
400	10	1,513	8,058												
405	10														
410	10														
420	10														
430	10														
435	10														
440	10														
450	10														
460	10														
465	10														
470	10														
480	10														

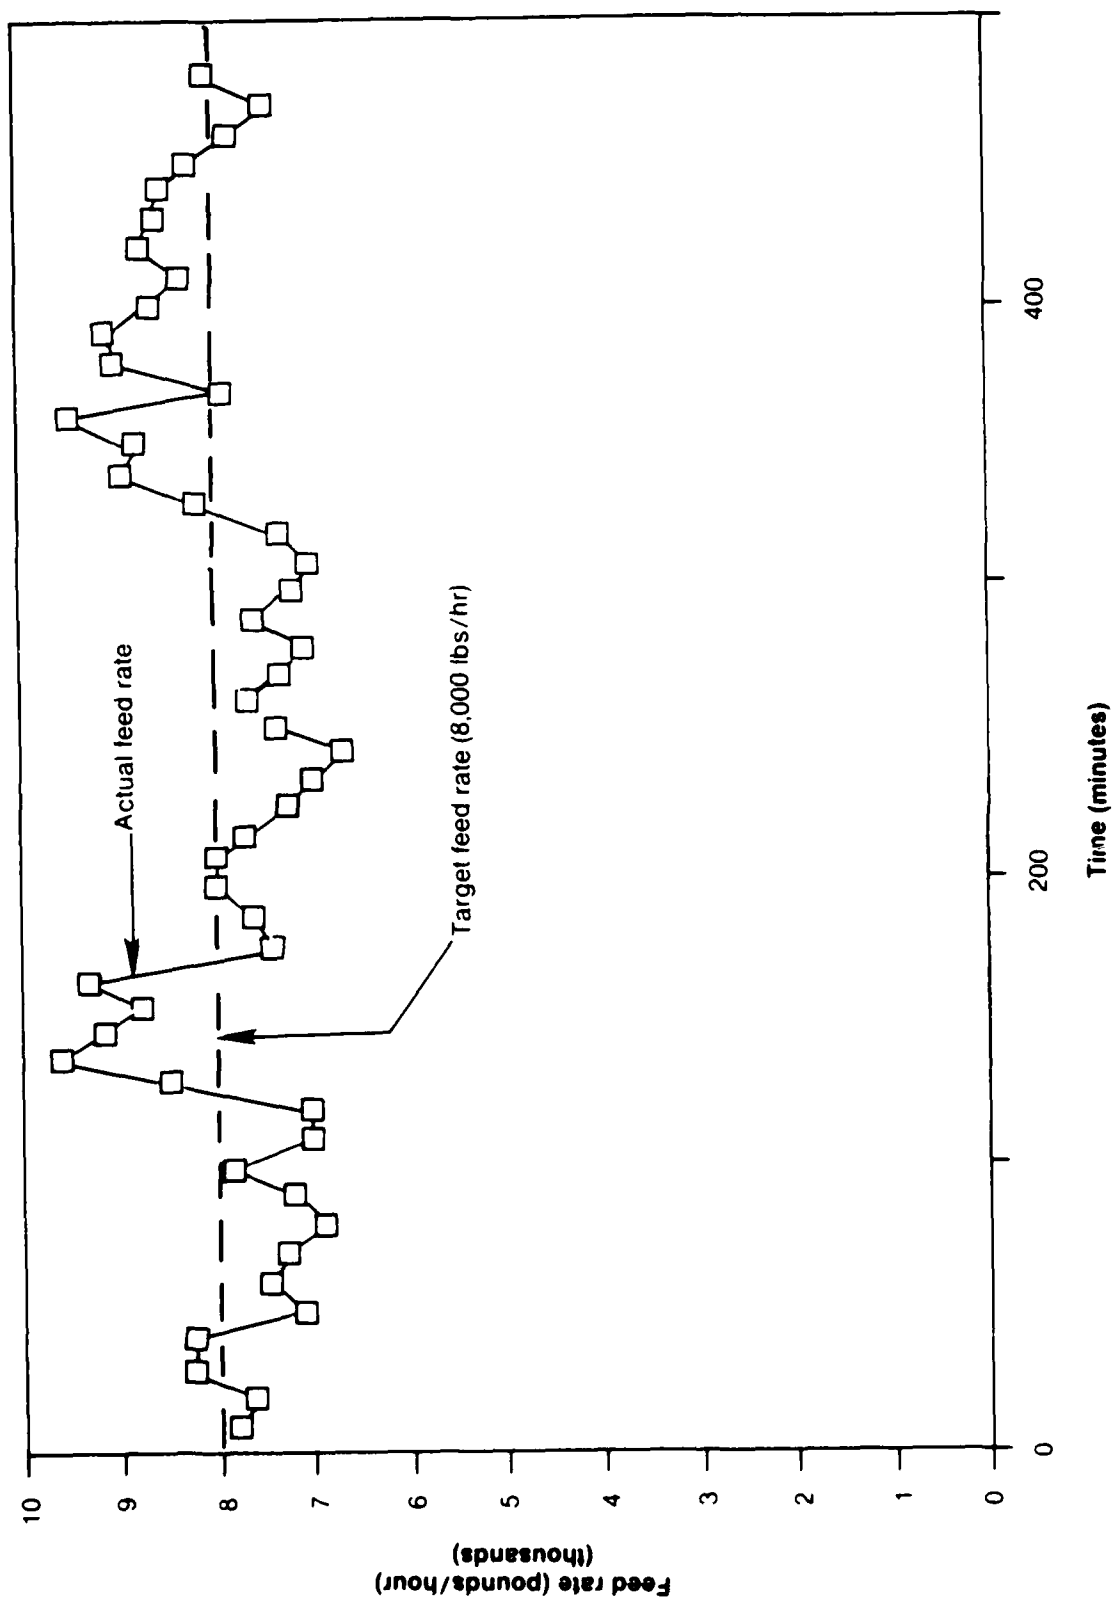


Figure 9. Feed rate during test run no. 4, CHAAP soil, 8,000 lb./hr., 8-hour test.

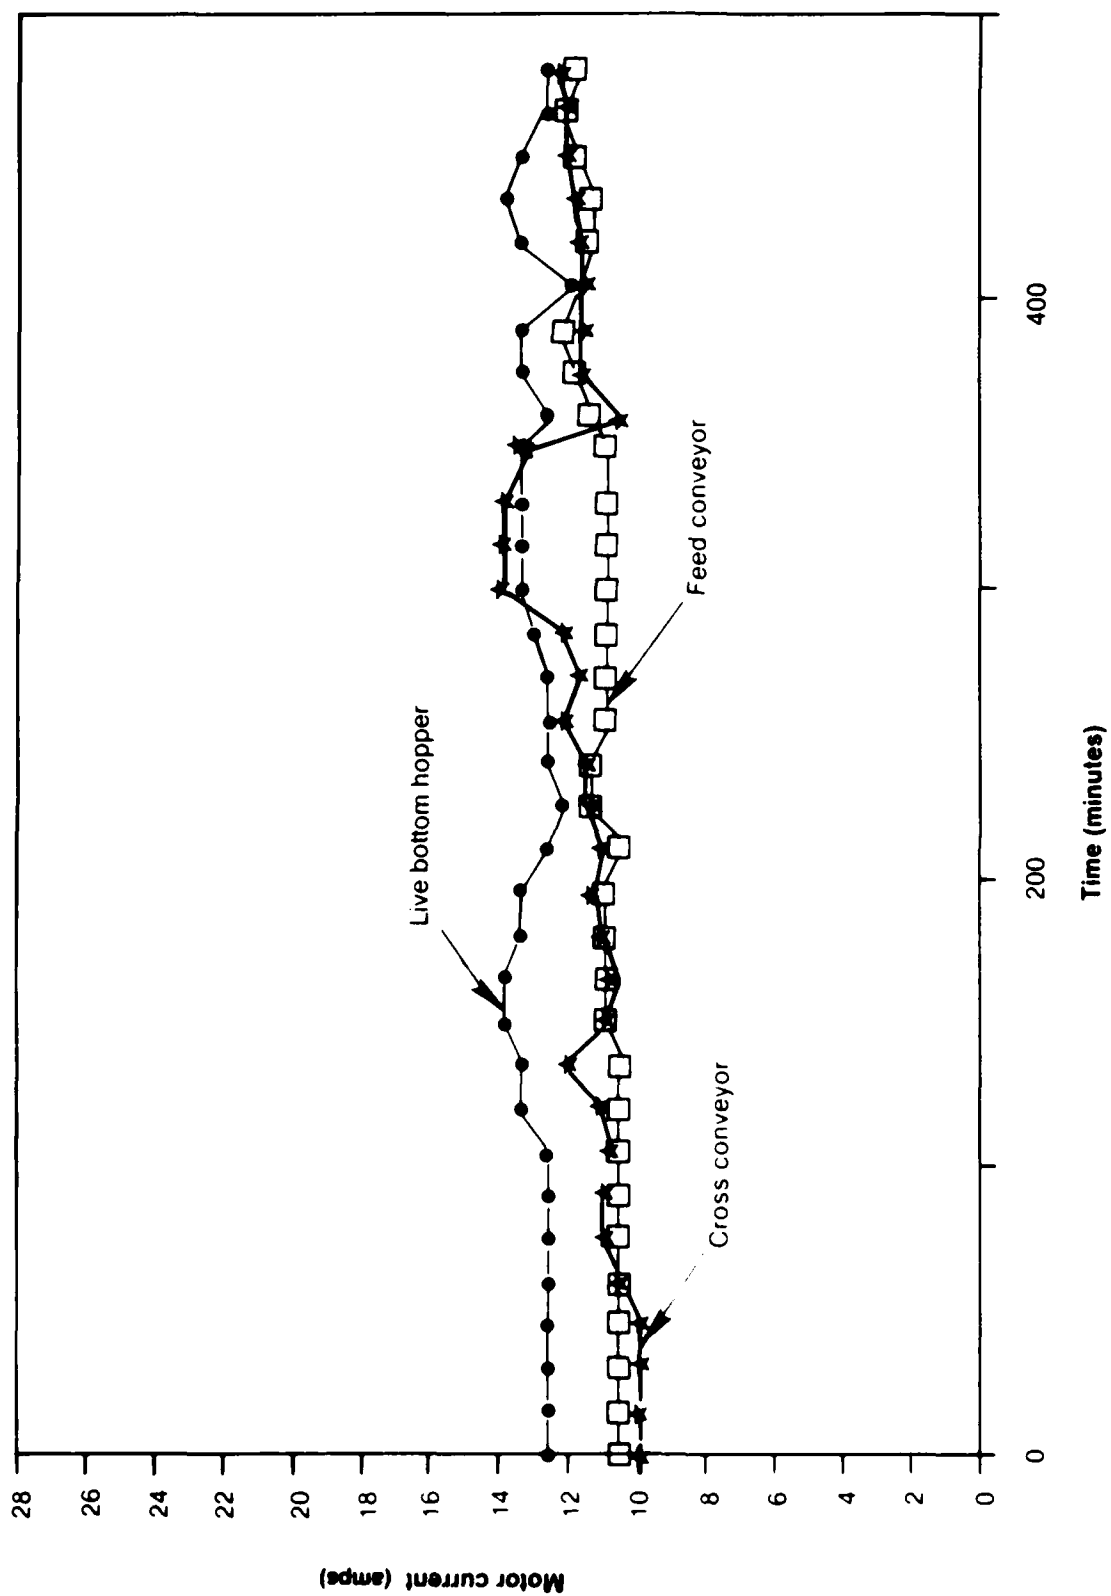


Figure 10. Motor current during test run no. 4, CHAAP soil, 8,000 lb./hr., 8-hour test.

RUN 8

7/10/86

CHAAP SOIL

TARGET FEED: 12,000 LB/HR

WESTON

Time (minutes)	Duration of hopper fill cycle (minutes)	Net weight of soil in hopper (lb)	Feed rate (lb/hr)	Feed conveyor		Cross conveyor		Live bottom hopper		Feed conveyor		Cross conveyor		Live bottom hopper	
				(%)	Motor amps	(%)	Motor amps	(%)	Motor amps	Drive setting (rpm)	Speed (ppm)	(%)	Drive setting (rpm)	Speed (rpm)	(%)
0															
9	9	1,678	11,187	25	10.5	45	9.9	38	15.96	1.1	30	75	1.0	26	65
15															
17	8	1,546	11,595	30	12.6	47	10.34	30	12.6	1.1	30	75	1.0	26	65
26	9	1,819	12,127												
30															
35	9	1,660	11,067	30	12.6	47	10.34	30	12.6	1.1	30	75	1.0	26	65
45	10	2,007	12,042	30	12.6	50	11.0	30	12.6	1.1	30	75	1.0	26	65
54	9	1,662	11,080												
60															
63	9	1,783	11,886	27	11.34	45	9.9	27	11.34	1.1	30	75	1.0	26	65
72	9	1,661	11,073												
83	11	1,818	9,916												
90															
92	9	1,718	11,453	28	11.76	45	9.9	27	11.34	1.1	30	75	1.0	26	65
102	10	1,922	11,532												
105															
111	9	1,681	11,207	30	12.6	52	11.44	30	12.6	1.1	30	75	1.0	26	65
120	9	1,880	12,533	30	12.6	45	9.9	30	12.6	1.1	30	75	1.0	26	65
124	9	1,759	11,727												
148	9	1,849	12,327												
147	9	1,776	11,840												
150															
156	9	1,824	12,160	30	12.6	45	9.9	30	12.6	1.1	30	75	1.0	26	65
165	9	1,763	11,753	30	12.6	40	8.8	33	13.86	1.1	30	75	1.0	26	65
174	9	1,747	11,647												
180															
181	9	1,735	11,566	30	12.6	45	9.9	30	12.6	1.1	30	75	1.0	26	65
192	9	1,747	11,647												
202	10	1,818	10,908												
210															
212	10	1,964	11,784	30	12.6	45	9.9	30	12.6	1.1	30	75	1.0	26	65
215															
222	10	1,867	11,202	30	12.6	45	9.9	30	12.6	1.1	30	75	1.0	26	65
220															
232	10	1,952	11,712												
242	10	1,567	9,402												
252	10	1,802	10,812												

-38-

04/128

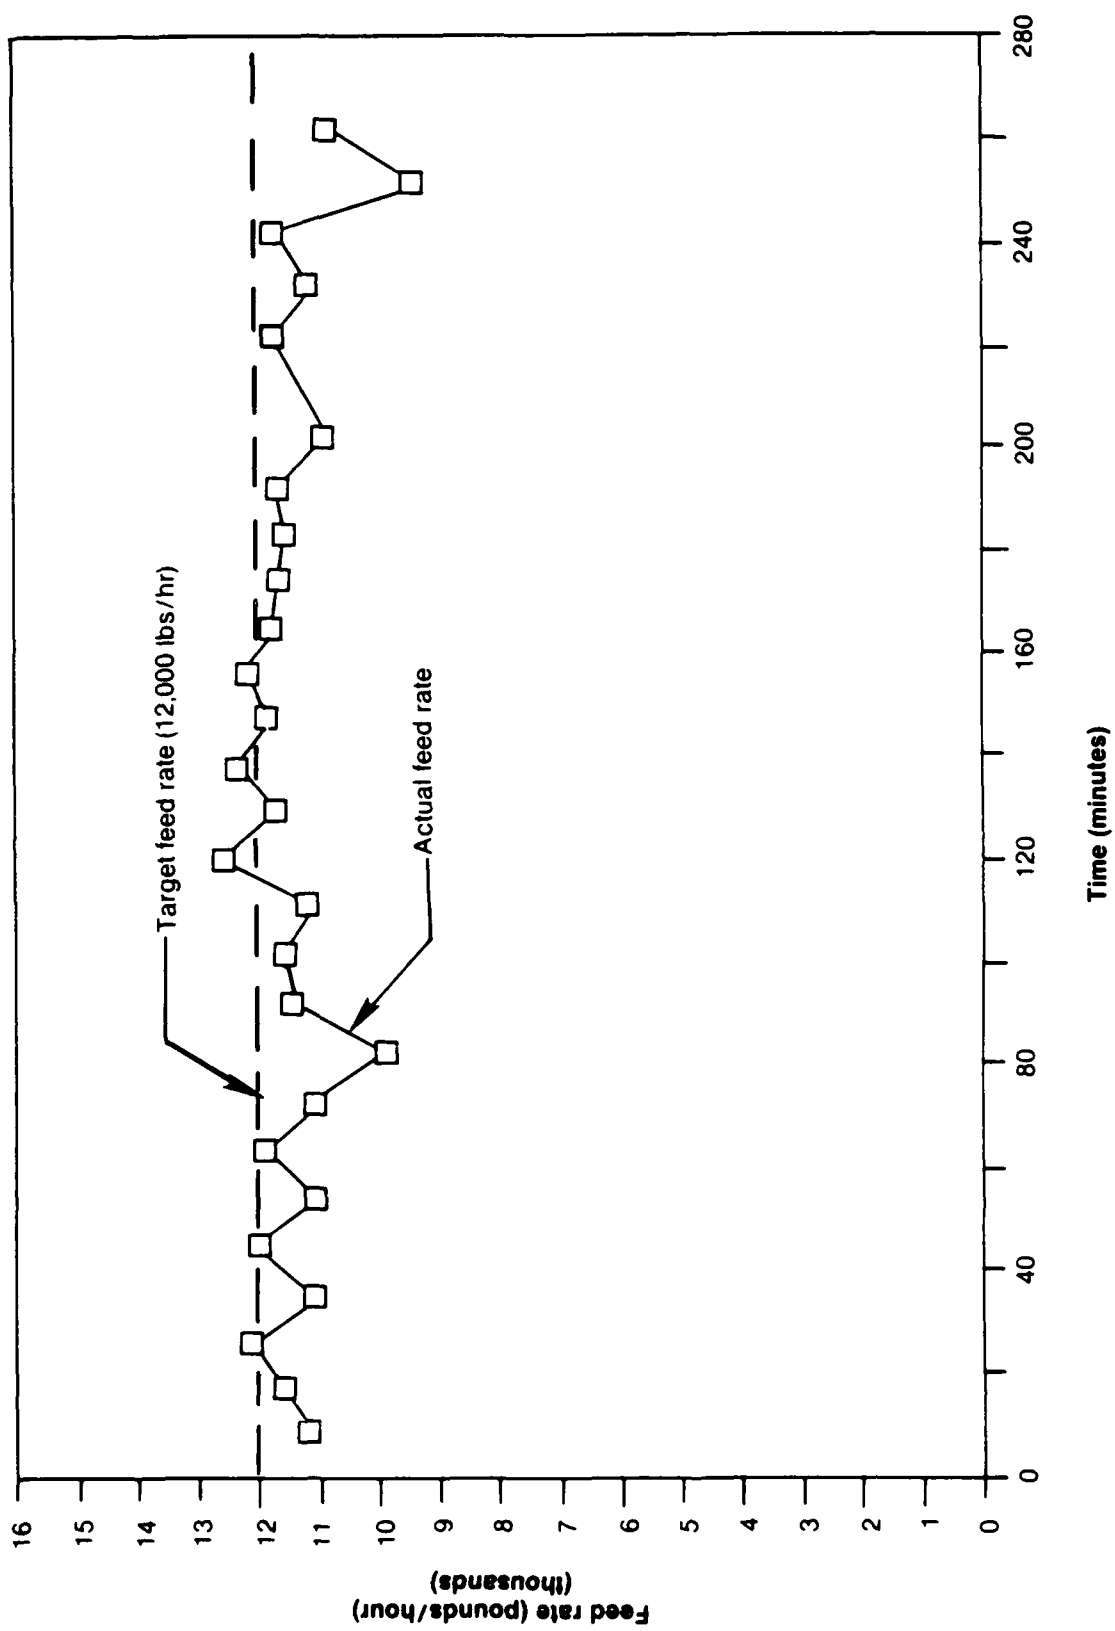


Figure 11. Feed rate during test run no. 8, CHAAP soil, 12,000 lb./hr.

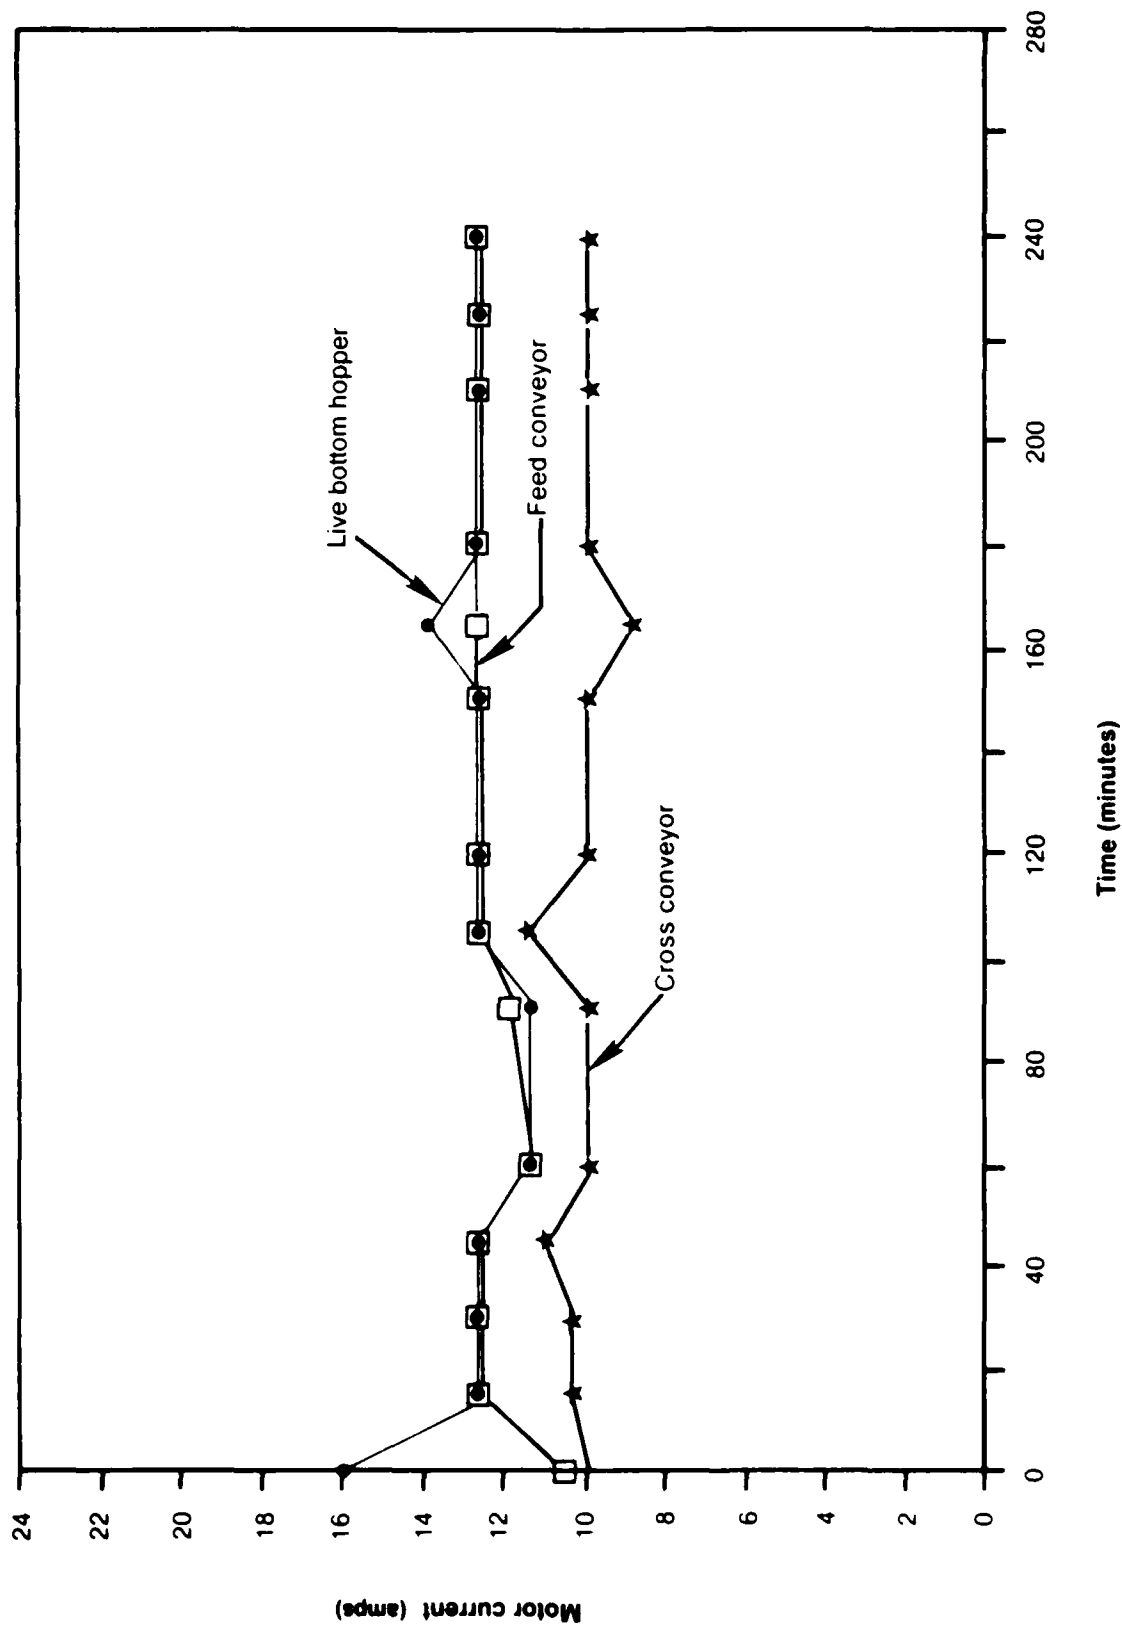


Figure 12. Motor current during test run no. 8, CHAAP soil, 12,000 lb./hr.

RUN 5

7/8/86

LAAP S01L

TARGET FEED: 4,000 LB/HR (8-HOUR RUN)

WESTON

Time (min- utes)	Duration of hopper fill cycle (minutes)	Net weight of soil in hopper (lb)	Feed rate (lb/ hr)	Feed conveyor		Cross conveyor		Live bottom hopper		Feed conveyor		Cross conveyor		Live bottom hopper				
				(%)	Motor amps	(%)	Motor amps	(%)	Motor amps	(%)	Drive Speed setting (rpm)	(%)	Drive Speed setting (rpm)	(%)	Drive Speed setting (rpm)			
0				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65	1.1	1.0	2.5
10	10	1,466	8,760															
18	8	1,240	9,018															
30	12	1,185	6,051															
40	10	1,142	6,852															
52	12	1,121	5,605															
62	10	803	4,818															
77	15	1,217	4,868															
92	15	1,428	5,712															
107	15	1,288	5,152															
122	15	1,106	4,424															
137	15	1,007	4,028															
143				25	10.5	29	6.38	25	10.5	1.1	30	75	1.0	26	65	0.4	0.75	1.9
152	15	1,013	4,052															
172	20	1,288	3,864															
188				25	10.5	27	5.94	25	10.5	1.1	30	75	1.0	26	65	0.48	0.7	1.8
192	20	1,462	4,386															
212	20	1,201	3,603															
218				25	10.5	27	5.94	25	10.5	1.1	30	75	1.0	26	65	0.35	0.7	1.8
232	20	1,176	3,528															
242	40	1,787	2,681															
292	20	1,582	4,746															
302	10	790	4,740															

-41-

019.8

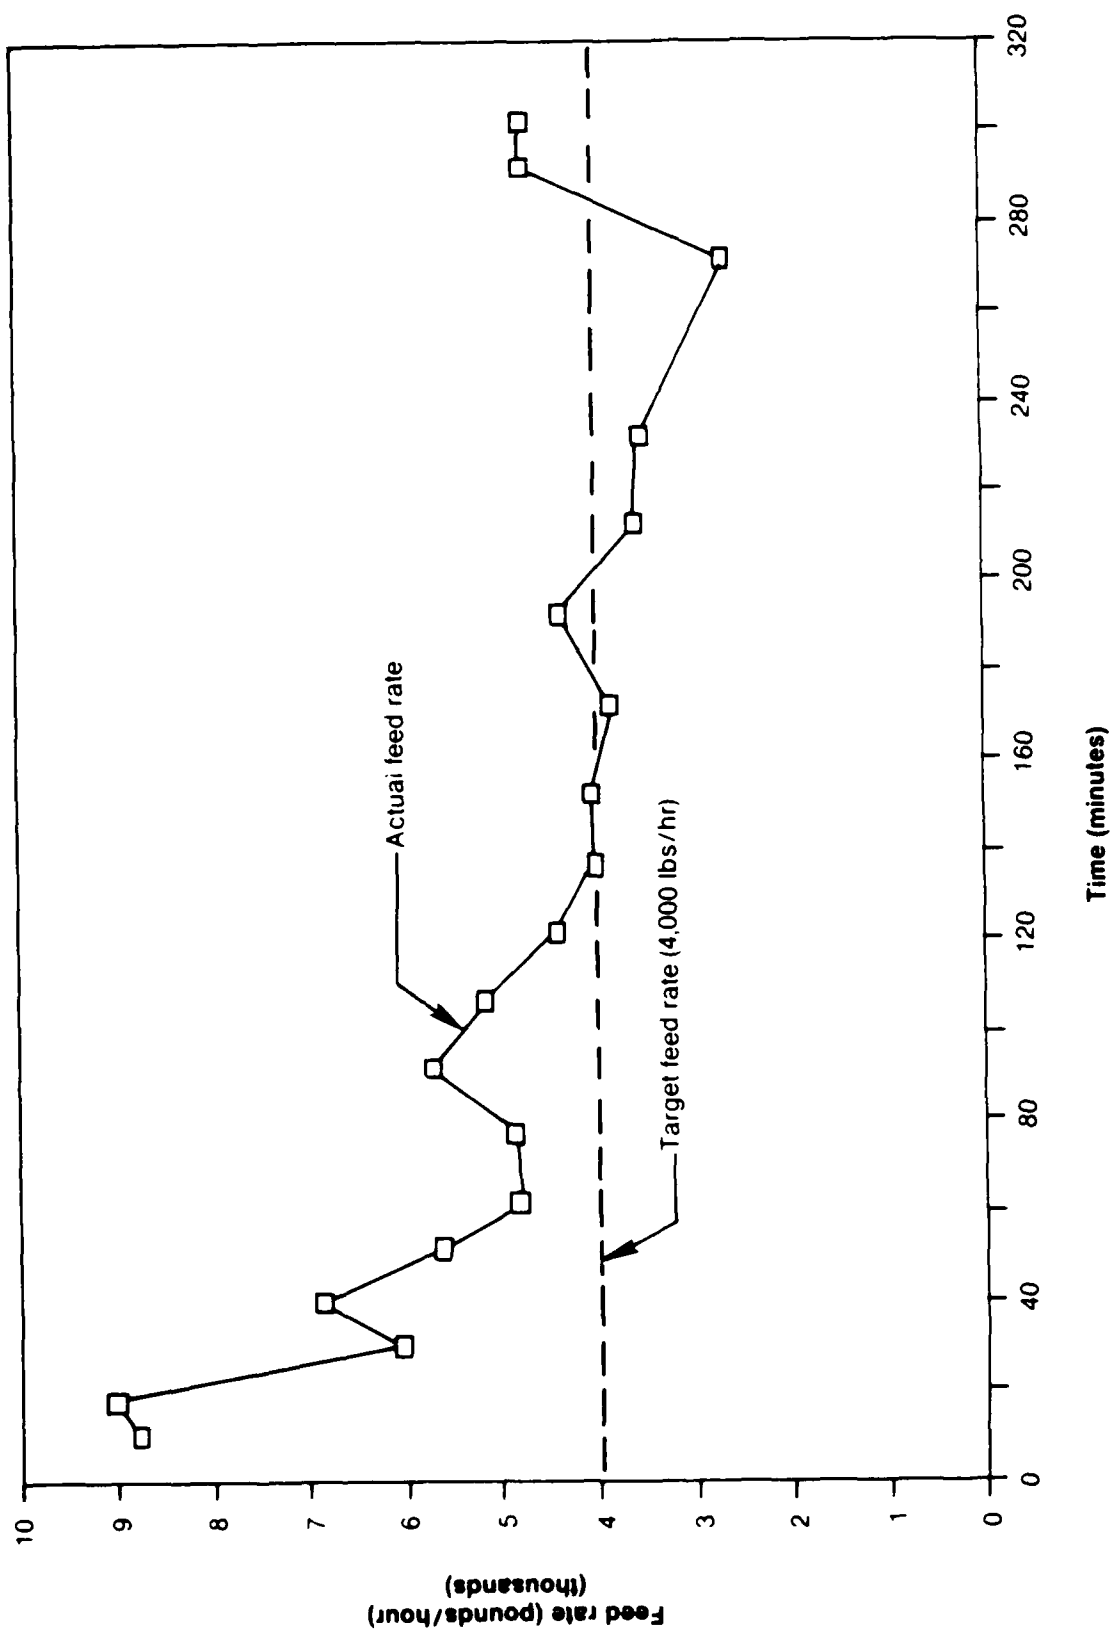


Figure 13. Feed rate during test run no. 5, LAAP soil, 4,000 lb./hr.

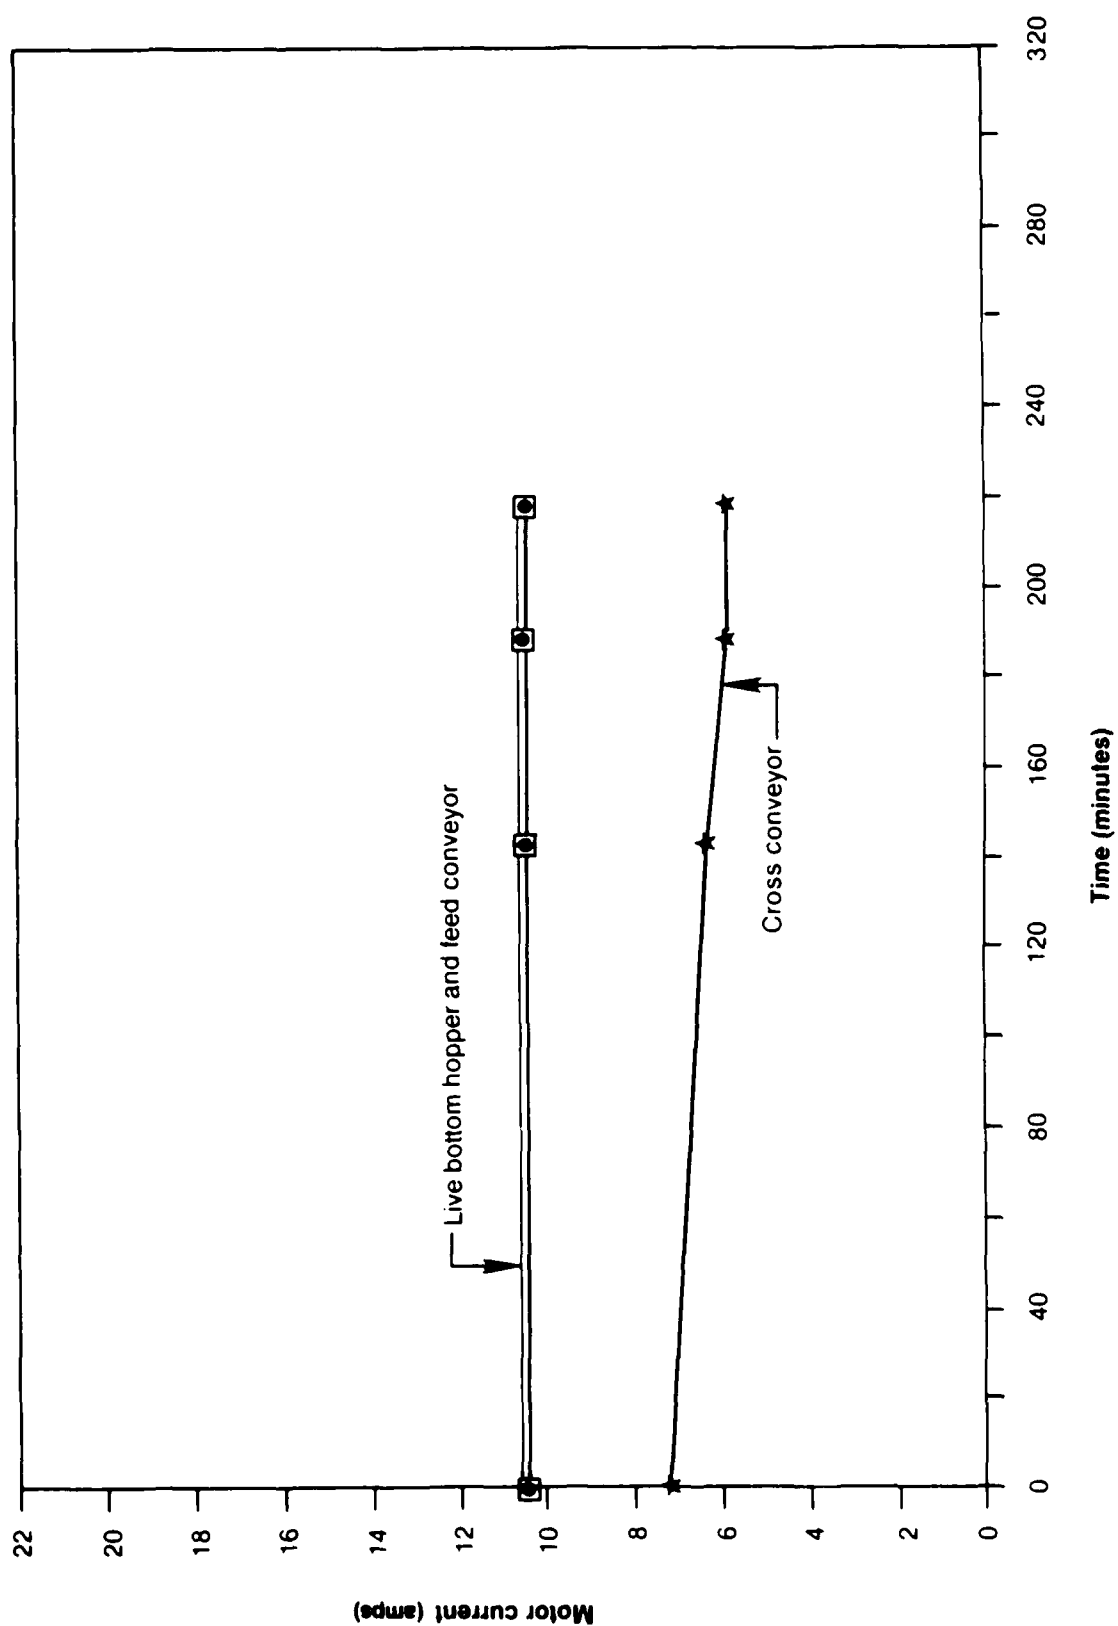


Figure 14. Motor current during test run no. 5, LAAP soil, 4,000 lb./hr.

RUN 7

7/9/86

LAAP SOIL

TARGET FEED: 8,000 LB/HR (8-HOUR RUN)

WESTON

Time (min- utes)	Duration of hopper fill cycle (minutes)	Net weight of soil in hopper (lb)	Feed rate (lb/ hr)	Feed conveyor			Cross conveyor			Live bottom hopper			Feed conveyor			Cross conveyor			Live bottom hopper		
				(%)	amps	Motor	(%)	amps	Motor	(%)	amps	Motor	Drive setting (ppm)	Speed (rpm)	(%)	Drive setting (rpm)	Speed (rpm)	(%)	Drive setting (rpm)	Speed (rpm)	(%)
0				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65	0.5	0.8	2.0			
10	10	2,083	12,498	25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65						
15				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65						
22	12	1,718	10,308	25	10.5	30	6.6	25	10.5	1.1	30	75	1.0	26	65	0.4	0.75	1.9			
30				25	10.5	30	6.6	25	10.5	1.1	30	75	1.0	26	65						
32	10	2,094	12,564																		
42	10	1,728	10,368																		
45				25	10.5	30	6.6	25	10.5	1.1	30	75	1.0	26	65	0.3	0.7	1.8			
52	10	1,198	7,188	25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65	0.3	0.7	1.8			
60				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65						
62	10	1,489	8,934																		
75	13	2,169	8,676																		
90	15	2,131	8,524	25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65	0.3	0.7	1.8			
105	15	2,168	8,672	25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65	0.3	0.7	1.8			
121	16	2,160	8,100																		
135				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65	0.3	0.7	1.8			
141	20	2,658	7,974																		
151	10	1,429	8,574																		
169	18	2,448	8,160																		
180				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65	0.3	0.7	1.8			
183	14	1,781	7,633																		
203	20	2,442	7,326																		
210				25	10.5	30	6.6	25	10.5	1.1	30	75	1.0	26	65	0.3	0.7	1.8			
223	20	2,828	8,484																		
240				25	10.5	30	6.6	25	10.5	1.1	30	75	1.0	26	65	0.3	0.7	1.8			
243	20	2,651	7,953																		
263	20	2,707	8,121																		
270				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65	0.3	0.7	1.8			
283	21	2,515	7,600																		

-41-

041928

RUN 7
7/9/86
LAAP SOIL
TARGET FEED: 8,000 LB/HR (8-HOUR RUN)

WESTON

Time (min- utes)	Duration of hopper fill cycle (minutes)	Net weight of soil in hopper (lb)	Feed rate (lb/ hr)	Feed conveyor		Cross conveyor		Live bottom hopper		Feed conveyor		Cross conveyor		Live bottom hopper	
				(%)	amps	(%)	amps	(%)	amps	Drive setting (ppm)	Speed (rpm)	(%)	amps	Drive setting (rpm)	Speed (rpm)
300				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65
304	20	3,052	9,156												
324	20	2,477	7,431												
330				25	10.5	43	9.46	25	10.5	1.1	30	75	1.0	26	65
344	20	2,866	8,598												
355				25	10.5	45	9.9	25	10.5	1.1	30	75	1.0	26	65
364	20	2,674	8,022												
375				25	10.5	42	9.24	25	10.5	1.1	30	75	1.0	26	65
384	20	2,714	8,142												
390				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65
404	20	2,566	7,698												
405				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65
424	20	2,806	8,418												
425				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65
444	20	2,906	8,718												
445				25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65
464	20	2,454	7,362												
465				25	10.5	48	10.56	25	10.5	1.1	30	75	1.0	26	65
485	25			25	10.5	35	7.7	25	10.5	1.1	30	75	1.0	26	65
486	22	2,932	7,996												
496	10	1,174	7,044												
500				25	10.5	40	8.8	25	10.5	1.1	30	75	1.0	26	65

-45-

0.1118

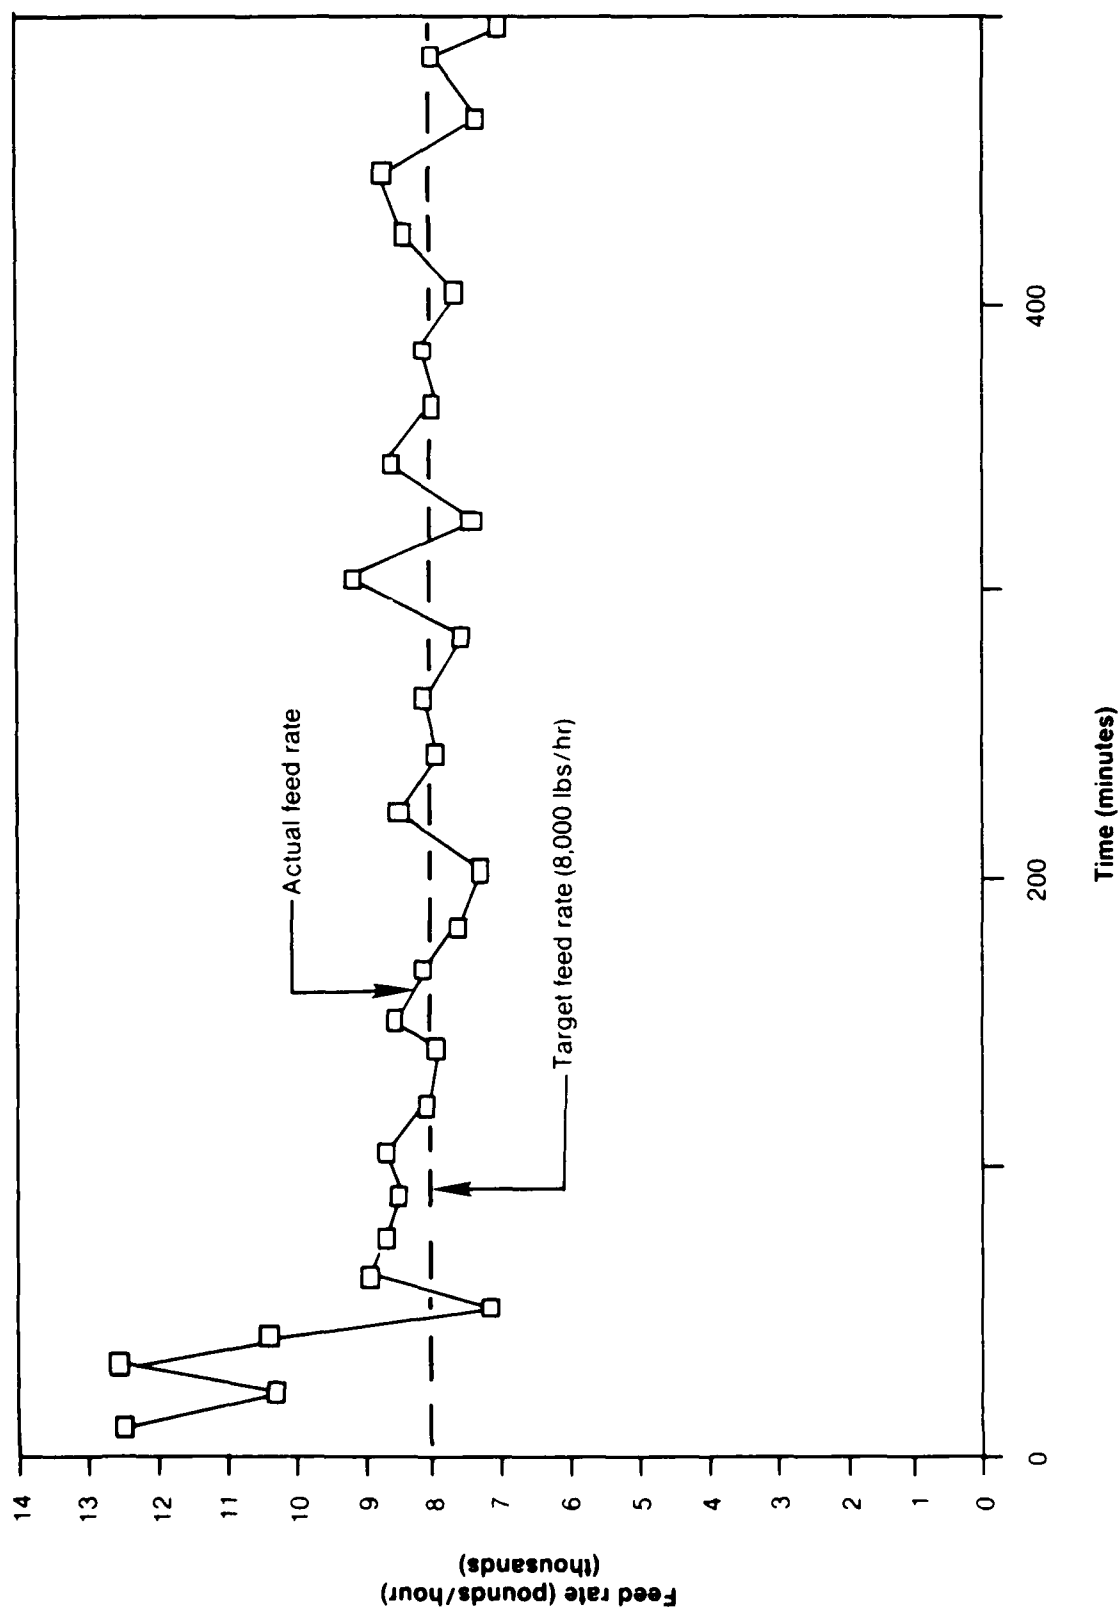


Figure 15. Feed rate during test run no. 7, LAAP soil, 8,000 lb./hr., 8-hour test.

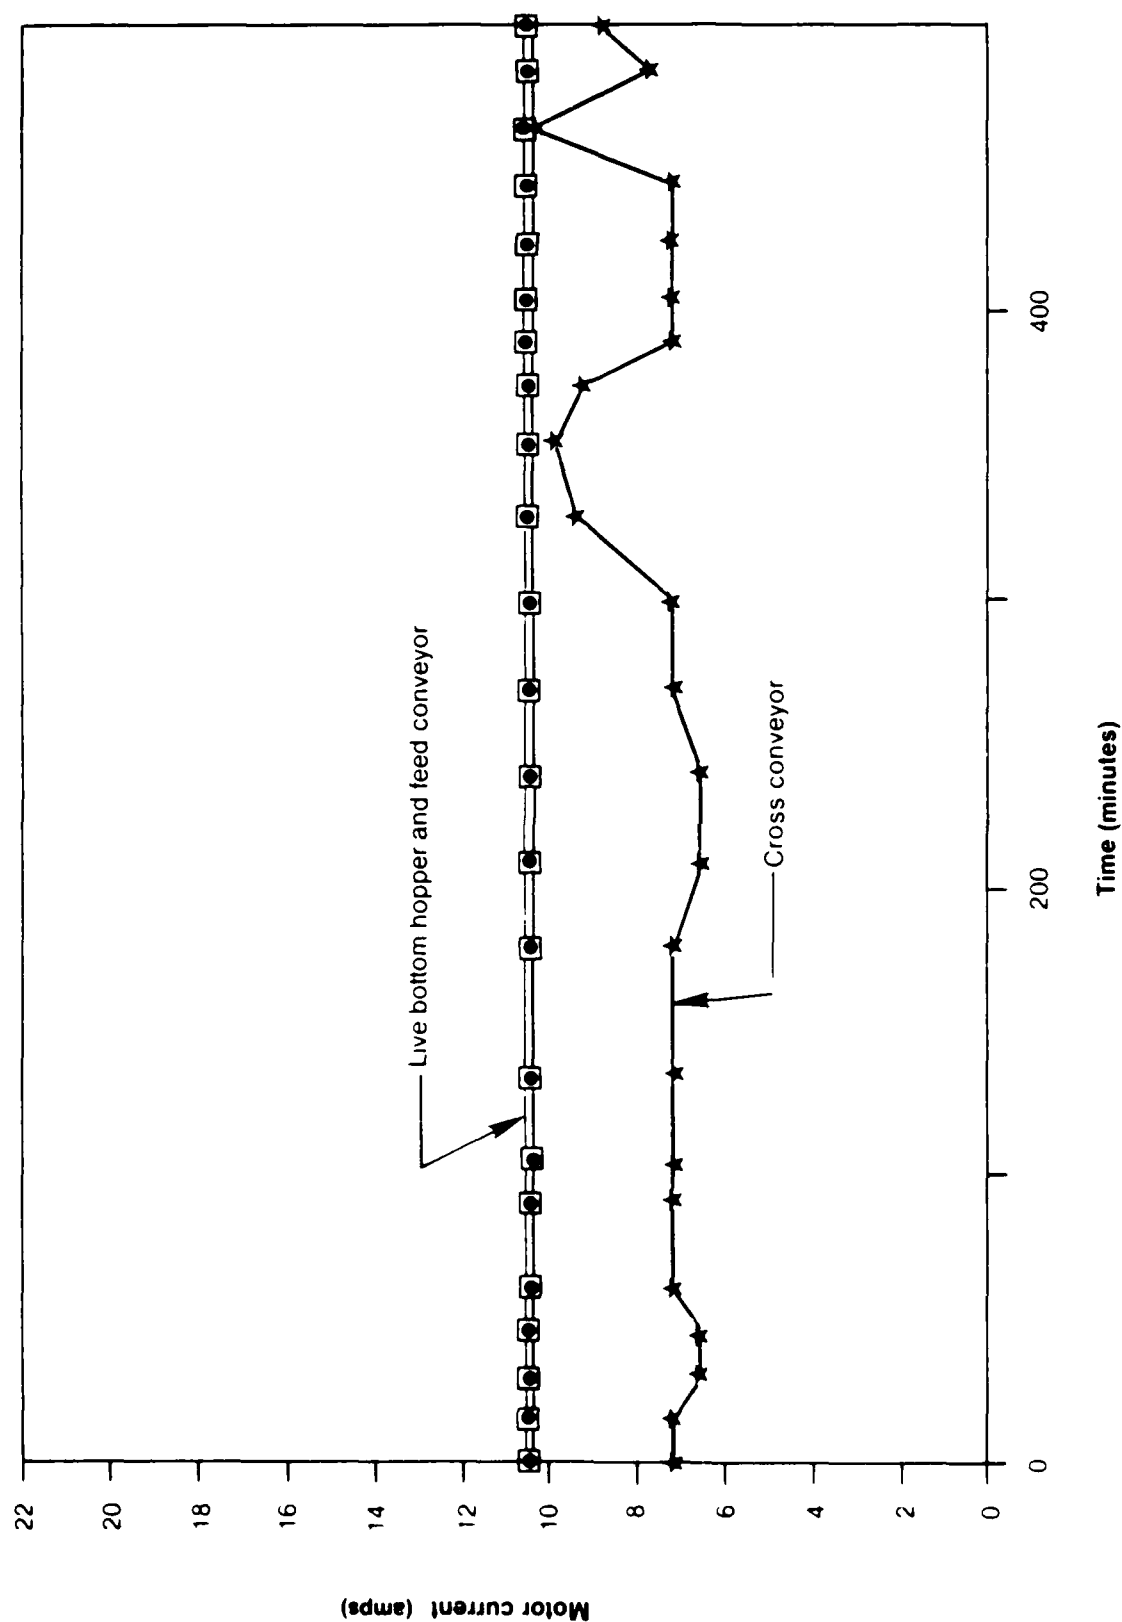


Figure 16. Motor current during test run no. 7, LAAP soil, 8,000 lb./hr., 8-hour test.

RUN 6

7/8/86

LAAP SOIL

TARGET FEED: 12,000 LB/HR

WESTON

Time (min- utes)	Duration of hopper cycle (minutes)	Net weight of soil in hopper (lb)	Feed rate (lb/ hr)	Live bottom				Feed conveyor		Cross conveyor		Live bottom hopper	
				Feed conveyor Motor (%)	Feed conveyor Motor amps	Cross conveyor Motor (%)	Cross conveyor Motor amps	hopper Motor (%)	hopper Motor amps	Drive Setting (rpm)	Speed (rpm)	Drive Setting (rpm)	Speed (rpm)
0	7	1,801	15,447										
7	7	1,157	9,517										
14	7	1,220	10,457										
21	7	1,583	13,568										
28	7	1,342	11,503										
35	7	1,317	7,902										
45	10	1,725	10,338										
55	10	2,069	15,517										
65	8	2,242	13,452										
75	10	1,911	12,740										
80	9	1,436	8,676										
92	10	2,233	13,398										
100	9	2,540	16,933										
102	10	2,108	13,848										
111	10	1,943	11,658										
120	10	1,868	11,208										
131	10	1,093	6,558										
145	8	2,380	18,600										
150	10												
151	8												
154													
155													
156													

-18-

0128

RUN 6
7/8/86
LAAP SOIL
TARGET FEED: 12,000 LB/HR

Time (min- utes)	Duration of hopper fill cycle (minutes)	Net weight of soil in hopper (lb)	Feed rate (lb/ hr)	Feed conveyor		Cross conveyor		Live bottom hopper		Feed conveyor		Cross conveyor		Live bottom hopper	
				(%)	amps	(%)	amps	(%)	amps	Drive Speed setting (rpm)	(%)	Drive Speed setting (rpm)	(%)	Drive Speed setting (rpm)	(%)
171	12	2,280	11,400												
179	8	2,320	17,400	25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65
180															
189	10	1,808	10,848	25	10.5	33	7.26	25	10.5	1.1	30	75	1.0	26	65
195															
199	10	2,526	15,156												
209	10	2,182	13,092	25	10.5	45	9.9	25	10.5	1.1	30	75	1.0	26	65
210															
219	10	1,932	11,597	25	10.5	50	11.0	25	10.5	1.1	30	75	1.0	26	65
225															
229	10	2,033	12,198												
239	10	2,239	13,434	25	10.5	50	11.0	25	10.5	1.1	30	75	1.0	26	65
240															
249	10	2,418	14,500												
260	11	2,458	13,407	25	10.5	50	11.0	25	10.5	1.1	30	75	1.0	26	65
270	10	2,005	12,010												
280	10	1,940	11,640												

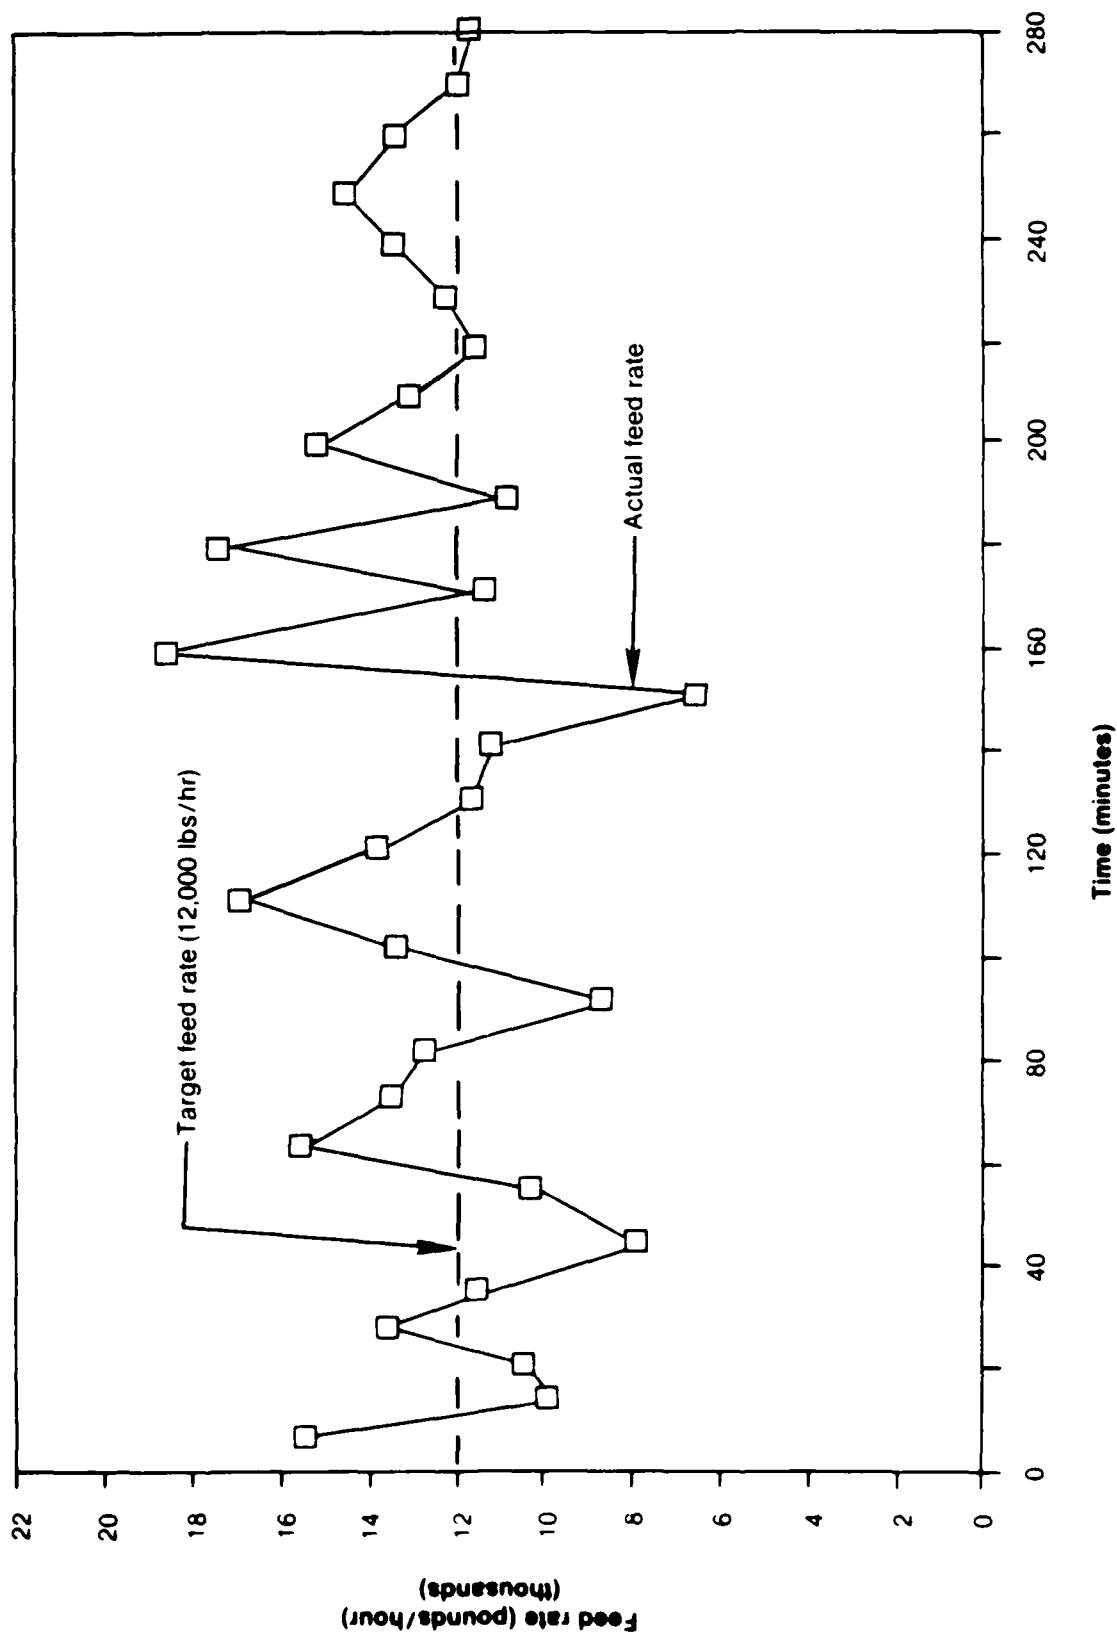


Figure 17. Feed rate during test run no. 6, LAAP soil, 12,000 lb./hr.

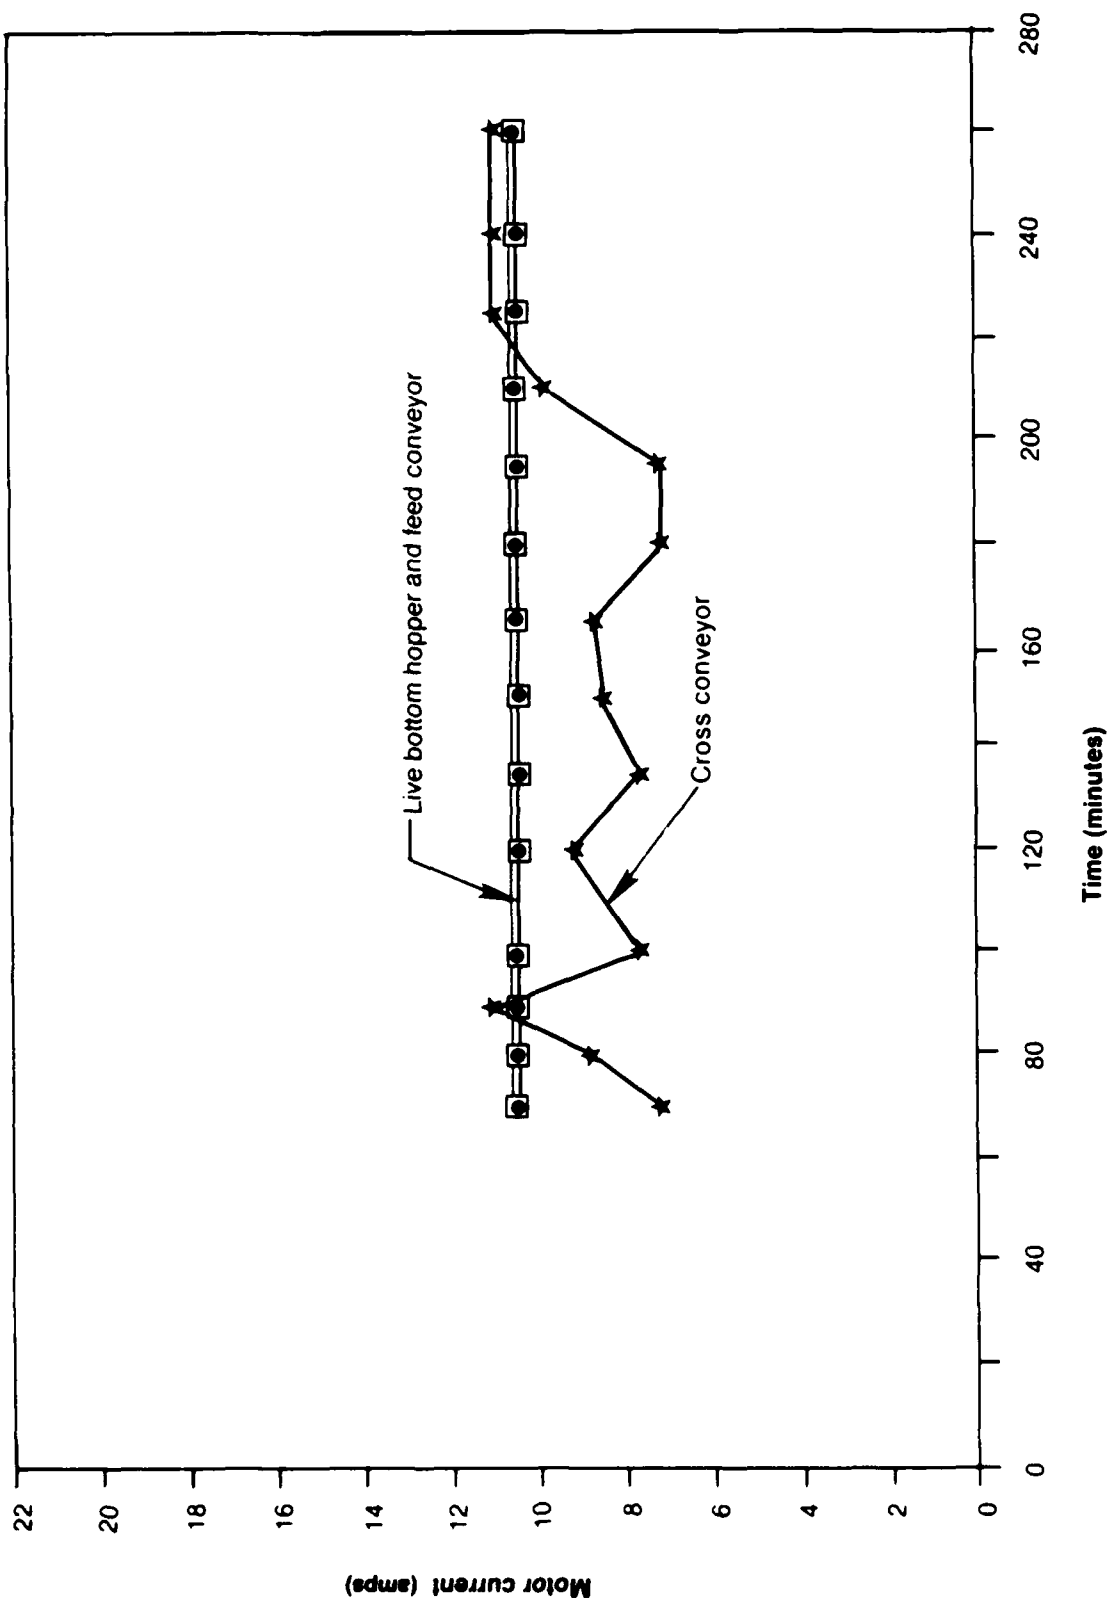


Figure 18. Motor current during test run no. 6, LAAP soil, 12,000 lb./hr.

5.3 Analysis of test data. This section provides an analysis of the following system parameters:

- Soil feed rate.
- Soil moisture content and bulk density.
- Soil size distribution.
- Rotational speed of screw conveyors.
- Screw conveyor motor current.
- LAAP soil explosives concentrations.

5.3.1 Soil feed rate. A summary of the average and range feed rate data for each of the test runs is provided below:

Soil type	Run no.	Target feed rate (lb/hr)	Actual feed rate (average)		Range of feed rates	
			(lb/hr)	(% of target)	(lb/hr)	(% of target)
CHAAP	1	4,000	3,907	97.7	3,596- 4,299	89.9-107.5
CHAAP	3	8,000	7,967	99.6	7,434- 8,418	92.9-105.2
CHAAP	4	8,000	7,791	97.4	6,666- 9,608	83.3-120.1
CHAAP	8	12,000	11,451	95.4	9,402-12,533	78.4-104.4
LAAP	5	4,000	5,099	127.5	2,681- 9,018	67.0-225.4
LAAP	7	8,000	8,541	106.7	7,044-12,498	88.0-156.2
LAAP	6	12,000	12,617	105.1	6,558-18,600	54.6-155.0

As shown in this summary, the full range of target feed rates (i.e., 4,000-12,000 lb/hr) was achieved for the CHAAP and LAAP soils. The feed system maintained feed rates very close to the target values for the CHAAP soils (i.e., average feed rate 95.4-99.6 percent of the target values). The instantaneous variations in CHAAP feed rates were typically within ± 10 percent and in the most extreme cases still within ± 20 percent of the target values. With the exception of Test Run No. 5, which is misleading due to operator error (the feed rate was decreased seven times during the test run before the feed rate was below 4,000 lb/hr), the feed system also maintained feed rates very close to the target values for the LAAP soils (i.e., 105.1-106.7 percent of the target values). However, for the LAAP soils, the instantaneous variations in feed rates were more significant with typical variations within ± 20 percent and extreme variations as much as ± 50 percent of the target values. The reason for the wider range of variations for the LAAP soils is discussed in Subsection 5.4.

5.3.2 Soil moisture content and bulk densities. The soil moisture content and soil bulk densities for the test runs are summarized as follows:

Soil type	Run no.	Feed soil or processed soil	Soil moisture content (%)	Soil bulk density
CHAAP	1	Feed soil	16.4	---
CHAAP	1	Processed soil	17.5	77 lb/ft ³
CHAAP	3	Feed soil	16.7	---
CHAAP	3	Processed soil	16.4	71 lb/ft ³
CHAAP	4	Feed soil	15.2	---
CHAAP	4	Processed soil	15.9	70 lb/ft ³
CHAAP	8	Feed soil	16.1	---
CHAAP	8	Processed soil	17.4	78 lb/ft ³
LAAP	5	Feed soil	*	---
LAAP	5	Processed soil	*	107 lb/ft ³
LAAP	7	Feed soil	*	---
LAAP	7	Processed soil	*	116 lb/ft ³
LAAP	6	Feed soil	*	---
LAAP	6	Processed soil	*	118 lb/ft ³

*Soil moisture content data were not available for the draft technical report. These data will be provided in the final report.

The CHAAP soil moisture content ranged from 15.2-17.5 percent with an average of 16.4 percent. The CHAAP soil bulk density for the processed soil (discharged from the feed system) ranged from 70-78 lb/ft³ with an average of 74 lb/ft³.

The LAAP soil moisture content data were not available for this report due to difficulty in locating a subcontractor that was willing to perform moisture content and size distribution testing on explosives-contaminated soils. These samples have been submitted to the Allegany Ballistics Laboratory, and the results will be submitted as an addendum to this report. The LAAP soil bulk density for the processed soil ranged from 107-118 lb/ft³ with an average of 114 lb/ft³.

5.3.3 Soil size distribution. The soil size distribution data for the CHAAP test runs are summarized in Table 13. The actual soil gradation curves for the feed soil and processed soil for each CHAAP run are presented in Appendix G. As shown in Table 13, the CHAAP soil size distribution data are very consistent. These results are summarized below:

Soil classification	Size range	Percentages	
		Average	Range
Cobbles	>3"	0	0
Gravel - coarse	3" - 3/4"	0	0
- fine	3/4" - 4 mesh	0	0
Sand - coarse	4 - 10 mesh	1.6	1-3
- medium	10 - 40 mesh	4.9	4-6
- fine	40 - 200 mesh	16.3	13-19
Silt or clay	<200 mesh	77.2	75-82

5.3.4 Rotational speed of screw conveyor. Figure 19 provides a graphical plot of the relationship between the Reeves variable speed drive setting and the measured live bottom hopper screw speed (in rpm) and screw tip speed (in feet per second). As shown in Figure 19, this is a relatively linear relationship. It is important to note that even at the maximum variable speed drive setting of "7.0," that the screw tip speed is nearly an order of magnitude below the recommended maximum tip speed for explosives-contaminated soils of 2 feet per second.

Figure 20 provides a similar graphical plot for the cross conveyor and feed conveyor. Again, the relationships are linear. However, these conveyors are capable of exceeding the recommended maximum tip speed of 2 feet per second for explosives-contaminated soils.

The relationships presented in Figures 19 and 20 are totally independent of the type of soil being fed. They simply illustrate the mechanical relationship of the gear drive settings to the rotational speed of the respective screws. Actual corresponding feed rates are dependent upon soil density and material handling characteristics. Subsection 6.2 provides recommendations relative to maintaining conveyor tip speed below the 2-foot-per-second safety criterion.

TABLE 13. SUMMARY OF SOIL SIZE DISTRIBUTION DATA FOR
THE CHAAP TEST RUNS

CHAAP run no.	Percent by weight in each size classification							To- tal	
	Cob- bles >3"	Gravel		Coarse 4-10 mesh	Sand		Silt or clay <200 mesh		
		Coarse	Fine		Coarse	Medium			Fine
		3"- 3/4"	3/4"- 4 mesh		10-40 mesh	40-200 mesh			
1 - Feed	0	0	0	3	4	17	76	100	
1 - Processed	0	0	0	2	5	18	75	100	
3 - Feed	0	0	0	1	5	19	75	100	
3 - Processed	0	0	0	1	5	16	78	100	
4 - Feed	0	0	0	1	6	15	78	100	
4 - Processed	0	0	0	1	6	16	77	100	
8 - Feed	0	0	0	1	4	13	82	100	
8 - Processed	0	0	0	2	5	16	77	100	

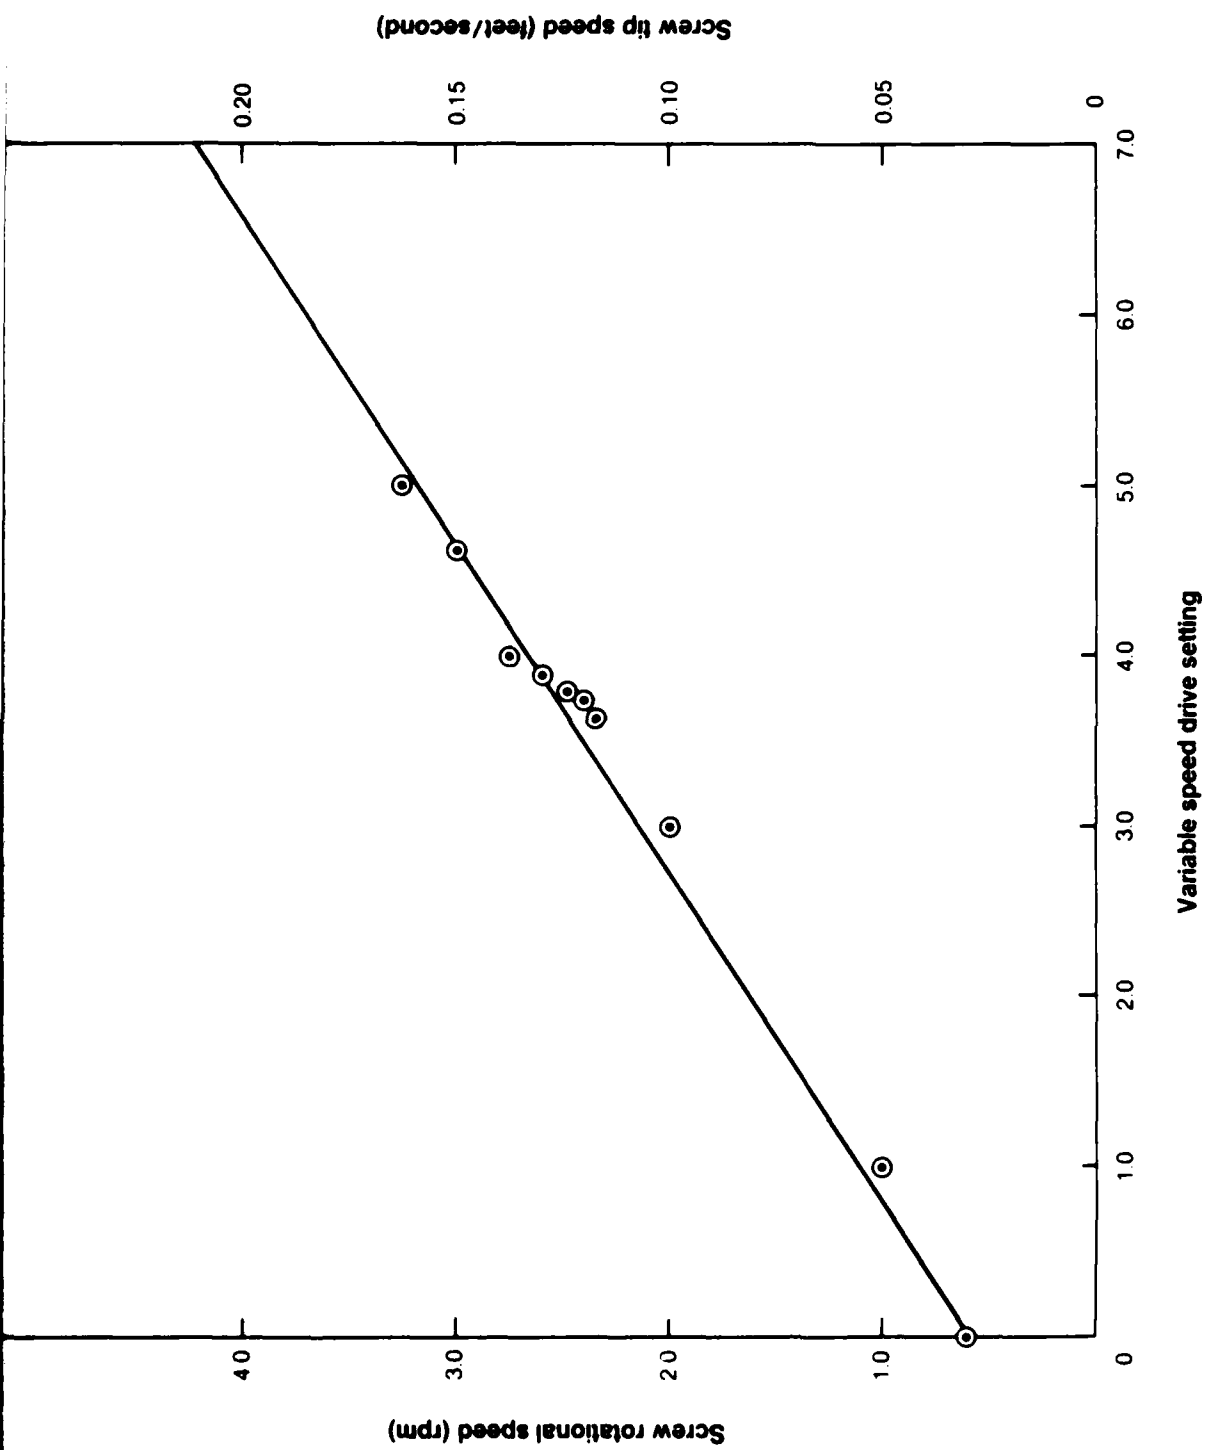


Figure 19. Relationship between live bottom hopper screw speed and variable speed drive settings for all types of soil.

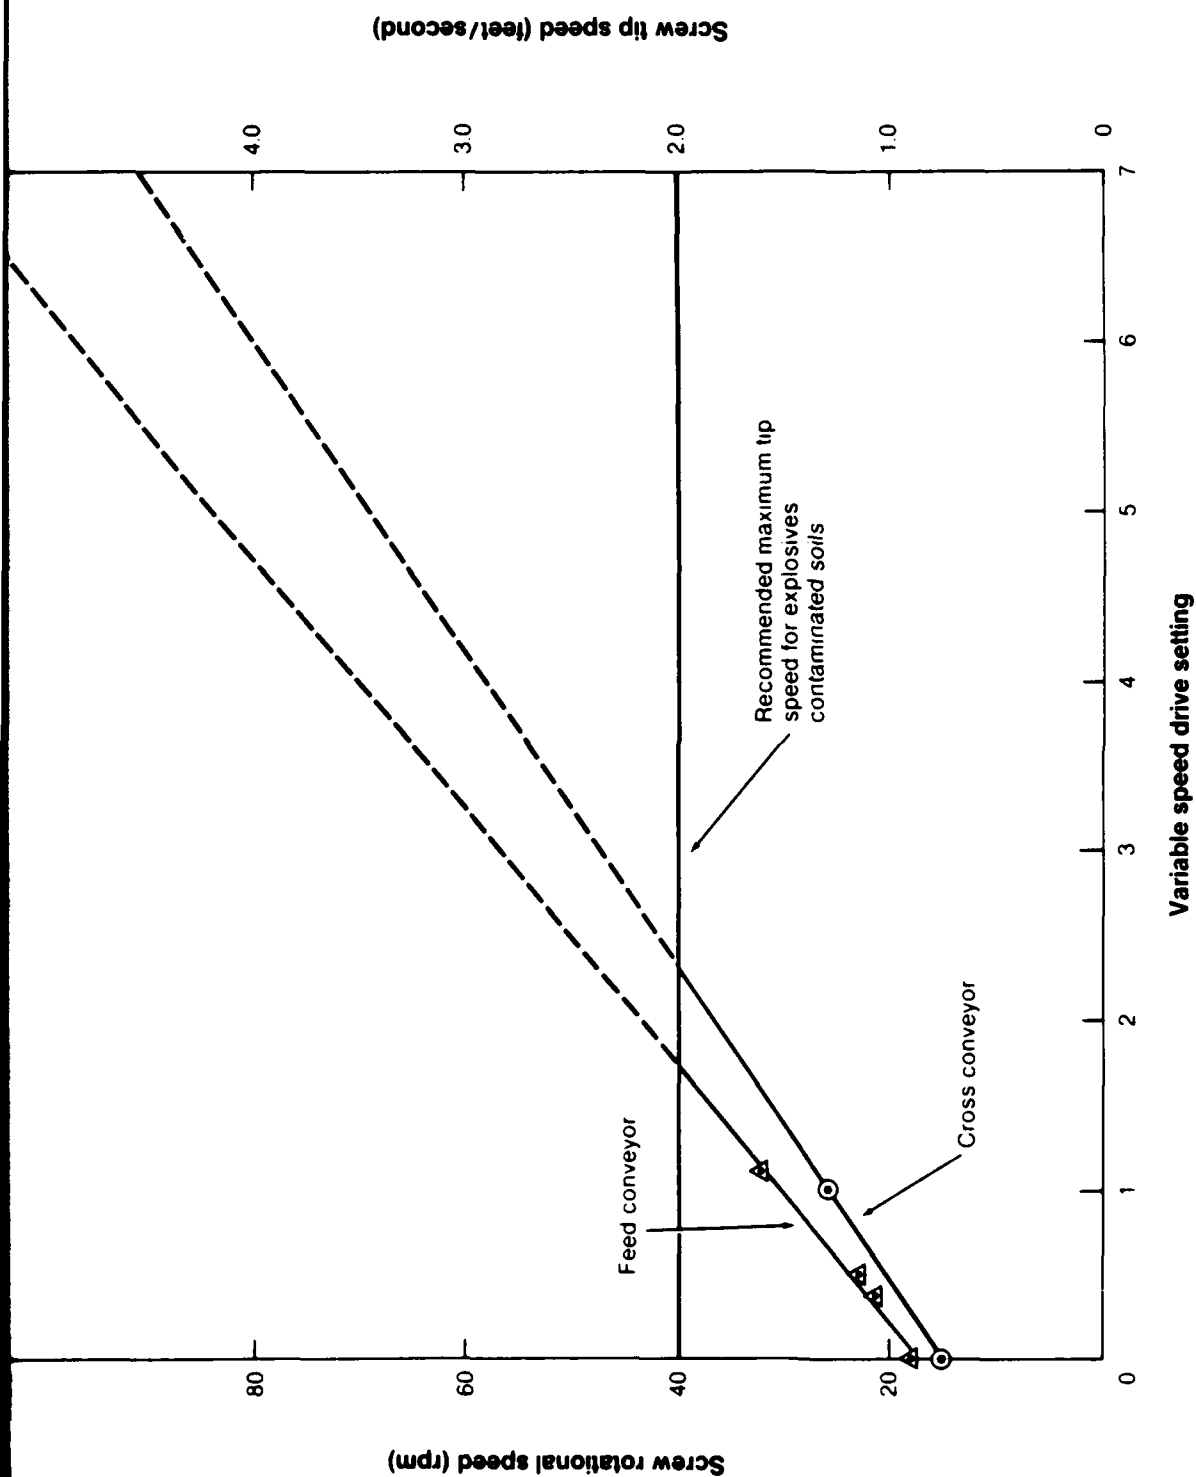


Figure 20. Relationship between conveyor and feed conveyor screw speeds and variable speed drive settings for all types of soil.

5.3.5 Screw conveyor motor current. The live bottom conveyor, cross conveyor, and feed conveyor motor current (both average and range data) are graphically presented for each CHAAP soil test run in Figure 21. A similar graphical plot for the LAAP soil test runs is presented in Figure 22.

5.3.6 LAAP soils explosives concentrations. A summary of the feed soil and processed soil explosives concentrations is provided in Table 14. In addition, after Run No. 7, the 8-hour run at 8,000 lb/hr, samples were taken from several points in the system where soil was compacted in the cross conveyor trough. The reason for this testing was to evaluate whether explosives have a tendency to concentrate within the feed system. This sample is labeled "Run No. 7-Accumulated." As shown in Table 14, the explosives concentrations for "Run No. 7-Accumulated" were somewhat lower than for "Run No. 7-Processed," which indicates no tendency of explosives to concentrate within the feed system. However, there was such a high degree of variability between explosives concentrations in "Run No. 7-Feed" and "Run No. 7-Processed" that these results must be considered inconclusive.

5.4 Physical observations. The field testing activities can be broken down into seven major areas:

- (1) Soil excavation, staging, and feeding to the hopper.
- (2) Live bottom hopper operation.
- (3) Cross conveyor operation.
- (4) Feed soil characteristics.
- (5) Feed conveyor operation.
- (6) Control system operation.
- (7) Shaft seal purge system operation.

This section provides a summary of physical observations regarding each of the foregoing areas.

5.4.1 Soil excavation, staging, and feeding to the hopper. The method used for soil excavation, staging, and feeding to the hopper for the LAAP soil was in accordance with the proposed future full-scale operational procedures. The procedure worked very well. The only problem was the inability of the tracked-excavator operator to observe the level of soil in the hopper.

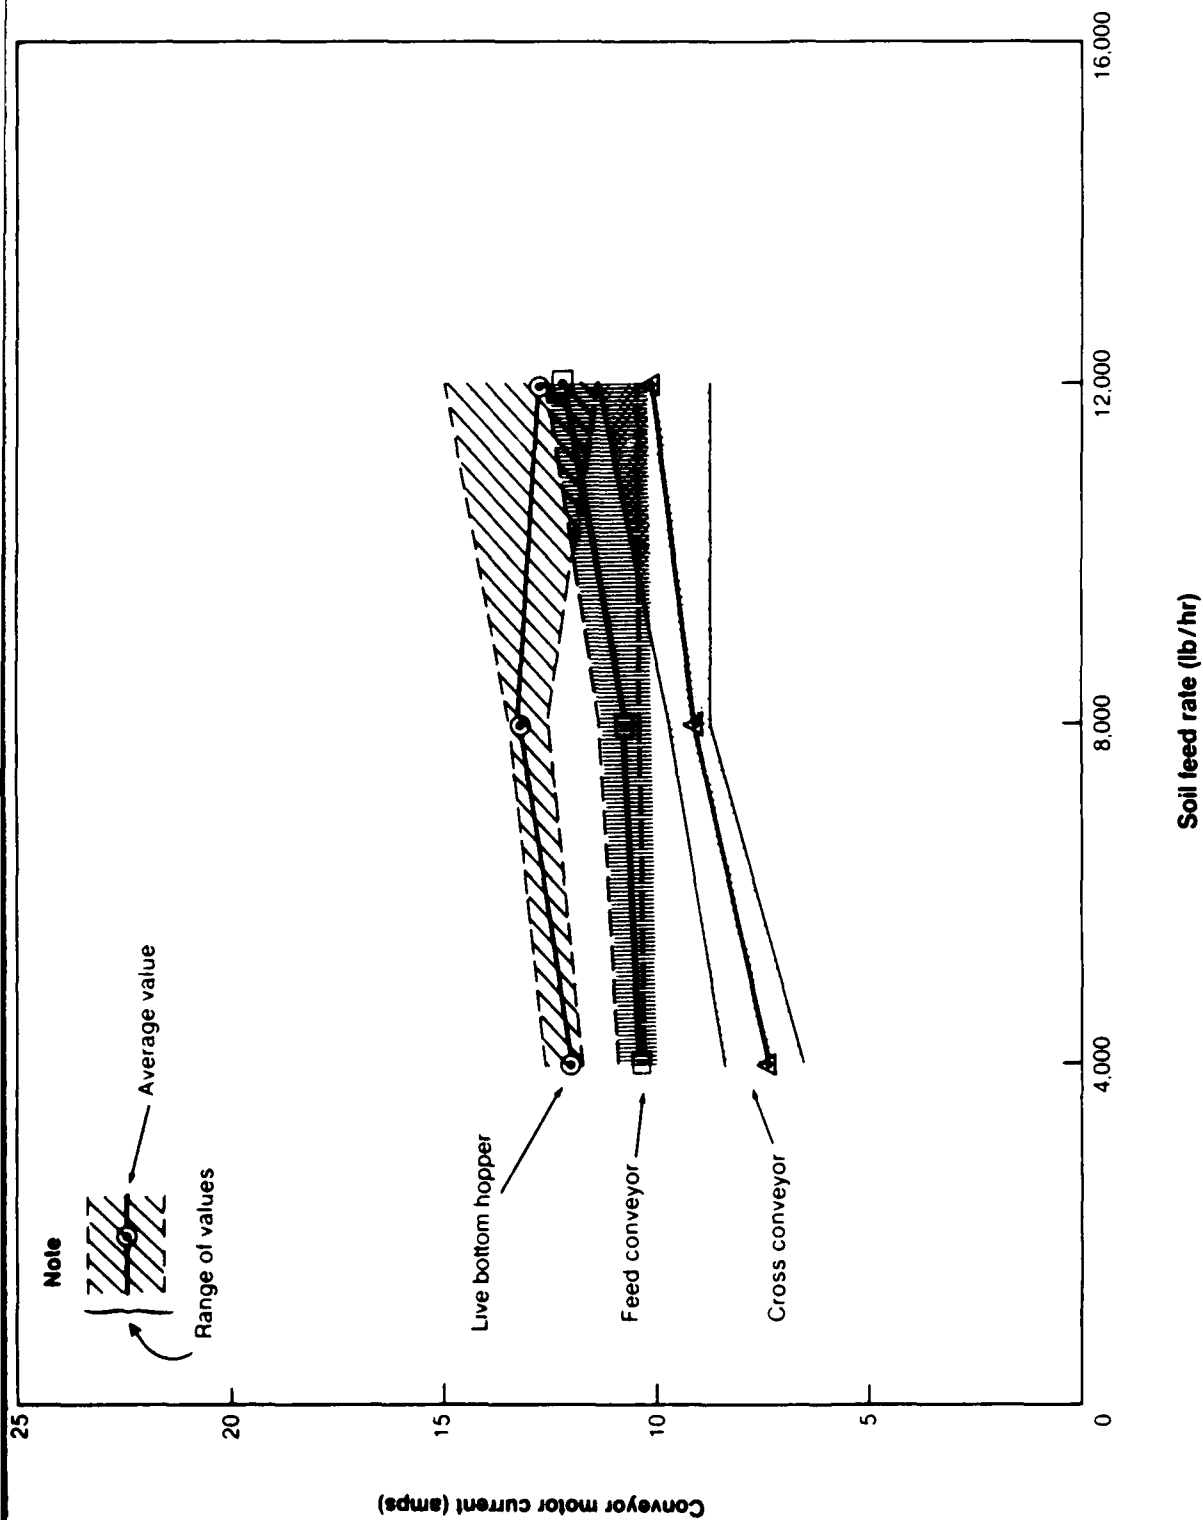


Figure 21. Motor current for CHAAP soil test runs.

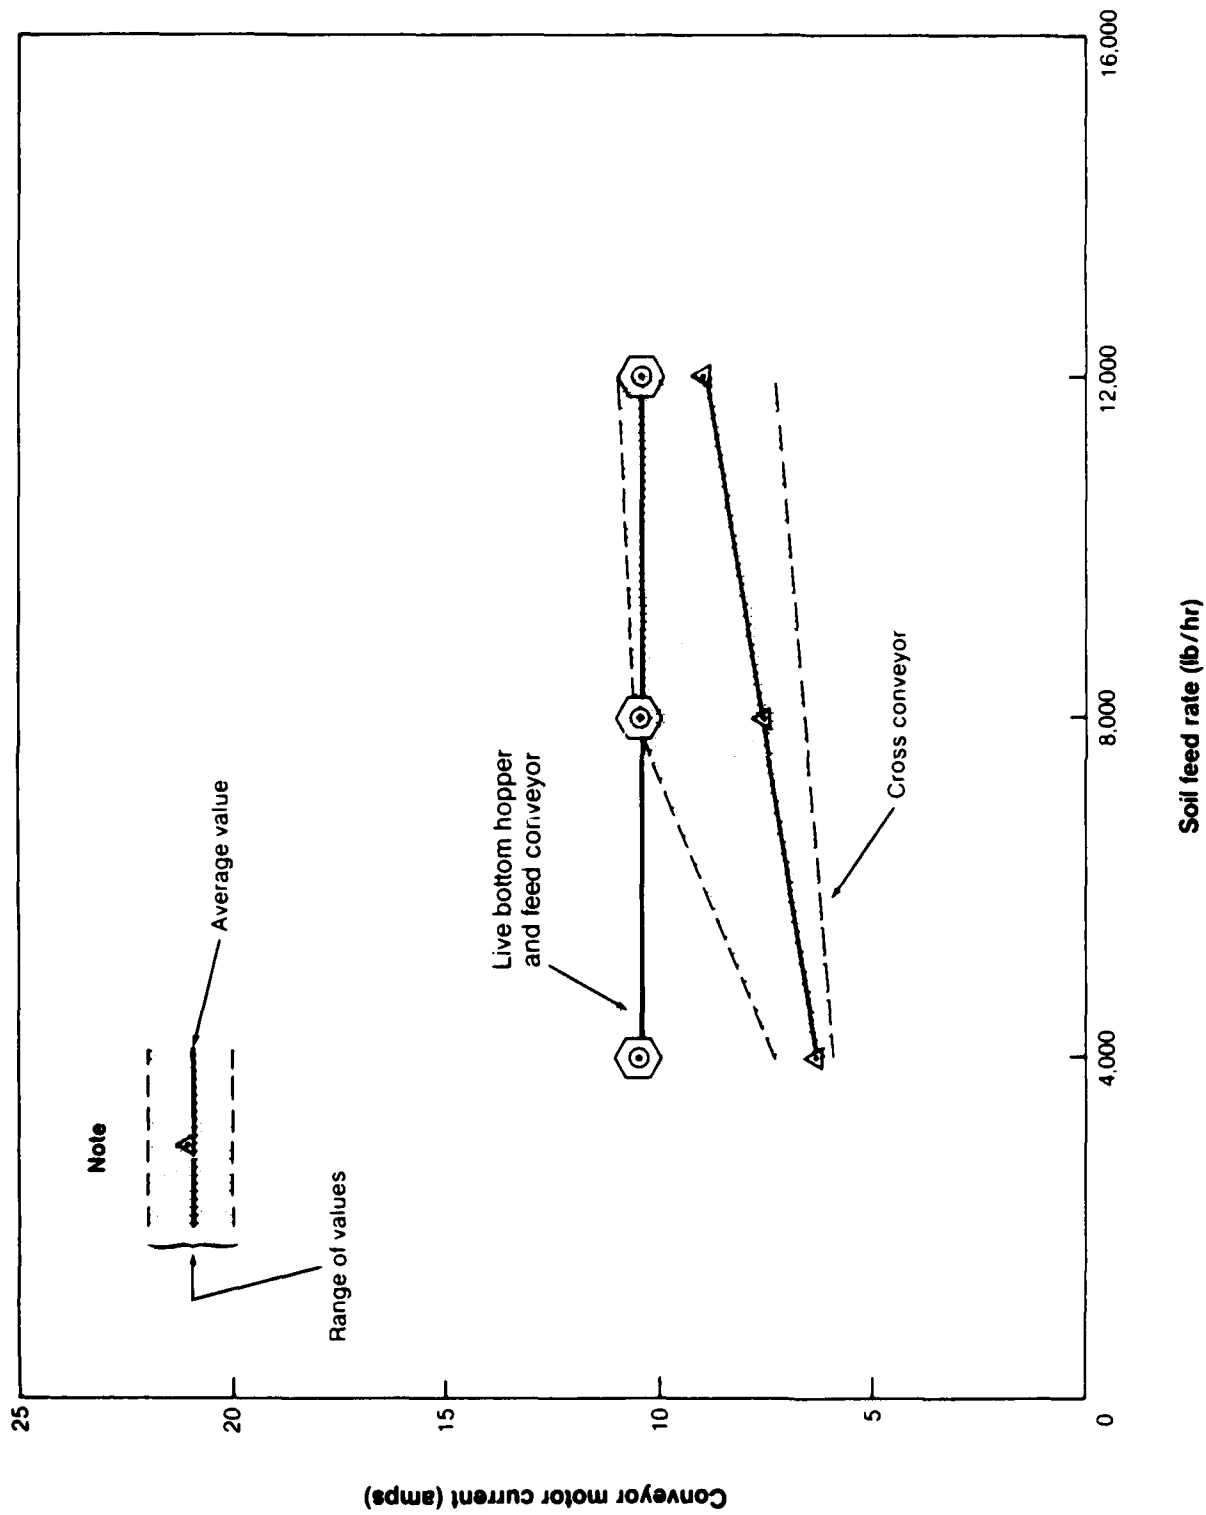


Figure 22. Motor current for LAAP soil test runs.

TABLE 14. SUMMARY OF SOIL EXPLOSIVES CONCENTRATIONS FOR
THE LAAP TEST RUNS

LAAP run no.	Explosives concentration ¹ (ppm, dry basis)					Totals
	2,4,6-TNT	RDX	HMX	Tetryl	Others	
5 - Feed	5,833	3,357	824	---	77	10,091
5 - Processed	8,918	4,290	1,232	47	59	14,546
6 - Feed	169,900	26,540	6,300	3,290	60	206,090
6 - Processed	74,690	16,570	4,040	250	---	95,550
7 - Feed	93,990	20,141	4,830	320	---	119,281
7 - Processed	163,000	93,500	21,730	---	---	278,230
7 - Accumulated	160,900	31,840	6,820	1,040	---	200,600
Detection limits ²	1.0	0.8	1.4	0.8	0.6	---

¹Legend

2,4,6-TNT - 2,4,6 Trinitrotoluene
 RDX - 1,3,5-Trinitro-Hexahydro-1,3,5-Triazine
 HMX - 1,3,5,7-Tetranitro-Octahydro-1,3,5,7-Tetracyclooctane
 Tetryl - Tetrahitromethylaniline
 Others - 1,3,5-Trinitrobenzene,
 1,3-Dinitrobenzene,
 Nitrobenzene,
 2,6-Dinitrotoluene, and
 2,4-Dinitrotoluene.
 (All numbers are reported as 1,3,5-Trinitrobenzene.)

²Analyzed by high performance liquid chromatography (HPLC) using USATHAMA Method 8H.

5.4.2 Live bottom hopper operation. The live bottom hopper proved to be a very effective and reliable metering device for maintaining system feed rate. During the formal test runs more than 300,000 pounds of soil were processed with no downtime due to hopper bridging, jams, or equipment malfunction. Control of system feed rate was provided exclusively by the live bottom hopper. The cross conveyor and feed conveyor were set at rotational speeds nearly an order of magnitude faster than the live bottom hopper. This approach was taken to minimize the potential for soil buildup and potential jamming in the cross conveyor and feed conveyor.

There was a slight tendency for bridging at the front of the live bottom hopper due to the recessed lip of the access doors. This could be corrected by building up the faces of these doors to eliminate the recess.

All feed rate conditions for both soil types were achieved without exceeding 75 percent of the maximum recommended conveyor tip speed of 2 feet per second.

5.4.3 Cross conveyor operation. The cross conveyor operated flawlessly for the CHAAP soils. For the LAAP soils, there was a slight tendency for buildup of the sticky plastic clay to the conveyor flights. However, the clay soils would only build up to a certain level at which time the twin, counter-rotating, ribbon flight screws tended to self-clean. The net result was instantaneous decreased and increased feed rates as the material was building up or breaking free, respectively. However, over longer averaging periods (i.e., 20-40 minutes), the average feed rates were relatively stable.

All feed rate conditions for both soil types were achieved without exceeding 65 percent of the maximum recommended conveyor tip speed of 2 feet per second.

5.4.4 Feed conveyor operation. The feed conveyor operated flawlessly for both CHAAP and LAAP soils. It was not possible to observe whether similar buildups were experienced for the LAAP soil as for the cross conveyor. It is assumed that similar buildup did occur. However, due to the short length of the feed conveyor compared to the cross conveyor, the net impact was much less significant.

All feed rate conditions for both soil types were achieved without exceeding 10 percent of the maximum recommended conveyor tip speed of 2 feet per second.

5.4.5 Feed soil characteristics. The CHAAP soil had much lower moisture content than the LAAP soil. As a result, the CHAAP soil discharging from the feed conveyor was broken up into rather consistent lumps ranging from 0 to 1 inch in diameter. The LAAP soil discharging from the feed conveyor came out as considerably larger clumps of wet plastic clay. Both of the material consistencies would be quite acceptable for introduction into the rotary kiln.

5.4.6 Control system operation. All control system functions were tested while processing uncontaminated CHAAP soil. Jams were simulated individually in all three conveyors by lowering the motor amp limit switches. Lowering the "high" limit switch for each conveyor until it tripped simulated an overloaded condition for the conveyor. This condition simply alarms the operator and shuts down upstream conveyors until the overload condition clears. At this time, the upstream conveyors become permissive and the operator can manually restart them. Lowering the "high-high" limit switch for each conveyor until it tripped simulated a jam for the conveyor. This condition alarms the operator, shuts down upstream conveyors, and automatically reverses the conveyor for 3/4 of a revolution. The conveyor then automatically attempts to restart in a forward direction. If it jams again, this procedure automatically repeats. If it jams again, the conveyor automatically shuts down. Once the jam is cleared the conveyor and upstream conveyor become permissive and the operator can manually restart them.

All of the alarm conditions specified previously in Table 5 were tested as discussed above and functioned properly.

5.4.7 Shaft purge system operation. A shaft seal purge system was installed to preclude migration of explosives-contaminated material into the seals. The shaft bearings are all outboard of the material flow path. The shaft seals are compression seals filled with braided Teflon®. Originally, a compressed air purge was to be installed. However, during installation it was decided that a low pressure (i.e., gravity feed) oil seal purge system was more advantageous for the following reasons:

- (a) A compressed air purge could over-pressurize the seal, causing the opening of a free path for contamination into the seal.
- (b) The compression seals are not well suited for compressed air purge.
- (c) The flow of air through the seal would tend to dry the seal internals, resulting in a potentially hazardous situation due to explosives sensitivity.



- (d) If a fire were to propagate within the feed system, introducing air through the seals would introduce oxygen which may promote the fire.

Therefore, a gravity oil seal purge system was installed which performed very well.



6. CONCLUSIONS AND RECOMMENDATIONS

6.1 Conclusions

- (a) The feed system successfully demonstrated the ability to safely and reliably process 50 to 150 percent of the design feed rate (8,000 lb/hr) of explosives-contaminated soils. During the formal test runs more than 300,000 pounds of soil were processed.
- (b) With the exception of lump size reduction for the CHAAP soil, the feed system did not significantly affect the feed soil grain size distribution.
- (c) Curves were developed which correlate variable speed drive settings with conveyor rotational speeds (in rpms) and tip speeds (in feet per second).
- (d) Curves were developed which correlate conveyor motor amps with soil feed rate. Variations in motor amps do not appear to be significant enough to serve as a basis for predicting or controlling the feed rate.
- (e) A practical soil excavation, staging, and feeding technique was developed for full-scale field operations.
- (f) The live-bottom hopper proved to be a very reliable and effective metering device for maintaining system feed rate.
- (g) The control system was fully tested and functioned properly.
- (h) The gravity oil seal purge system performed very well. It was easy to monitor and to maintain.
- (i) Analysis of soils compacted in the conveyor trough after Test Run No. 7 demonstrated no tendency for explosives to accumulate in the system during operation. However, due to the short duration of the test and the variability of explosives concentration in the feed and processed soils, these results are inconclusive.
- (j) Table 15 provides a summary of the recommendations from the "Hazards Analysis of Incinerator Feed System (see Appendix D) conducted by Allegheny Ballistics Laboratory (ABL) and how the recommendations were applied during actual field tests of the feed system.

Recommendations

How applied during the field tests of the feed system

The mandatory recommendations are:

1. The incinerator feed system (IFS) must be operated remotely (unattended) when handling explosives-contaminated soils. The separation between the operating unit and personnel must be based on standard distance tables which take into consideration the hopper's capacity, compaction, explosive concentration, the potential blast overpressure, thermal radiation from a fire ball, and primary fragment dispersion from an explosion.
2. Wooden "bang" boards must be installed on the top flanges of the hopper to prevent accidental metal-to-metal contact of the dumper and hopper.
3. Procedures and rules must be established calling out acceptable tools and techniques for clearing hopper bridging and screw jams. Nonsparking metal tools may not be adequate or proper due to the impact process potentials of the materials.

The nonmandatory recommendations are:

1. Lagoon material should be inspected prior to dumping to assure it is damp, and does not contain rocks or foreign metal materials.
2. Rock, frozen, or dried lumps should not be fed to the IFS.
3. Adequate water should be available for dampening lagoon material, remote fire fighting, wash out, and initiation suppression.
4. Jams in screw conveyors should be washed to remove all possible contamination before attempting repairs.
5. Washings of the IFS should be collected for disposal or directed back to the lagoon to prevent contaminating additional soil.
6. All area tools should be accounted for prior to starting or resuming operation of the IFS.

Responses to Mandatory Recommendations

1. The control panel was located approximately 100 feet from the feed system to allow remote operation. Video cameras were installed to allow observation of the feed system remotely. Personnel access was minimized to the fullest extent practical when processing the LAAP explosives-contaminated soils. Fire hoses were used to continuously wet the entire test area and lagoon soils to reduce soil sensitivity.
2. Wooden "bang" boards were installed on the top flanges of the hopper. Also, plywood sheets were installed on the weigh scale and concrete pad areas where the self-dumping hoppers were staged to reduce potential for metal-to-metal or metal-to-concrete friction.
3. In addition to using nonsparking tools, the standard procedure for cleaning hopper bridging (which never happened) or screw jams was to first deluge the area with the fire hose to reduce the material sensitivity.

Responses to Nonmandatory Recommendations

1. Lagoon material was inspected manually and oversize rocks and foreign metal materials were removed.
2. All LAAP lagoon soils were saturated with water prior to feeding to the system.
3. Water supply at the LAAP site was more than adequate.
4. See Note 3 above. This was standard operating procedure.
5. All washings were directed to lagoon No. 12, which was adjacent to the test site.
6. All area tools were accounted for prior to starting or resuming system operation.

Recommendations

7. Consideration should be given to using wooden, plastic, or fiberglass materials of construction for shovels, rakes, hoes, and hopper bridge clearing rods.
8. A combustion products infrared analyzer with samplers located above the hopper and at the final screw outlet may detect early signs of decomposition or initiation and allow for shutdown and the addition of quenching water.
9. Personnel in the area should be protected with flame-resistant cloth coveralls.

6.2 Recommendations

- (a) It is recommended that the feed system (incorporating the modifications described herein) be made available to DOD contractors for use on incineration remedial action projects.
- (b) It is recommended that the live-bottom hopper variable speed drive be used to manually control system feed rate. The cross conveyor and feed conveyor should be run at 25 and 30 rpm, respectively. This will preclude material buildup in these conveyors while operating at speeds below the recommended maximum tip speeds.
- (c) It is recommended that a warning sign and a physical stop (i.e., bolt) be placed on the variable speed drives for the cross conveyor and feed conveyors to limit conveyor tip speeds to no more than 2 feet per second. The recommended maximum variable speed drive setting for the feed conveyor is 1.5 and 2.0 for the cross conveyor.
- (d) It is recommended that a large convex mirror be placed above the live-bottom hopper to allow the tracked excavation operator visual observation of the soil level in the hopper.
- (e) It is recommended that the live-bottom hopper doors be built up with a metal plate to provide a smooth internal surface and preclude bridging in the hopper.
- (f) It is recommended that the control system be modified so that the system diagnostic warning lights on the control panel remain on after the annunciator is silenced.
- (g) Based on ABL's recommendations, additional testing should be considered to determine whether the higher concentrations of explosives such as found in the LAAP sludge will respond with sustained burning and transition to an explosion at energy levels above those in the process, and which exceed the equivalent energy levels of the sensitivity tests, but which are much lower than the energy levels associated with propagation tests.
- (h) Upon review of this report, the Department of Defense Explosives Safety Board (DDESB) and the U.S. Army Armament, Munitions and Chemical Command Field Safety Activity (FSA) have determined the following:
 - (1) The incinerator feed system test has demonstrated the capability of the feed system to safely transport the explosives-contaminated soils that were used during the test. However, because of the nonhomogeneity of lagoon sediments, operational procedures should be established to ensure that the explosives content of the sediment is less than 25 percent dry weight before it is

introduced into the feed system. In lieu of this, operation protection must be provided against hazardous fragments and overpressure, assuming the maximum credible event to be a detonation involving the total amount of explosives in the feed system and the incinerator.

- (2) All sediment at an operational site should be adequately wetted to preclude the initiation of a fire or detonation prior to introduction of the sediment into the incinerator, i.e., within the feed system. A capability should be established to maintain an adequate sediment moisture content in the feed system during periods of extended shutdown.
- (3) An integrated systems test of the feed system and the incinerator should be conducted under actual operating conditions before system parameters are finalized. A site plan and safety submission for this test should be prepared and submitted to DDESB and FSA for approval prior to the start of the test. The results of this test will provide the basis for a DDESB review of the site plans and safety submissions required for sediment decontamination operations at selected Army installations.

END

5-87

DTIC