REPORT NO. NADC-76357-40

DEVELOPMENT OF AN INFLATABLE HEAD/NECK RESTRAINT SYSTEM FOR EJECTION SEATS

Thomas J. Zenobi
Crew Systems Department
NAVAL AIR DEVELOPMENT CENTER
Warminster, Pennsylvania 18974

28 FEBRUARY 1977

INTERIM REPORT
AIRTASK NO. WF41-451-403

APPROVED FOR PUBLIC RELEASE, DISTRIBUTION UNLIMITED

Prepared for
NAVAL AIR SYSTEMS COMMAND
Department of the Navy
Washington, D.C. 20361

NOTICES

REPORT NUMBERING SYSTEM - The numbering of technical project reports issued by the Naval Air Development Center is arranged for specific identification purposes. Each number consists of the Center acronym, the calendar year in which the number was assigned, the sequence number of the report within the specific calendar year, and the official 2-digit correspondence code of the Command Office or the Functional Department responsible for the report. For example: Report No. NADC-76015-40 indicates the fifteenth Center report for the year 1976, and prepared by the Crew Systems Department. The numerical codes are as follows:

CODE	OFFICE OR DEPARTMENT
00	Commander, Naval Air Development Center
01	Technical Director, Naval Air Development Center
02	Program and Financial Management Department
07	V/STOL Program Office
09	Technology Management Office
10	Naval Air Facility, Warminster
20	Aero Electronic Technology Department
30	Air Vehicle Technology Department
40	Crew Systems Department
50	Systems Department
60	Naval Navigation Laboratory
81	Technical Support Department
85	Computer Department

PRODUCT ENDORSEMENT - The discussion or instructions concerning commercial products herein do not constitute an endorsement by the Government nor do they convey or imply the license or right to use such products.

APPROVED BY: David N. DeSimone DATE: 28 FEBRUARY 1977

DAVID N. DeSIMONE, Acting Dep. Dir.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER NADC-76357-40	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) DEVELOPMENT OF AN INFLATABLE HEAD/NECK RESTRAINT SYSTEM FOR EJECTION SEATS.		5. TYPE OF REPORT & PERIOD COVERED Interim rept.,
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Thomas J. Zenobi		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Crew Systems Department (Code 40) Naval Air Development Center Warminster, Pennsylvania 18974	F41451	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AIRTASK No. WF41-451-403
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Systems Command (AIR-340B) Department of the Navy Washington, D. C. 20361		12. REPORT DATE 28 Feb[redacted]977
		13. NUMBER OF PAGES ~~28~~ 29p.
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Inflatable neck collar
Inflatable neck ring
Neck injury
Head rotation

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

A ring-shaped inflatable head/neck restraint system for ejection seats is being developed at the Crew Systems Department, NADC. The purpose of this system is to reduce neck injuries due to violent forward head rotation at the time of ejection thrust and parachute opening shock. Inflation of the neck ring will be conducted by a solid propellant gas generator. Design considerations include form-and-fit, cost effectiveness, packaging and integration into life support equipment.

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

S/N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

406 620

S/N 0102- LF- 014- 6601

TABLE OF CONTENTS

LIST OF FIGURES

INTRODUCTION

The objective of an operational head restraint is to limit forward head-and-neck rotation on the crew member during ejection and at the time of parachute opening shock, thereby reducing the probability of injury to the neck muscles and cervical portion of the spine.

When the center of gravity (CG) of the helmet/head mass is forward of the ejection thrust vector or forward of the parachute opening force vector, the head is apt to rotate violently forward. Occurrence of violent head rotation during ejection is encouraged by actuation of the lower ejection handle, the headrest design and movement of the crewman's helmet. Head rotation is most susceptible during lower ejection handle actuation because of the tendency to hunch forward while pulling on the handle; as a result, the CG of the head may move forward of the ejection thrust line. Additionally, the headrests on current ejection seats are designed to allow the crew member to maintain visual contact with the instrument panel displays during catapault launches and carrier landings. In fulfilling this requirement, the headrest is designed to restrain the crewman's head forward of a normal seating position; such a position makes the head susceptible to rotation. Whenever the helmet shifts forward on the head under the influence of outside forces, the CG of the head/helmet mass may move forward of the ejection thrust vector, resulting in head rotation. For ejections and parachute openings, head rotation may be violent enough to cause the crewman's chin to impact his sternum.

Based on data from the Naval Safety Center, Norfolk, Virginia, there were over 1300 Navy aircraft ejections during the calendar years 1967-1974. Of these ejections, approximately 8 percent resulted in some type of neck injury attributed to ejection or parachute opening forces. The severity of the injuries ranged from neck muscle strains to fractures of cervical vertebrae. It can only be speculated that some downed airmen may have been lost at sea because they could not deploy life support equipment due to incapacitation from head rotation injuries. Along with injury to the neck and spine, violent head rotation can impart shear strains on the brain[1,2] and produce unconsciousness[2].

The reported incidence of such injuries indicates a need for an effective head restraint system. As a consequence, the Crew Systesm Department (CSD) of the Naval Air Development Center has been involved in the development of a protective system to eliminate or reduce head rotation injury. The present hardware under development by this activity uses the concept of an inflatable neck collar (or neck bladder). This design is an off-shoot of an earlier inflatable chin bag which was originally developed at CSD[3]. The chin bag, shown in figure 1, was fastened to the helmet chin strap. Although the depicted

---

1. *Holbourne, A. H. S.; Mechanics of Head Injuries, Lancet 245:438-441, 1943.*
2. *Ommaya, A. K. and Hirsch, A. E.; Tolerances for Cerebral Concussion From Head Impact and Whiplash in Primates, J. Biomechanics 4:13-21, 1971.*
3. *Schulman, M. and Hendler E.; Restraint of the Head During Acceleration, paper presented in the Tenth Annual SAFE Symposium Proceedings, Oct 1972.*

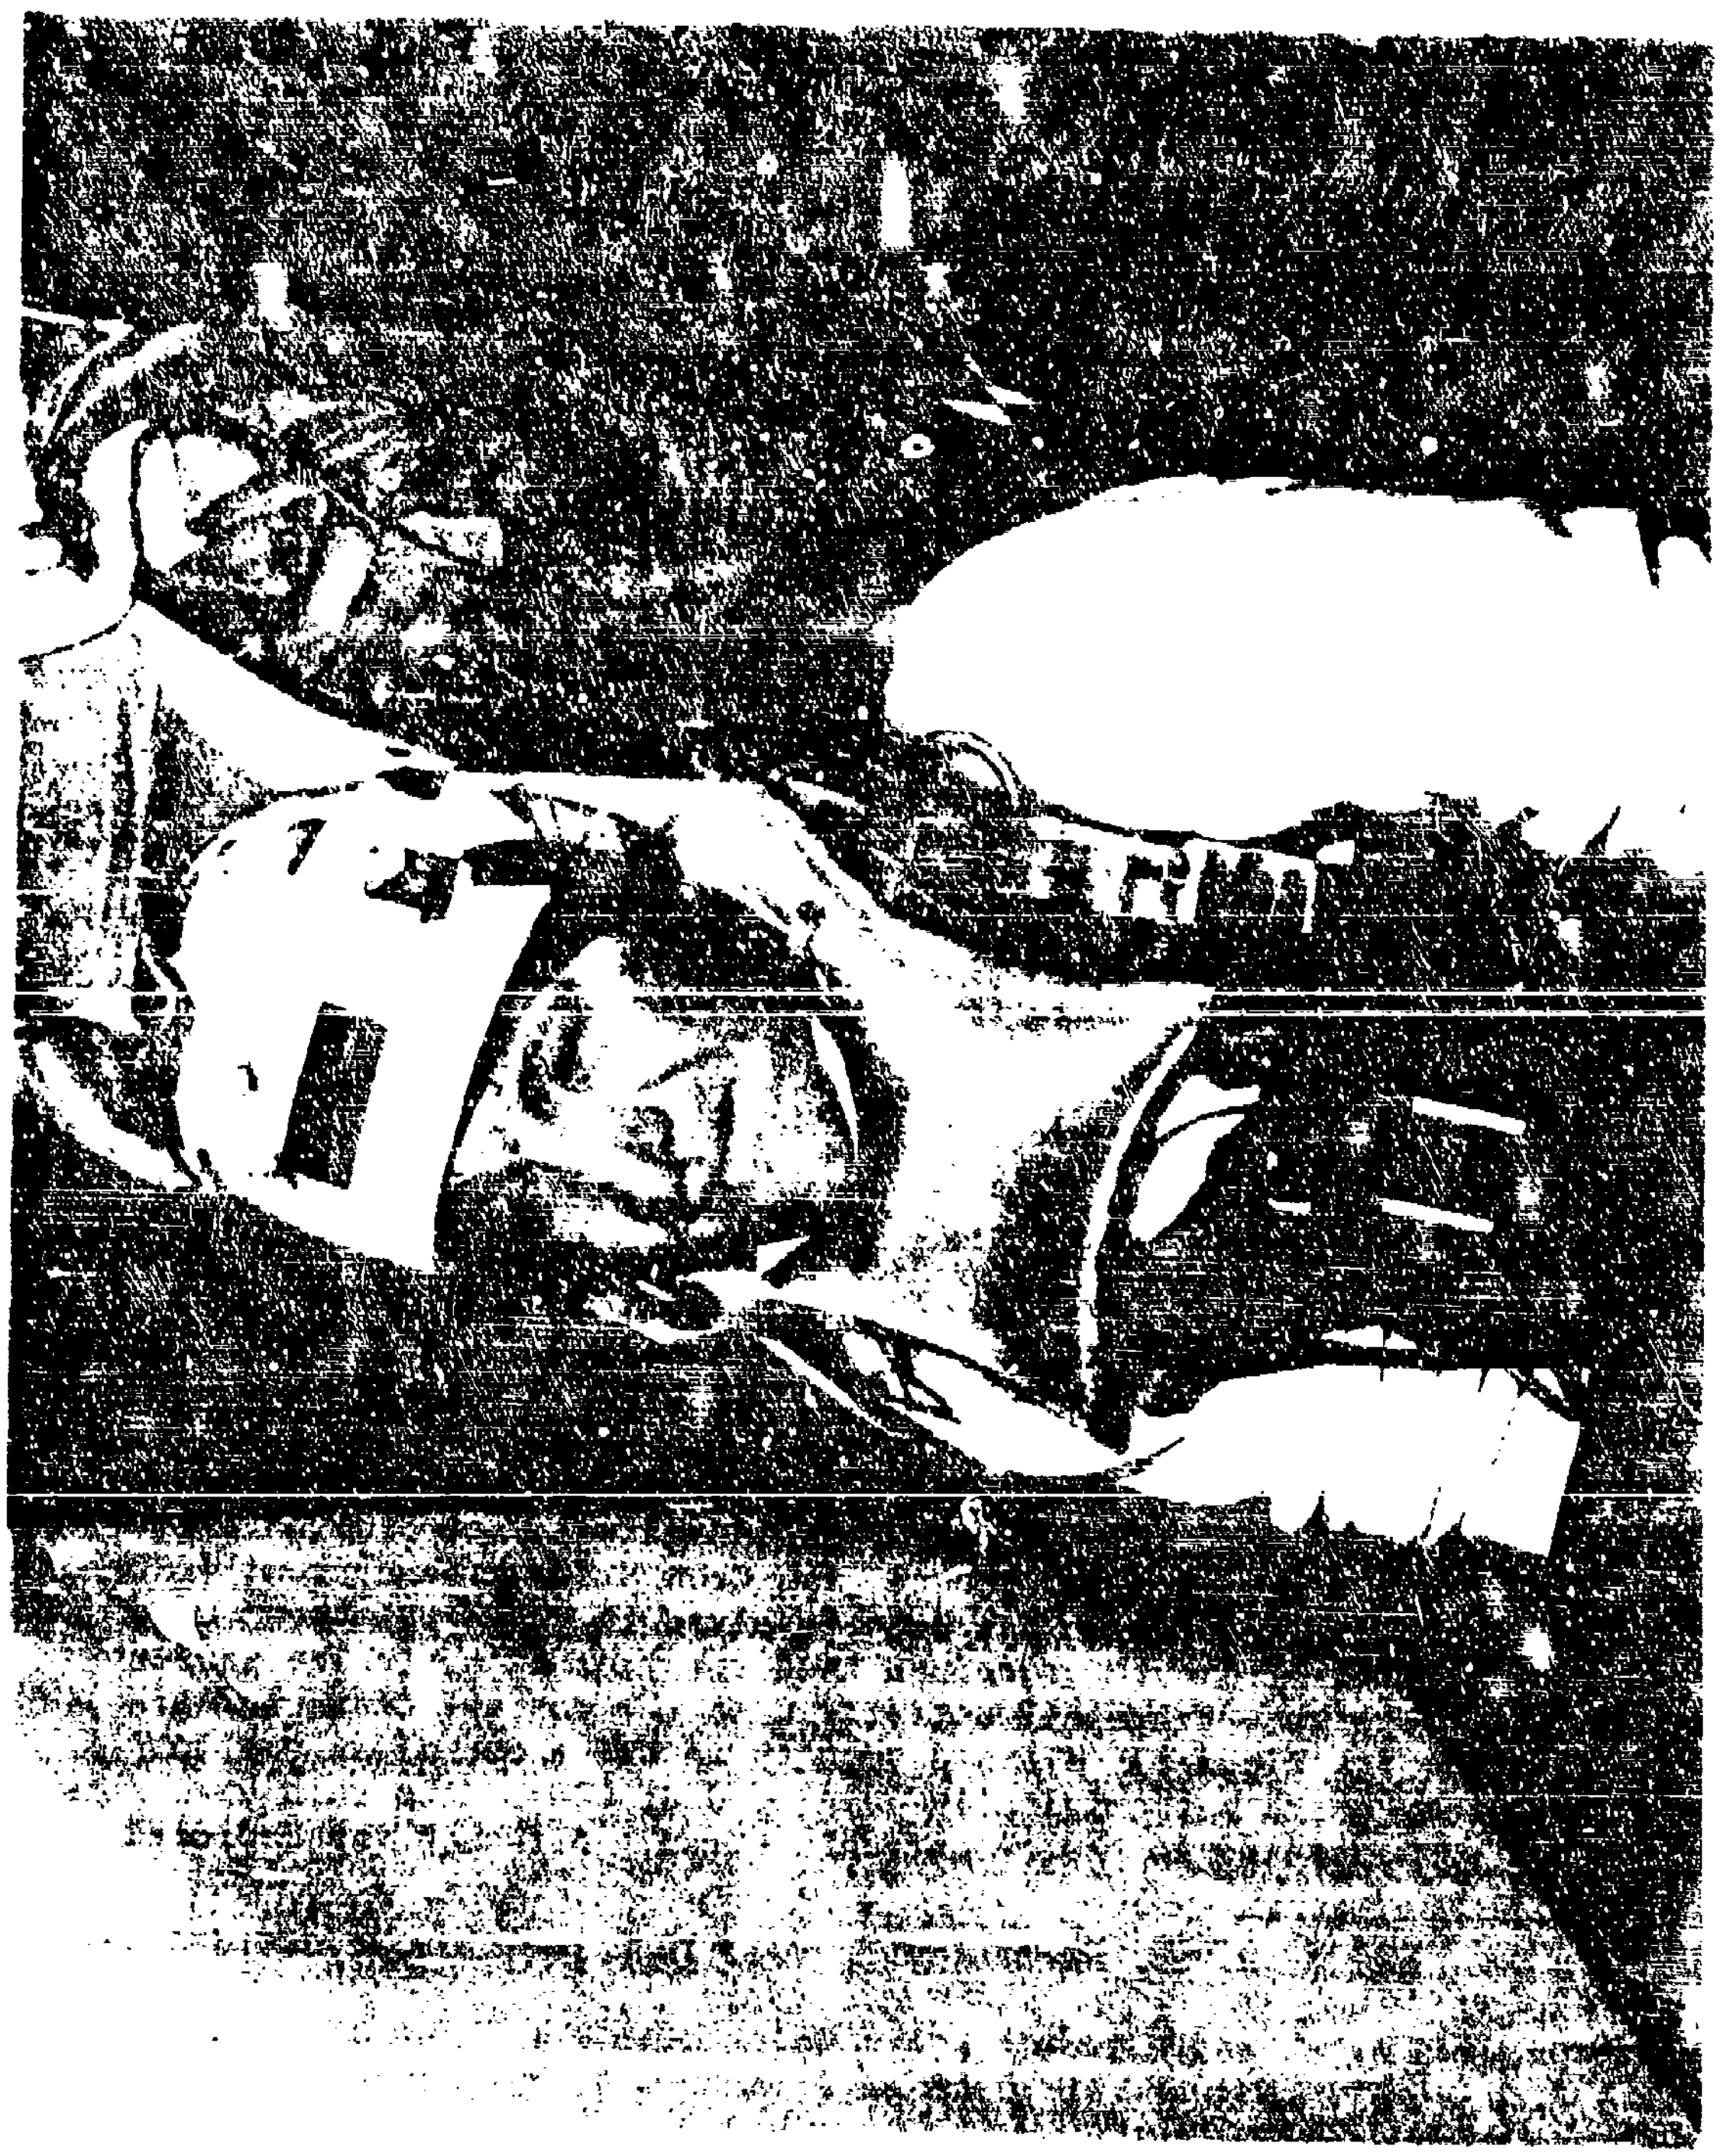

FIGURE 1 - Inflatable Chin Bag

configuration was not an optimized design with regard to shape and positioning, it was tested using live subjects on the CSD ejection tower facility[3] to demonstrate its improved head restraint characteristics. Because of the experimental nature of these tests, peak ejection force was held to about 6 G's (compared to an actual ejection generating a force of approximately 11 to 14 G's) and the bag was preinflated and positioned before the ejection thrust. Comparison of live subject ejections with and without the bag are shown in figure 2. The most important aspect of the experiment was to show that the chin bag reduced head rotation by 20 deg, demonstrating the feasibility of using an inflatable head restraint. Of interest in figure 2 is the curve of the no helmet subject. Head rotation for this condition was the most limited and supports the argument for a light helmet.

In July and August of 1972, CSD conducted numerous ejection tower tests (with ejection forces in the 10 to 12 G range) using a modified inflatable neck collar to protect the human subjects from neck injuries. Although the tests were conducted to acquire data not affiliated with development of the neck collar, analysis of the test films showed that it helped to limit head rotation during ejection. These tests further supported the concept to be used for developing an operational head restraint.

The effectiveness of any device as a head restraint is based primarily on its capability of eliminating head rotation and angular acceleration. The emphasis being placed on limiting head rotation, since there is evidence that neck injuries are caused by hyperextension of neck muscles and hyperflexion of cervical vertebrae due to violent forward head rotation[4].

The following text discusses the design philosophy pertaining to development and fabrication of the CSD inflatable neck collar. (Throughout the remainder of this report, the terms: neck collar, neck bladder, neck bag, and head restraint will be used interchangably.)

Results of neck collar testing on the CSD ejection tower will be discussed in a future NAVAIRDEVCEN report. Plans have been made to conduct these tests in the near future after the fabrication of test models is completed.

DESIGN CONSIDERATIONS

There are essentially five major design considerations pertaining to development of the inflatable head restraint:

1. Cost effectiveness

2. Inflation technique

---

3. *See page 3.*
4. *Ewing, C. L., King, A. I. and Prasad, P.; Structural Considerations of the Human Vertebral Column Under* $+G_Z$ *Impact Acceleration, AIAA paper No. 71-144 presented at AIAA 9th Aerospace Sciences Meeting, New York, Jan, 1971.*

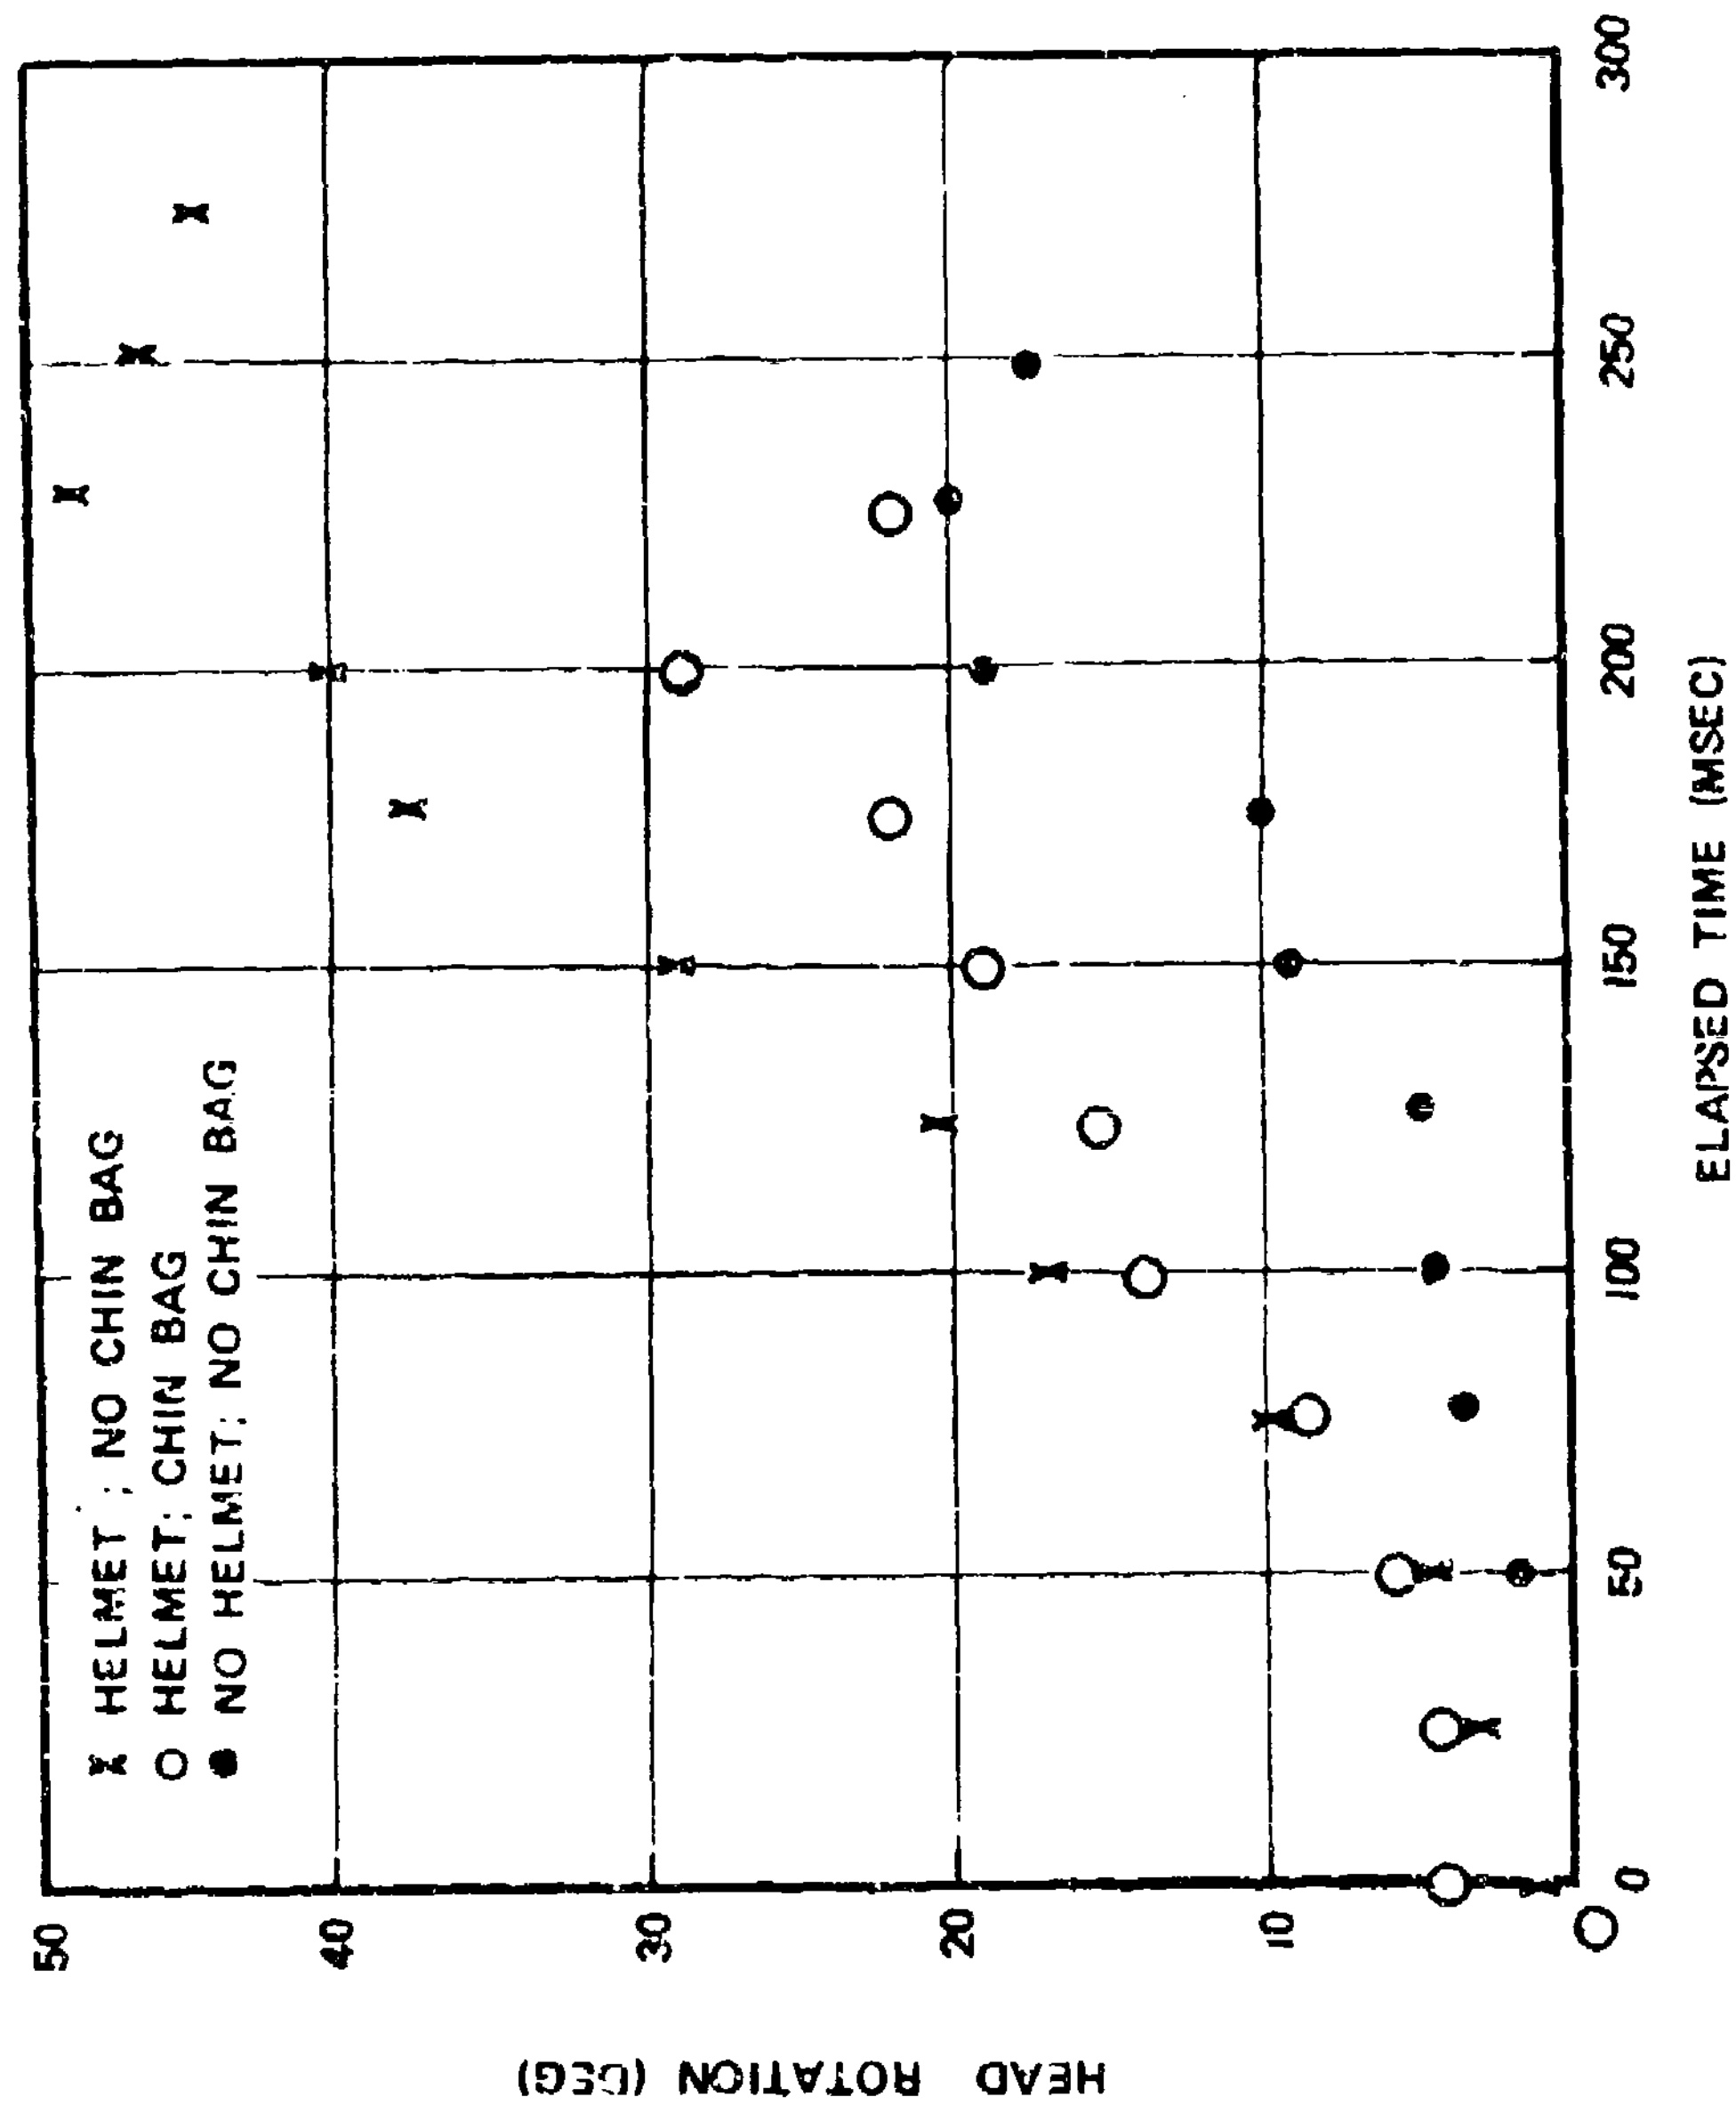

FIGURE 2 - Chin Bag Test Data

3. Form and fit of the inflatable bladder to ensure head support.

4. Packaging of the deflated bladder.

5. Integration into life support equipment.

The last three design areas require the most attention in the development process since inflation technique is within current state-of-the-art technology, and cost effectiveness will depend primarily on complexity of the form, fit, fabrication and packaging of the neck bladder.

The remainder of this report discusses the design problems encountered in developing the neck collar along with the design approach which is expected to yield an effective system.

COST EFFECTIVENESS

Costs pertaining to the head restraint system must be kept low as compared to other life support systems. On a value vs cost basis, the head restraint would have a low rating when compared to a system such as a parachute recovery system or an ejection seat propulsion system. Both the recovery and propulsion systems have high values which justify a high cost for their development and operation since failure of either would lead to catastrophic results. However, a head restraint failure would be less likely to cause severe consequences since the crew member is still restrained by a conventional harness. Therefore, costs pertaining to development, production, and maintenance of the neck collar must be kept low if it is to be accepted into the fleet.

Maintenance and operational costs should be extremely low since components such as the bladder, package, gas lines, squib and gas generator have been designed to have shelf-lives measured in terms of years. In the aircraft cockpit, maintenance would essentially consist of visual inspection, and normal service life would be measured in years; no special test equipment will be needed during preventive and corrective maintenance procedures.

The bulk of the cost (beyond the development phase) would be fabrication and acquisition costs. Components of the inflator system such as gas lines, gas generator, squib, packaging fabric and bladder material are "off-the-shelf" items requiring very little or no development effort or redesign; therefore, the costs due to manufacturer's retooling and product development should be nominal.

The areas requiring concern for cost overrun are fabrication and packaging of the neck bladder. It is important that construction of the bladder and its packaging be kept simple. Patterns used in fabrication must not require intricate cutting procedures and long curing times for adhesive bonding.

INFLATION TECHNIQUE

An operational requirement of the neck collar is to have it inflate automatically at the time of ejection initiation. The neck bladder is to be packaged around the crewman's flight suit collar so that it will inflate around his neck and under his chin to support the head and prevent its rotation. The time from ejection initiation (when the lower ejection handle or face curtain is actuated) to initial upward movement of the ejection seat is usually 0.2 to 0.3 seconds (the delay time needed to jettison the canopy). Therefore, the restraint bladder must inflate during the delay. This inflation time can be easily attained since current inflator systems, such as those in automobile air bag systems, can inflate large volume bladders within 0.05 sec after receiving the initiation input signal.

Inflation pressure inside the neck bladder is unspecified at this time, although it is expected to range between 3 psi (2.07 nt/cm^2) and 8 psi (5.51 nt/cm^2). Ejection tower tests are to be conducted to determine if the magnitude of the inflation pressure has a significant effect on rebound of the crewman's head. It has been observed that low pressures, about 2 psi (1.38 nt/cm^2) to 4 psi (2.76 nt/cm^2), create some "spring back" or trampoline effect on the bladder. Higher pressures, 6 psi (4.13 nt/cm^2) and upwards, make the bladder very rigid. It has not as yet been determined if the high pressures will have a detrimental effect on head restraint. Whatever the pressure magnitude is, inflator systems can inflate the bladder before ejection seat motion begins.

The inflator system will use a squib-actuated solid propellant gas generator. The amount of solid propellent which creates the gas used for inflation will depend on the volume in the bladder and the inflation pressure. The electrical squib initiates burning of the propellant within milliseconds after receiving an input signal from the ejection actuator. The gas used for inflation is non-toxic and does not reach a temperature high enough to injure the crewman. It should be emphasized that the squib-actuated solid propellant gas generator system consists of state-of-the-art technology, and that the components are now being manufactured by several industrial organizations.

The gas generator is to be located on the ejection seat and the flexible (plastic or rubber) gas supply line will be severed by a ballistically actuated guillotine or strap cutter at the time of seat-man separation during the ejection sequence. On some ejection seats it may be possible to route the gas line along the inertia reel shoulder straps such that the inertia reel strap cutter will sever the gas line. A small check valve located near the bladder will prevent loss of gas from the bladder after the gas line is severed. Figure 3 illustrates the design configuration of the pertinent components. The bladder will remain inflated to offer head restraint for parachute opening shock. During parachute descent, the crewman can pull the bladder off with a free hand if he feels that it encumbers his head motion.

INFLATABLE NECK BLADDER DESIGN

Design of an effective inflatable head restraint emphasizes the need for human engineering. Form and fit of the neck bladder to ensure head support is the most difficult task in development of the system.

To complicate matters, there is a large range of crewman anthropometric dimensions to which the inflatable bladder must be fitted. Dimensions of concern in fitting the inflated bladder are neck circumference, anterior neck

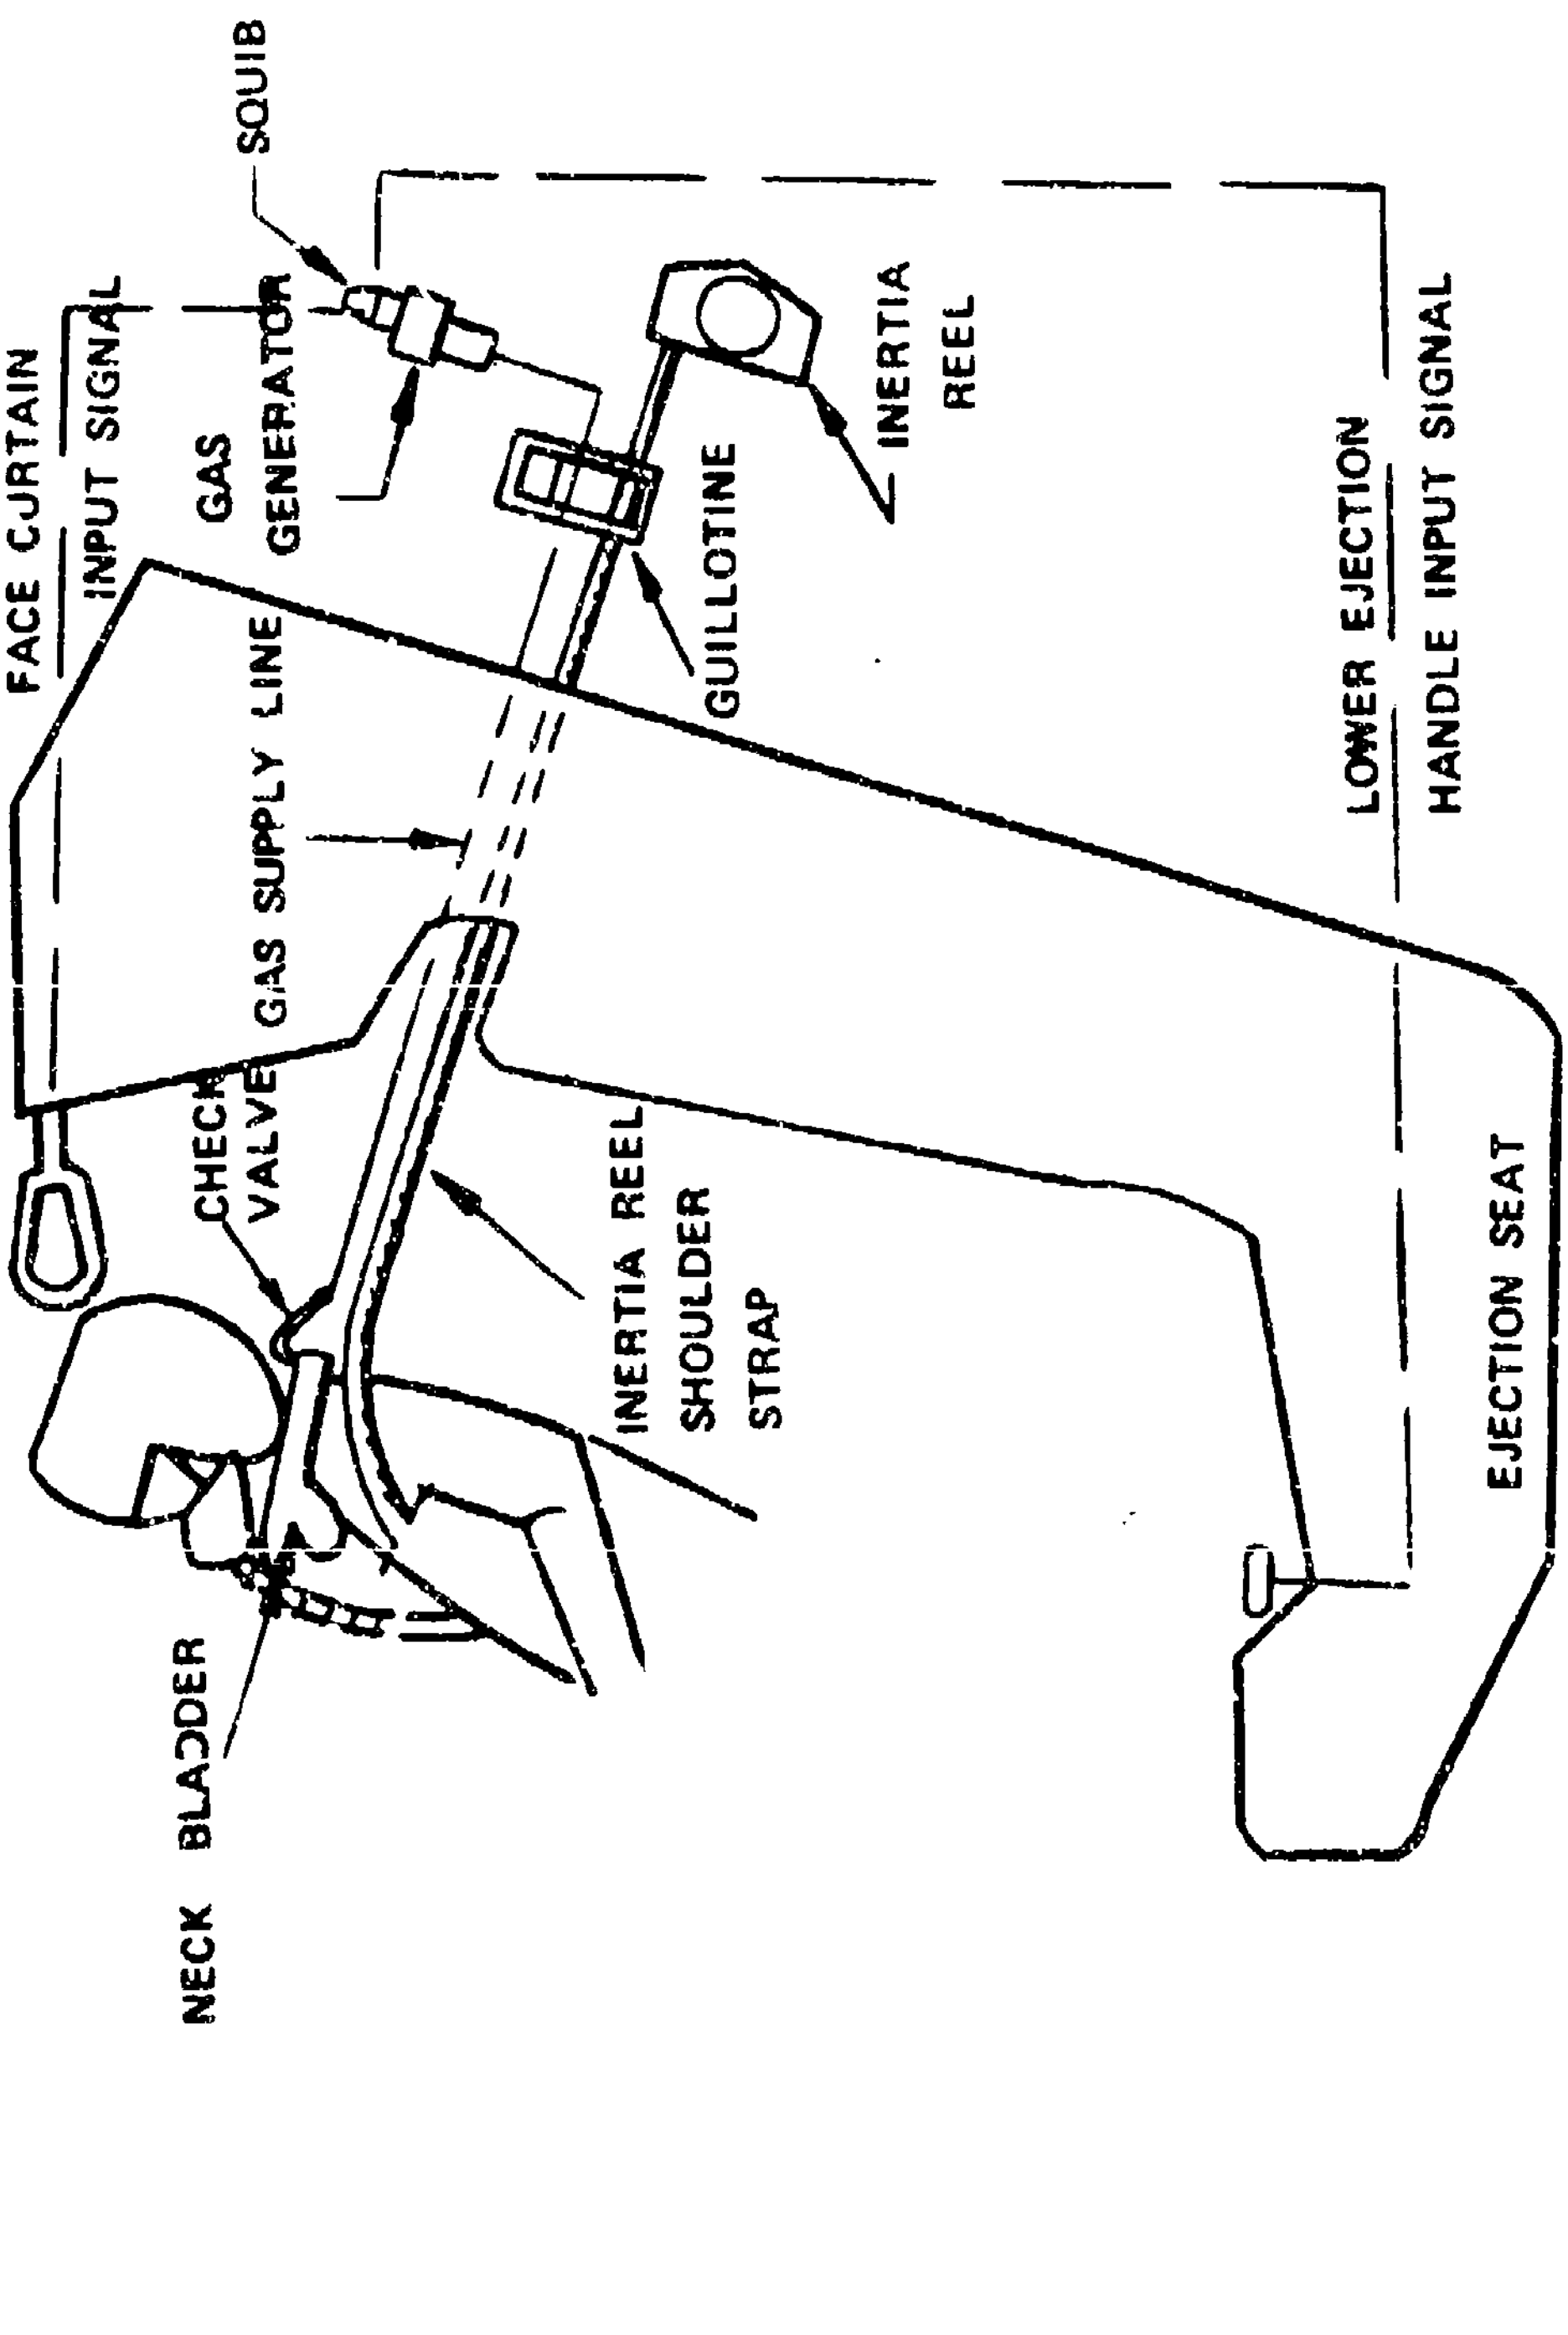

FIGURE 3 - Layout of Inflation System Components

length and mandible projection. These dimensions have to be considered for crewmen populations ranging from the 3rd percentile to 98th percentile populations. Table I lists the range of dimensions[5]. Like other wearing apparel, the neck collar will have to be fabricated in various sizes so that it fits all personnel; possibly, fabrication in four sizes will fit the entire range of crewmen. For development purposes, all neck collar models are being designed to the 50th percentile anthropometry.

The crux of the design approach in developing an inflatable head restraint is to support the crewman's chin with an inflated bladder or bag; along with chin support, the restraint should offer some support for lateral and backward rotation. Such a design requirement suggests a ring-shaped inflatable neck collar.

With the neck collar configuration, it is critical that the inner diameter of the ring-shaped bladder not be too large, otherwise the crewman's chin can slip inside the ring allowing his head to rotate forward. The advantage of the ring-shape design over a simple frontal chin bag design is that the ring does not slip away from the chin as easily as the chin bag. This is so because the ring is braced around the crewman's neck; whereas, the chin bag is only supported by a chin strap and can pivot along the strap causing the bag to slip or "squirt out" from under the mandible. An early ring-shaped neck collar is shown in figure 4. (This model is often called a "neck ring.") It was designed as three-layered rings and fabricated in an accordion-shaped configuration in an attempt to have the collar lay flat against the flight garment and to reduce packaging bulk. This design provided chin support and restricted head rotation, but due to excessive height of the bladder design the crewman helmet was pushed up and off his head. This condition can induce forward rotation of the helmet at the time of ejection thrust with the possibility that the front of the helmet can forcefully strike and possibly fracture the crewman's nose. Also, with the helmet pushed up and off the crewman's head, windblast or parachute opening forces could cause the helmet to completely separate from the crewman's head leaving him without head protection for the remainder of his parachute descent and rescue operations.

Refinement of the neck ring design required reducing the neck bladder height on the sides and back of the crewman's head. It was at these areas where the inflated bladder pushed against the helmet. The refined design has only one ring (2.0 inch, 3.08 cm cross-section diameter) encircling the crewman's neck. The portion of the ring under the crewman's chin was fabricated to two ring segments as shown in figures 5a and 5b. In designing the neck collar, it is necessary to support the chin by using the crewman's chest (sternum) as a supporting base for the bladder. A proper design allows the bladder to inflate under the chin and into his sternum. The refined neck collar design of figure 5 is more effective than the neck ring in figure 4 since it restrains the head but does not push against the helmet. The contour of the helmet fits within the contour of the inflated collar as depicted in figure 6.

---

5. *Hertzberg, H. T., Daniels, G. S., and Churchill, E.; Anthropometry of Flying Personnel-1950, WADC Tech Report 52-321, Wright-Patterson AFB, Ohio.*

TABLE I

ANTHROPOMETRIC MEASUREMENTS PERTAINING TO NECK COLLAR DESIGN

CREWMAN PERCENTILE	NECK CIRCUMFERENCE IN. (MM)	ANTERIOR NECK LENGTH IN. (MM)	JAW (MENTON) PROJECTION IN. (MM)
			
3	13.8 (350.7)	2.1 (54.0)	1.4 (35.3)
25	14.7 (372.1)	3.0 (75.7)	1.7 (43.3)
50	15.1 (384.3)	3.4 (87.1)	1.9 (47.6)
75	15.6 (396.5)	3.8 (97.7)	2.0 (52.0)
98	16.7 (424.6)	4.9 (124.0)	2.4 (61.7)

FIGURE 4 - An Early Neck Collar Design - Three Layer Neck Ring

FIGURE 5a - Refined Neck Collar Design

FIGURE 5b - Refined Neck Collar Design

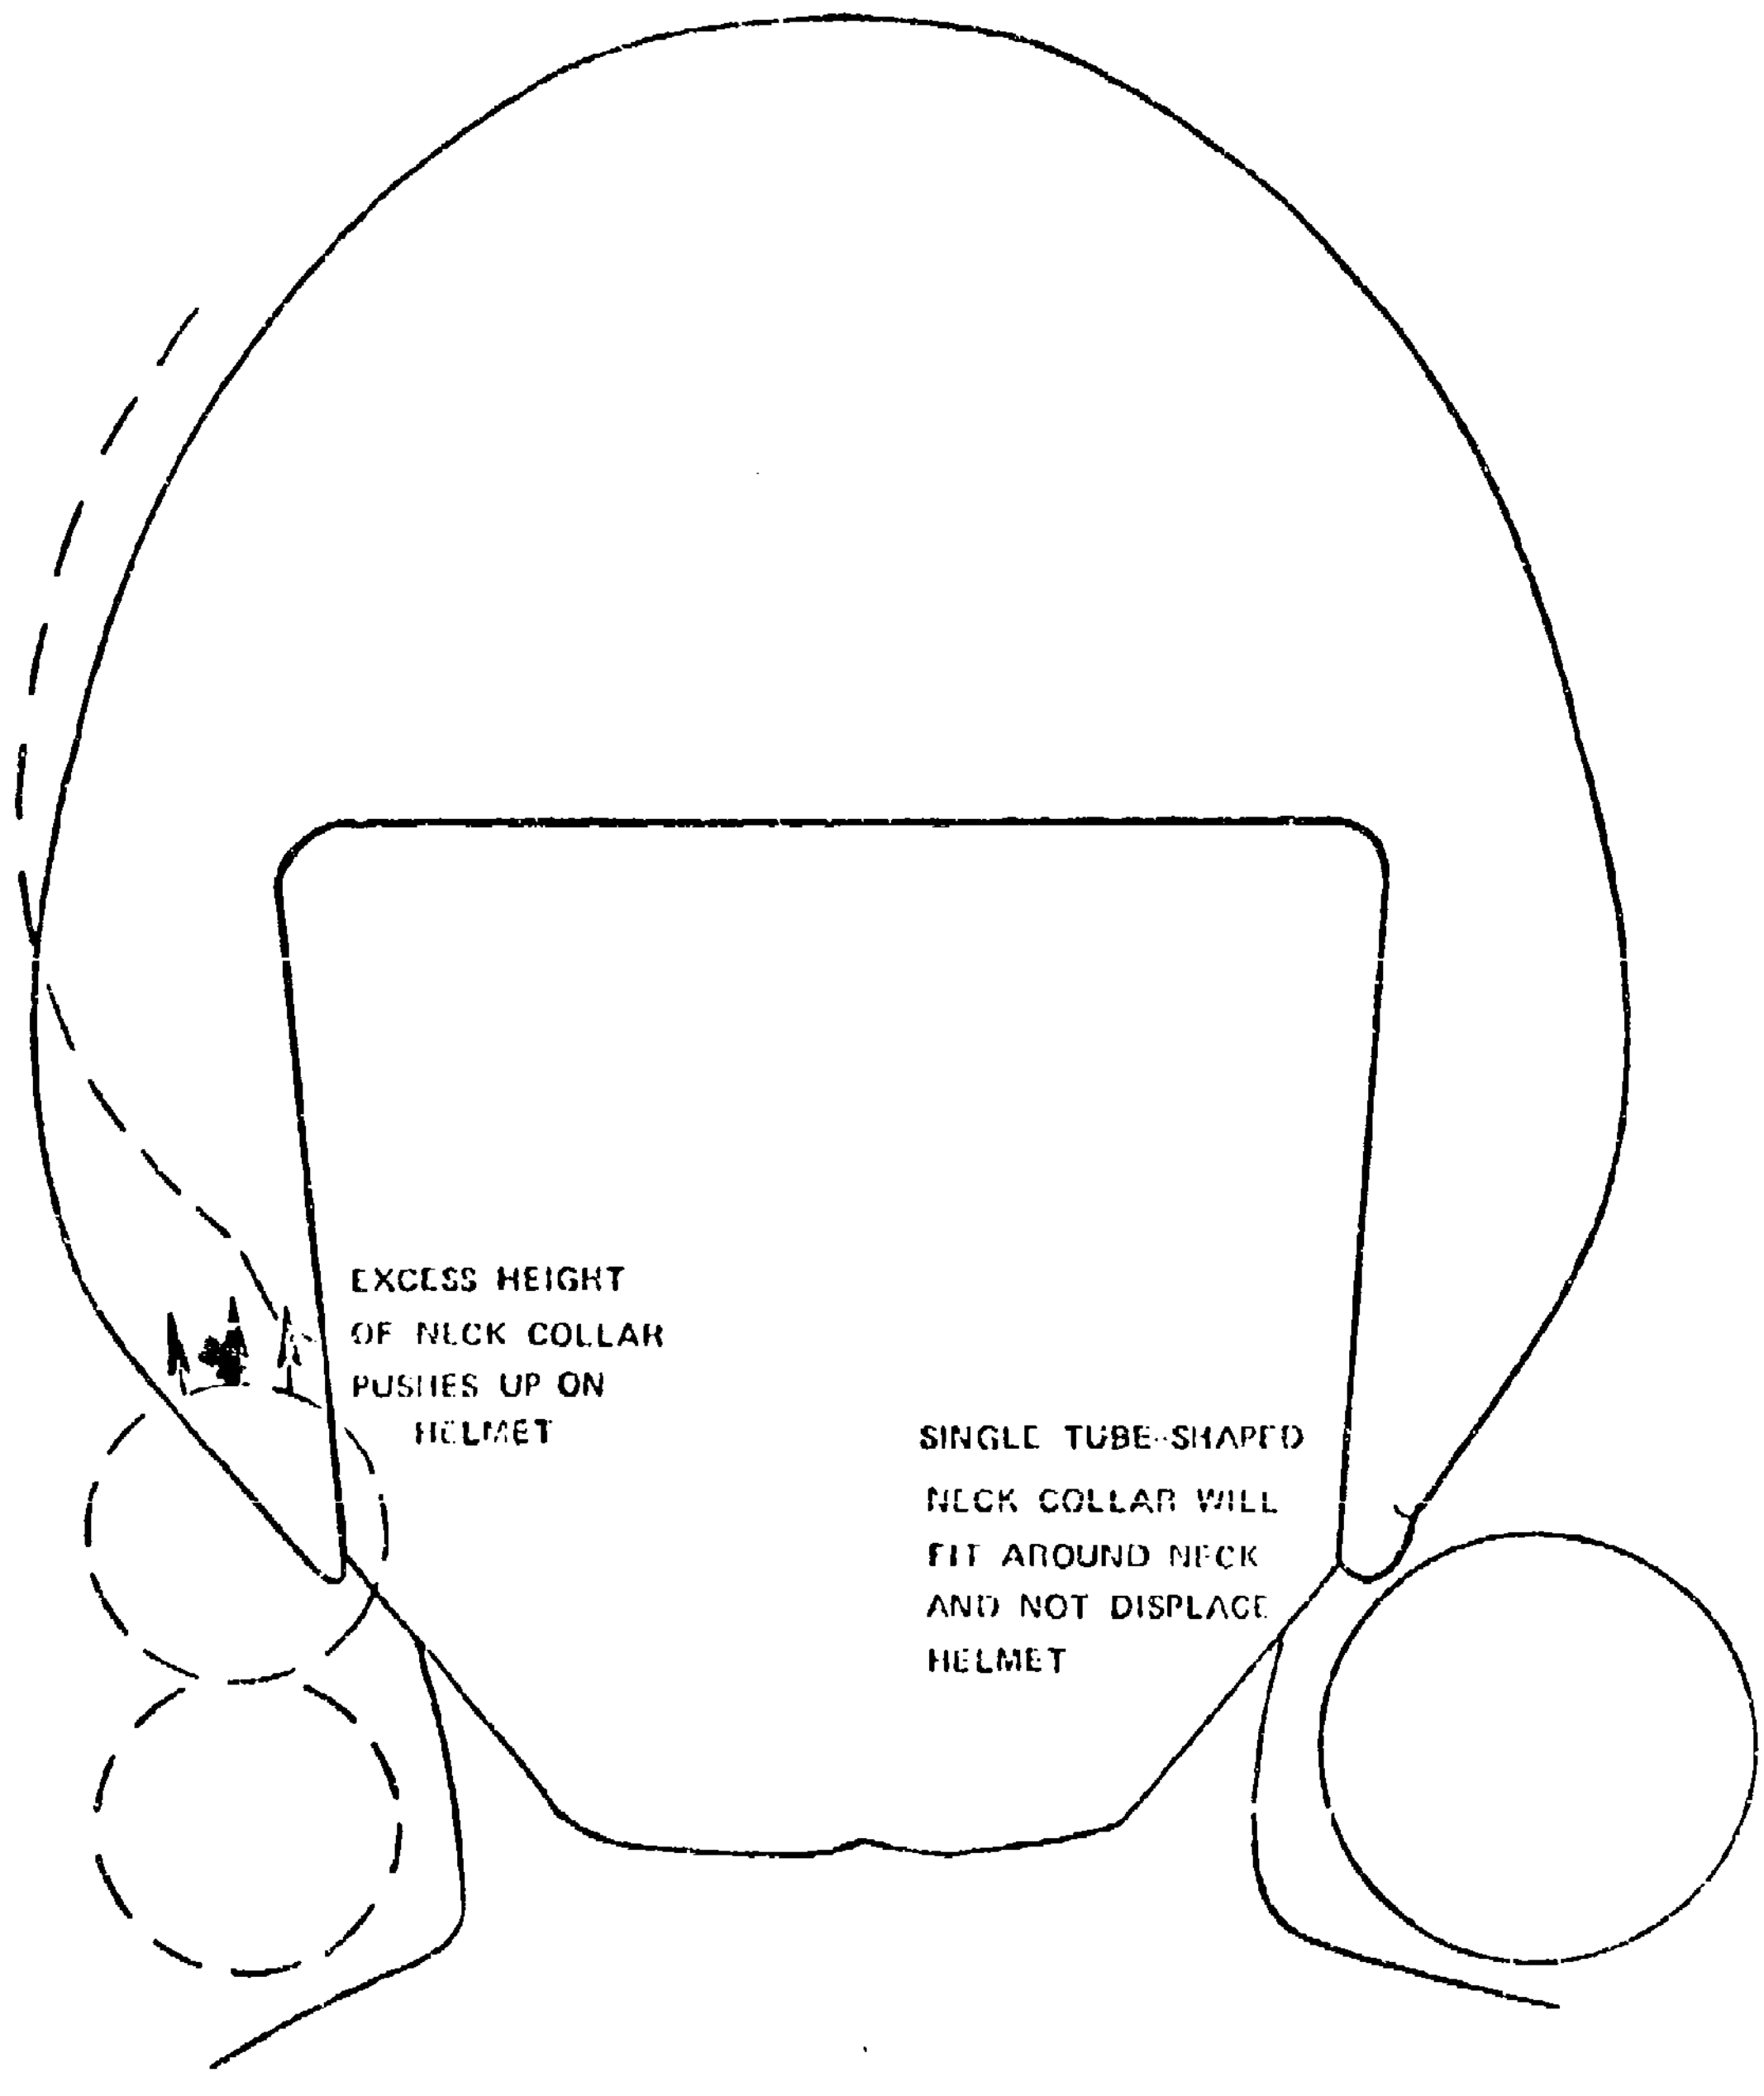

FIGURE 6 - Neck Ring Interference With Crewman's Helmet

The neck ring and ring segments are constructed of simple flat patterns bonded together with adhesive cement. The bladder fabric is neoprene-coated nylon. The sealing process for the development phase uses the adhesive cement rather than heat sealing in order to obtain a stronger bond. Inflation pressures in bladders sealed with the adhesive cement can be as high as 25 psi (17.26 nt/cm^2), whereas heat sealed bladders have ruptured at 6 psi (4.13 nt/cm^2). As stated earlier, the inflation pressure has not been determined and further dynamic testing will be needed to select the desired pressure.

The neck collar location does not interfere with life support equipment, specifically the oxygen mask and life preserver package. Figure 7 shows the location of the neck collar package with respect to the life preserver.

In the design of the inflatable neck collar, several design considerations materialize which are unique to the design of inflatables. Trial-and-error design and fabrication of models becomes necessary in achieving good form and fit. The desired form and fit of an inflated bladder is not easily assessed from the fabrication patterns because the fabric stretches and distorts upon inflation. For example, the inner diameter of the neck ring in its deflated mode decreases upon inflation, as shown in figure 8. Models fabricated at NAVAIRDEVCEN use neoprene-coated nylon, and the average reduction in the neck diameter upon inflation is about 12 percent ($D_2 \approx 0.88\ D_1$). The ends of the ring, although separated when deflated, will overlap upon inflation. The designer must also take care not to design any sharp edges into the bladder. Dimensional deformation can cause sharp corners on the patterns to push inwards against the neck as shown in figure 9. Of course, it is best to eliminate sharp corners not only for comfort purposes but because they are stress concentration areas during inflation and are difficult areas to properly seal and bond. Also, seams of the inflatable which rest against the neck must be smooth, as shown in figure 10.

Should a bladder be designed such that it becomes offset, as illustrated in figure 11, then the head is susceptible to snapping sideways; therefore, it is important to have a broad base under the chin and to prevent the restraint from shifting or sliding to the side of the jaw or around the neck. These problems are minimized in the neck ring design which offers stable support of the head.

PACKAGING TECHNIQUE

The neoprene-coated nylon bladder material offers strength, yet it is light and pliable enough for obtaining the desired packaging profile. Presently, the packaged bladder still has some excess bulk due to the use of reinforcement tape along the seams of the bladder; however, it is expected that a lighter tape can be used to reduce bulk.

Presently, the neck collar package (which is made of the same fabric as the flight suit) is to be an "add-on" to the collar of the suit. It can be fastened to the flight suit collar with Velcro or metal snaps. The collar extends across the flight suit zipper under the crewman's chin. All hat is required of the crewman is to fasten down the front section on the side of the flight suit collar and plug in the flexible gas supply line to the inlet tube

FIGURE 7 - Location of Neck Collar With Respect to the Life Preserver Package

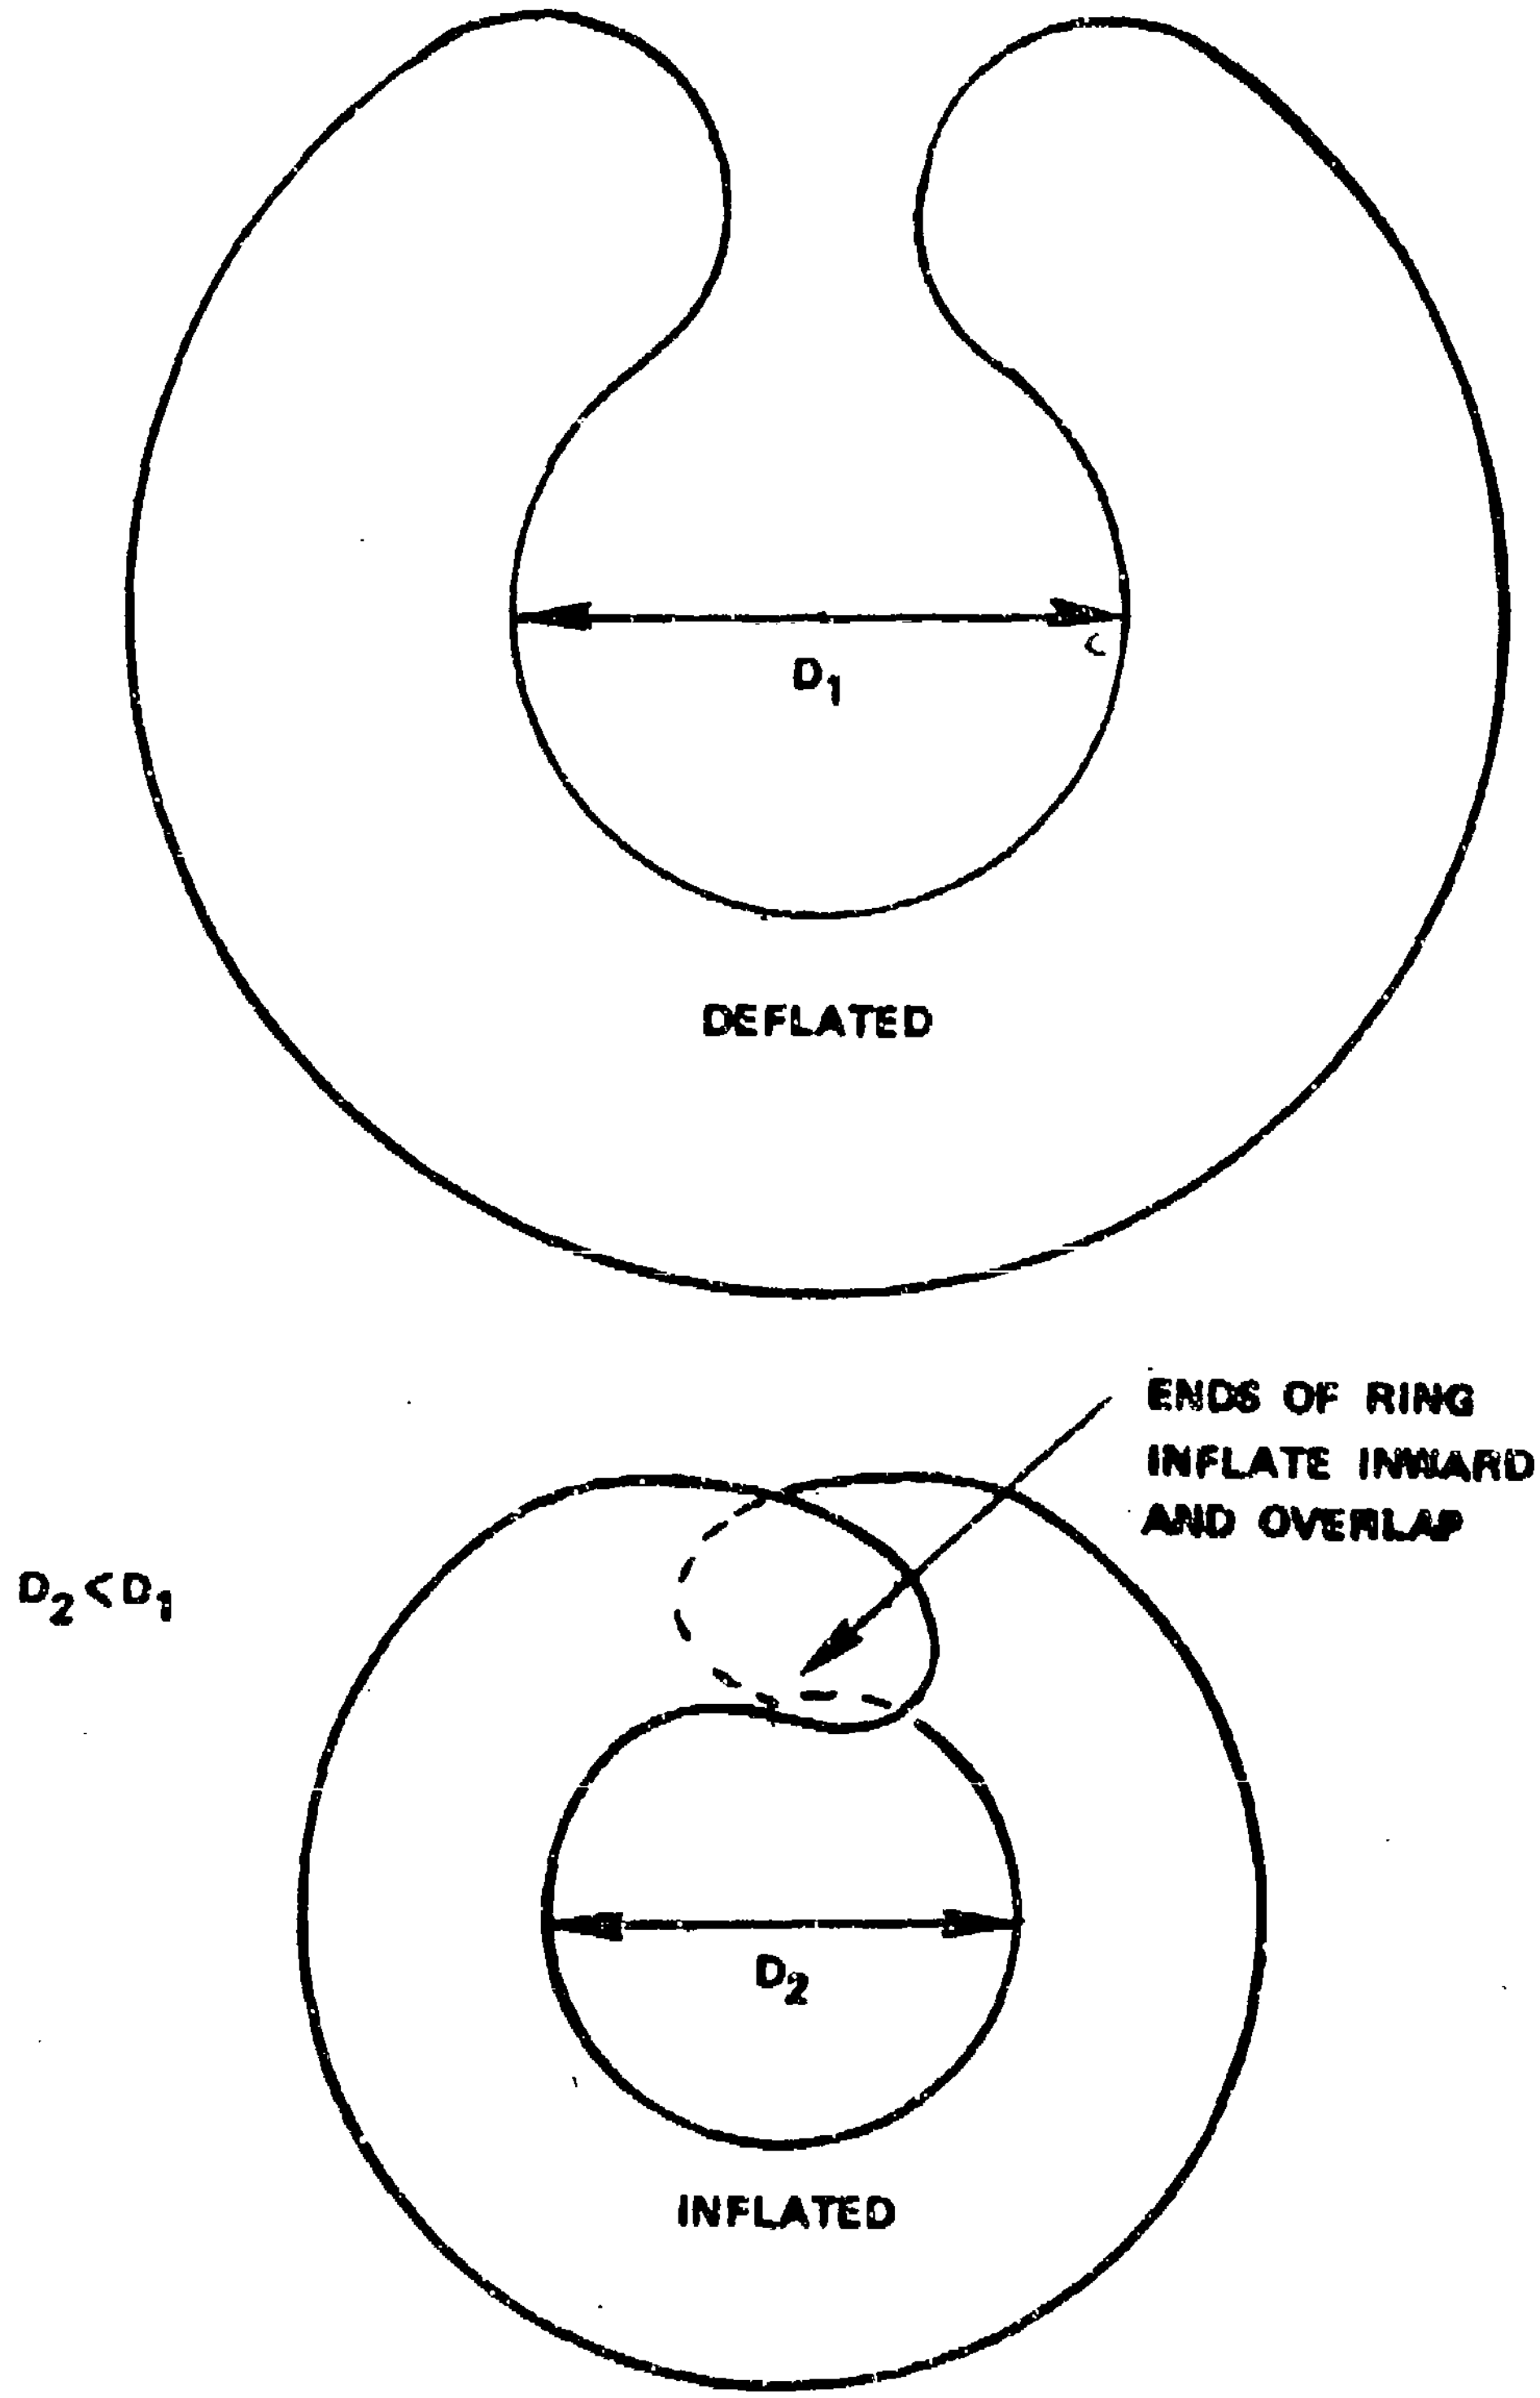

FIGURE 8 - Neck Ring Diameter Distortion From Deflated to Inflated Configuration

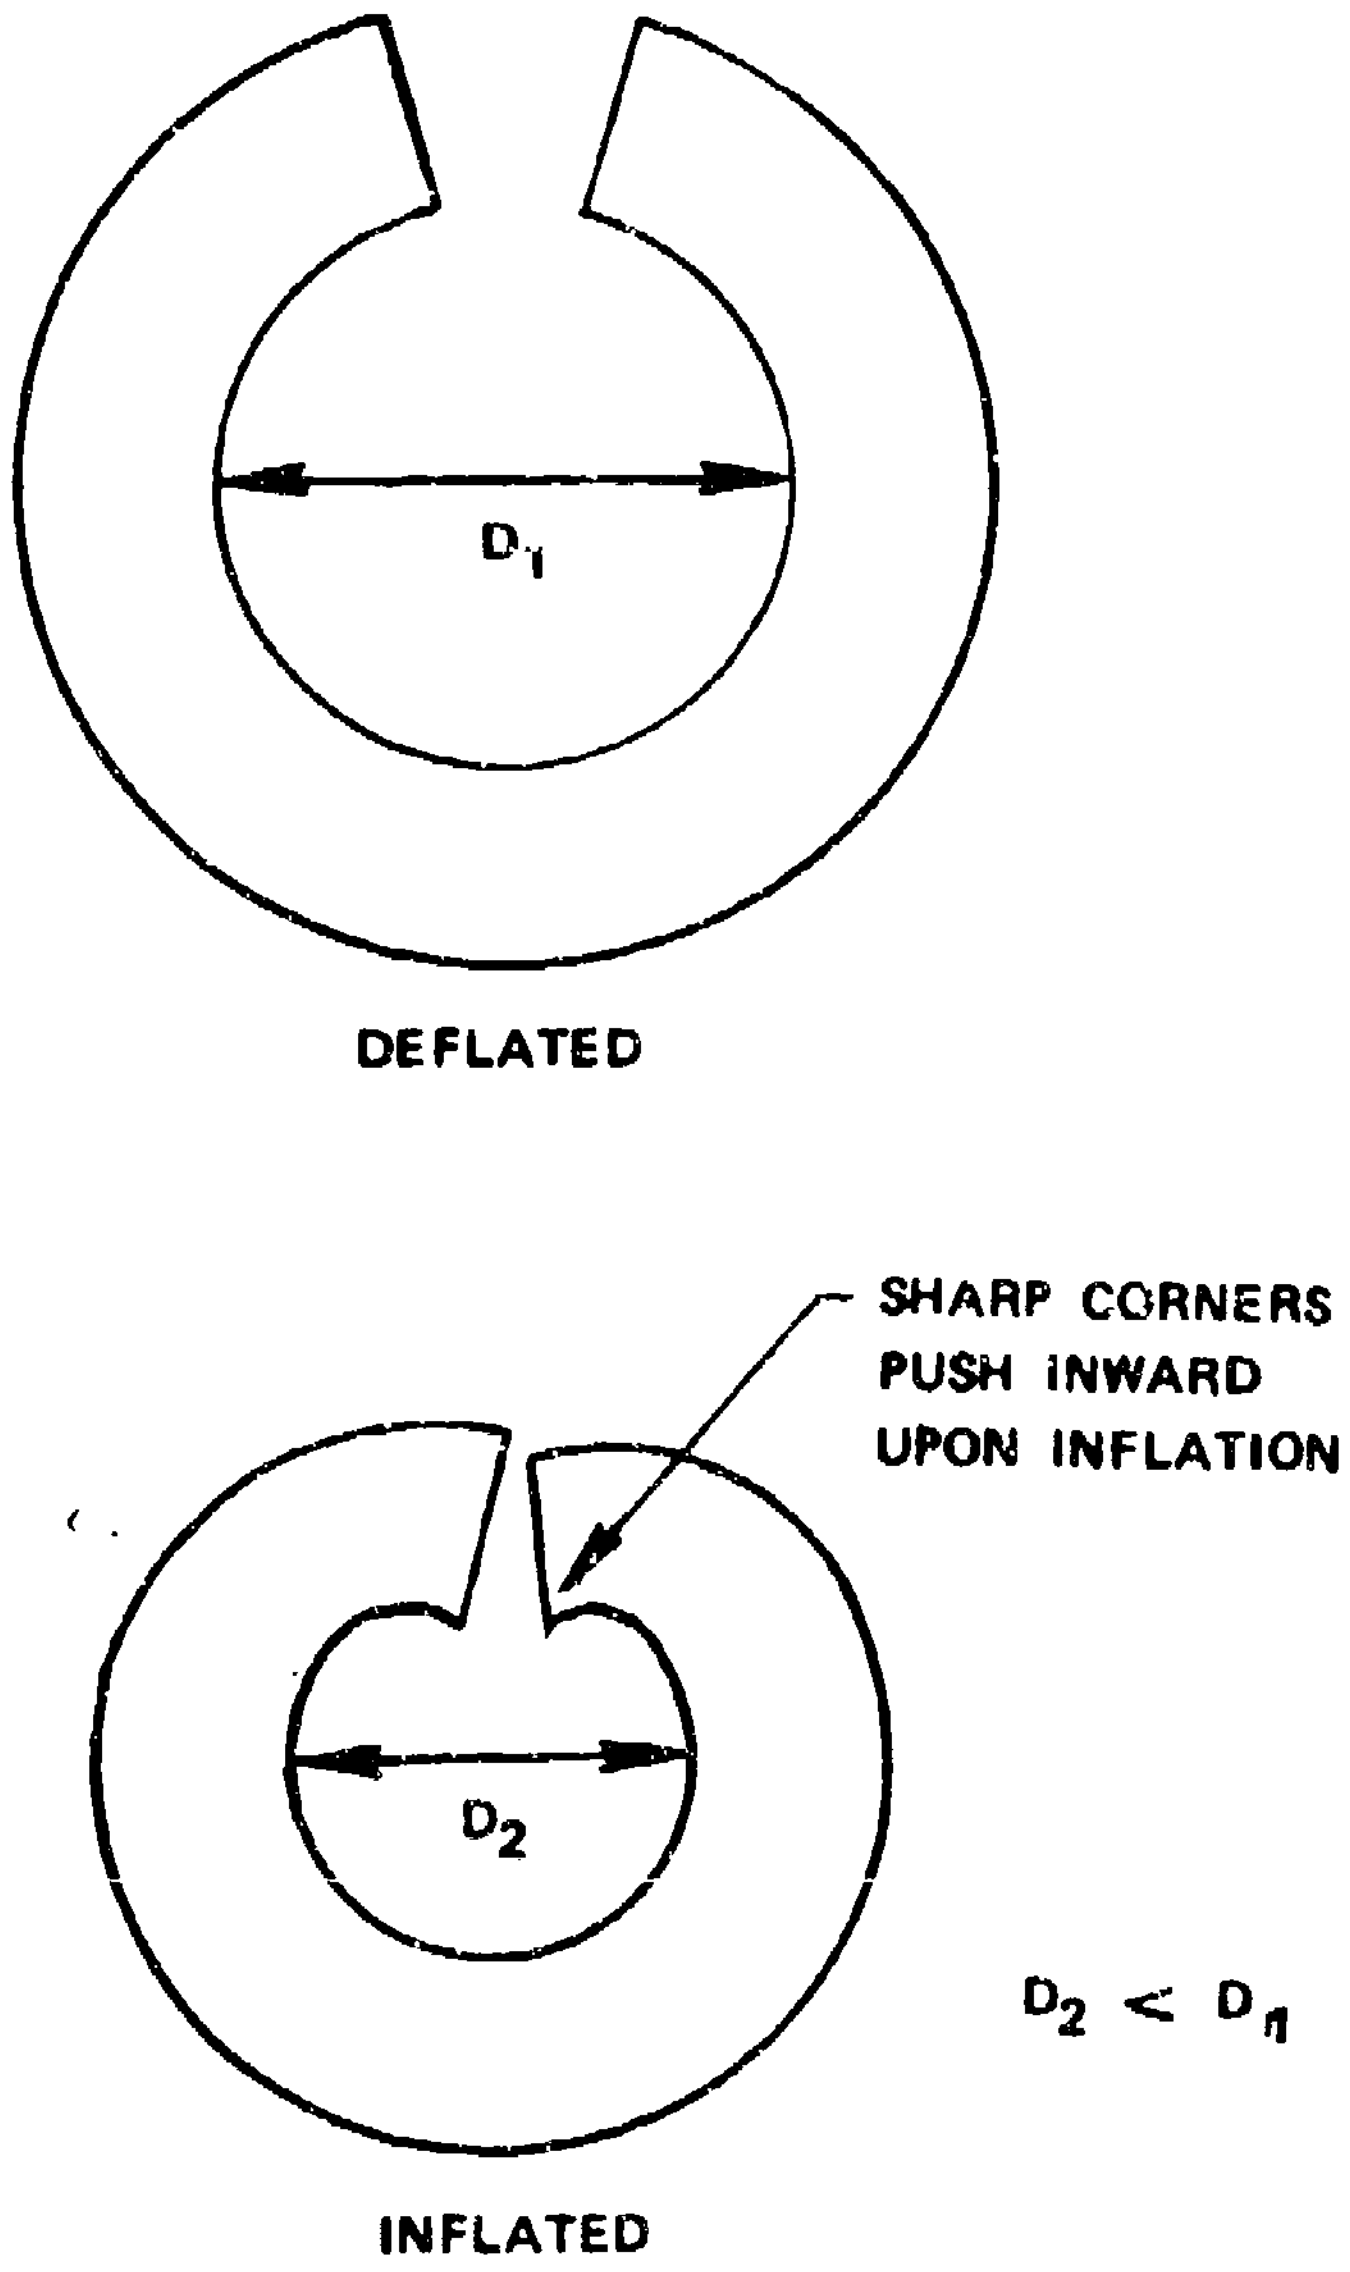

FIGURE 9 - Possibility of Neck Lacerations Due to Incorrectly Designed Neck Bladder

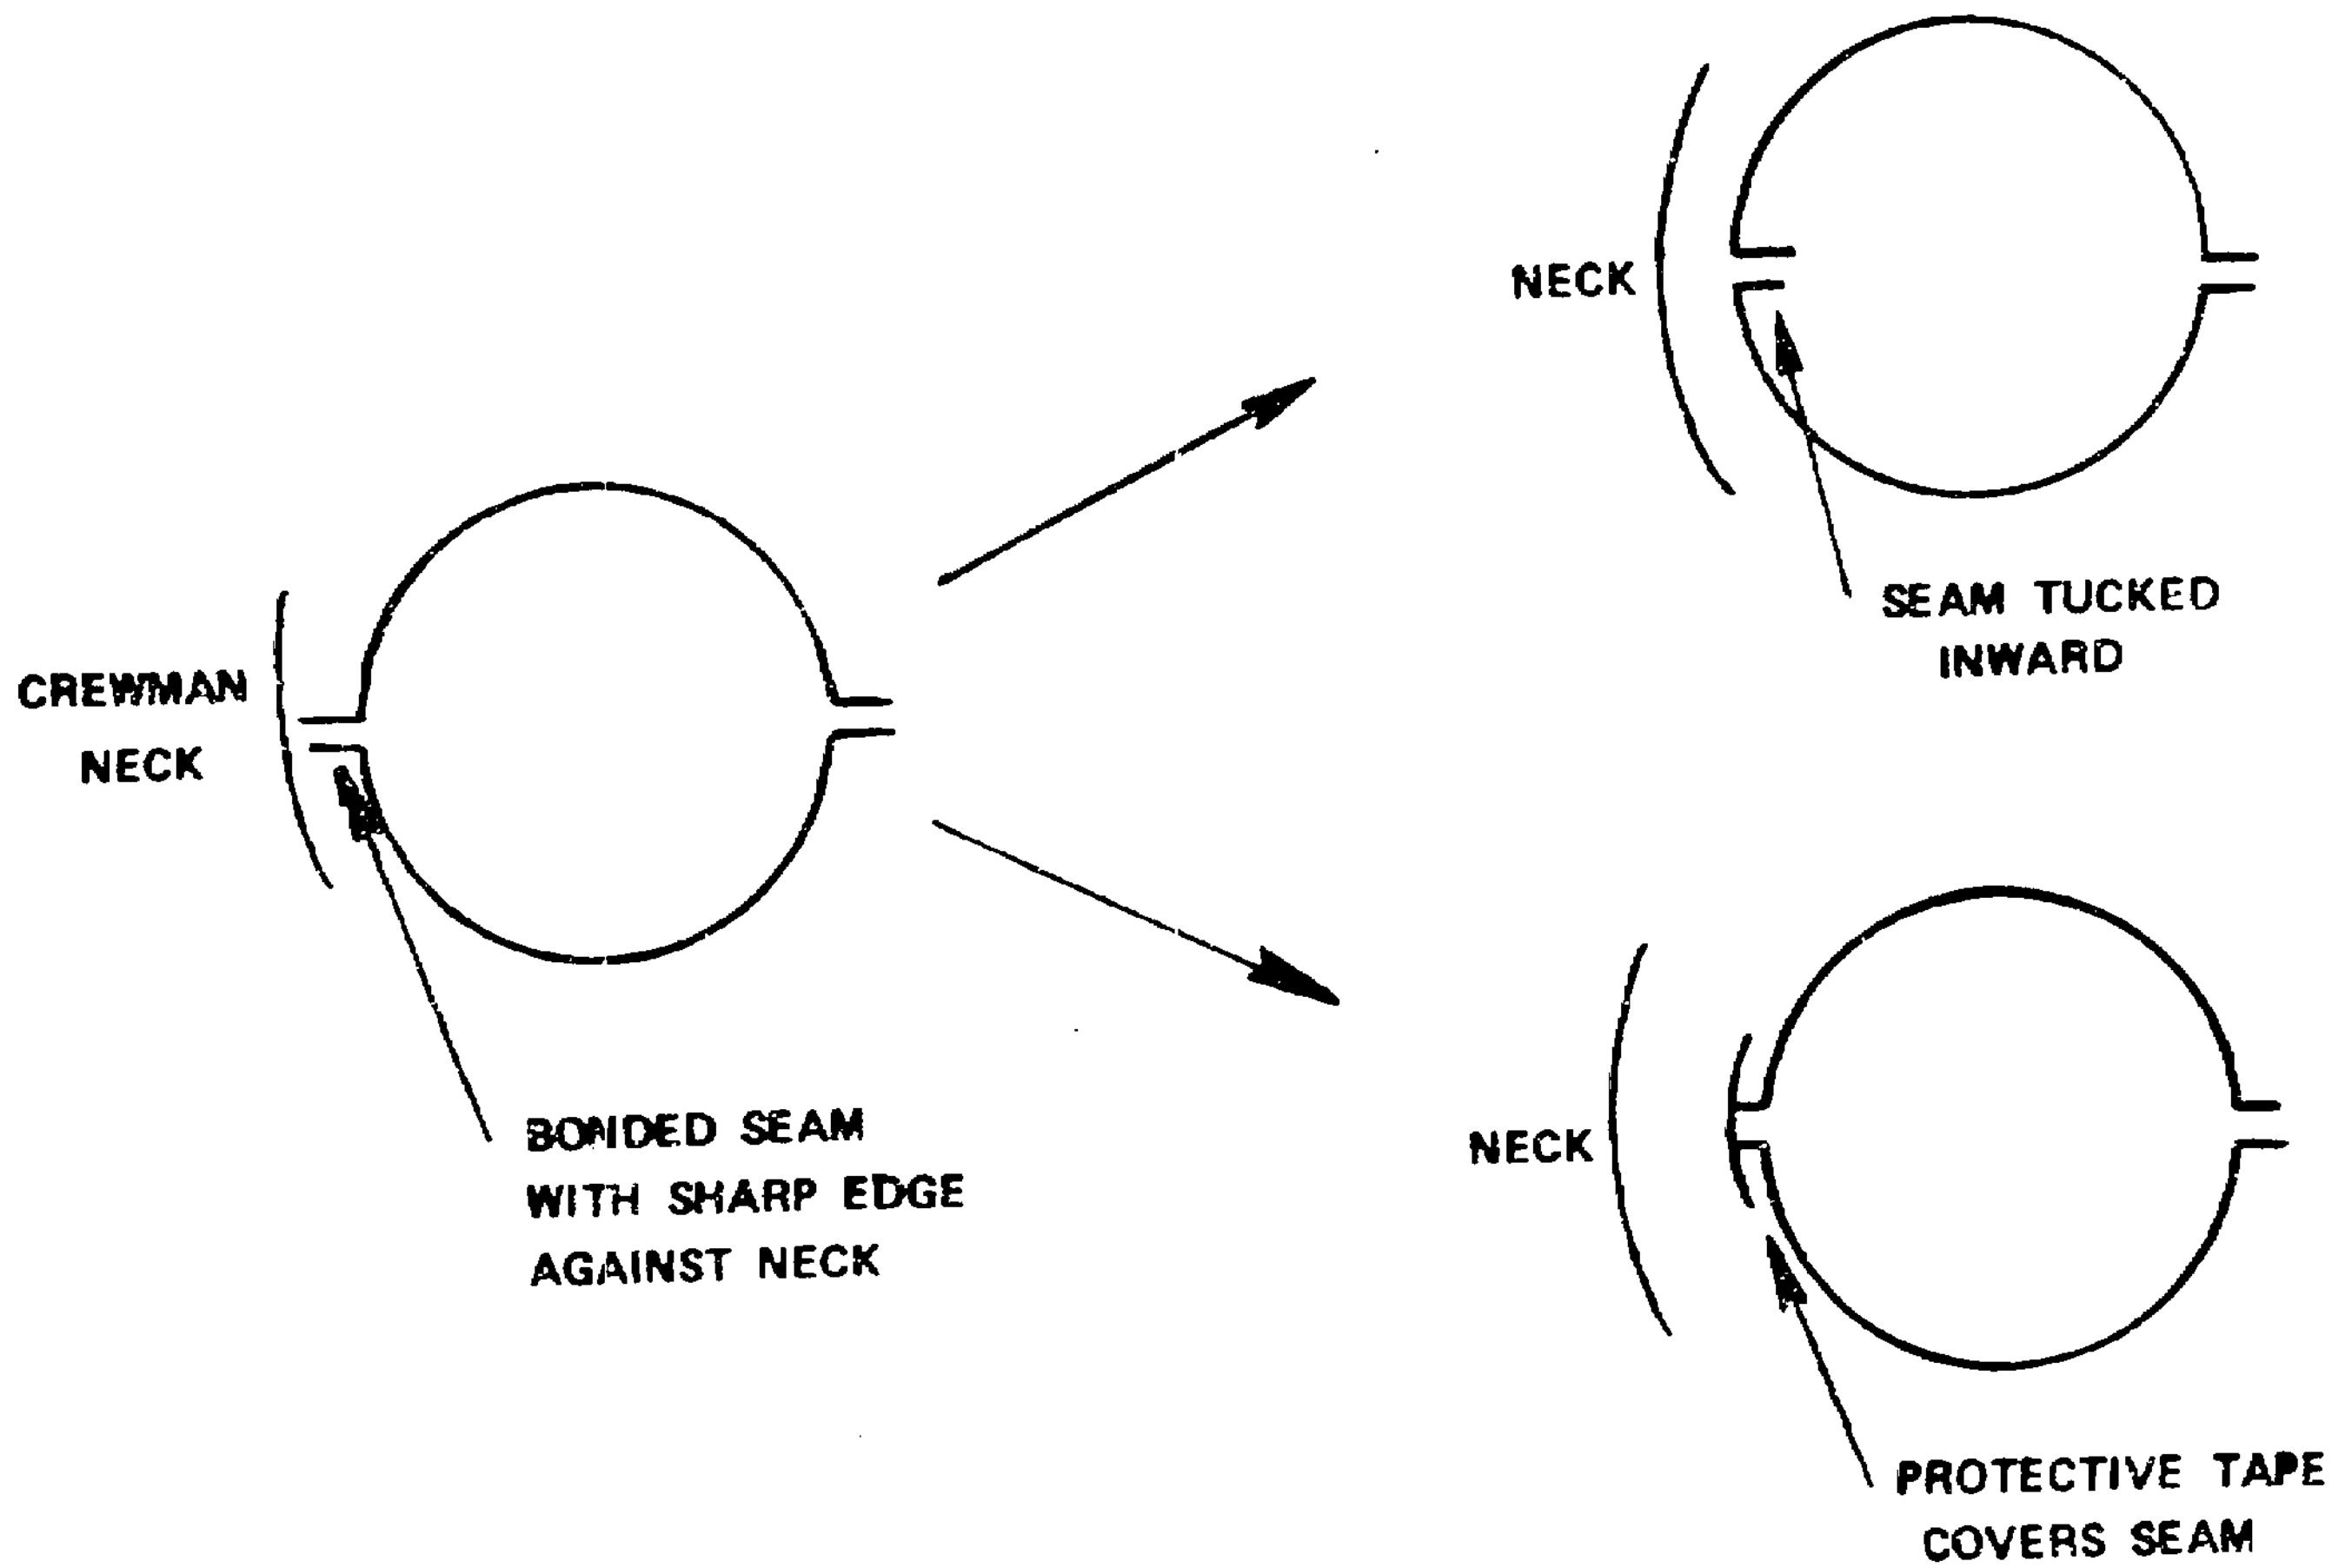

FIGURE 10 - Proper Seam Construction to Insure Comfort Upon Inflation

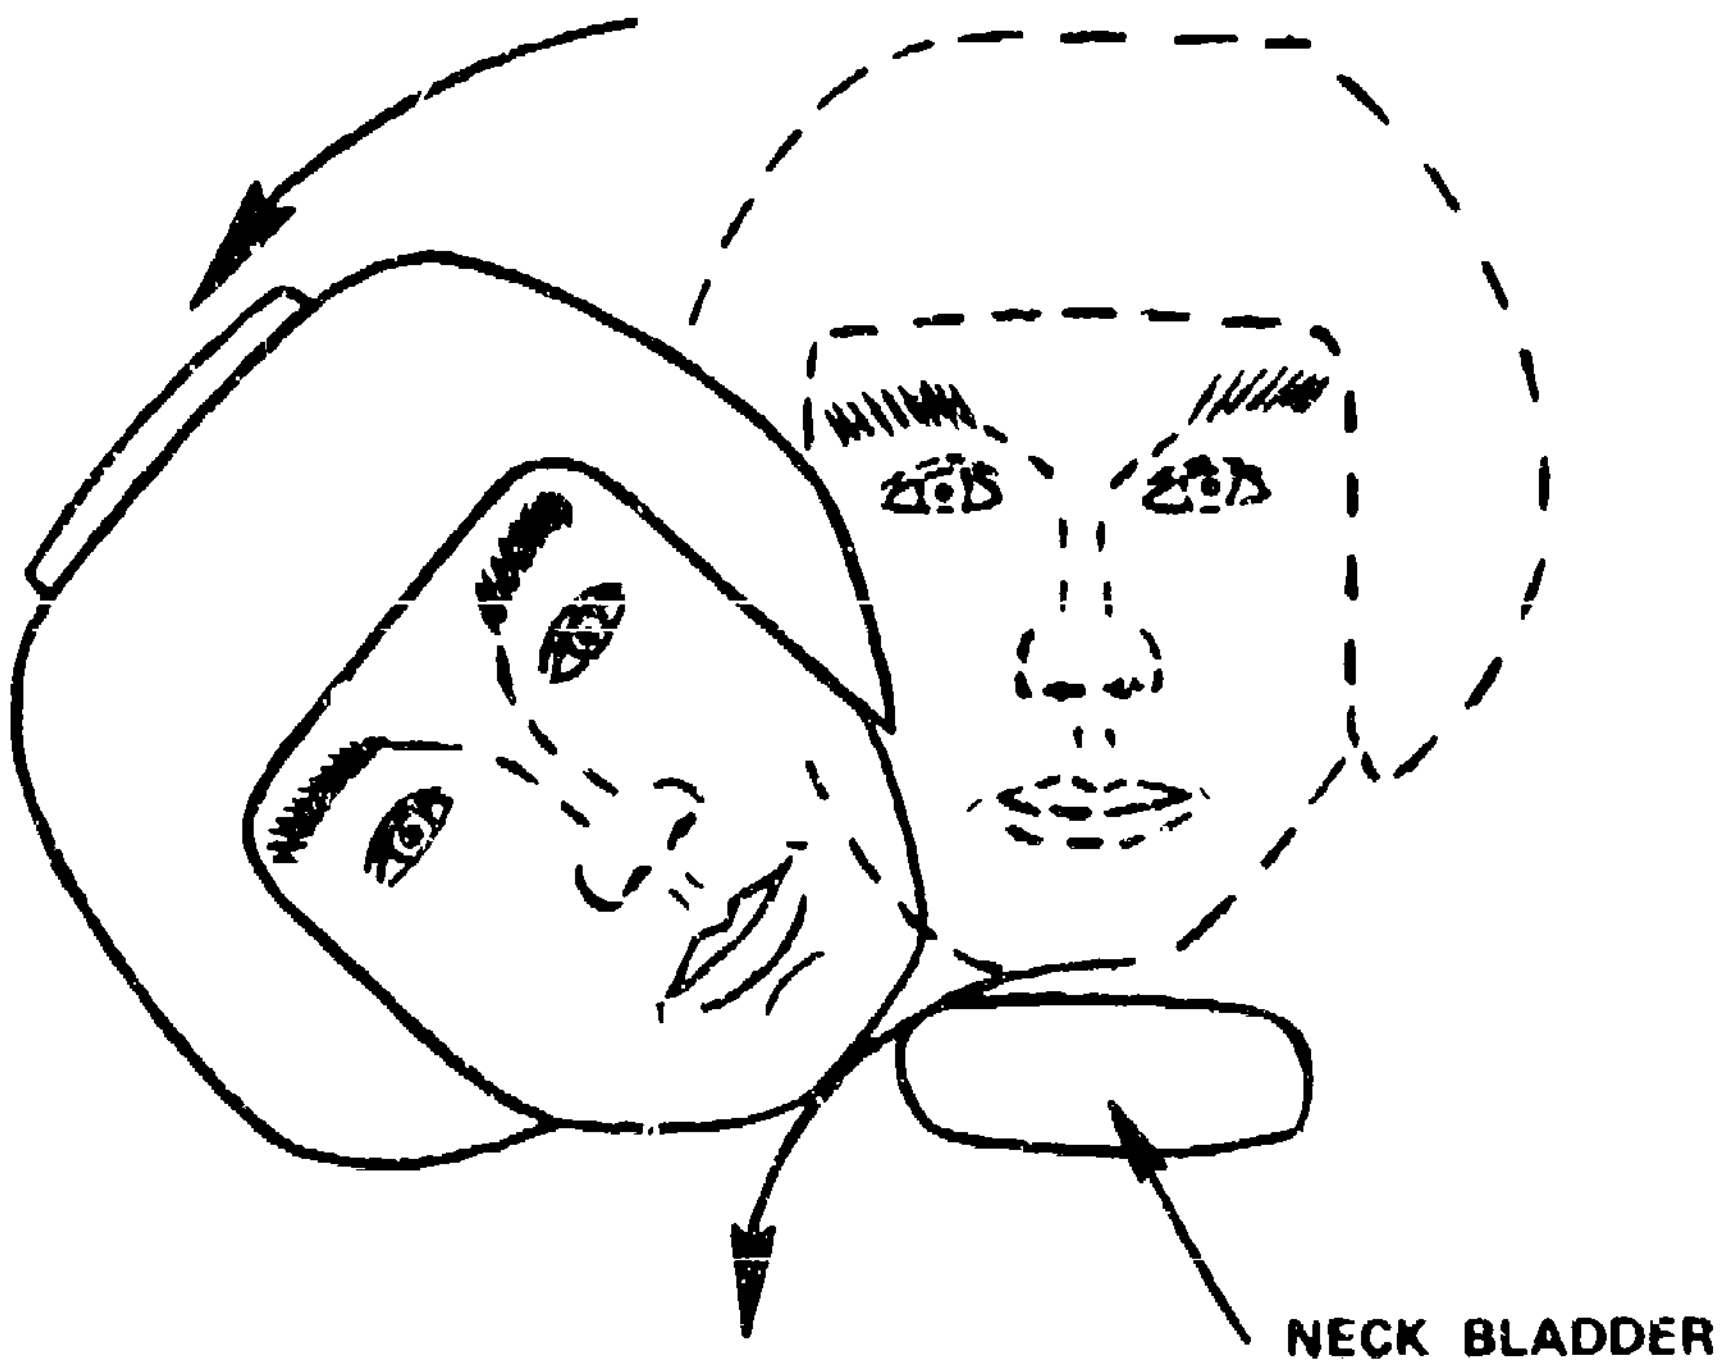

FIGURE 11 - Sideways Flexion of the Head Due to Improper Positioning of the Neck Bladder

of the neck collar. The packaged inflatable when worn looks like a turtle neck collar. Upon inflation, the neck bladder pops through its package to support the crewman's head. The package seam is fastened together with Velcro and splits apart as the pressurized bladder forces its way out of the package. Figures 12 through 15 show the neck collar package and its inflation sequence.

The neck collar is now being developed as a flight suit "add-on," but if necessary the flight suit collar can be easily altered for permanent storage of the neck bladder.

FUTURE EFFORTS

Ejection tower tests are to be conducted to finalize the form and fit of the neck bladder. Steps are now underway to procure an inflation system and to fabricate a breadboard system. It is expected that a complete feasibility model will be available before March 1977.

Another ongoing effort at CSD is the development of an inflatable torso restraint vest. In this system bladders under the MA-2 harness straps will inflate at the time of ejection to ensure proper positioning of the crewman. Plans are now being made to incorporate the neck collar with the torso bladders; the inflation system will inflate both the neck and torso bladders simultaneously. Integration of both systems will require nominal modification of the present neck collar design.

ACKNOWLEDGEMENT

The author wishes to extend his appreciation to the following persons for their support in conjunction with this report; to Mr. B. Schrandt for fabrication of the inflatable neck ring models; to Mrs. C. Filipino for fabrication and alteration of the life support apparel and neck collar package; to Mr. M. Schulman for technical review of this report.

FIGURE 13a - Fully Positioned Neck Collar Package

FIGURE 13b - Fully Positioned Neck Collar Package

FIGURE 14 - Neck Collar Beginning to Inflate

FIGURE 15 - Fully Inflated Neck Collar

DISTRIBUTION LIST (continued)

	No. of Copies
American Institutes for Research, Pittsburgh.	1
Aviation Medicine Research Lab, Columbus.	1
Biological Abstracts, Philadelphia.	1
University of California, Davis	1
Calspan Corp (Library), Buffalo	1
Countway Library of Medicine, Boston.	1
Drexel University (Biomedical Engrg), Philadelphia.	1
University of Illinois, Chicago	1
Indiana University, Indianapolis.	1
Library of College of Physicians of Philadelphia.	1
Lovelace Foundation, Albuquerque.	1
Ohio State University, Columbus	1
University of Pennsylvania, Philadelphia.	1
John B. Pierce Foundation Laboratory, New Haven	1
Presbyterian-Univ of Pa Medical Center, Philadelphia.	1
University of Southern California, Los Angeles.	1
Temple University Hospital (Dr. Kern), Philadelphia	1
Wayne State University, Detroit	1
Institute of Marine Biomedical Research, Wilmington, N.C. . . .	2
David Clark Co, Worcester, Mass	1
Convair Aerospace Div, San Diego.	1
General Electric Co, Philadelphia	1
Grumman Aerospace Corp, Bethpage, N.Y..	1
Lockheed-California, Burbank.	1
Rockwell International, Los Angeles	1
Fairchild Republic Co, Farmingdale, N.Y..	1
Vought Systems Div, LTV Aerospace, Dallas	2
Webb Associates, Yellow Springs, Ohio	1
Dr. Carl C. Clark, Baltimore.	1
Dr. Herbert Shepler, Rockville, Md.	1

D I S T R I B U T I O N   L I S T

REPORT NO. NADC-76357-40

AIRTASK NO. WF41-451-403

	No. of Copies
DDC	12
National Library of Medicine, Bethesda	1
CNO (OP-098E), Pentagon	1
NAMRL (Code L1), Pensacola	1
Naval Training Equipment Center (N-2), Orlando	2
NMRI (Tech Ref Library), Bethesda	1
Naval Submarine Med Center (Library), Groton	1
NAVAIRSYSCOM, AIR-954	8
(2 for retention)	
(1 for AIR-531)	
(1 for AIR-5312)	
(2 for AIR-5315)	
(2 for AIR-340B)	
Naval Safety Center, Norfolk	1
Naval Air Test Center, Patuxent River	1
ONR (Code 107), Arlington	1
FAA (AC-100), Oklahoma City	1
FAA (AC-101.1), Oklahoma City	1
Dept Transportation Library (FAA), Washington	2
6570 AMRL/DAL Library, Wright-Patterson AFB	1
Hq, USAF/RDPS, Washington	1
USAF SAM (SUL-4), Brooks AFB, Texas	1
USAF SAM/RAW, Brooks AFB, Texas	1
Air University Library, Maxwell AFB, Alabama	1
HQ, TAC, SGS, Langley AFB, Virginia	1
Aerospace Pathology Branch, Washington	1
Edgewood Arsenal (SMUEA-TS-L) Aberdeen Proving Ground, Md	1
USA Natick Labs (Tech Library), Natick, Mass.	1
ITPR Lab, U.S. AIR (Dr. Dusek), Arlington	1
NASA-Lewis Research Center (Library), Cleveland	2
NASA-Johnson Space Center (E.L. Hays), Houston	1
Science and Tech Div, Library of Congress	1
National Institutes of Health (Library), Bethesda	1
National Research Council (Med Records)	1
US Army Aeromedical Research Lab, Fort Rucker	1
NAMRL Detachment, New Orleans	1
HQ, USAF/SGPA, Washington	1
Dept of Transportation, NHTSA, Riverdale, Md.	1
Hq, Naval Material Command (034-D) (CAPT Kaufman)	1
COMOPTEVFOR, Norfolk	1
McDonnel Corp, St. Louis (Dept E422) (T. Quinn)	1

CONTINUED ON INSIDE OF COVER