

AD A061487

NSWC/WOL TR-78-172

12
NW

LEVEL

MEASUREMENT OF THE RATES OF DIFFUSION OF SOLUBLE ZINC THROUGH MEMBRANE MATERIALS IN KOH SOLUTION BY DIFFERENTIAL PULSE POLAROGRAPHY AND COMPARISON WITH POTENTIOMETRIC METHODS,

10 BY WILLIAM P. KILROY LINDA LAUGHLIN

RESEARCH AND TECHNOLOGY DEPARTMENT

30 OCT 1978

22 p.

16 R013011

17) 2 R0130141

Approved for public release, distribution unlimited.

DDC
NOV 24 1978



NAVAL SURFACE WEAPONS CENTER

Dahlgren, Virginia 22448 • Silver Spring, Maryland 20910

391596

DDC FILE COPY

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NSWC/WOL TR 78-172 ✓	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Measurement of the Rates of Diffusion of Soluble Zinc Through Membrane Materials in KOH Solution by Differential Pulse Polarography and Comparison with Potentiometric Methods.	5. TYPE OF REPORT & PERIOD COVERED	
	6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s) William P. Kilroy Linda Laughlin	8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Surface Weapons Center ✓ White Oak Silver Spring, MD 20910	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 61152N; 0; ZR0130101; 0;	
11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE 30 October 1978	
	13. NUMBER OF PAGES 25	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Zincate Membrane Diffusion Battery Separator Differential Pulse Polarography		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The rate of zincate diffusion through battery membrane materials has been measured by potentiometry and compared to a new technique employing differential pulse polarography.		

DD FORM 1473 1 JAN 73

EDITION OF 1 NOV 68 IS OBSOLETE
S/N 0102-014-6601

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

SUMMARY

A new separator material for alkaline batteries is presently under development at the Naval Surface Weapons Center. One of the criteria used in evaluating the separator is the rate of diffusion of soluble zincate through the separator. In order to assist in the efficient development of a viable separator material, it is essential to have an efficient and reproducible method for evaluating rates of diffusion.

This investigation was undertaken to determine the reliability, convenience, and reproducibility of measuring diffusion of soluble zinc through separators.

This work was sponsored by the Independent Research Program of the Naval Surface Weapons Center.

SG Fisher
(Acting for)
J. R. DIXON
By direction

ADDITIONAL FOR		
ONE	With Section	<input checked="" type="checkbox"/>
TWO	With Section	<input type="checkbox"/>
THREE		<input type="checkbox"/>
NO. OF PAGES		
DATE		
BY		
NO. OF COPIES		
DISTRIBUTION STATEMENT CODES		
CLASS	GROUP	EXT. NO.
A		

CONTENTS

	<u>Page</u>
INTRODUCTION.....	5
THEORY.....	6
EXPERIMENTAL.....	6
Potentiometry.....	6
Differential Pulse Polarography.....	7
Procedure.....	7
DISCUSSION OF RESULTS.....	7
CONCLUSION.....	10

ILLUSTRATIONS

<u>Figure</u>	<u>Page</u>
1 Comparison of Zincate Flux through Cellophane Membranes.....	11

TABLES

<u>Table</u>		<u>Page</u>
1	Reproducibility of the Potential of the Zinc-Zincate Couple in 45% KOH.....	9
2	Reproducibility of the DPP Method for Measuring Zn ⁺⁺ in KOH.....	9
3	Reproducibility of the DPP Method in Measuring Zincate Flux through Membranes.....	10

INTRODUCTION

With the continued development of improved batteries, there has been a simultaneous need for the creation of better synthetic polymeric separators. The complexities associated with improving separators require a thorough knowledge of properties and structure. In order to clearly characterize the physical and chemical properties of separator materials, suitable experimental methods must be established for determining each of the desired parameters.

The accurate measurement of separator resistance has been the subject of the first report.¹ We now wish to report on an improved method for the measurement of zincate ion diffusion.

The standard method for measuring zincate ion diffusion through separators² is based on potentiometric theory, i.e., the potential of a zinc-zincate ion couple at constant hydroxyl ion concentration will vary by 0.0295 volts for each 10-fold change in concentration of zincate ion concentration.³ The potentiometric method was originally selected for its convenience in providing a rapid and strictly instrumental technique. However, we have found that the practical application of this potentiometric technique to be unsatisfactory. The detection of low concentrations of zincate in highly alkaline solutions by potentiometry was found to be subject to numerous experimental difficulties leading to irreproducibility of the potential-concentration calibration curve.

Accurate rates of diffusion can be better achieved by sampling a portion of the solution and analyzing for zinc ion by atomic absorption spectroscopy. Differential pulse polarography was studied as a technique to provide the convenience of the potentiometric method while improving the analysis procedure to rival that of atomic absorption.

-
1. W. P. Kilroy and C. T. Moynihan, "Measurement of Battery Separator Resistances in Low Impedance Conductivity Cells for A-C Bridge Techniques", J. Electrochem. Soc. 125(4), 520 (1978).
 2. J. J. Lander, "Zinc Diffusion", Characteristics of Separators for Alkaline Silver Oxide Zinc Secondary Batteries - Screening Methods, Edited by J. E. Cooper and A. Fleischer, 1964.
 3. T. P. Dirkse, "The Nature of the Zinc-Containing Ion in Strongly Alkaline Solutions", J. Electrochem. Soc. 101(6), 328 (1954).

THEORY

The polarographic method employs the unique characteristics of the current-voltage curves obtained when solutions of electrooxidizable or electroreducible substances are electrolyzed at a dropping mercury electrode (DME). As a continuously increasing potential is applied to a solution containing inert electrolyte and an electroactive specie, a maximum current is attained that is governed by the rate of supply of the electroactive substance to the electrode surface by a process whose rate is independent of the electrode potential. This maximum current is directly proportional to the concentration of the electroactive substance. Quantitative data is readily obtained via a current-concentration calibration curve.

The sensitivity of the analysis is increased by a technique in which the current flow is sampled before and after application of a potential pulse that is imposed on the linearly increasing dc voltage. This differential pulse polarographic method presents a current signal approximating the derivative of the polarographic wave, and thus yields large easily defined current peaks that are directly proportional to concentrations in the order of ppb or less.

The differential pulse method offers the advantage in that electrodes other than the DME can be used while maintaining the advantages of DME polarography. In addition, more than one element may be analyzed simultaneously under appropriate conditions in either organic or inorganic solutions.

Comparison of the potentiometric and differential pulse polarographic techniques was accomplished using cellophane membranes in a diffusion cell similar to that used by Harris.⁴ The cell allows a membrane to be introduced between cell halves, one half containing a zincate-rich solution and the other half containing a zincate-poor solution. The flux, or moles of zincate diffusing per unit time is directly proportional to this concentration gradient. The zincate ion will diffuse to the zincate-deficient side of the cell at a rate controlled by the membrane thickness, area, total porosity and pore size.

EXPERIMENTAL

A modified version of the cell described by Harris⁴ was employed. Details of the potentiometric method have been reported.² Standard zincate solutions were prepared by dissolving known amounts of reagent ZnO in Fisher certified 45% KOH.

POTENTIOMETRY. Potentiometric calibration curves were obtained using deaerated standard zincate solutions maintained under a flowing blanket of argon. Changes in potential between a Hg/HgO reference electrode and an amalgamated zinc electrode were recorded to 0.01 mv on a Cimron Model 7200A Voltmeter. The zinc electrode consisted of 1/8 inch 99.99% zinc that was cleaned in HCl, washed in water and heavily amalgamated in a solution of mercuric acetate. In diffusion studies, the Hg/HgO reference and amalgamated zinc electrodes were inserted into the zincate-poor side of the cell under an argon atmosphere and the voltage recorded at various time intervals.

4. E. L. Harris, "Electrolyte Diffusion", Characteristics of Separators for Alkaline Silver Oxide Zinc Secondary Batteries - Screening Methods, Edited by J. E. Cooper and A. Fleischer, 1964.

DIFFERENTIAL PULSE POLAROGRAPHY (DPP). The DPP calibration curve was established using 10^{-3} M to 10^{-5} M zinc ion in 0.8 M KOH and recording the curves with a PAR model 174A DPP instrument. The cell employed a working dropping mercury electrode (DME), a platinum wire counter electrode, and a Hg/HgO reference electrode. All the solutions were deaerated and blanketed with water saturated argon before recording.

In diffusion studies, if the concentration of the KOH employed is less than about 16%, then the DPP measurements can be made insitu. For studies employing a DME electrode in higher KOH concentrations, either another electrode must be used or a portion of the zinc-poor solution must be sampled, diluted and then measured in a separate cell.

PROCEDURE. A membrane material consisting of a 0.785 in^2 surface area was inserted between two cell compartments. The zinc-rich side contained 250 ml of 1M ZnO in 45% KOH whereas the zinc-poor side contained 250 ml of 45% KOH. At intervals, the zinc-poor solution was stirred and a 2 ml aliquot was removed and placed in a polarographic cell containing 25 ml of distilled water. After purging with water soaked argon, the DPP curve was recorded. In order to prevent osmotic pressure generated fluxes of zincate, approximately 2 ml of the zincate-rich solution was simultaneously removed. A correction factor, $0.250 - 0.002(n-1)$ where n is the n^{th} aliquot removed, was applied to correct the volume in determining an accurate value of the zincate flux. The flux was reported as moles $\text{Zn}^{++}/\text{min in}^2$.

DISCUSSION OF RESULTS

In the process of evaluating new membrane materials for battery separators, we employed the standard potentiometric method⁴ for determining rates of diffusion of soluble zinc through these membranes. However, we experienced difficulty in obtaining consistent data. This was attributed to several factors that affect the potentiometric calibration curve. The principal problem encountered was in obtaining a reproducible voltage-concentration calibration curve. Only over the higher zinc ion concentrations from 1.0 M to 10^{-2} M Zn^{++} was the potentiometric method found to be reversible (obeying the Nernst equation) and reproducible. Table 1 illustrates the irreproducible and non-Nernstian behavior observed for more dilute zincate solutions. Table 1 represents the average of six measurements using new zinc amalgam electrodes each time.

Diffusion studies are typically made in the 10^{-3} M to 10^{-4} M zincate concentration region. The irreproducibility of the non-Nernstian 15 mv potential difference over this concentration region is confirmed by the high standard deviation. This poor precision is further accented by the 8 and 10 mv range that was observed between the high and low values of the measured potentials.

Several experimental difficulties were observed to contribute to the irreproducible nature of the potential-concentration curve. If one desires to reuse the zinc amalgam, selection of an appropriate solvent (neutral, acidic or basic) and the extent of exposure to oxygen affects the electrode behavior. At the low concentrations (10^{-4} M), slow dissolution of zinc from the amalgam, the proximity of the reference and the speed of stirring the solution affect the observed potential.

Differential pulse polarography was investigated as an alternate method. It is inherently more sensitive, routinely detecting 10^{-5} M concentrations. However, the question remained as to the reproducibility (precision) and convenience of the method.

The method is less convenient for measuring zincate in solutions containing more than approximately 16% KOH. The polarographic half wave potential and the DPP peak potential of the zinc ion becomes more negative with increasing KOH concentration until it eventually merges with the solvent reduction potential and becomes immeasurable at a DME electrode. Therefore, for concentrated KOH solutions, an aliquot of the solution must be removed and placed into a separate cell for measurement. The measuring cell contains the electrodes and 25 ml of deaerated water.

In order to demonstrate the reproducibility of the DPP method, two typical concentrations, 7.5×10^{-4} M and 7.5×10^{-5} M Zn^{++} , were selected. Three distinct standard solutions of each were prepared and five to six values of the peak current for each solution was measured. The results are shown in Table 2.

The precision of the two methods can be observed by comparing Tables 1 and 2. For a 10-fold concentration change and a corresponding potential change of 15 mv, the potentiometric method exhibits an 8 to 10 mv range. This contrasts with the very low 0.1 to 0.8 ua range observed over a 36 ua difference for the DPP method over a similar 10-fold concentration change.

We wished to compare the precision and accuracy of the zincate flux across a membrane using the potentiometric and DPP methods. Cellophane and silvered cellophane were selected as membrane materials because of their homogeneity. An example of a zincate flux measurement for each method is illustrated in Figure 1. The scatter and/or curvature was found to be characteristic of the potentiometric method. This arises from the irreproducibility of the potentiometric calibration curve. Considering the poor precision of the method (Table 1), the accuracy of flux values obtained by this procedure is questionable.

The excellent precision of zincate flux measured across cellophane and silvered cellophane by the DPP method is illustrated in Table 3.

CONCLUSION

The potentiometric method, although convenient, has been found to be subject to numerous experimental difficulties that can lead to variable flux values, easily diverging by a factor of two. This method may be viable as a screening method when relative flux values of two or more membranes are to be compared. However, in reporting accurate flux values, a method such as the DPP method is recommended.

Table 1. Reproducibility of the Potential of the Zinc-Zincate Couple in 45% KOH

<u>Zn⁺⁺ (moles/liter)</u>	<u>Potential*(volts)</u>	<u>S</u>	<u>Range(mv)</u>
10 ⁻²	1.433	.0036	8
10 ⁻³	1.459	.0040	10
10 ⁻⁴	1.474	.0031	8

* Average of six measurements
S - Standard deviation

Table 2. Reproducibility of the DPP Method for Measuring Zn⁺⁺ in KOH(7.50 x 10⁻⁴ M Zn⁺⁺)

<u>Solution</u>	<u>Peak Current (ua)*</u>	<u>S</u>	<u>Range (ua)</u>
1	41.09	0.28	0.62
2	40.03	0.38	0.75
3	40.40	0.31	0.75
AV.	40.51		

(7.50 x 10⁻⁵ M Zn⁺⁺)

<u>Solution</u>	<u>Peak Current (ua)*</u>	<u>S</u>	<u>Range (ua)</u>
1	4.171	0.026	0.040
2	4.122	0.061	0.124
3	4.223	0.100	0.150
AV.	4.138		

* Average of 5 to 6 measurements
S - Standard Deviation

Table 3. Reproducibility of the DPP Method in Measuring Zincate Flux through Membranes

<u>Membrane Sample</u>	Zincate Flux ($\text{moles}/\text{min-in}^2$)*	
	<u>Cellophane</u>	<u>Ag-Cellophane</u>
1	7.15×10^{-6}	5.83×10^{-6}
2	7.06×10^{-6}	6.28×10^{-6}
3	6.46×10^{-6}	5.28×10^{-6}
4	6.55×10^{-6}	-
5	6.46×10^{-6}	-
AV.	6.72×10^{-6}	5.78×10^{-6}

* The flux was measured through a 0.785 in^2 orifice. The average wet thickness for cellophane was 3.36 mil and for Ag-cellophane was 3.06 mil. The data has been reported as moles/min.-in² for a 1.0 mil membrane thickness.

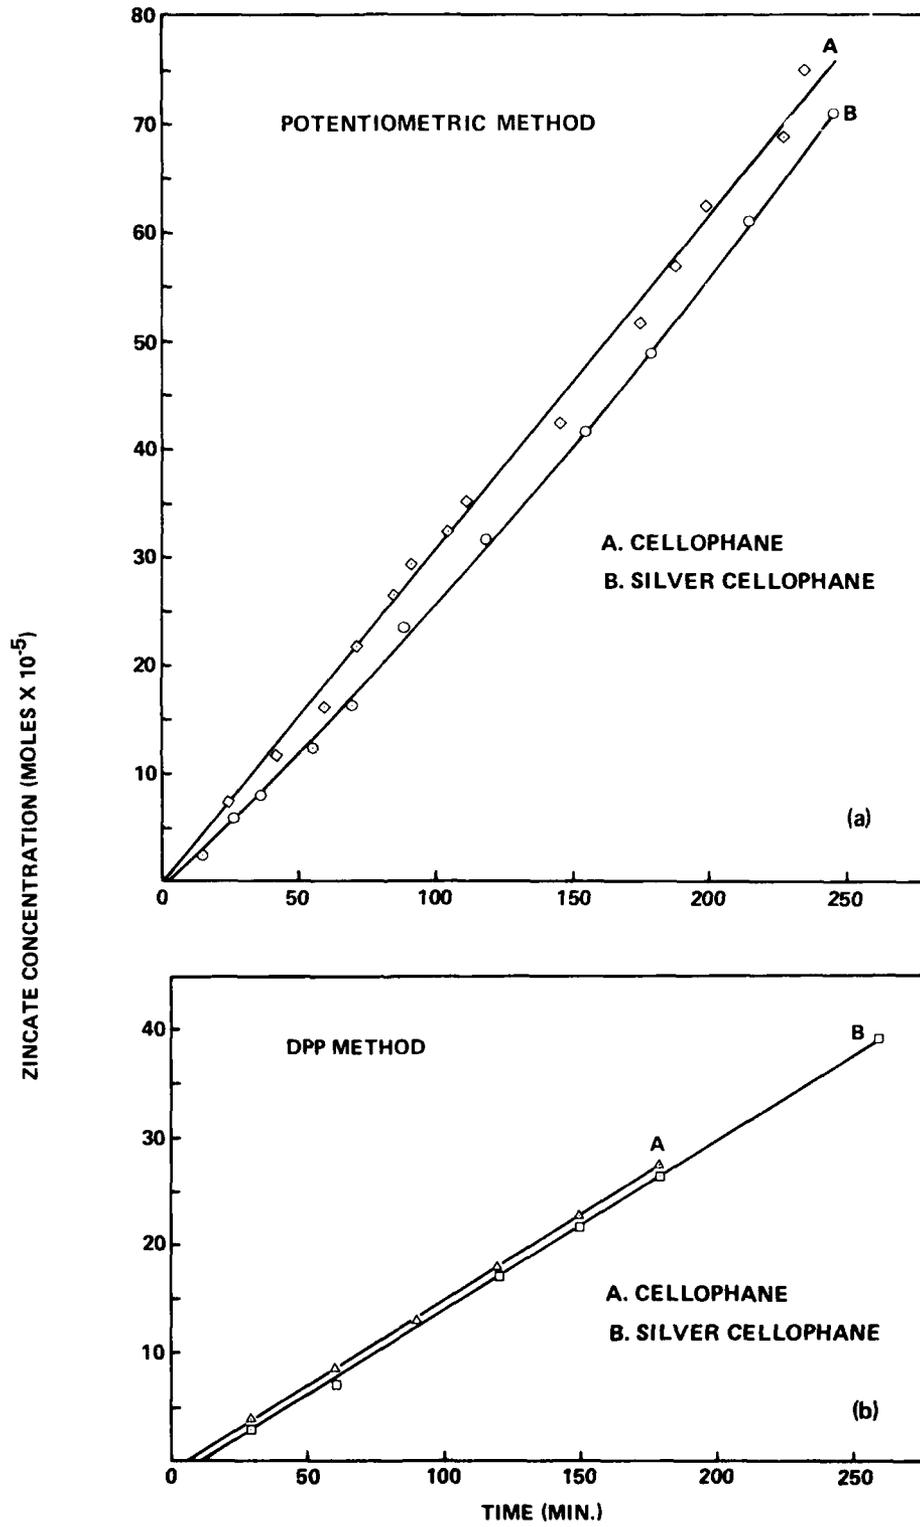


FIGURE 1 COMPARISON OF ZINCATE FLUX THROUGH CELLOPHANE MEMBRANES

DISTRIBUTION

Defense Documentation Center Cameron Station Alexandria, VA 22314	12
Defense Nuclear Agency Attn: Library Washington, DC 20301	2
Institute for Defense Analyses R&E Support Division 400 Army-Navy Drive Arlington, VA 22202	
Naval Material Command Attn: Code 08T223 Washington, DC 20360	
Office of Naval Research Attn: G. Neece (Code ONR 472) 800 N. Quincy Street Arlington, VA 22217	2
Naval Research Laboratory Attn: Dr. Fred Saalfeld (Code NRL 6100) A. Simon (Code NRL 6130) 4555 Overlook Avenue, S. W. Chemistry Division Washington, DC 20360	
Naval Postgraduate School Attn: Dr. William M. Tolles (Code 612) Dr. Oscar Biblarz Monterey, CA 93940	
Naval Air Systems Command Attn: Dr. H. Rosenwasser (Code NAVAIR 301C) E. Nebus (Code NAVAIR 5332) Washington, DC 20361	
Naval Electronic Systems Command Attn: A. H. Sobel (Code PME 124-31) Washington, DC 20360	

DISTRIBUTION (Cont.)

Naval Sea Systems Command

Attn: Capt J. H. Spiller, (Code PMS 407)
F. Butler (Code PMS 40764)
M. Murphy (Code NAVSEA 0331C)
S. J. Matesky (Code NAVSEA 0331J)
J. W. Murrin (Code NAVSEA 0331)
Code NAVSEA 9823
S. R. Marcus (Code NAVSEA 03B)
W. W. Blaine (Code NAVSEA 033)
Code NAVSEA 09G32

Washington, DC 20362

2

Strategic Systems Project Office

Attn: K. N. Boley (Code NSP 2721)
M. Meserole (Code NSP 2722)

Department of the Navy
Washington, DC 20360

Naval Air Development Center

Attn: J. Segrest (Code AVTD 3043)
W. McLaughlin (Code 2043)

Warminster, PA 18974

Naval Civil Engineering Laboratory

Attn: Dr. W. S. Haynes (Code L-52)
F. Rosell

Port Hueneme, CA 93040

Naval Intelligence Support Center

Attn: Dr. H. Ruskie (Code 362)
Washington, DC 20390

Naval Ocean Systems Center

Attn: Code 922
J. McCartney (Code 251)
Dr. S. D. Yamamoto (Code 513)

San Diego, CA 92152

Naval Ship Engineering Center

Attn: A. Himy (Code 6157D)
Washington, DC 20360

Naval Weapons Center

Attn: Dr. E. Royce (Code 38)
Dr. A. Fletcher (Code 3852)
M. H. Ritchie (Code 5525)
R. Dettling (Code 4575)

China Lake, CA 93555

DISTRIBUTION (Cont.)

Naval Weapons Support Center
Attn: D. G. Miley (Code 305)
Electrochemical Power Sources Division
Crane, IN 47522

Naval Coastal Systems Center
Attn: Library
Panama City, FL 32407

Naval Underwater Systems Center
Attn: T. Black (Code 3642)
J. Moden (Code SB332)
Newport, RI 02840

David W. Taylor Naval Ship Research and Development Center
Attn: A. B. Neild (Code 2723)
W. J. Levendahl (Code 2703)
J. Woerner (Code 2724)
H. R. Urbach (Code 2724)
Annapolis Laboratory
Annapolis, MD 21402

Scientific Advisor
Attn: Code AX
Commandant of the Marine Corps
Washington, DC 20380

Air Force of Scientific Research
Attn: R. A. Osteryoung
Directorate of Chemical Science
1400 Wilson Boulevard
Arlington, VA 22209

Frank J. Seiler Research Laboratory, AFSC
Attn: Capt. J. K. Erbacher (Code FJSRL/NC)
Lt. Col. Lowell A. King (Code FJSRL/NC)
USAF Academy, CO 80840

Air Force Materials Laboratory
Wright-Patterson AFB
Dayton, OH 45433

Air Force Aero Propulsion Laboratory
Attn: W. S. Bishop (Code AFAPL/POE-1)
J. Lander (Code AFAPL/POE-1)
Wright-Patterson AFB, OH 45433

DISTRIBUTION (Cont.)

Air Force Rocket Propulsion Laboratory
Attn: Lt. D. Ferguson (Code MKPA)
Edwards Air Force Base, CA 93523

Office of Chief of Research and Development
Department of the Army
Attn: Dr. S. J. Magram
Energy Conversion Branch
Room 410, Highland Building
Washington, DC 20315

U. S. Army Research Office
Attn: B. F. Spielvogel
P. O. Box 12211
Research Triangle Park, NC 27709

HQDA-DAEN-ASR-SL
Attn: Charles Sculla
Washington, DC 20314

U. S. Development and Readiness Command
Attn: J. W. Crellin (Code DRCDE-L)
5001 Eisenhower Avenue
Alexandria, VA 22333

U. S. Army Electronics Command
Attn: A. J. Legath (Code DRSEL-TL-P)
E. Brooks (Code DRSEL-TL-PD)
G. DiMasi
Fort Monmouth, NJ 07703

Army Material and Mechanical Research Center
Attn: J. J. DeMarco
Watertown, MA 02172

USA Mobility Equipment R and D Command
Attn: J. Sullivan (Code DRXFB)
Code DRME-EC
Electrochemical Division
Fort Belvoir, VA 22060

DISTRIBUTION (Cont.)

Edgewood Arsenal
Attn: Library
Aberdeen Proving Ground
Aberdeen, MD 21010

Picatinny Arsenal
Attn: M. Merriman (Code SARPA-FR-S-P)
Dr. B. Werbel (Code SARPA-FR-E-L-C)
A. E. Magistro (Code SARPA-ND-D-B)
U. S. Army
Dover, NJ 07801

Harry Diamond Laboratory
Attn: A. A. Benderly (Code DRXDO-RDD)
W. Kuper (Code DRXDO-RDD)
J. T. Nelson (Code DRKDO-RDD)
C. Campanguolo

Department of Army Material
Chief, Power Supply Branch
2800 Powder Mill Road
Adelphi, MD 20783

Department of Energy
Attn: L. J. Rogers (Code 2101)
Division of Electric Energy Systems
Washington, DC 20545

Department of Energy
Attn: Dr. A. Landgrebe (Code MS E-463)
Energy Research and Development Agency
Division of Applied Technology
Washington, DC 20545

Headquarters, Department of Transportation
Attn: R. Potter (Code GEOE-3/61)
U. S. Coast Guard, Ocean Engineering Division
Washington, DC 20590

NASA Headquarters
Attn: Code RRM
Washington, DC 20546

NASA Goddard Space Flight Center
Attn: G. Halpert (Code 711)
T. Hennigan (Code 716.2)
Greenbelt, MD 20771

DISTRIBUTION (Cont.)

NASA Lewis Research Center
Attn: J. S. Fordyce (Code MS 309-1)
H. J. Schwartz (Code MS 309-1)
2100 Brookpark Road
Cleveland, OH 44135

NASA Scientific and Technical Information Facility
Attn: Library
P. O. Box 33
College Park, MD 20740

National Bureau of Standards
Metallurgy Division
Inorganic Materials Division
Washington, DC 20234

2

Battelle Memorial Institute
Defense Metals & Ceramics Information Center
505 King Avenue
Columbus, Ohio 43201

Bell Laboratories
Attn: Dr. J. J. Auburn
600 Mountain Avenue
Murray Hill, NJ 07974

Brookhaven National Laboratory
Attn: J. J. Egan
Building 815
Upton, NY 11973

California Institute of Technology
Attn: Library
Jet Propulsion Laboratory
4800 Oak Grove Drive
Pasadena, CA 91103

Argonne National Laboratory
Attn: H. Shimotake
R. K. Steunenberg
L. Burris
9700 South Cass Avenue
Argonne, IL 60439

Johns Hopkins Applied Physics Laboratory
Attn: Library
R. Rumpf
Howard County
Johns Hopkins Road
Laurel, MD 20810

DISTRIBUTION (Cont.)

Oak Ridge National Laboratory
Attn: K. Braunstein
Oak Ridge, TN 37830

Sandia Laboratories
Attn: R. D. Wehrle (Code 2522)
B. H. Van Domelan (Code 2523)
Albuquerque, NM 87115

Catholic University
Attn: Dr. C. T. Moynihan (Physics)
Chemical Engineering Department
Washington, DC 20064

University of Tennessee
Attn: G. Mamantov
Department of Chemistry
Knoxville, TN 37916

University of Florida
Attn: R. D. Walker
Department of Chemical Engineering
Gainesville, FL 32611

Applied Research Laboratory
Attn: Library
Penn State University
University Park, PA 16802

Catalyst Research Corporation
Attn: G. Bowser
N. Issacs
F. Tepper
1421 Clarkview Road
Baltimore, MD 21209

ESB Research Center
Attn: Library
19 W. College Avenue
Yardley, PA 19067

EIC Corporation
Attn: J. R. Driscoll
G. L. Holleck
55 Chapel Street
Newton, MA 02158

DISTRIBUTION (Cont.)

Eagle-Picher Industries, Incorporated

Attn: D. R. Cottingham

J. Dines

D. L. Smith

J. Wilson

Electronics Division, Couples Department

P. O. Box 47

Joplin, MO 64801

Eagle-Picher Industries, Incorporated

Attn: P. E. Grayson

Miami Research Laboratories

200 Ninth Avenue, N. E.

Miami, OK 74354

Electrochemical Corporation

2485 Charleston Road

Mountain View, CA 04040

Eureka Advance Science Division

Attn: D. Ryan

L. Raper

P. O. Box 1547

Bloomington, IL 61701

Foote Mineral Company

Attn: H. R. Grady

Exton, PA 19341

General Electric Company

Attn: R. D. Walton

R. Szwarc

Neutron Devices Department

P. O. Box 11508

St. Petersburg, FL 33733

Gould, Incorporated

Attn: S. S. Nielsen

G. R. Ault

40 Gould Center

Rolling Meadows, IL 60008

GT & E Laboratory

Attn: N. Marihcic

E. Peled

40 Sylvan Road

Waltham, MA 02154

DISTRIBUTION (Cont.)

Honeywell, Incorporated
Attn: Library
R. Walk
W. Ebner
Dr. P. M. Shah
Defense Systems Division
Power Sources Center
104 Rock Road
Horsham, PA 19044

Hughes Aircraft Company
Attn: Library
Dr. L. H. Fentnor
Aerospace Groups
Missile Systems Group
Tucson Engineering Laboratory
Tucson, AZ 85734

KDI Score, Incorporated
Attn: L. A. Stein
F. DeMarco
K. K. Press
200 Wight Avenue
Cockeysville, MD 21030

Lockheed Missiles and Space Company, Incorporated
Attn: Library
Lockheed Palo Alto Research Laboratory
3251 Hanover Street
Palo Alto, CA 94304

P. R. Mallory and Company, Incorporated
Attn: G. F. Cruze
B. McDonald
D. Linden
Battery Division
South Broadway
Tarrytown, NY 10591

P. R. Mallory and Company, Incorporated
Attn: Library
Dr. A. N. Dey
Dr. H. Taylor
Laboratory for Physical Science
Burlington, MA 01803

Power Conversion, Incorporated
70 MacQuesten Parkway S.
Mount Vernon, NY 10550

DISTRIBUTION (Cont.)

Union Carbide Battery Products Division
Attn: R. A. Powers
P. O. Box 6116
Cleveland, OH 44101

Wilson Greatbatch LTD.
Attn: Library
1000 Wehrle Drive
Clarence, NY 14030

Yardney Electric Corporation
Attn: Library
A. Beachielli
82 Mechanic Street
Pawcatuck, CT 02891

Callery Chemical Company
Attn: Library
Callery, PA 16024

Kawecki Berylco Industries, Incorporated
Attn: J. E. Eorgan
R. C. Miller
Boyertown, PA 19512

Rockwell International
Attn: Dr. Samuel J. Yosim
Atomics International Division
8900 DeSoto Avenue
Canoga Park, CA 91304

Union Carbide
Attn: Library
Nuclepore Corporation
7035 Commercial Circle
Pleasantown, CA 94556

Ventron Corporation
Attn: L. R. Frazier
10 Congress Street
Beverly, MA 01915

NSWC/WOL TR 78-172

DISTRIBUTION (Cont.)

Stanford University
Attn: C. John Wen
Center for Materials Research
Room 249, McCullough Building
Stanford, CA 94305

EDO Corporation
Attn: E. P. DiGiannantonio
Government Products Division
2001 Jefferson Davis Highway
Arlington, VA 22202

Perry International, Incorporated
Attn: R. A. Webster
117 South 17th Street
Philadelphia, PA 19103

Ford Aerospace and Communications Corporation
Attn: R. A. Harlow
M. L. McClanahan
Metallurgical Processes
Advanced Development-Aeronutronic Division
Ford Road
Newport Beach, CA 92663

Globe Union Incorporated
Attn: Dr. R. A. Rizzo
5757 N. Green Bay Avenue
Milwaukee, WI 53201

University of Missouri, Rolla
Attn: Dr. J. M. Marchello
210 Parker Hall
Rolla, MO 65401

RAI Research Corporation
Attn: Dr. Carl Perini
225 Marcus Boulevard
Hauppauge, NY 11787

TO AID IN UPDATING THE DISTRIBUTION LIST
FOR NAVAL SURFACE WEAPONS CENTER, WHITE
OAK TECHNICAL REPORTS PLEASE COMPLETE THE
FORM BELOW:

TO ALL HOLDERS OF NSWC/WOL/TR 78-172
by William P. Kilroy. Code R-33
DO NOT RETURN THIS FORM IF ALL INFORMATION IS CURRENT

A. FACILITY NAME AND ADDRESS (OLD) (Show Zip Code)

NEW ADDRESS (Show Zip Code)

B. ATTENTION LINE ADDRESSES:

C.

REMOVE THIS FACILITY FROM THE DISTRIBUTION LIST FOR TECHNICAL REPORTS ON THIS SUBJECT.

D.

NUMBER OF COPIES DESIRED _____

**DEPARTMENT OF THE NAVY
NAVAL SURFACE WEAPONS CENTER
WHITE OAK, SILVER SPRING, MD. 20910**

**OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE, \$300**

**POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316**



**COMMANDER
NAVAL SURFACE WEAPONS CENTER
WHITE OAK, SILVER SPRING, MARYLAND 20910**

ATTENTION: CODE R-33