

AD A 078229

~~LEVEL~~

13

AD

AD-E400 371

CONTRACTOR REPORT ARLCD-CR-79017 ✓

CALORIMETRY STUDIES OF AMMONIA,  
NITRIC ACID, AND AMMONIUM NITRATE

R. T. REWICK  
B. J. GIKIS

SRI INTERNATIONAL  
MENLO PARK, CA

I. WEISMAN  
PROJECT LEADER, ARRADCOM

DDC  
RECEIVED  
DEC 17 1979  
E

DDC FILE COPY

OCTOBER 1979



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND  
LARGE CALIBER  
WEAPON SYSTEMS LABORATORY  
DOVER, NEW JERSEY

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

79 11 29 043

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.

Destroy this report when no longer needed. Do not return it to the originator.

The citation in this report of the names of commercial firms or commercially available products or services does not constitute official endorsement or approval of such commercial firms, products, or services by the United States Government.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Contractor Report ARLCD-CR-79017	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) CALORIMETRY STUDIES OF AMMONIA, NITRIC ACID, AND AMMONIUM NITRATE.	5. TYPE OF REPORT & PERIOD COVERED Final rept.	
7. AUTHOR(s) R. T. Rewick, B. J. Gikis / SRI International I. Weisman / Project Leader, ARRADCOM	8. CONTRACT OR GRANT NUMBER(s) DAAK 21-72-C-0230	
9. PERFORMING ORGANIZATION NAME AND ADDRESS SRI International 333 Ravenswood Avenue Menlo Park, CA 94025	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS "X" Facility Project No. 5762528	
11. CONTROLLING OFFICE NAME AND ADDRESS ARRADCOM, TSD STINFO (DRDAR-TSS) Dover, NJ 07801	12. REPORT DATE OCT 1979	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) ARRADCOM, LCWSL Manufacturing Technology Division (DRDAR-LCM-PE) Dover, NJ 07801	13. NUMBER OF PAGES 23	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) ARLCD, SBIE	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
18. SUPPLEMENTARY NOTES	19. CR-79017, L AD-E400 371	
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Calorimetry Heat of reaction Ammonium nitrate Heat capacity Nitric acid Heat of solution Ammonia		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Based on calorimetry studies, basic thermochemical data were obtained for the design of the nitric acid-ammonium nitrate reaction process to be used for the RDX/HMX "X" Facility. △		

DD FORM 1 JAN 73 1473 - EDITION OF 1 NOV 65 IS OBSOLETE


UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

410281

LW

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

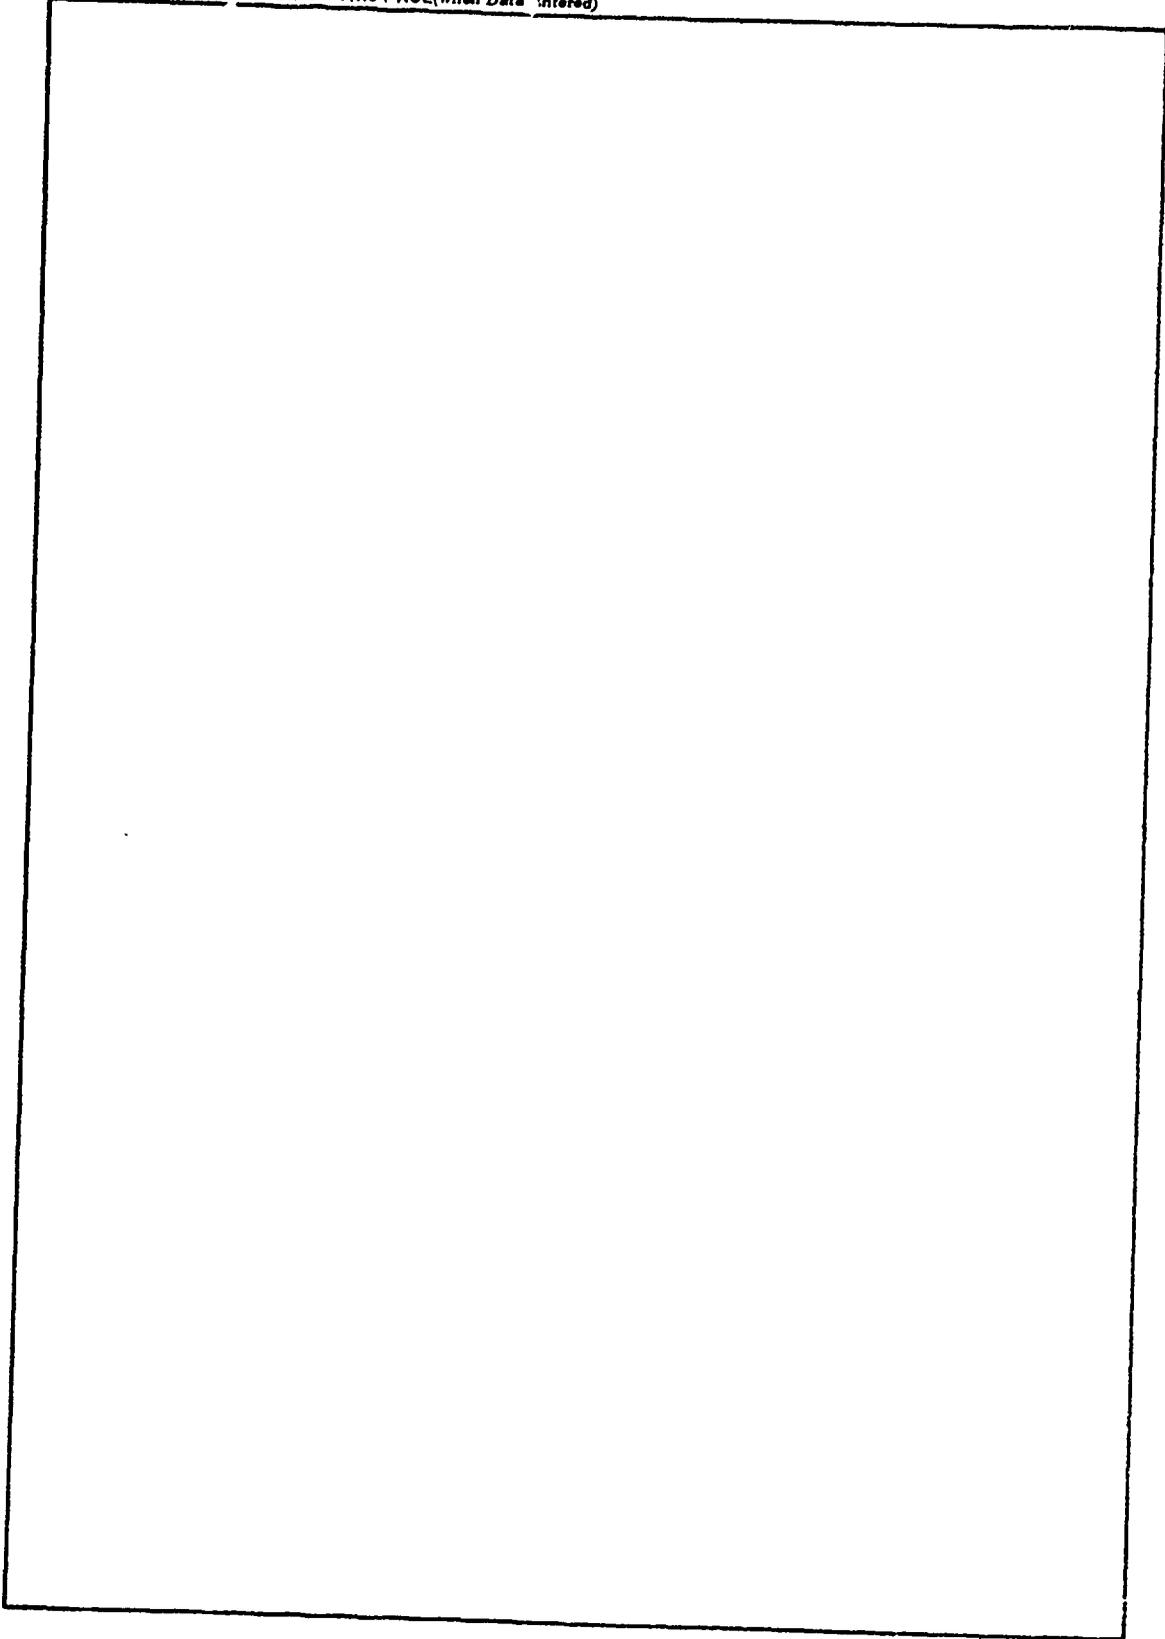

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

## TABLE OF CONTENTS

	Page no.
Introduction	1
Experimental Details	1
The Calorimeter	1
Reagents	2
The Heat of Reaction of $\text{NH}_3(\ell)$ and $\text{HNO}_3(\ell)$	2
The Heat of Dilution of $\text{HNO}_3/\text{NH}_4\text{NO}_3$ (56.4/42.6 wt %)	9
The Heat of Reaction of $\text{NH}_3(\ell)$ with a Dilute Mix	16
Heat Capacity of $\text{HNO}_3/\text{NH}_4\text{NO}_3$ Mix	16
Conclusions and Action Taken	16
References	17
Distribution List	19

Accession For		<input checked="" type="checkbox"/>
NTIS GRA&I		<input type="checkbox"/>
DDC TAB		<input type="checkbox"/>
Unannounced		<input type="checkbox"/>
Justification		<input type="checkbox"/>
By _____		
Digitized by _____		
Approved by _____		
Date	Month	Year
A		

## TABLES




1	Summary of calorimetric data	6
2	Thermochemical cycle for calculating heat of reaction between $\text{NH}_3(\ell)$ and $\text{HNO}_3(\ell)$	10
3	Heat of dilution of mix	13
4	Heat of formation of $\text{NH}_4\text{NO}_3$ solution	14
5	Heat capacity of mix at $25.4^\circ\text{C}$	15

## FIGURES

1	Outside view of calorimeter reaction vessel	3
2	Inside view of calorimeter reaction vessel	4
3	Heat of solution of $\text{NH}_4\text{NO}_3(\text{s})$ in 99.6 wt % $\text{HNO}_3(\ell)$ (run no. 6)	5
4	Integral heat of solution of $\text{NH}_4\text{NO}_3(\text{s})$ in 99.6 wt % $\text{HNO}_3(\ell)$ versus molality $\text{NH}_4\text{NO}_3$	11
5	Integral heat of solution of $\text{NH}_4\text{NO}_3(\text{s})$ in 99.6 wt % $\text{HNO}_3(\text{s})$ versus moles $\text{HNO}_3/\text{mole } \text{NH}_4\text{NO}_3$	12

## INTRODUCTION

The Army is contemplating building another facility (in addition to the one at Holston Army Ammunition Plant (HAAP)) to manufacture RDX and HMX and its compositions. One of the processes in this manufacturing operation is the production of ammonium nitrate in a nitric acid solution. The process contemplated for this new facility has enough differences from the present operation at HAAP that the basic thermochemical data of the following reactions are required; as well as the heat capacity of the mix:





This report describes the calorimetry work and subsequent calculations to obtain these data.

## EXPERIMENTAL DETAILS

### The Calorimeter

Figures 1 and 2 show photographs of the calorimeter reaction vessel used for this study. The reaction vessel is constructed from Durimet 20, a stainless steel alloy enriched in Cu and Ni. This alloy is reported in Perry's Chemical Engineering Handbook to be highly resistant to corrosion by 100% nitric acid (51 microns per year at 50°C). Special features of the vessel include a propeller-type stirrer, an ampule holder, and an ampule breaker (plunger device designed to break the ampule). After loading, the reactor vessel is sealed, placed in an insulated Dewar flask, and covered with about 2,700 cm<sup>3</sup> of water. Extending through the styrofoam cap of the Dewar flask are the ampule breaker and stirrer connections, a bath stirrer, a calibration heater, and an NBS-calibrated platinum resistance thermometer. Calorimetric measurements were conducted using well documented procedures (ref 1) that included the application of the NBS heat-leak correction formulas (ref 2). The results of a typical experiment are shown in figure 3.



## Reagents

Concentrated ammonium hydroxide (25.67 wt %  $\text{NH}_3$ ) was standardized by potentiometric titration against standard 1 N HCl. For calorimetric measurements, samples were transferred by syringe into weighed 4-cm<sup>3</sup> glass ampules that were flame-sealed, reweighed, and mounted in a fixed position in the sample holder.

Ammonium nitrate (99.5% assay, Mallinckrodt Chemical Company) was dried for several hours at 130°C and then transferred to a dry box through an antechamber that was evacuated to less than 50 microns of Hg. Glass ampules containing  $\text{NH}_4\text{NO}_3$  were filled in the dry box and then flame-sealed under a nitrogen atmosphere. A Karl-Fischer titration of the  $\text{NH}_4\text{NO}_3$  handled under these conditions showed the presence of less than 0.1%  $\text{H}_2\text{O}$ . An x-ray diffraction pattern of the dried sample was identical to the literature spectrum of  $\text{NH}_4\text{NO}_3$ .

Anhydrous nitric acid was prepared by distillation of 90%  $\text{HNO}_3$  from fuming sulfuric acid (oxides of nitrogen were removed before distillation by treatment with urea). Nitric acid samples stored in sealed polyethylene bottles in the dark at -80°C were transferred by pipette to the calorimeter immediately after thawing to room temperature. The  $\text{HNO}_3$  content of samples used in the study, determined from potentiometric titration against standard 1 N NaOH, was 99.6 ± 0.2 wt%  $\text{HNO}_3$ . As a measure of the extent of reaction with the wall of the calorimeter,  $\text{HNO}_3$  samples were analyzed following the calorimetric determination. After correction for the  $\text{HNO}_3$  consumed during the reaction of interest, the analysis of the final composition varied less than 1% from the calculated final composition. In addition, no Fe or Ni was detected by atomic absorption analysis of the  $\text{HNO}_3$  in contact with the reaction vessel.

## The Heat of Reaction of $\text{NH}_3(\ell)$ and $\text{HNO}_3(\ell)$

During a meeting on 2 August 1978 with ARRADCOM; Project Manager of Munitions Production Base Modernization and Expansion; US Army Engineer District, Huntsville, Engineering Division; and SRI it was suggested that direct measurement of reaction (1) would be difficult because of problems of safety, temperature control, and accurate measurement associated with handling liquid ammonia. As an alternative approach, it was proposed to measure the following reaction:






Figure 1. Outside view of calorimeter reaction vessel.

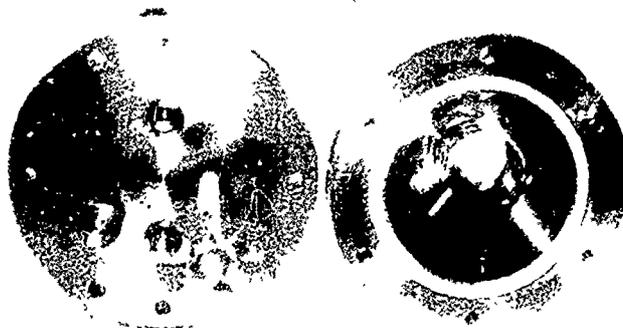


Figure 2. Inside view of calorimeter reaction vessel.

Resistance ( $\Omega$ )  
 (As measured by NBS-calibrated  
 Leeds and Northrup Pt resistance thermometer,  
 S/N 1597230,  $1 \Omega = 9.917^\circ\text{C}$ )

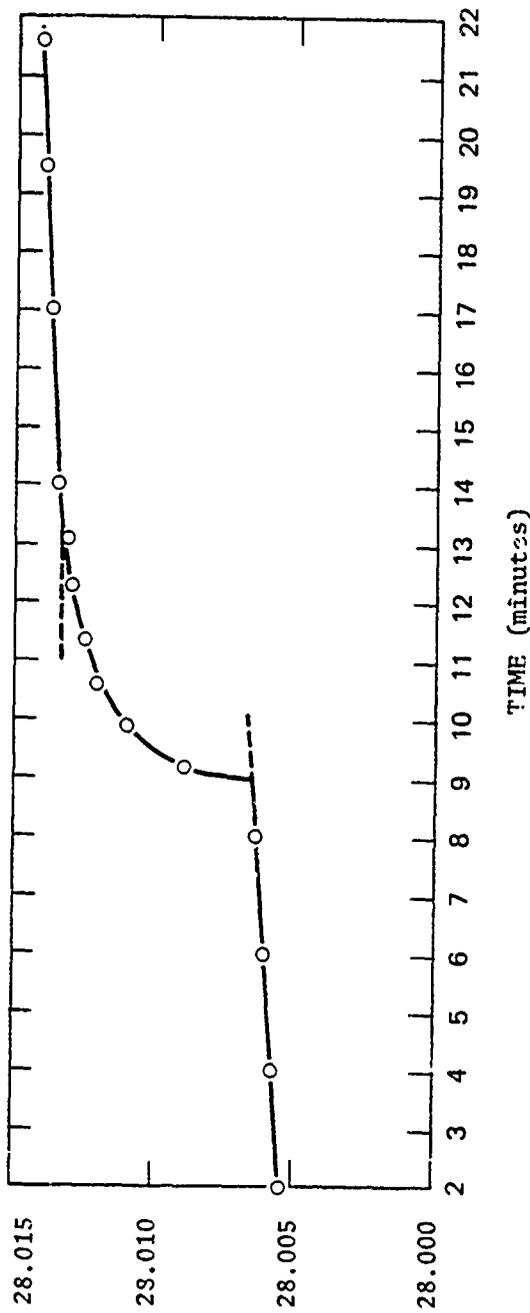


FIGURE 3 HEAT OF SOLUTION OF  $\text{NH}_4\text{NO}_3(s)$  IN 99.6 wt%  $\text{HNO}_3(l)$  (RUN NO. 6)

Figure 3. Heat of solution of  $\text{NH}_4\text{NO}_3(s)$  in 99.6 wt %  $\text{HNO}_3(l)$  (run no. 6).

Table 1. Summary of calorimetric data

Run	Reactant Composition			Run temp. (K)	$C_p^*$ (kcal/ $\Omega$ )	$\Delta T^*$ ( $\Omega$ )	Total kcal	kcal/mole		
	System	Moles	Molality							
1	NH <sub>4</sub> OH/HNO <sub>3</sub>	0.0525 NH <sub>3</sub>	0.70	298.32	32.496	0.0691	2.2455	-42.77		
		0.1438 H <sub>2</sub> O	1.91							
		1.194 HNO <sub>3</sub>	-							
2	NH <sub>4</sub> OH/HNO <sub>3</sub>	0.0422 NH <sub>3</sub>	0.56	298.28	31.518	0.0574	1.8091	-42.87		
		0.1154 H <sub>2</sub> O	1.53							
		1.195 HNO <sub>3</sub>	-							
3	NH <sub>4</sub> OH/HNO <sub>3</sub>	0.0475 NH <sub>3</sub>	0.63	298.30	31.900	0.0632	2.0161	-42.44		
		0.1298 H <sub>2</sub> O	1.73							
		1.192 HNO <sub>3</sub>	-							
13	NH <sub>4</sub> OH/HNO <sub>3</sub>	0.0521 NH <sub>3</sub>	0.69	298.33	31.149	0.0696	2.1680	-41.63		
		0.1510 H <sub>2</sub> O	2.00							
		1.195 HNO <sub>3</sub>	-							
Average of runs 1, 2, 3, and 13		0.0486 NH <sub>3</sub>	0.65	298.31		Average		-42.43		
		0.1350 H <sub>2</sub> O	1.79						Stand Dev.	0.56
		1.194 HNO <sub>3</sub>	-							
4	H <sub>2</sub> O/HNO <sub>3</sub>	0.2834 H <sub>2</sub> O	3.77	298.19	31.580	0.0369	1.1653	- 4.11		
		1.193 HNO <sub>3</sub>	-							

\*See footnote at end of table.

Table 1. (cont.)

Run	System	Reactant Composition		Run temp. (K)	C <sub>p</sub> <sup>*</sup> (kcal/Ω)	ΔT <sup>*</sup> (Ω)	Total kcal	kcal/mole
		Moles	Molality					
5	H <sub>2</sub> O/HNO <sub>3</sub>	{ 0.2082 H <sub>2</sub> O 1.197 HNO <sub>3</sub>	{ 2.76 }	298.13	34.059	0.0259	0.8821	- 4.24
9	H <sub>2</sub> O/HNO <sub>3</sub>	{ 0.1293 H <sub>2</sub> O 1.189 HNO <sub>3</sub>	{ 1.72 }	298.08	30.468	0.0118	0.3595	- 2.78
12	H <sub>2</sub> O/HNO <sub>3</sub>	{ 0.09512 H <sub>2</sub> O 0.239 HNO <sub>3</sub>	{ 6.32 }	298.05	31.430	0.0118	0.3709	- 3.90
6	NH <sub>4</sub> NO <sub>3</sub> /HNO <sub>3</sub>	{ 0.0301 NH <sub>4</sub> NO <sub>3</sub> 1.198 HNO <sub>3</sub>	{ 0.40 }	298.04	32.423	0.0061	0.1978	- 6.58
7	NH <sub>4</sub> NO <sub>3</sub> /HNO <sub>3</sub>	{ 0.0441 NH <sub>4</sub> NO <sub>3</sub> 1.196 HNO <sub>3</sub>	{ 0.59 }	298.05	31.154	0.0084	0.2617	- 5.93
8	NH <sub>4</sub> NO <sub>3</sub> /HNO <sub>3</sub>	{ 0.0378 NH <sub>4</sub> NO <sub>3</sub> 1.196 HNO <sub>3</sub>	{ 0.50 }	298.02	30.710	0.0073	0.2242	- 5.93
10	NH <sub>4</sub> NO <sub>3</sub> /HNO <sub>3</sub>	{ 0.0469 NH <sub>4</sub> NO <sub>3</sub> 0.478 HNO <sub>3</sub>	{ 1.56 }	298.02	28.994	0.0088	0.2551	- 5.44
11	NH <sub>4</sub> NO <sub>3</sub> /HNO <sub>3</sub>	{ 0.0748 NH <sub>4</sub> NO <sub>3</sub> 0.239 HNO <sub>3</sub>	{ 4.97 }	298.02	31.982	0.0074	0.2367	- 3.16

\*See footnote at end of table.


Table 1. (cont.)

Run	System	Reactant Composition		Run temp. (K)	$C_p^*$ (kcal/°)	$\Delta T^*$ (°)	Total kcal	kcal/mole
		Moles	Molality					
14	NH <sub>4</sub> NO <sub>3</sub> /H <sub>2</sub> O/HNO <sub>3</sub>	0.0199 NH <sub>4</sub> NO <sub>3</sub>	0.64	298.04	30.756	0.0039	0.1199	- 6.03
		0.0555 H <sub>2</sub> O	1.78					
		0.478 HNO <sub>3</sub>	-					
16	NH <sub>4</sub> NO <sub>3</sub> /HNO <sub>3</sub>	0.0500 NH <sub>4</sub> NO <sub>3</sub>	3.31	298.01	30.522	0.0070	0.2137	- 4.28
		0.239 HNO <sub>3</sub>	-					
17	NH <sub>4</sub> NO <sub>3</sub> /HNO <sub>3</sub>	0.1427 NH <sub>4</sub> NO <sub>3</sub>	9.44	298.00	30.908	0.0077	0.2380	- 1.67
		0.239 HNO <sub>3</sub>	-					

8

\*As measured by NBS-calibrated Leeds and Northrup Pt resistance thermometer, S/N 1597230, 1 ° = 9.917°C.

To obtain the desired heat of reaction ( $\Delta H_R$ ) of (1), the measured value for (5) was combined with the  $\Delta H_R$  for the following reactions:



Since heats of reaction vary with concentration, it is important to apply  $\Delta H_R$  values for reactions (6) through (8) that are measured or calculated at compatible concentrations with (5). For reaction (6),  $\Delta H_{R298}$  is calculated from literature values (ref 3) to be -3.00 kcal/mole. Similar information for reactions (7) and (8) is either not available or is in concentration ranges that cannot be accurately extrapolated to required laboratory conditions. Therefore,  $\Delta H_R$  was measured for (7) and (8) at the required concentrations for use with (5) and (6) to obtain (1). These reactions are summarized in table 2. Using calculated or measured  $\Delta H_R$  values for reactions (5) through (8) and Hess' law of constant heat summation,  $\Delta H_{R298}$  of reaction (1) was calculated to be -31.755 kcal/mole.

The reliability of the data can be assessed from replicate values obtained for reaction (5). As shown in table 1, the 95% confidence limit of the average value (-42.43 kcal/mole) is + 0.90 kcal/mole. It is estimated that the error introduced from the water (less than 0.02 mole) contained in the 99.6 wt %  $\text{HNO}_3$  used in these measurements is less than 0.5 kcal/mole.

#### The Heat of Dilution of $\text{HNO}_3/\text{NH}_4\text{NO}_3$ (56.4/42.6 wt %)

To the best of the investigators' knowledge, the heat of solution of  $\text{NH}_4\text{NO}_3(\text{s})$  in 99.6 wt %  $\text{HNO}_3(\ell)$  has not been previously reported. The observed exothermic heat of solution is of theoretical interest since the solution of most crystalline materials involves the adsorption of heat. The data appear to fit a straight line on a semilog plot (fig 4), which permits an accurate interpolation between concentrations. In another presentation of the results, the heat of solution per mole of  $\text{HNO}_3(\ell)$  is given in figure 5, and the heat of solution at infinite dilution approaches a value of -6.5 kcal/mole  $\text{NH}_4\text{NO}_3$ .

The heat of dilution of the  $\text{HNO}_3/\text{NH}_4\text{NO}_3$  mix is calculated from the thermochemical cycle shown in table 3. The results (-1.38 kcal/mole  $\text{HNO}_3$  (298 K)) can also be derived directly from data for the heat

Table 2. Thermochemical cycle for calculating heat of reaction between  $\text{NH}_3(\ell)$  and  $\text{HNO}_3(\ell)$

Step	Reaction	$\Delta H_r$ (kcal)	Run
1.	$(0.049)\text{NH}_3 \cdot (0.135)\text{H}_2\text{O} + (1.194)\text{HNO}_3 \rightarrow (0.049)\text{NH}_4\text{NO}_3 \cdot (0.135)\text{H}_2\text{O} \cdot (1.145)\text{HNO}_3$	$(-42.43)(0.049) = -2.079$	1, 2, 3, 13
2.	$(0.049)\text{NH}_4\text{NO}_3 \cdot (0.135)\text{H}_2\text{O} \cdot (1.145)\text{HNO}_3 \rightarrow (0.049)\text{NH}_4\text{NO}_3 + (0.135)\text{H}_2\text{O} \cdot (1.145)\text{HNO}_3$	$(+6.03)(0.049) = +0.295$	14
3.	$(0.135)\text{H}_2\text{O} \cdot (1.145)\text{HNO}_3 \rightarrow (0.135)\text{H}_2\text{O} + (1.145)\text{HNO}_3$	$(+2.78)(0.135) = +0.375$	9
4.	$(0.049)\text{NH}_3 + (0.135)\text{H}_2\text{O} \rightarrow (0.049)\text{NH}_3 \cdot (0.135)\text{H}_2\text{O}$	$(-3)(0.049) = -0.147$ (ref 3)	

SUMMING:  $(1.194)\text{HNO}_3 + (0.049)\text{NH}_3 \rightarrow (0.049)\text{NH}_4\text{NO}_3 + (1.145)\text{HNO}_3$

SIMPLIFYING:  $(0.049)\text{HNO}_3 + (0.049)\text{NH}_3 \rightarrow (0.049)\text{NH}_4\text{NO}_3$

OR

$\text{HNO}_3(\ell) + \text{NH}_3(\ell) \rightarrow \text{NH}_4\text{NO}_3(\ell)$

-1.556 (-31.755 kcal/mole)

-31.755

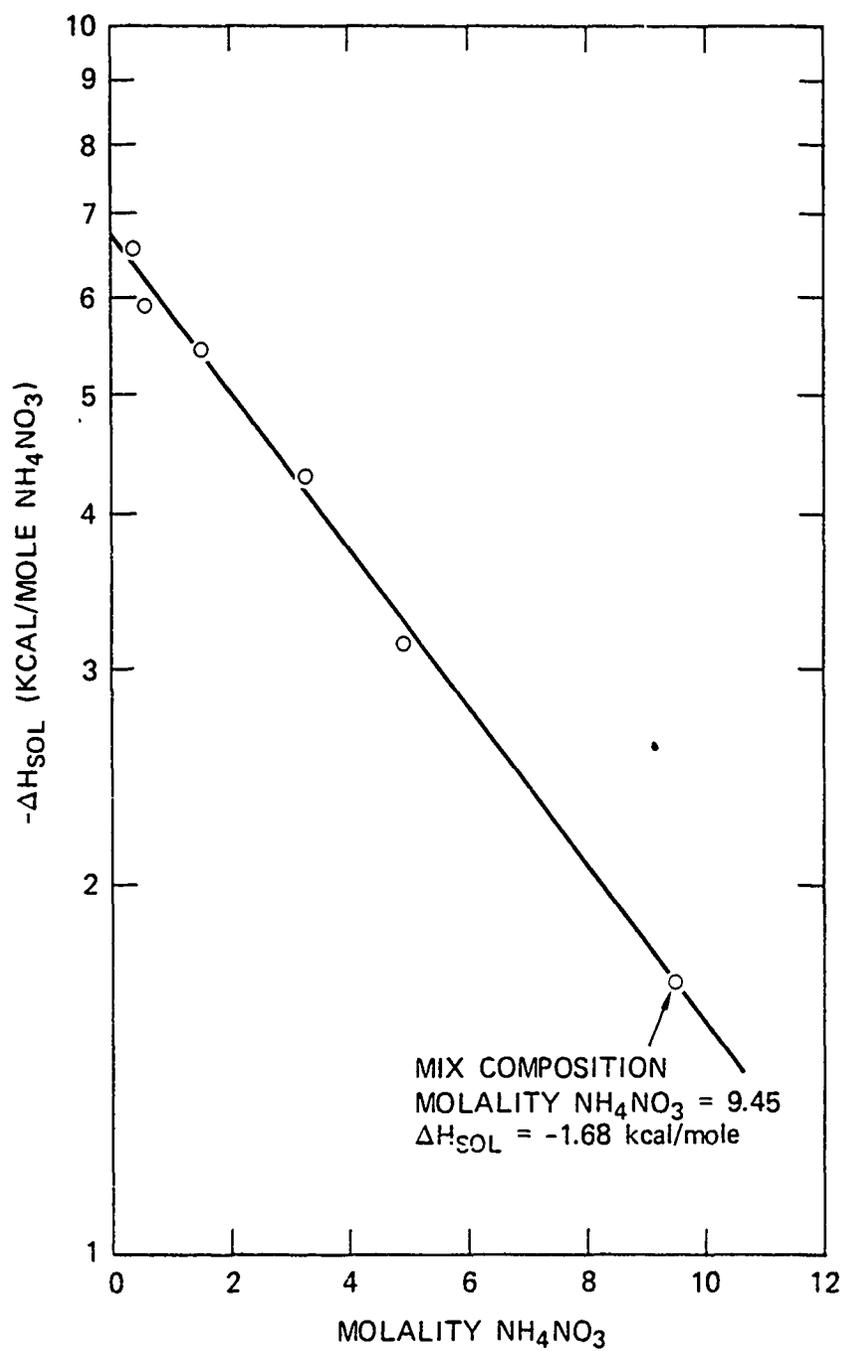


Figure 4. Integral heat of solution of  $\text{NH}_4\text{NO}_3(s)$  in 99.6 wt %  $\text{HNO}_3(l)$  versus molality  $\text{NH}_4\text{NO}_3$ .

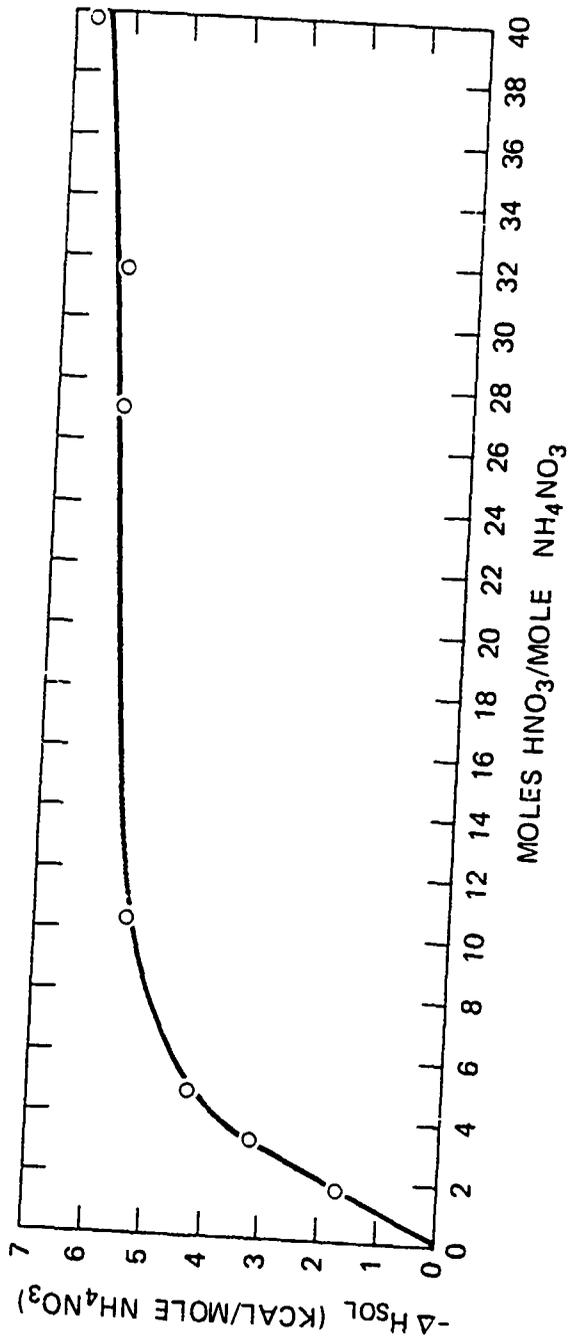


Figure 5. Integral heat of solution of  $\text{NH}_4\text{NO}_3(\text{s})$  in 99.6 wt %  $\text{HNO}_3(\text{s})$  versus moles  $\text{HNO}_3$ /mole  $\text{NH}_4\text{NO}_3$ .

Table 3. Heat of dilution of mix<sup>a</sup>

<u>Reaction</u>	<u>Molality NH<sub>4</sub>NO<sub>3</sub></u>	<u>ΔH<sub>R</sub> (kcal) (from fig 4)</u>
NH <sub>4</sub> NO <sub>3</sub> .(1.68)HNO <sub>3</sub> → NH <sub>4</sub> NO <sub>3</sub> + (1.68)HNO <sub>3</sub>	(9.45)	+1.68
NH <sub>4</sub> NO <sub>3</sub> + (1.77)HNO <sub>3</sub> → NH <sub>4</sub> NO <sub>3</sub> .(1.77)HNO <sub>3</sub>	(8.97)	-1.80
<hr/>		
<div style="display: flex; justify-content: space-around;"> <span>Sol A</span> <span>Sol B</span> </div> NH <sub>4</sub> NO <sub>3</sub> .(1.68)HNO <sub>3</sub> + (0.087)HNO <sub>3</sub> → NH <sub>4</sub> NO <sub>3</sub> .(1.77)HNO <sub>3</sub>		-0.12 <sup>b</sup> kcal/mole NH <sub>4</sub> NO <sub>3</sub>
(11.49)NH <sub>4</sub> NO <sub>3</sub> .(19.31)HNO <sub>3</sub> + HNO <sub>3</sub> → (11.49)NH <sub>4</sub> NO <sub>3</sub> .(20.31)HNO <sub>3</sub>		-1.38 kcal/mole HNO <sub>3</sub>

<sup>a</sup>1,000 parts mix + 29.51 parts HNO<sub>3</sub>.


<sup>b</sup>ΔH<sub>R</sub> = ΔH<sub>f</sub> Sol B - ΔH<sub>f</sub> Sol A = -1.80 - (-1.68) = -0.12 (fig 4)

\*1000 parts mix + 29.51 parts HNO<sub>3</sub>.

Table 4. Heat of formation of  $\text{NH}_4\text{NO}_3$  solution

System	Heat of reaction of $\text{NH}_3(\ell)$ with dilute mix		
	Step	$\frac{\Delta H_R}{\text{kcal/mole NH}_4\text{NO}_3}$	$\frac{\Delta H_R}{\text{kcal for reaction}}$
$\text{NH}_3 + \text{HNO}_3 \rightarrow \text{NH}_4\text{NO}_3$	1	-31.755	-31.755
$(31.8)\text{NH}_4\text{NO}_3 + (53.48)\text{HNO}_3 \rightarrow (31.8)\text{NH}_4\text{NO}_3 \cdot (53.48)\text{HNO}_3$	2	-1.68	-53.424 <sup>a</sup>
$(54.48)\text{HNO}_3 \cdot (30.8)\text{NH}_4\text{NO}_3 \rightarrow (54.48)\text{HNO}_3 + (30.8)\text{NH}_4\text{NO}_3$	3	1.8	+55.440 <sup>b</sup>

Overall reaction (sum 1 + 2 + 3)



-29.74

The same value can be calculated from the final equation using the relationship:

$$\Delta H_R = \Delta H_R \text{ Step 1} + \Delta H_R (\text{mix formation}) \times (31.8) - \Delta H (\text{dilute mix formation}) \times (30.8).$$

<sup>a</sup>Product of (-1.68) (31.8)

<sup>b</sup>Product of (1.8) (30.8)

Table 5. Heat capacity of mix\* at 25.4°C

<u>Blank</u>	<u>C<sub>p</sub> system (heat/°C)</u>		<u>C<sub>p</sub> mix</u> <u>cal/g/°C</u>
	<u>+ mix</u>	<u>ΔC<sub>p</sub></u>	
3.057	3.120	0.063	0.47

\*133.30 g, 43.6 wt % NH<sub>4</sub>NO<sub>3</sub>/56.2 wt % HNO<sub>3</sub>/0.2 wt % H<sub>2</sub>O

of solution of  $\text{NH}_4\text{NO}_3(\text{s})$  in  $\text{HNO}_3(\text{l})$ . This calculation involves the difference in the heats of formation of  $\text{NH}_4\text{NO}_3$  dissolved in  $\text{HNO}_3$  (fig 4) of the product and the reactant compositions. The importance of this approach is that the heat of dilution or concentration of an  $\text{HNO}_3/\text{NH}_4\text{NO}_3$  mix over the composition range studied can be calculated directly from figure 4 without recording the separate steps involved. The cycle in table 3 represents the point in the nitric acid-ammonium nitrate reaction process where the nitric acid is added.

#### The Heat of Reaction of $\text{NH}_3(\text{l})$ with a Dilute Mix


The heat of reaction of  $\text{NH}_3(\text{l})$  with a dilute mix (molality = 8.97) to generate the normal mix (molality = 9.45) is calculated from the thermochemical cycle shown in table 4. The result (-29.74 kcal/mole) is obtained by first adding the heat of reaction for the formation of  $\text{NH}_4\text{NO}_3$  obtained in table 2 to the heat of dilution of  $\text{NH}_4\text{NO}_3$  in nitric acid to obtain the normal mix composition. These are represented by steps 1 and 2 in table 4. Finally, the heat of dilution of ammonium nitrate in nitric acid to obtain the dilute mix must be added as in step 3. Figure 4 is used to obtain the required heats for steps 2 and 3 on a mole of  $\text{NH}_4\text{NO}_3$  basis. These heats are then multiplied by the number of moles of  $\text{NH}_4\text{NO}_3$  involved as shown in the chemical equations of steps 2 and 3. The algebraic sum of the respective heats gives the overall heat of reaction, and the chemical sum of equations 1, 2, and 3 gives the overall reaction involved. This reaction will take place in the reactor generating  $\text{NH}_4\text{NO}_3$  in the production facility.


#### Heat Capacity of $\text{HNO}_3/\text{NH}_4\text{NO}_3$ Mix

The heat capacity of an  $\text{HNO}_3/\text{NH}_4\text{NO}_3$  mix (56.4 Wt %  $\text{HNO}_3$  /43.6 wt %  $\text{NH}_4\text{NO}_3$ ) was determined experimentally from the difference in heat capacity of the empty reaction vessel and the vessel containing a weighed quantity of the mix. The result of 0.45 cal/g/°C at 25°C (table 5) is close to that expected for the  $\text{HNO}_3/\text{NH}_4\text{NO}_3$  system, since both components have reported equal heat capacities of about 0.4 cal/g/°C.

### CONCLUSIONS AND ACTION TAKEN

The following heat of reaction data pertinent to the design of a nitric acid-ammonium nitrate reaction process for the RDX/HMX facility were obtained:

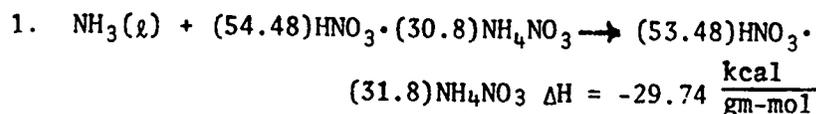



$$(20.31)\text{HNO}_3 \quad \Delta H = -1.38 \frac{\text{kcal}}{\text{gm-mol}}$$

Also obtained was the heat capacity of the mixture:

43.6 wt %  $\text{NH}_4\text{NO}_3$

56.2 wt %  $\text{HNO}_3$

0.2 wt %  $\text{H}_2\text{O}$

0.47 cal/g/°C

These data were forwarded to the U. S. Army Engineer District, Huntsville, Alabama, for their design of the NA/AN process to be used in the manufacture of RDX/HMX.

#### REFERENCES

1. A. Weissberger and B. Rossiter, Eds., Physical Methods of Chemistry, Part V: Determination of Thermodynamic and Surface Properties, Wiley-Interscience, New York, 1971, p 347
2. R. S. Jessup, National Bureau of Standards Monograph 7, Precise Measurement of Heat of Combustion with a Bomb Calorimeter, 26 February 1960
3. National Bureau of Standards Technical Note 270-3, 1968

## DISTRIBUTION LIST

Commander  
US Army Armament Research and  
Development Command  
ATTN: DRDAR-LCM-PE (4)  
DRDAR-LCM-P  
DRDAR-LCM-E (2)  
Dover, NJ 07801

Project Manager for Munition Production  
Base Modernization and Expansion  
US Army Materiel Development and  
Readiness Command  
ATTN: DRCPM-PBM-EE (4)  
Dover, NJ 07801

US Army Engineer District, Huntsville  
ATTN: Engineering Division, HNDED-ME (3)  
HNDED-PM (2)  
P.O. Box 1600 West Station  
Huntsville, AL 35807

Commander  
Holston Army Ammunition Plant  
ATTN: SARHO-E (3)  
Kingsport, TN 37662

Director  
US Army Industrial Base Engineering Activity  
ATTN: DRXIB-MT (2)  
Rock Island, IL 61299

Ralph M. Parsons Company  
ATTN: K. Lewis (5)  
100 West Walnut Street  
Pasadena, CA 91124

SRI International  
ATTN: B. Gikis (5)  
R. Rewick (5)  
Dr. D. D. Cubicciotti (3)  
333 Ravenswood Avenue  
Menlo Park, CA 94025

Defense Documentation Center (12)  
Cameron Station  
Alexandria, VA 22314

Weapon System Concept Team/CSL  
ATTN: DRDAR-ACW  
Aberdeen Proving Ground, MD 21010

Technical Library  
ATTN: DRDAR-CLJ-L  
Aberdeen Proving Ground, MD 21010

Technical Library  
ATTN: DRDAR-TSB-S  
Aberdeen Proving Ground, MD 21005

Benet Weapons Laboratory  
Technical Library  
ATTN: DRDAR-LCB-TL  
Watervliet, NY 12189

Commander  
US Army Armament Materiel  
Readiness Command  
ATTN: DRSAR-LEP-L  
Rock Island, IL 61299

Director  
US Army TRADOC Systems Analysis Activiey  
ATTN: ATAA-SL (Tech Lib)  
White Sands Missile Range, NM 88002

US Army Materiel Systems Analysis Activity  
ATTN: DRXSJ-MP  
Aberdeen Proving Ground, MD 21005

Commander  
US ARMY COM  
ATTN: DRDAR-TSS (5)  
Dover, NJ 07801