

AD-A094 711

TECHNICAL
LIBRARY

AD-A094 711

TECHNICAL REPORT ARLCB-TR-80045

ELASTIC-PLASTIC ANALYSIS USING A
TRIANGULAR RING ELEMENT IN NASTRAN

P. C. T. Chen

November 1980



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
LARGE CALIBER WEAPON SYSTEMS LABORATORY
BENÉT WEAPONS LABORATORY
WATERVLIET, N. Y. 12189

AMCMS No. 36KA7000204

DA Project No. 156401813GRN

PRON No. 1A0215641A1A

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

DTIC QUALITY INSPECTED 3

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The use of trade name(s) and/or manufacturer(s) does not constitute an official indorsement or approval.

DISPOSITION

Destroy this report when it is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARLCB-TR-80045	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) ELASTIC-PLASTIC ANALYSIS USING A TRIANGULAR RING ELEMENT IN NASTRAN		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) P. C. T. Chen		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Benet Weapons Laboratory Watervliet Arsenal, Watervliet, NY 12189 DRDAR-LCB-TL		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMCMS No. 36KA7000204 DA Project No. 156401813GRN PRON No. 1A0215641A1A
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Armament Research & Development Command Large Caliber Weapon Systems Laboratory Dover, NJ 07801		12. REPORT DATE November 1980
		13. NUMBER OF PAGES 15
14. MONITORING AGENCY NAME & ADDRESS (If different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Presented at Ninth NASTRAN Users' Colloquium, NASA/Kennedy Space Center, FL, 21-23 October 1980. Published in proceedings of the colloquium.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) NASTRAN Program Triangular Ring Elastic-Plastic Gun Tube Thread Problem		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) An elastic-plastic triangular ring element is implemented in the NASTRAN computer program. The plane-strain problem of a partially-plastic thick- walled cylinder under internal pressure is solved and compared with the ear- lier finite-difference solution. A very good agreement has been reached. In order to demonstrate its application to more general problems, an overloaded (CONT'D ON REVERSE)		

20. Abstract (Cont'd)

thread problem for the British Standard Buttress is examined. The maximum axial and principal stresses are located and their values are determined as functions of loading.

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION	1
TRIANGULAR RING ELEMENTS	2
NASTRAN IMPLEMENTATION	4
PROGRAM EVALUATION	4
THREAD PROBLEM	6
CONCLUSION	7
REFERENCES	8

LIST OF ILLUSTRATIONS

1. Radial displacement in a pressurized tube.	9
2. Stresses in a pressurized tube.	10
3. Finite element model for the thread problem.	11
4. Stresses in boundary elements (side D-E-F) at p = 54.65 Ksi.	12
5. Stresses in boundary elements (side D-E-F) at p = 100 Ksi.	13
6. Maximum axial and fillet stresses as functions of contact pressure.	14

INTRODUCTION

The piecewise linear analysis option of the NASTRAN program provides an algorithm for solving nonlinear problems in material plasticity.¹ However, the usefulness of this option is quite limited because only a few elements have been implemented. These include rod, tube, and bar elements for one-dimensional problems and plate elements for two-dimensional plane stress problems. In a recent paper,² the implementation of a trapezoidal ring element in NASTRAN for elastic-plastic analysis was described and two test problems of rotational symmetry were solved. The first is an infinitely long tube under uniform internal pressure. The NASTRAN results are in excellent agreement with an exact solution based on the finite-difference approach.³ The second problem is a thick-walled cylinder of finite length loaded over part of its inner surface. The NASTRAN results are in good agreement with another finite element solution.⁴

In the present report, two elastic-plastic problems of rotational symmetry are solved using triangular ring elements for the finite element models. The implementation of a triangular ring element in NASTRAN for elastic-plastic analysis follows the same procedures in reference 2 for a trapezoidal ring

¹"NASTRAN Theoretical Manual," NASA SP-221(01), 1972.

²Chen, P. C. T. and O'Hara, G. P., "Implementation of a Trapezoidal Ring Element in NASTRAN for Elastic-Plastic Analysis," NASA CP-2131, Proceedings of the Eighth NASTRAN User's Colloquium, pp. 101-112, October 1979.

³Chen, P. C. T., "A Finite-Difference Approach to Axisymmetric Plane-Strain Problems Beyond the Elastic Limit," Transactions of the Twenty-Fifth Conference of Army Mathematicians, pp. 455-465, January 1980.

⁴Chen, P. C. T., "Numerical Solution of Gun Tube Problems in the Elastic-Plastic Range," Proceedings of the 1977 Army Numerical Analysis and Computer Conference, pp. 423-439, November 1977.

element. In order to test the accuracy of the implementation, the plane-strain problem of a partially-plastic thick-walled cylinder under internal pressure is solved again and compared with the finite-difference solution.³ The second demonstrative problem in using NASTRAN triangular ring elements is an overloaded thread problem for the British Standard Buttress. A detailed discussion of this problem in the elastic range of loading was reported in reference 5. In the present report, uniform pressure distribution on the primary bearing surface of the thread is assumed and the load is applied in increments beyond the elastic limit. The maximum axial and principal stresses are located and their values are determined as functions of loadings.

TRIANGULAR RING ELEMENTS

The incremental displacement field employed for the triangular ring element is

$$\Delta u(r,z) = \beta_1 + \beta_2 r + \beta_3 z, \quad (1)$$

$$\Delta w(r,z) = \beta_4 + \beta_5 r + \beta_6 z. \quad (2)$$

The transformation from grid point coordinates to generalized coordinates is

$$\{\beta\} = [\Gamma_{\beta q}] \{\Delta q\} \quad (3)$$

where

$$\{q\}^T = [\Delta u_1, \Delta w_1, \Delta u_2, \Delta w_2, \Delta u_3, \Delta w_3], \quad (4)$$

$$\{\beta\}^T = [\beta_1, \beta_2, \beta_3, \beta_4, \beta_5, \beta_6], \quad (5)$$

³Chen, P. C. T., "A Finite-Difference Approach to Axisymmetric Plane-Strain Problems Beyond the Elastic Limit," Transactions of the Twenty-Fifth Conference of Army Mathematicians, pp. 455-465, January 1980.

⁵O'Hara, G. P., "Stress Concentrations in Screw Threads," NASA CP-2131, Proceedings of the Eighth NASTRAN User's Colloquium, pp. 65-77, October 1979.

and the elements of the inverse of the transformation matrix $[\Gamma_{\beta q}]^{-1}$ are the coefficients of the β 's in equations (1) and (2), evaluated at the corners of the element.

The stiffness matrix is formed in the same manner as that for the anisotropic elastic element. The final form referred to grid coordinates is

$$[K] = [\Gamma_{\beta q}]^T [\bar{K}] [\Gamma_{\beta q}] , \quad (6)$$

where

$$[\bar{K}] = 2\pi \int r [B]^T [D] [B] dzdr . \quad (7)$$

The $[B]$ matrix is the same as the elastic case, but now it expresses the incremental strains in terms of generalized coordinates

$$\{\Delta\epsilon\} = [B] \{\beta\} . \quad (8)$$

The $[D]$ matrix which relates the incremental stresses to the incremental strains, i.e.,

$$\{\Delta\sigma\} = [D] \{\Delta\epsilon\} , \quad (9)$$

is the same as that for a trapezoidal ring element presented in reference 2.

In developing the NASTRAN program for strain-hardening materials, we calculate $[D]^{-1}$ and obtain its inverse $[D]$ numerically. For ideally-plastic materials, this procedure fails and we should calculate $[D]$ directly using the closed form.

²Chen, P. C.T. and O'Hara, G. P., "Implementation of a Trapezoidal Ring Element in NASTRAN for Elastic-Plastic Analysis," NASA CP-2131, Proceedings of the Eighth NASTRAN User's Colloquium, pp. 101-112, October 1979.

NASTRAN IMPLEMENTATION

The implementation of a triangular ring element in NASTRAN for elastic-plastic analysis follows the same procedures for a trapezoidal ring element.^{2,6} Changes were required in the functional modules PLA1, PLA3, and PLA4, which included the writing of seven new subroutines. The changes in PLA1 allow this module to identify the new element as a member of the piecewise linear element set and properly initialize the nonlinear Element Summary and Element Connection Property Tables. Three element stress recovery subroutines were added to PLA3: PSIARG, a driver for stress data recovery; PSRIR1 and PSRIR2, phase I and II stress recovery routines. Element stiffness calculations in PLA4 required four new subroutines: PKIARG, a driver for nonlinear triangular ring elements in PLA4; PKRIR1 and PKRIR2, stress recovery routines which generate stresses for the computation of the nonlinear material matrix; and PKRIRS, the stiffness matrix generation routine for nonlinear triangular ring elements.

PROGRAM EVALUATION

In order to evaluate the accuracy of the computed code, the plane-strain problem of an elastic-plastic thick-walled cylinder under uniform internal pressure is solved again and compared with the finite-difference solution.³

²Chen, P. C. T. and O'Hara, G. P., "Implementation of a Trapezoidal Ring Element in NASTRAN for Elastic-Plastic Analysis," NASA CP-2131, Proceedings of the Eighth NASTRAN User's Colloquium, pp. 101-112, October 1979.

³Chen, P. C. T., "A Finite-Difference Approach to Axisymmetric Plane-Strain Problems Beyond the Elastic Limit," Transactions of the Twenty-Fifth Conference of Army Mathematicians, pp. 455-465, January 1980.

⁶"NASTRAN Programmer's Manual," NASA SP-223(01), 1972.

The tube of outside radius 2 inches and inside radius 1 inch is divided into 10 equal intervals and each interval consists of 2 triangular ring elements. The material constants are $E = 30 \times 10^6$ psi, $\nu = 0.3$, $\sigma_0 = 1.5 \times 10^5$ psi and the effective stress-strain curve is represented by three line segments connecting the four points in the $(\bar{\epsilon}, \bar{\sigma})$ plane, $(\bar{\epsilon}, \bar{\sigma}/\sigma_0) = (0.0, 0.0)$, $(0.005, 1.0)$, $(0.055, 1.5)$, $(0.1, 1.5)$. Twenty-three load factors are chosen: $P/\sigma_0 = 0.4323, 0.4738, 0.5125, 0.5484, 0.5818, 0.6128, 0.6415, 0.6681, 0.6925, 0.7150, 0.7356, 0.7545, 0.7716, 0.7871, 0.8011, 0.8135, 0.8245, 0.8341, 0.8423, 0.8493, 0.8550, 0.863, 0.87$. The numerical results based on the NASTRAN program have been obtained. For this problem, an exact solution based on a new finite-difference approach³ can be used to assess the accuracy of the NASTRAN code. Some of the results for the displacements and stresses are presented graphically in Figures 1 and 2. The radial displacements at the inside as well as outside surface are shown in Figure 1 as functions of internal pressure. Figure 2 shows the distributions of radial, tangential and axial stress components in a partially-plastic tube when the pressure is $p = 0.7356 \sigma_0$. As demonstrated in Figures 1 and 2, the NASTRAN results are in very good agreement with those based on the finite-difference approach.³

³Chen, P. C. T., "A Finite-Difference Approach to Axisymmetric Plane-Strain Problems Beyond the Elastic Limit," Transactions of the Twenty-Fifth Conference of Army Mathematicians, pp. 455-465, January 1980.

THREAD PROBLEM

As an application of using NASTRAN triangular ring elements for two-dimensional problems, an overloaded thread problem for the British Standard Buttress is examined. A finite element model is shown in Figure 3. A detailed discussion of this problem in the elastic range of loading was reported in reference 5. In the present report, uniform pressure distribution (P) on the primary bearing surface of the thread is assumed and the load is applied in ten unequal increments beyond the elastic limit. The elastic constants are $E = 25000$ Ksi, $\nu = 0.25$, and the effective stress-strain curve is represented by five line segments connecting the six points in the $(\bar{\epsilon}-\bar{\sigma})$ plane, ($\bar{\epsilon}-\bar{\sigma}$ in Ksi) = (0.0, 0.0), (0.0048,120), (0.0122,180), (0.0167,200), (0.0918,210), (0.25,210). The sides A-B and C-D are constrained in the axial direction and the side B-C, in the axial and radial directions.

The elastic problem is solved first and the upper limit of the elastic loading (p^*) is found to be 54.65 Ksi. Eleven load factors are chosen as follows: $p = 54.65, 60.59, 66.22, 71.54, 76.54, 81.23, 85.61, 89.68, 93.43, 96.87, 100.0$ Ksi. The numerical results based on the NASTRAN code have been obtained and the total CPU time is 59 minutes on IBM 360 Model 44. The plastic zone at the maximum load is indicated by the shaded area in Figure 3. Some of the stress results are shown graphically in Figures 4 through 6. Of particular interest is the region along side D-E-F. The axial stress (σ_z) and

⁵0'Hara, G. P., "Stress Concentrations in Screw Threads," NASA CP-2131, Proceedings of the Eighth NASTRAN User's Colloquium, pp. 65-77, October 1979.

major principal stress (σ_1) in the boundary elements along side D-E-F are shown in Figures 4 and 5, for the first and last load factor, respectively. The maximum fillet stress (σ_1) occurs near E, while the maximum axial stress always occurs at D. Finally, the maximum fillet stress and axial stress are plotted as functions of contact pressure in Figure 6.

CONCLUSION

An elastic-plastic triangular ring element has been implemented in the NASTRAN computer program. Its accuracy has been evaluated by solving a simpler problem for which an exact solution is available. Its application to more general problems has also been demonstrated by solving an overloaded thread problem.

REFERENCES

1. "NASTRAN Theoretical Manual," NASA SP-221(01), 1972.
2. Chen, P. C. T. and O'Hara, G. P., "Implementation of a Trapezoidal Ring Element in NASTRAN for Elastic-Plastic Analysis," NASA CP-2131, Proceedings of the Eighth NASTRAN User's Colloquium, pp. 101-112, October 1979.
3. Chen, P. C. T., "A Finite-Difference Approach to Axisymmetric Plane-Strain Problems Beyond the Elastic Limit," Transactions of the Twenty-Fifth Conference of Army Mathematicians, pp. 455-465, January 1980.
4. Chen, P. C. T., "Numerical Solution of Gun Tube Problems in the Elastic-Plastic Range," Proceedings of the 1977 Army Numerical Analysis and Computer Conference, pp. 423-439, November 1977.
5. O'Hara, G. P., "Stress Concentrations in Screw Threads," NASA CP-2131, Proceedings of the Eighth NASTRAN User's Colloquium, pp. 65-77, October 1979.
6. "NASTRAN Programmer's Manual," NASA SP-223(01), 1972.

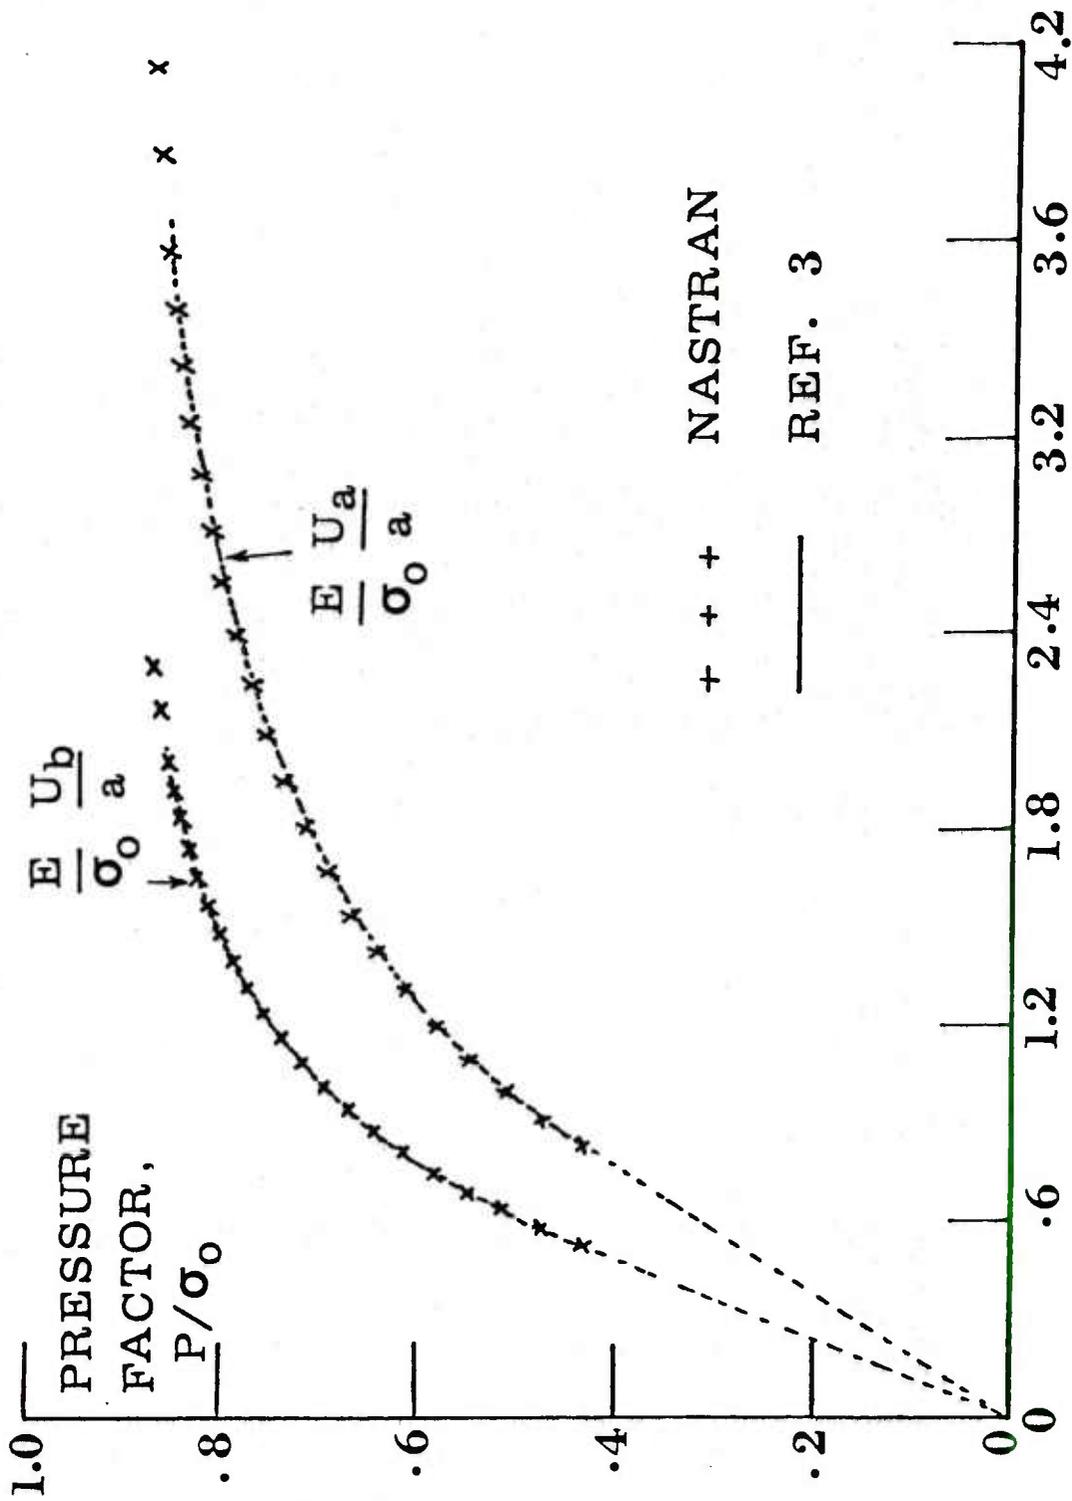


Figure 1. Radial displacement in a pressurized tube.

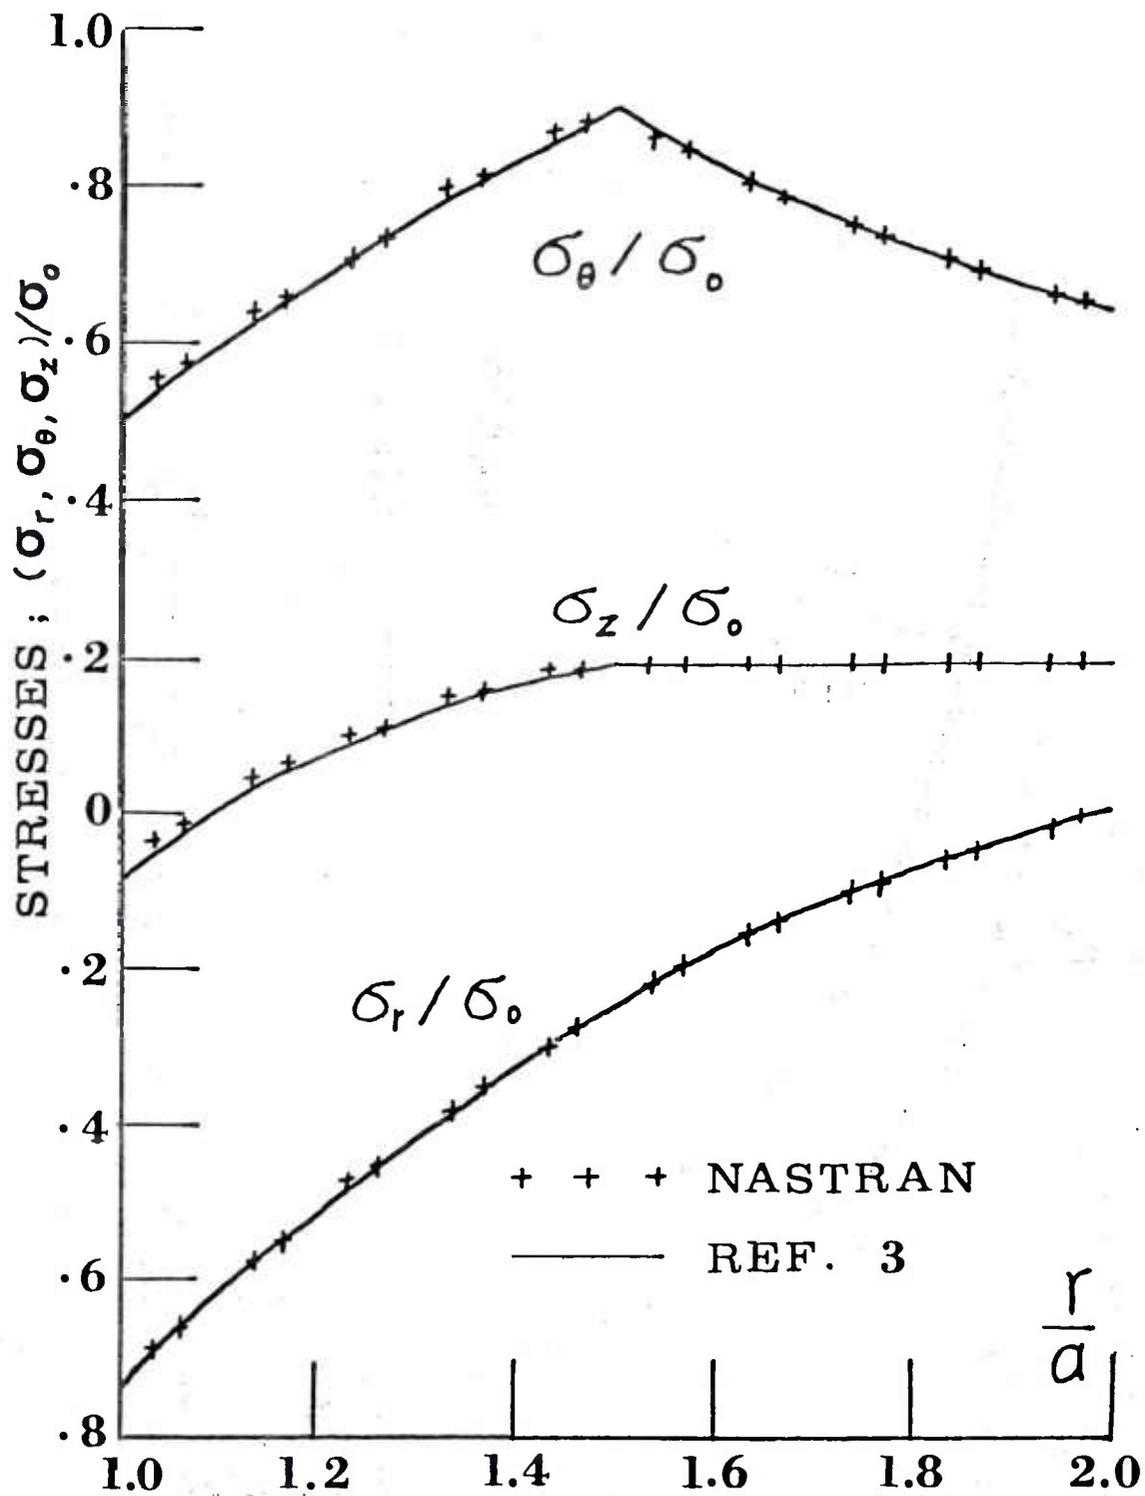


Figure 2. Stresses in a pressurized tube.

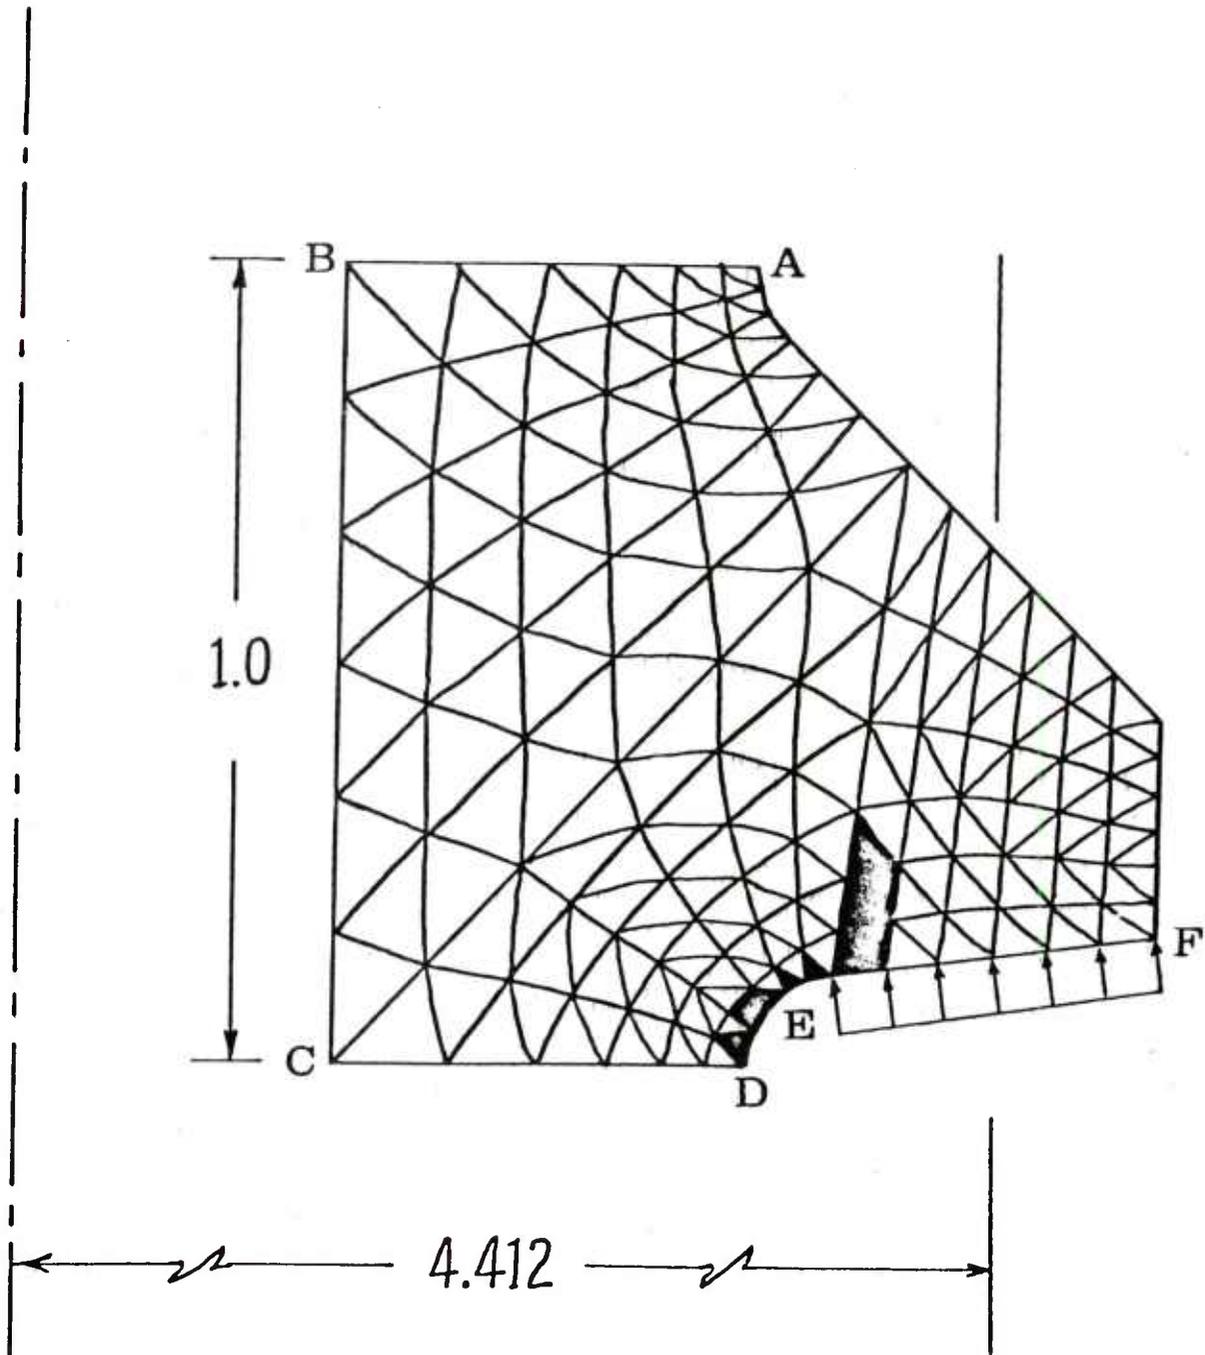


Figure 3. Finite element model for the thread problem.

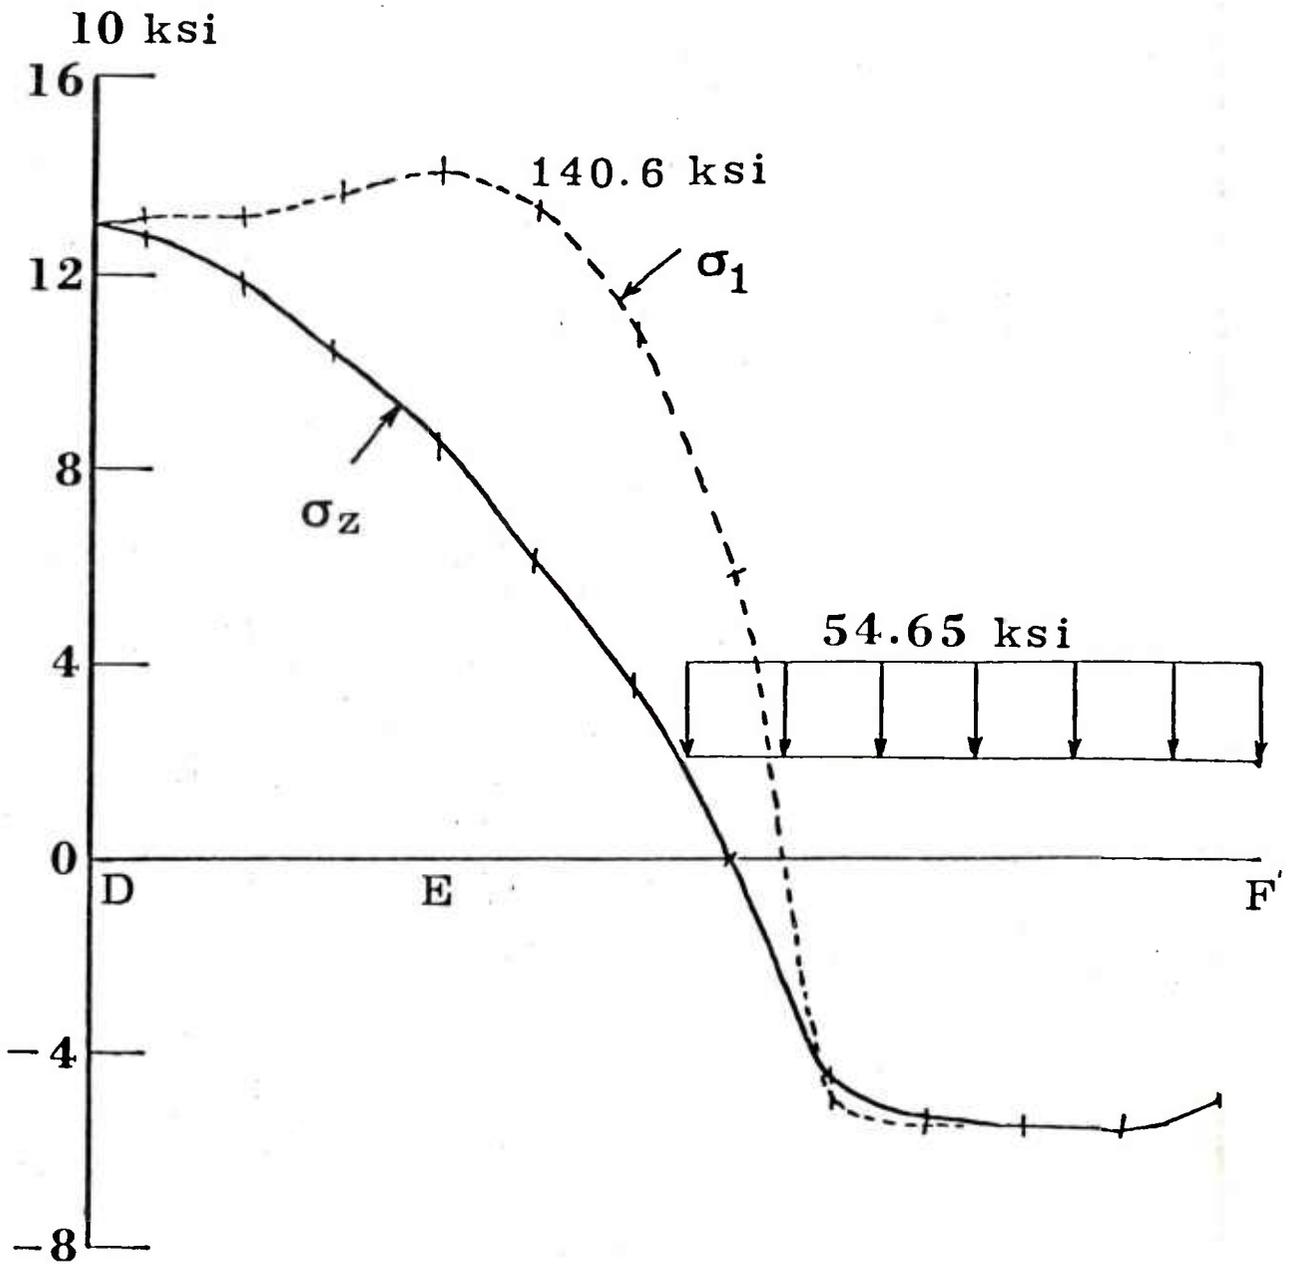


Figure 4. Stresses in boundary elements (side D-E-F) at $p = 54.65$ Ksi.

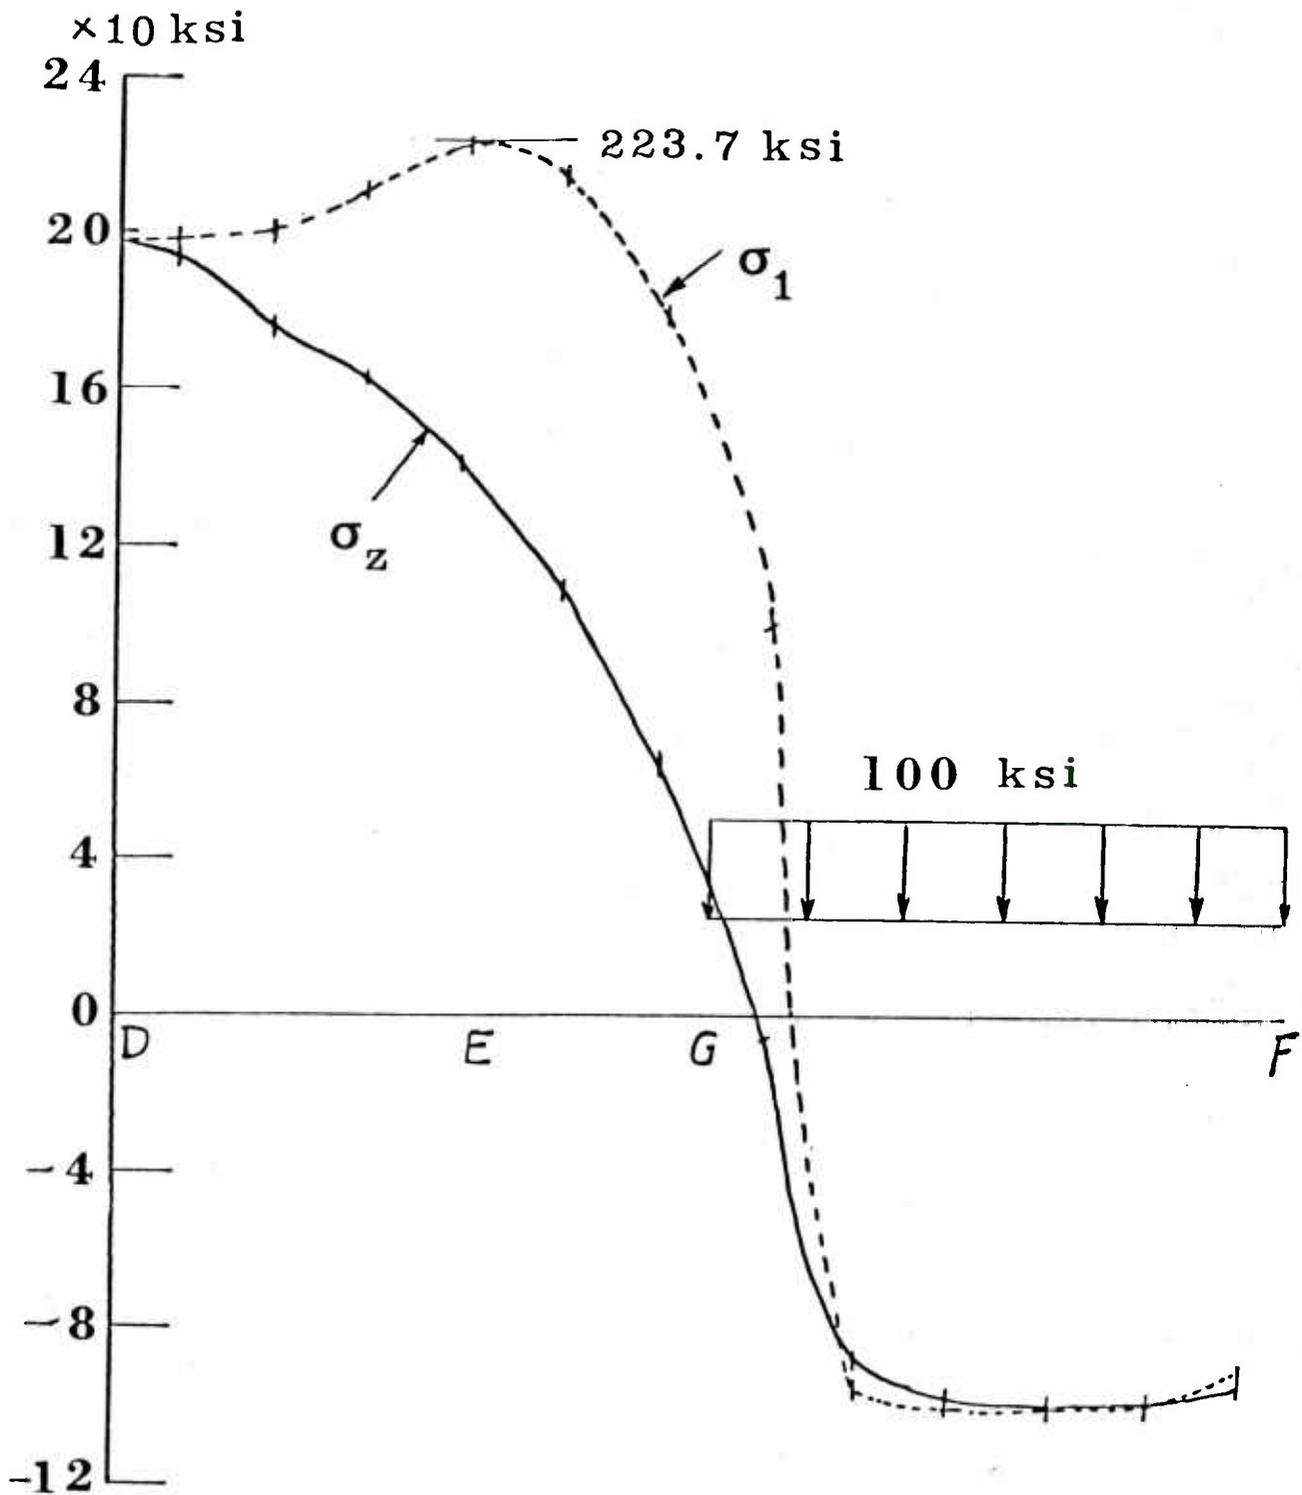


Figure 5. Stresses in boundary elements (side D-E-F) at $p = 100 \text{ Ksi}$.

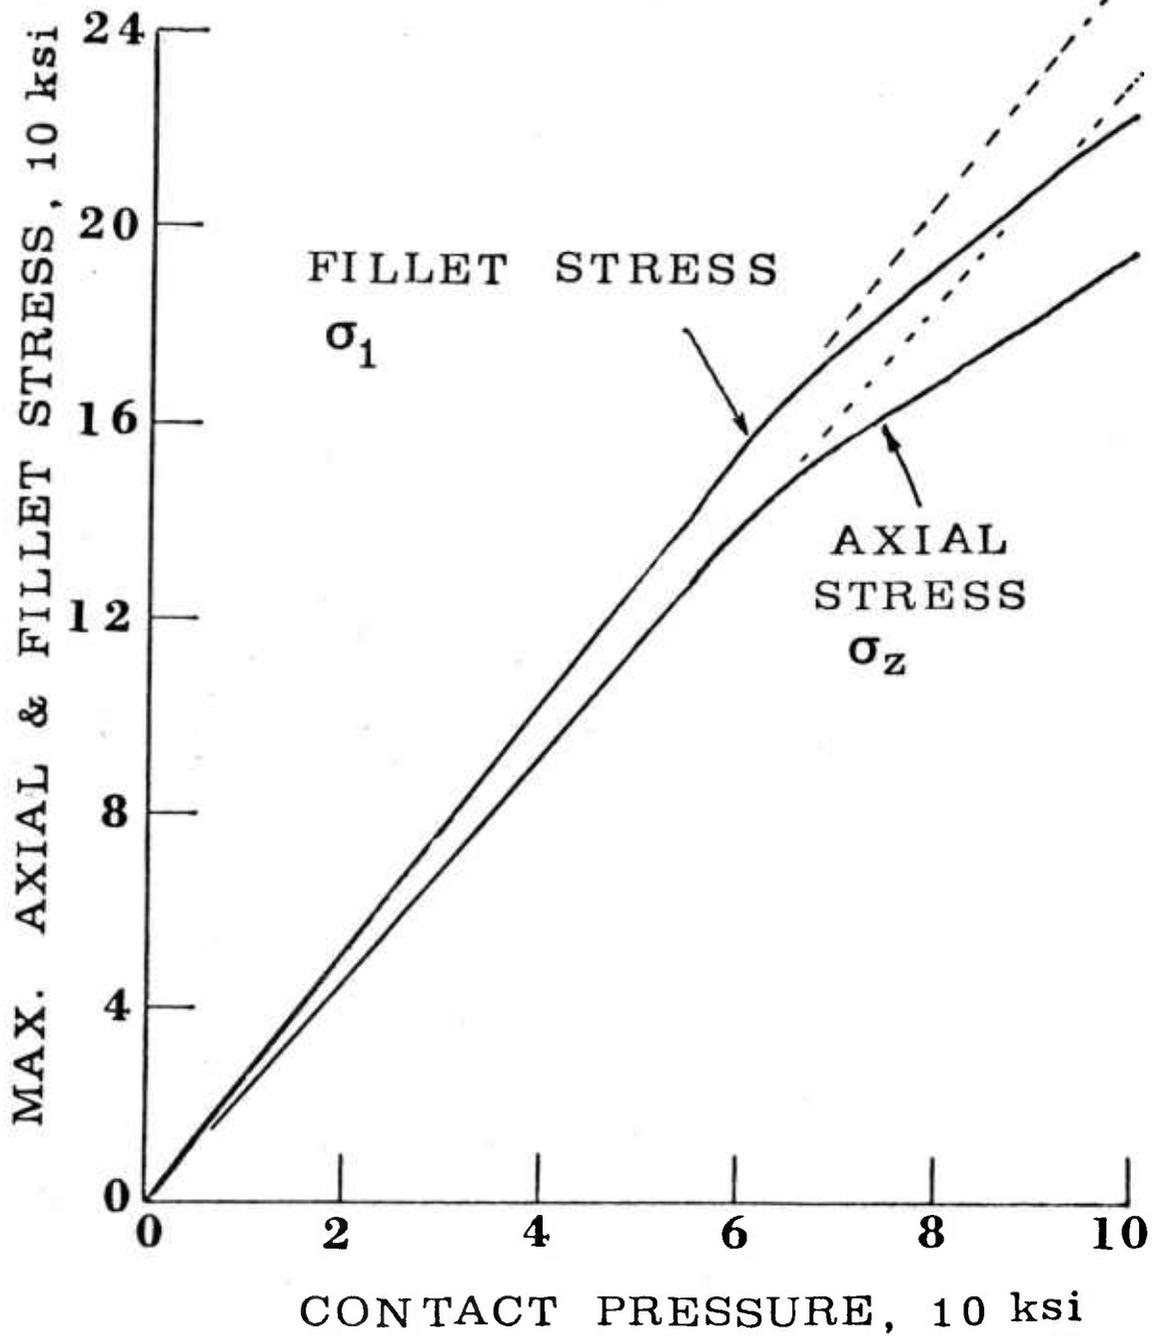


Figure 6. Maximum axial and fillet stresses as functions of contact pressure.

TECHNICAL REPORT INTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>
COMMANDER	1
CHIEF, DEVELOPMENT ENGINEERING BRANCH	1
ATTN: DRDAR-LCB-DA	1
-DM	1
-DP	1
-DR	1
-DS	1
-DC	1
CHIEF, ENGINEERING SUPPORT BRANCH	1
ATTN: DRDAR-LCB-SE	1
-SA	1
CHIEF, RESEARCH BRANCH	2
ATTN: DRDAR-LCB-RA	1
-RC	1
-RM	1
-RP	1
CHIEF, LWC MORTAR SYS. OFC.	1
ATTN: DRDAR-LCB-M	
CHIEF, IMP. 81MM MORTAR OFC.	1
ATTN: DRDAR-LCB-I	
TECHNICAL LIBRARY	5
ATTN: DRDAR-LCB-TL	
TECHNICAL PUBLICATIONS & EDITING UNIT	2
ATTN: DRDAR-LCB-TL	
DIRECTOR, OPERATIONS DIRECTORATE	1
DIRECTOR, PROCUREMENT DIRECTORATE	1
DIRECTOR, PRODUCT ASSURANCE DIRECTORATE	1

NOTE: PLEASE NOTIFY ASSOC. DIRECTOR, BENET WEAPONS LABORATORY, ATTN:
DRDAR-LCB-TL, OF ANY REQUIRED CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
ASST SEC OF THE ARMY RESEARCH & DEVELOPMENT ATTN: DEP FOR SCI & TECH THE PENTAGON WASHINGTON, D.C. 20315	1	COMMANDER US ARMY TANK-AUTMV R&D CMD ATTN: TECH LIB - DRDTA-UL MAT LAB - DRDTA-RK WARREN MICHIGAN 48090	1 1
COMMANDER US ARMY MAT DEV & READ. CMD ATTN: DRDDE 5001 EISENHOWER AVE ALEXANDRIA, VA 22333	1	COMMANDER US MILITARY ACADEMY ATTN: CHMN, MECH ENGR DEPT WEST POINT, NY 10996	1
COMMANDER US ARMY ARRADCOM ATTN: DRDAR-LC	1	COMMANDER REDSTONE ARSENAL ATTN: DRSMI-RB	2
-ICA (PLASTICS TECH EVAL CEN)	1	-RRS	1
-ICE	1	-RSM	1
-LCM	1	ALABAMA 35809	
-LCS	1	COMMANDER ROCK ISLAND ARSENAL	
-LCW	1	ATTN: SARRI-ENM (MAT SCI DIV)	1
-TSS(STINFO)	2	ROCK ISLAND, IL 61202	
DOVER, NJ 07801		COMMANDER HQ, US ARMY AVN SCH ATTN: OFC OF THE LIBRARIAN	1
COMMANDER US ARMY ARRCOM ATTN: DR SAR-LEP-L ROCK ISLAND ARSENAL ROCK ISLAND, IL 61299	1	COMMANDER US ARMY FCN SCIENCE & TECH CEN ATTN: DRXST-SD	1
DIRECTOR US Army Ballistic Research Laboratory ATTN: DRDAR-TSB-S (STINFO) ABERDEEN PROVING GROUND, MD 21005.	1	220 7TH STREET, N.E. CHARLOTTESVILLE, VA 22901	
COMMANDER US ARMY ELECTRONICS CMD ATTN: TECH LIB FT MONMOUTH, NJ 07703	1	COMMANDER US ARMY MATERIALS & MECHANICS RESEARCH CENTER ATTN: TECH LIB - DRXMR-PL	2
COMMANDER US ARMY MOBILITY EQUIP R&D CMD ATTN: TECH LIB FT BELVOIR, VA 22060	1	WATERTOWN, MASS 02172	

NOTE: PLEASE NOTIFY COMMANDER, ARRADCOM, ATTN: BENET WEAPONS LABORATORY, DRDAR-LCB-TL, WATERVLIET ARSENAL, WATERVLIET, N.Y. 12189, OF ANY REQUIRED CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST (CONT)

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
COMMANDER US ARMY RESEARCH OFFICE P.O. BOX 12211 RESEARCH TRIANGLE PARK, NC 27709	1	COMMANDER DEFENSE TECHNICAL INFO CENTER ATTN: DTIA-TCA CAMERON STATION ALEXANDRIA, VA 22314	12
COMMANDER US ARMY HARVEY DIAMOND LAB ATTN: TECH LIB 2800 POWDER MILL ROAD ADELPHIA, ME 20783	1	METALS & CERAMICS INFO CEN BATTELLE COLUMBUS LAB 505 KING AVE COLUMBUS, OHIO 43201	1
DIRECTOR US ARMY INDUSTRIAL BASE ENG ACT ATTN: DRXPE-MT ROCK ISLAND, IL 61201	1	MECHANICAL PROPERTIES DATA CTR BATTELLE COLUMBUS LAB 505 KING AVE COLUMBUS, OHIO 43201	1
CHIEF, MATERIALS BRANCH US ARMY R&S GROUP, EUR BOX 65, FPO N.Y. 09510	1	MATERIEL SYSTEMS ANALYSIS ACTV ATTN: DRXSY-MP ABERDEEN PROVING GROUND MARYLAND 21005	1
COMMANDER NAVAL SURFACE WEAPONS CEN ATTN: CHIEF, MAT SCIENCE DIV DAHLGREN, VA 22448	1		
DIRECTOR US NAVAL RESEARCH LAB ATTN: DIR, MECH DIV CODE 26-27 (DOC LIB) WASHINGTON, D. C. 20375	1 1		
NASA SCIENTIFIC & TECH INFO FAC. P. O. BOX 8757, ATTN: ACQ BR BALTIMORE/WASHINGTON INTL AIRPORT MARYLAND 21240	1		

NOTE: PLEASE NOTIFY COMMANDER, ARRADCOM, ATTN: BENET WEAPONS LABORATORY, DRDAE-LCB-TL, WATERVLIET ARSENAL, WATERVLIET, N.Y. 12189, OF ANY REQUIRED CHANGES.