

AD-A154 217

THE EFFECT OF SURFACE REACTIONS IN CATALYTIC COMBUSTION
(U) PRINCETON UNIV NJ DEPT OF MECHANICAL AND AEROSPACE
ENGINEERING D A SANTAVICCA ET AL. 15 JAN 85


1/1


UNCLASSIFIED

AFOSR-TR-85-0451 AFOSR-83-0326

F/G 21/2

NL

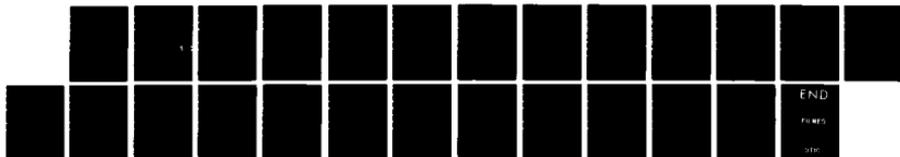

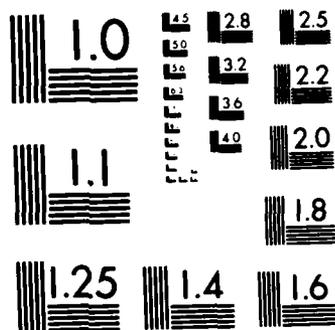

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD-A154 217

ON PAGE

1a REPORT SECURITY CLASS

UNCLASSIFIED

RESTRICTIVE MARKINGS

2a SECURITY CLASSIFICATION AUTHORITY

3 DISTRIBUTION/AVAILABILITY OF REPORT

2b DECLASSIFICATION/DOWNGRADING SCHEDULE

Approved for public release;
distribution is unlimited.

4 PERFORMING ORGANIZATION REPORT NUMBER(S)

7-1695

5. MONITORING ORGANIZATION REPORT NUMBER(S)

AFOSR-TR- 85-0451

6a NAME OF PERFORMING ORGANIZATION

Princeton University, Dept. of
Mech. & Aero. Engr.

6b OFFICE SYMBOL

(If applicable)

7a. NAME OF MONITORING ORGANIZATION

Air Force Office of Scientific Research

6c ADDRESS (City, State and ZIP Code)

Engineering Quadrangle
Princeton, NJ 08544

7b ADDRESS (City, State and ZIP Code)

Washington, DC 20332-6448

8a NAME OF FUNDING/SPONSORING
ORGANIZATIONAIR FORCE OFFICE
OF SCIENTIFIC RESEARCH

8b OFFICE SYMBOL

(If applicable)

NA

9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER

AFOSR 83-0326

8c ADDRESS (City, State and ZIP Code)

BOLLING AFB DC 20332-6448

10 SOURCE OF FUNDING NOS

PROGRAM
ELEMENT NO.PROJECT
NO.TASK
NO.WORK UN-
NO

61102F

2308

A2

11 TITLE (Include Security Classification) The Effects of Sur-
face Reactions in Catalytic Combustion

12 PERSONAL AUTHOR(S)

D.A. Santavicca, Y. Stein, and B.S.H. Royce

13a TYPE OF REPORT

Final

13b TIME COVERED

FROM 9/15/83 TO 9/14/84

14 DATE OF REPORT (Yr., Mo., Day)

85/1/15

15 PAGE COUNT

22

16 SUPPLEMENTARY NOTATION

17 COSATI CODES

FIELD GROUP SUB GR

18 SUBJECT TERMS (Continue on reverse if necessary and identify)

Catalytic Combustion

Catalytic Ignition

19 ABSTRACT (Continue on reverse if necessary and identify by block number)

Experiments were conducted in order to better understand the role of catalytic surface reactions in determining the ignition characteristics of practical catalytic combustors. Measurements of hydrocarbon concentrations, carbon monoxide and carbon dioxide concentrations, hydroxyl radical concentrations and gas temperature were made at the exit of a platinum coated, stacked plate, catalytic combustor during the ignition of lean propane-air mixtures. The substrate temperature profile was also measured during the ignition transient. In these experiments, ignition was initiated by suddenly turning on the fuel and the time to reach steady state was of the order of ten minutes. The gas phase reactions, which were clearly observable from these measurements, showed no pronounced effect due to the catalytic surface reactions, except possibly the absence of an hydroxyl radical overshoot. The transient ignition measurements were found to be valuable in understanding the steady state performance characteristics.

20 DISTRIBUTION AVAILABILITY OF ABSTRACT

UNCLASSIFIED/UNLIMITED SAME AS RPT DTIC USERS

21 ABSTRACT SECURITY CLASSIFICATION

UNCLASSIFIED

22a NAME OF RESPONSIBLE INDIVIDUAL

JULIAN M TISHKOFF

22b TELEPHONE NUMBER
(Include Area Code)

(202) 767-4935

22c OFFICE SYMBOL

AFOSR/NA

DTIC FILE COPY

DTIC
ELECTE
MAY 29 1985
B

TABLE OF CONTENTS

	<u>Page</u>
Title Page	i
Table of Contents	ii
Research Objectives	1
Status of Research	5
Description of Experiment	5
Transient Measurement Results	8
OH Measurement Results	14
References	18
Personnel	22
Interactions	22

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification _____	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

Approved for public release;
distribution unlimited.



RESEARCH OBJECTIVES

Numerous studies of the feasibility of applying catalytic combustion to practical combustion systems have been made in recent years. This work has been motivated by the potential advantages of high temperature catalytically assisted combustion over conventional combustion. These studies include the development of catalytic combustors for aircraft gas turbines [1-6], stationary gas turbines [7-12], highway vehicle gas turbines [13-17] and boilers [11]. Other studies have focused on catalytic combustion of particular fuels such as methane [18-20], low-BTU gases [9,21], No. 6 oil [22], heavy fuels [23] and coal derived liquids [24]. The potential for low conversion of fuel-bound nitrogen to NO_x has also been investigated [22,25-29]. The advantages of catalytic combustion which have been demonstrated by such studies include lower emissions, higher efficiency, increased operational stability, stable operation at lower equivalence ratios, improved pattern factor and wider fuel specifications. Still other work has been concerned with catalyst durability [30,31] and with the development of mathematical models which can be used to interpret experimental data and for combustor design optimization [32-37].

Under typical catalytic combustion operating conditions there are a number of physical and chemical processes which are important in terms of the catalytic combustor performance [38-40]. These include axial and radial convection of species, heat and momentum; axial and radial diffusion of species, heat and momentum; axial heat transfer in the substrate by conduction and radiation; gas phase chemical reactions and surface chemical reactions. The overall conversion efficiency of a catalytic combustor under normal operating conditions is typically mass transfer limited, with most

AIR FORCE OFFICE OF SCIENTIFIC RESEARCH AFOSR
NOTICE OF RESEARCH RESULTS
This document is the property of the Air Force Office of Scientific Research
Approved for public release; distribution is unlimited.
MATTHEW J. KENNEDY
Chief, Technical Information Division

of the fuel being consumed near the channel entrance by surface reactions and the remaining fuel being consumed near the channel exit by gas phase reactions.

Specific studies have been made to elucidate the roles of the various physical and chemical processes which effect catalytic combustion. For example, Marteney and Kesten [41] diluted the reacting mixture with argon, thereby limiting the temperature rise and making the surface reactions dominant. Bruno et al. [42] ran with CO/O₂/inert mixtures and by changing the inert (N₂, A, He and CO₂ were used) the diffusion characteristics of the flow field were varied. Hiam et al. [43] and Schwartz et al. [44] have measured the heterogeneous ignition temperatures as indicated by exothermic surface reactions on platinum and palladium filaments exposed to flows of various hydrocarbon-oxygen mixtures. Ablow et al. [45] theoretically and experimentally studied the relative importance of gas phase and surface reactions for the case of catalytic combustion in a stagnation point boundary layer, the advantage being that such a flow field is well understood thus simplifying the formulation of the mathematical model which was used to interpret the experimental results.

The objective of this research was to improve our understanding of the role of catalytic surface reactions in determining the performance characteristics of practical catalytic combustors. It is generally acknowledged that under typical fuel lean operating conditions, fuel and oxygen react on the surface to form water and carbon dioxide and that the resultant heat release and fuel consumption act to enhance and inhibit, respectively, the downstream gas phase and surface reactions. Since the competition between these two processes is very important in determining the gas phase ignition characteristics

for flow over a catalytic surface [46], part one of this research was to experimentally characterize the ignition of lean propane/air mixtures over a platinum catalyst. Although there had been several theoretical studies of this process [33, 35, 46-48], prior to this work there had been no experimental studies. The experiments conducted in this study consisted of measurements of the catalyst substrate temperature profile and exhaust gas composition during the transient ignition process that follows the sudden turn on of the fuel.

The second part of this research was the investigation of the possibility that intermediate or radical species generated by the catalytic wall reactions can diffuse into the gas phase boundary layer and homogeneously catalyze the gas phase reactions. That such an effect may play a role in catalytic combustion is supported by low pressure studies of the oxidation of hydrogen on platinum where the production of OH was observed above catalyst temperatures of approximately 800°K [49-51]. It is also interesting that preliminary results using detailed kinetics for CO/air mixtures at atmospheric pressure indicate that H_2O_2 and HO_2 , present in finite amounts in the same temperature range, are good candidates as species easily decomposed by platinum to form OH [52]. That significant OH production occurs at the catalytic wall under catalytic combustion conditions is also consistent with the experimental observations of Cattolica and Schefer [53,54] where they found net OH production in the boundary layer near the leading edge of a heated platinum plate in an H_2 /air flow. Although the generation of radicals by catalytic processes and the effect on gas phase reactions has been previously observed [55], the importance of this phenomenon in catalytic combustion systems had not been previously studied. Such a phenomenon could be particularly important

in determining the ignition temperatures, flammability limits, emission characteristics, sooting behavior and flame stabilization characteristics of practical catalytic combustors.

The second part of this research was an experimental study of the effect of surface generated OH radicals during the combustion of propane-air mixtures over platinum coated catalysts under catalytic combustion conditions. In particular, laser induced fluorescence was used to measure OH radical concentration immediately downstream of two catalytic plates in a stacked plate catalyst bed. It is important to realize that the effect of surface generated radicals should be evaluated under catalytic combustion conditions. This is because catalytic ignition, combustion and extinction involve the coupling of chemistry and fluid dynamics through the processes of gaseous convection and diffusion, substrate conduction and radiation, and gas and surface chemical reactions. It is the relative importance and the interaction of these phenomena which determine the overall performance characteristics such as ignition temperature or blowout limit, of a given catalyst-fuel system.

STATUS OF THE RESEARCH

Description of the Experiment

Both the transient measurement and the OH radical measurements were conducted in the same stacked plate catalytic combustor, which consisted of nine flat catalytic plates (100 mm long, 50 mm wide, 1 mm thick), spaced 6 mm apart. The catalyst plates (supplied by W. Retallick) were made from a steel alloy substrate, with an aluminum oxide barrier and an outer coating of platinum. Six 0.75 mm diameter holes were drilled into the side of the center plate at six axial locations and chromel-alumel thermocouples were inserted into these holes for measurements of the plate's axial temperature profile. A combination water cooled, gas sampling and thermcouple probe was used to obtain gas composition and temperature measurements at the exit of the catalyst bed. All experiments were with lean propane-air mixtures at one atmosphere pressure. In the transient experiments the inlet temperature and velocity were fixed, the fuel was turned on, and the transient response of the catalyst axial temperature profile and of the exhaust gas temperature and composition (i.e. carbon monoxide, carbon dioxide, propane, propylene, ethane, ethylene and methane) were measured at several axial locations along the length of the catalyst bed. The fuel transient, which was measured under cold flow conditions with a hot wire anemometer, was less than one second. The carbon monoxide and carbon dioxide measurements were made using non-dispersive infrared gas analyzers, which have a characteristic response time of less than five seconds. The hydrocarbon measurements were made using a multi-loop gas sample storage system with subsequent analysis by gas chromatography. The characteristic response time of the multi-loop gas sample system was less than ten seconds.

Optical access was available at several axial locations along the length of the catalyst bed through ten millimeter diameter windows located on opposite sides of the test section. Based on a similar experiment by Cattolica and Schefer [53,54], it was anticipated that the OH concentrations would be large enough for detection by resonance absorption spectroscopy. Under the conditions of our experiment the OH detection limit using the absorption technique was about 10^{16} /cc, as compared to equilibrium OH concentrations of about 10^{13} /cc (based on the overall equivalence ratio and the catalyst temperature). Measurements were attempted in the stacked plate combustor using resonance absorption and were unsuccessful, implying that the OH concentration was less than 10^{16} /cc but still possibly greater than the overall equilibrium concentration. In order to extend the OH detection limits it was decided to use laser induced fluorescence (LIF). Because of the limited optical access with the stacked plate configuration, it was necessary to use "forward scatter" collection. The spatial resolution with this configuration is comparable to that of the absorption measurements, which is adequate for the two dimensional flow field between the catalyst plates. The main difficulty with this approach is in separating the fluorescence from the laser light. The optical configuration that has been successfully used is shown in Figure 1.

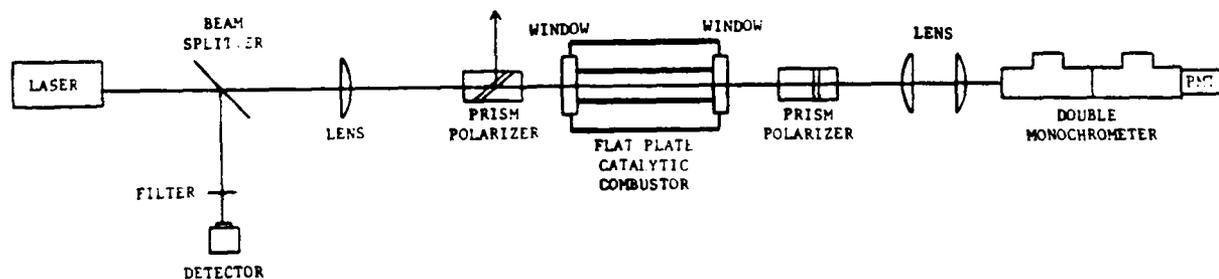


Figure 1. Laser Induced Fluorescence experimental configuration for catalytic combustion measurements.

The absorption transition is $v=0$ to $v=1$ at 2820 \AA and the fluorescence from $v=1$ to $v=0$ at 3090 \AA is detected. The use of polarization rejection and a 0.25 meter double monochromator effectively blocks the laser light. The detection limit with the "forward scatter" LIF was approximately $10^{12}/\text{cc}$.

The laser used for the OH measurements was a Nd:YAG pumped dye laser which was frequency doubled to obtain the required ultraviolet wavelengths. The dye laser used a diffraction grating at grazing incidence. The resultant linewidth after frequency doubling was approximately 0.1 cm^{-1} . A typical OH excitation spectra obtained with this laser system and the "forward scatter" LIF in a methane-air flat flame burner is shown in Figure 2. The OH concentration measurements were made with the laser wavelength fixed on the $Q_1(2)$ line and a spectrometer slit function of 20\AA .

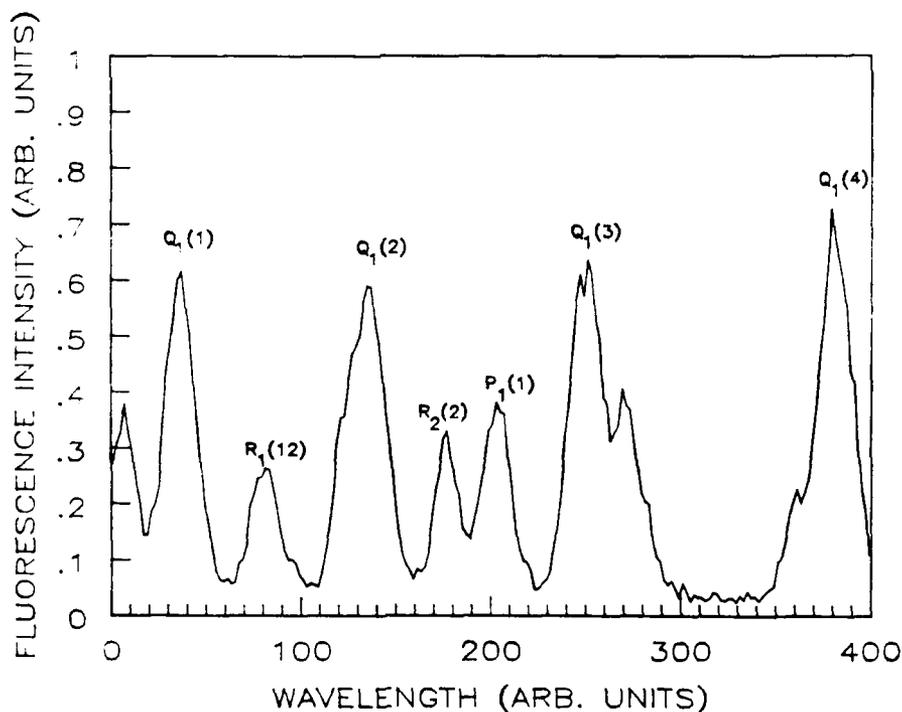


Figure 2. OH excitation spectra from methane-air flat flame.

Transient Measurement Results

The transient response of the substrate temperature profile is shown in Figures 3 and 4 where it can be seen that the front of the catalyst heats up first due to heat release by the catalytic surface reactions.

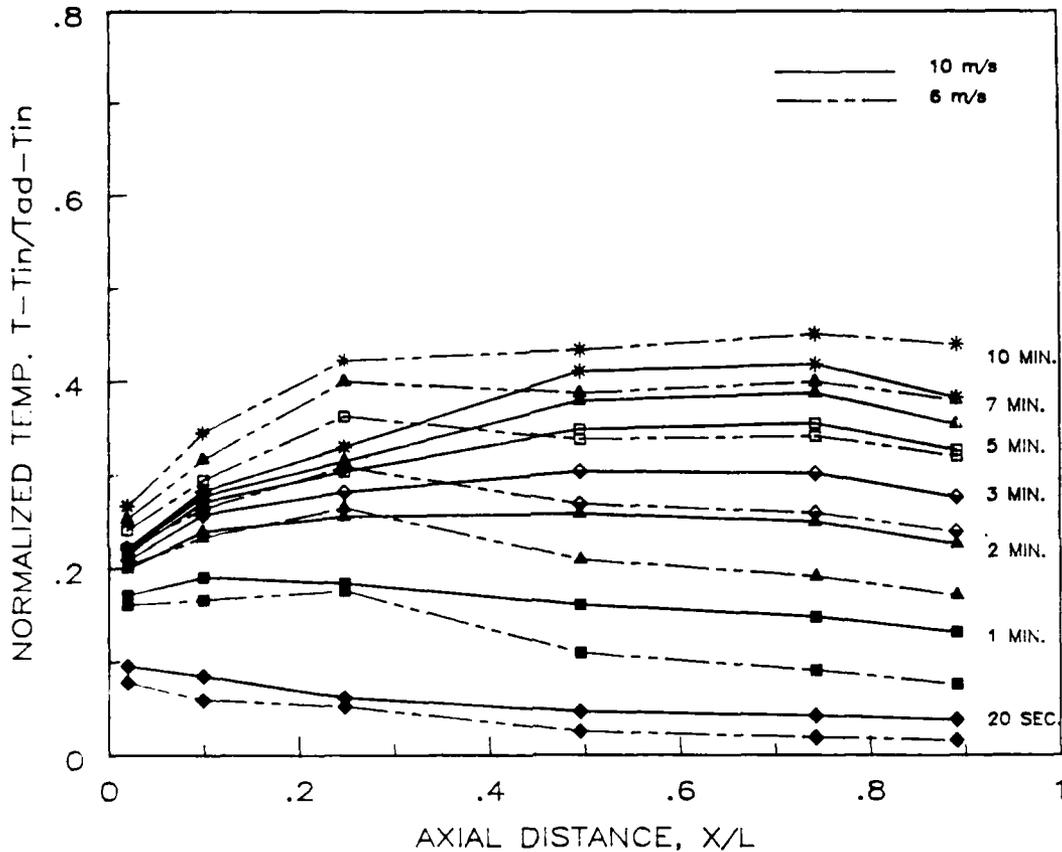


Figure 3. Substrate temperature profile transient: Inlet temperature = 700°K, propane/air equivalence ratio = 0.25.

These reactions however consume fuel and therefore the downstream sections of the catalyst are exposed to a lower equivalence ratio. The subsequent heat up of the back of the catalyst is strongly dependent on convective heat transfer from the front of the catalyst as can be seen by the fact that the back of the catalyst heats up more quickly when the reference velocity is

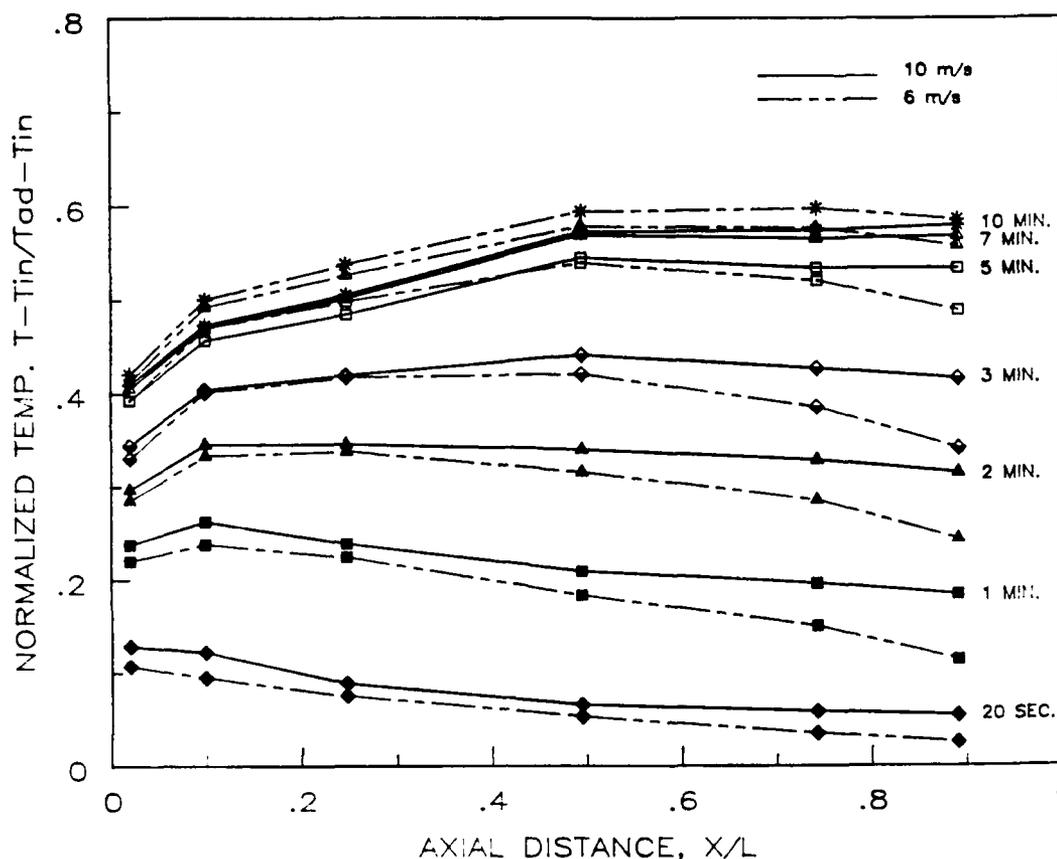


Figure 4. Substrate temperature profile transient: Inlet temperature = 700°K , propane/air equivalence ratio = 0.3.

increased from 6 m/s to 10 m/s. The steady state temperature profile appears to be relatively insensitive to a change in reference velocity from 6 m/s to 10 m/s when the equivalence ratio is 0.3. However, when the equivalence ratio is lowered to 0.25 this same change in reference velocity has a pronounced effect on the steady state substrate temperature profile.

The transient exhaust gas composition measurements for the 6 m/s reference velocity, 700°K inlet temperature, 0.3 equivalence ratio case are shown in Figures 5 and 6. These measurements were made 25 mm downstream of the catalyst bed exit. The CO_2 concentration (Figure 5) is found to increase

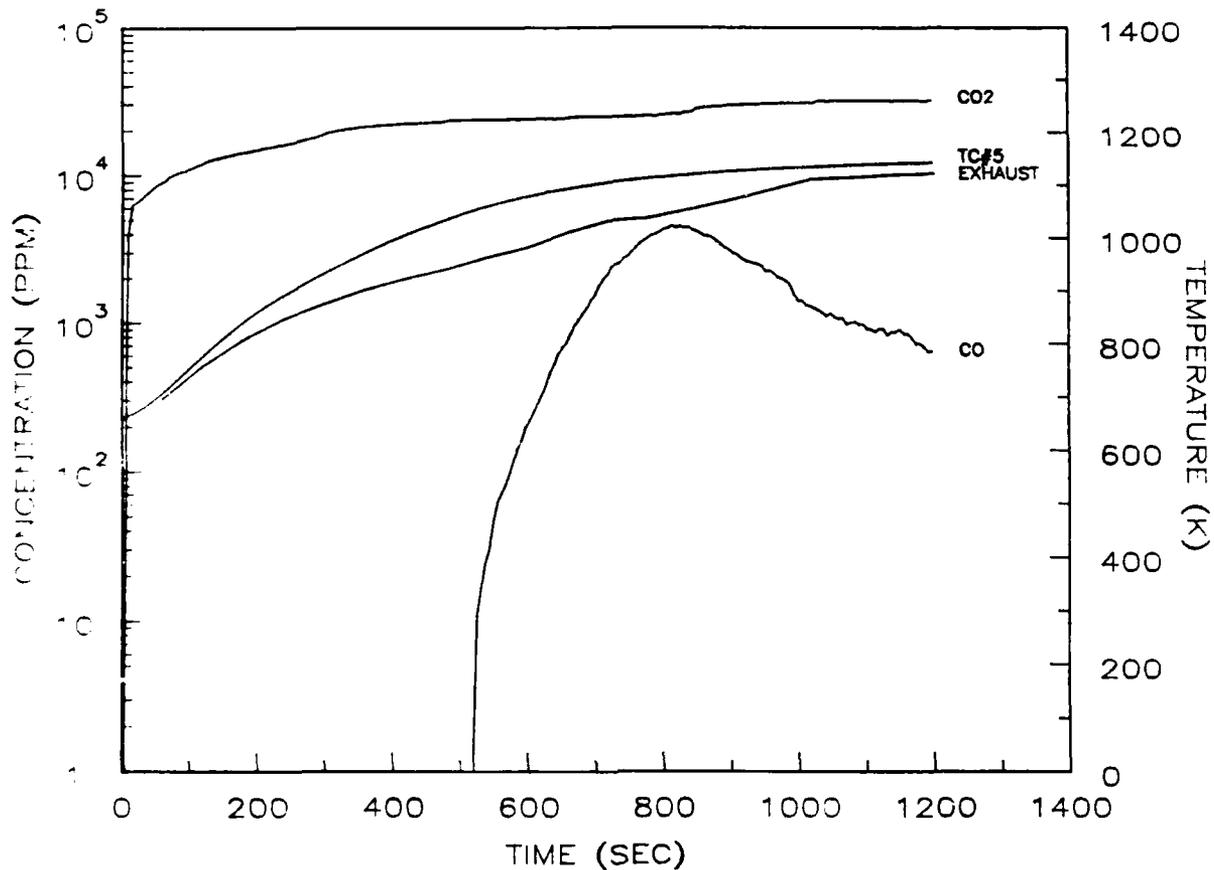


Figure 5. Transient exhaust gas carbon monoxide and carbon dioxide concentrations and temperature: Inlet temperature = 700°K , propane/air equivalence ratio = 0.3, reference velocity = 6 m/s.

immediately after the fuel is turned on, due to the oxidation of the propane on the catalyst surface, to a value of 6000 PPM which corresponds to a propane conversion efficiency of 5%. After this sudden increase in CO_2 the catalyst surface is totally covered and the conversion becomes controlled by the surface reaction rate. As the surface temperature increases (TC #5) the surface reaction rate increases resulting in a slow increase in the CO_2 emissions. It is not clear from these results when and to what extent the catalyst's performance becomes diffusion controlled before it reaches steady state.

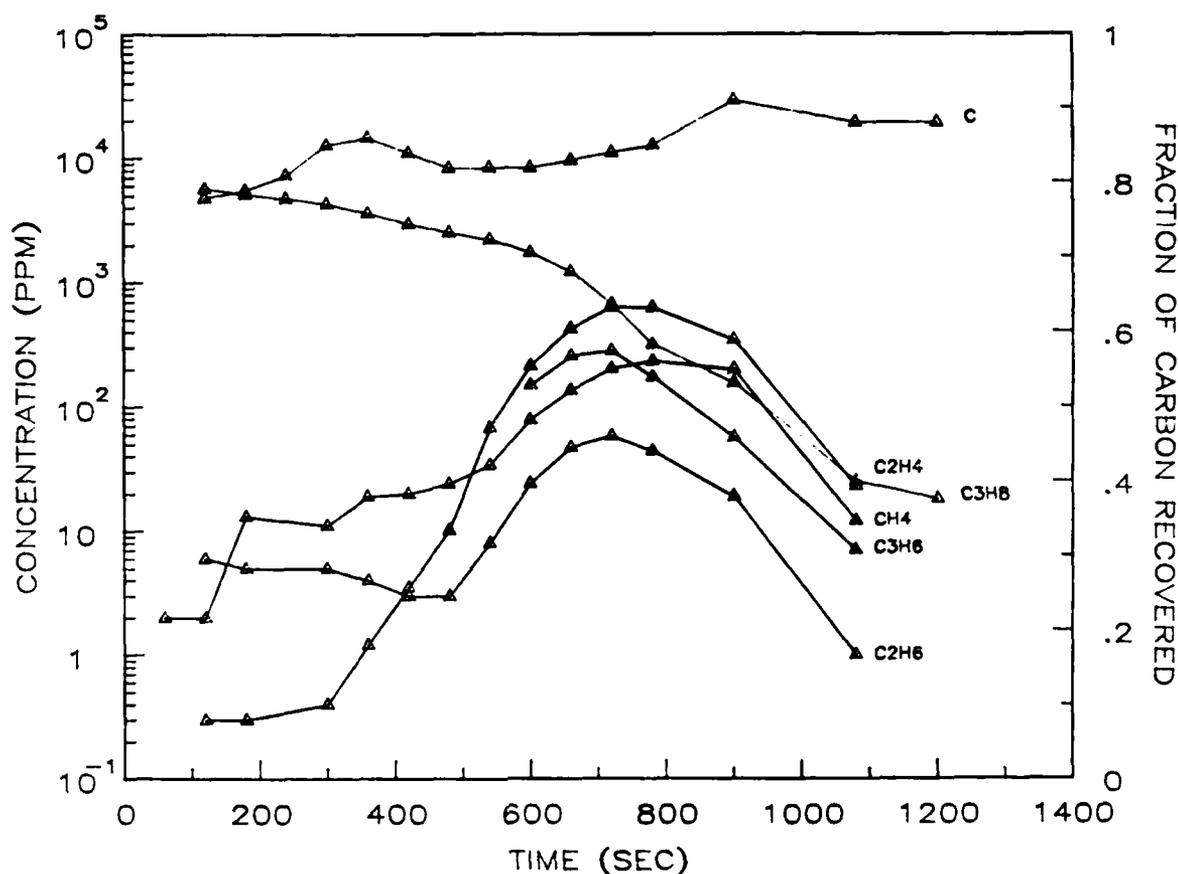


Figure 6. Transient exhaust gas hydrocarbon concentrations: Inlet temperature = 700°K, propane/air equivalence ratio = 0.3, reference velocity = 6 m/s.

At approximately 550 seconds after the fuel is turned on, CO appears in the exhaust (Figure 5). The CO concentration increases to a maximum of 5000 PPM at 800 seconds and then decreases to a steady state level of less than 1000 PPM. The appearance and subsequent disappearance of CO are due to gas phase reactions, since under these conditions it is well established that propane oxidizes directly to water and carbon dioxide on platinum catalysts.

The transient hydrocarbon emissions (Figure 6) are consistent with the explanation for CO and CO₂ emissions. The propane concentration decreases

without any significant intermediate hydrocarbon concentrations until approximately 500 seconds when the gas temperature becomes sufficiently high for the gas phase reactions to begin. Once the gas phase reactions begin, some of the propane breaks down into C1 to C3 hydrocarbons. As the gas temperature increases, but slightly before the CO peak in Figure 5, the intermediate hydrocarbon concentrations peak. As the gas temperature increases further the intermediate hydrocarbons are oxidized to form water and carbon monoxide. And as shown in Figure 5 the carbon monoxide is then oxidized to form carbon dioxide. This behavior of the carbon monoxide and intermediate hydrocarbons is very similar to what has been observed by others in purely gas phase reactions under nearly identical conditions. Similar even in terms of the relative concentrations of the intermediate hydrocarbons and the fact that the hydrocarbons peaks before the carbon monoxide. This similarity suggests that there is not a strong or pronounced effect of the surface reactions on the gas phase reactions.

Figure 7 shows the effect of lowering the equivalence ratio to 0.25 on the transient hydrocarbon emissions. We see the onset of gas phase reactions as indicated by the rise in the intermediate hydrocarbon concentrations, however, the reactions do not go to completion and there are significant unburned hydrocarbon emissions at steady state. This result shows the important role of gas phase reactions in achieving high combustion efficiency in catalytic combustors.

The effect of reference velocity on CO and CO₂ emission is shown in Figure 8. As the gas velocity increases the CO₂ emissions are found to decrease which is primarily due to the shortened residence time. The 3 m/s and 6 m/s cases show evidence of the onset of gas phase reactions by the

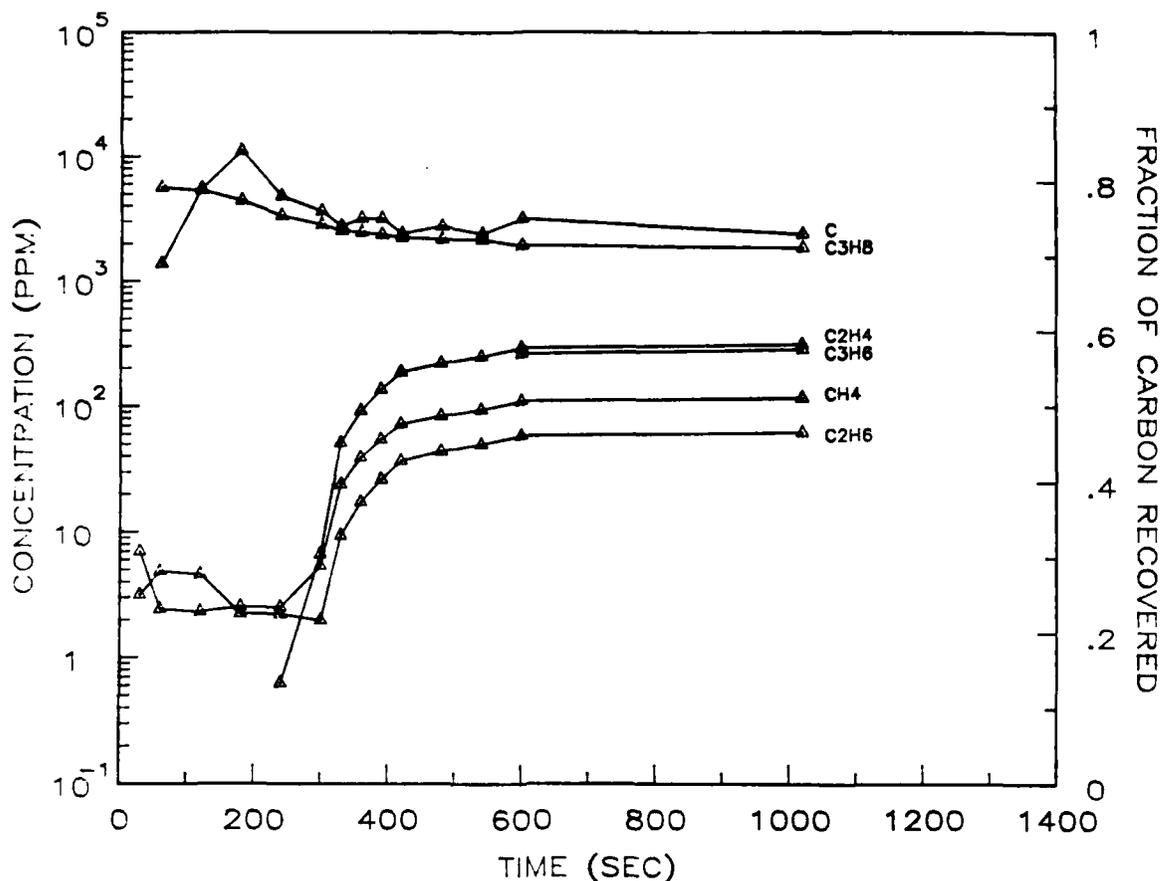


Figure 7. Transient exhaust gas hydrocarbon concentrations: Inlet temperature = 700°K, propane/air equivalence ratio = 0.25, reference velocity = 6 m/s.

increase in CO emissions at approximately 600 seconds and 300 seconds, respectively. As the gas velocity is increased from 3 m/s to 6 m/s, the convective heat transfer from the front of the catalyst bed increases causing the gas phase reactions to begin earlier. However, as the gas velocity is further increased to 12 m/s the effect of shortened residence time dominates and the onset of gas phase reactions is not observed. These CO results demonstrate the valuable insights that can be gained from the transient ignition measurements. Attempting to explain the steady state CO emissions results without the transient results would have been very difficult.

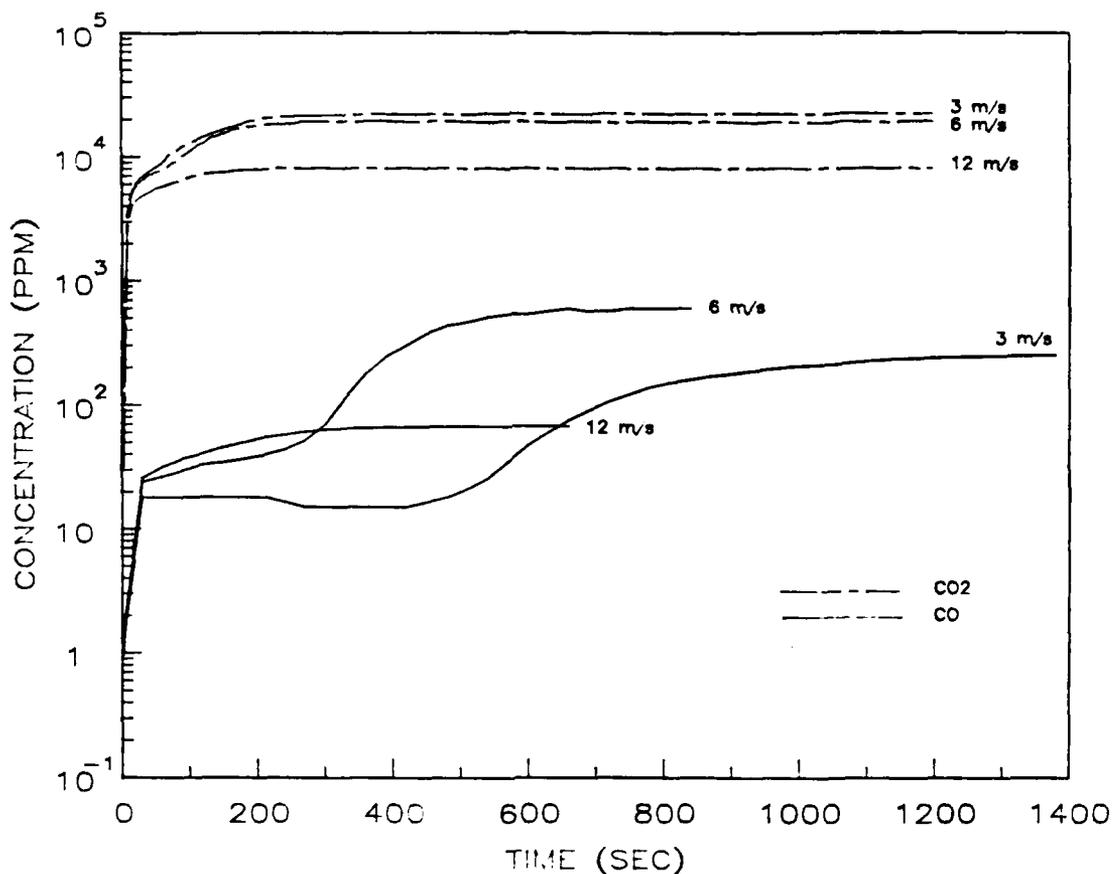


Figure 8. Transient exhaust gas carbon monoxide and carbon dioxide concentrations: Inlet temperature = 700°K, propane/air equivalence ratio = 0.25.

OH Measurement Results

Attempts were made to detect OH radicals within and at the exit of the catalyst bed at propane in air equivalence ratios of 0.25 and 0.3, reference velocities of 3, 6 and 12 m/s, and at inlet temperatures up to 700°K with no success. It was only by increasing the equivalence ratio to 0.35 at an inlet temperature of 700°K and reference velocity of 3 m/s that we were able to detect OH at the exit of the catalyst bed. The transient CO, CO₂ and

hydrocarbon emissions for this case are shown in Figures 9 and 10.

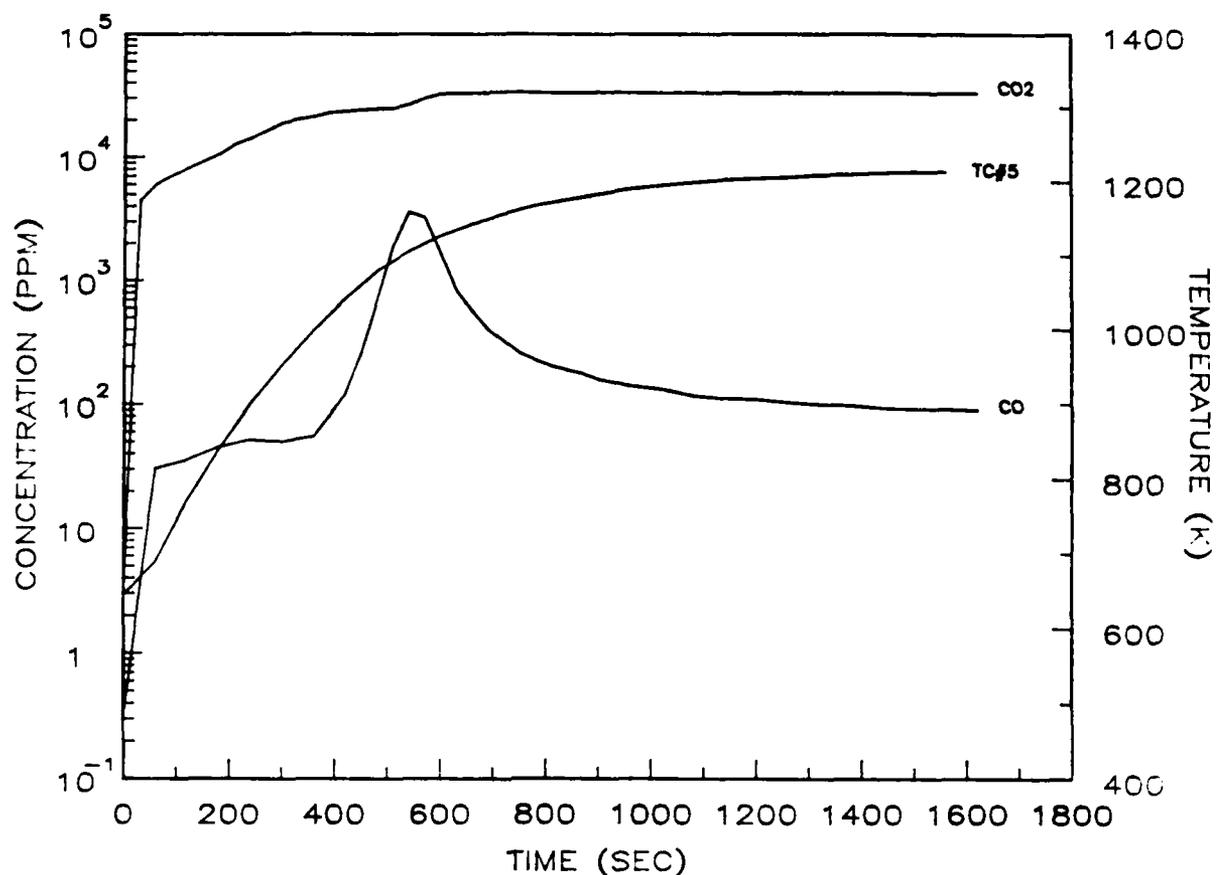


Figure 9. Transient exhaust gas carbon monoxide and carbon dioxide concentrations: Inlet temperature = 700°K, propane/air equivalence ratio = 0.35, reference velocity = 3 m/s.

As observed previously the occurrence of gas phase reactions is evident by the peak and subsequent consumption of the intermediate hydrocarbons and carbon monoxide. The corresponding transient OH concentration measurement is shown in Figure 11. As has been observed under gas phase conditions the OH concentration begins to increase in the post-flame region after the disappearance of the intermediate hydrocarbons and carbon monoxide, reaching a steady state level in the downstream post-flame gases which corresponds to

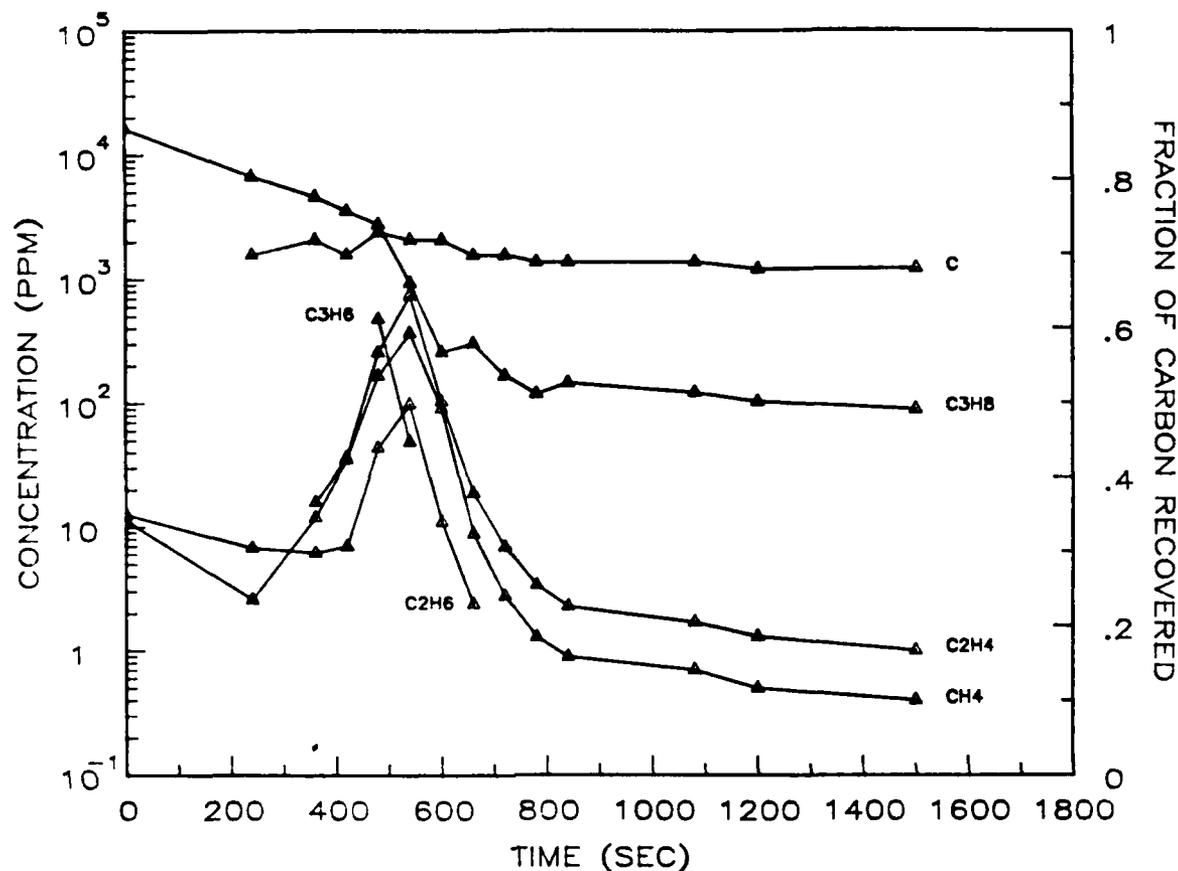


Figure 10. Transient exhaust gas hydrocarbon concentrations: Inlet temperature = 700°K, propane/air equivalence ratio = 0.35, reference velocity = 5 m/s.

its equilibrium value. The LIF measurement from which Figure 11 was obtained was calibrated by assuming that the steady state OH concentration was equal to the equilibrium OH concentration based on the overall equivalence ratio and the exhaust gas temperature. One notable discrepancy between this result and the purely gas phase reaction result is the absence of an OH radical overshoot. This suggests the possibility that the platinum catalyst is acting as a source of OH radicals, which is very reasonable given the presence of water and the high surface temperature, and that the steady state OH

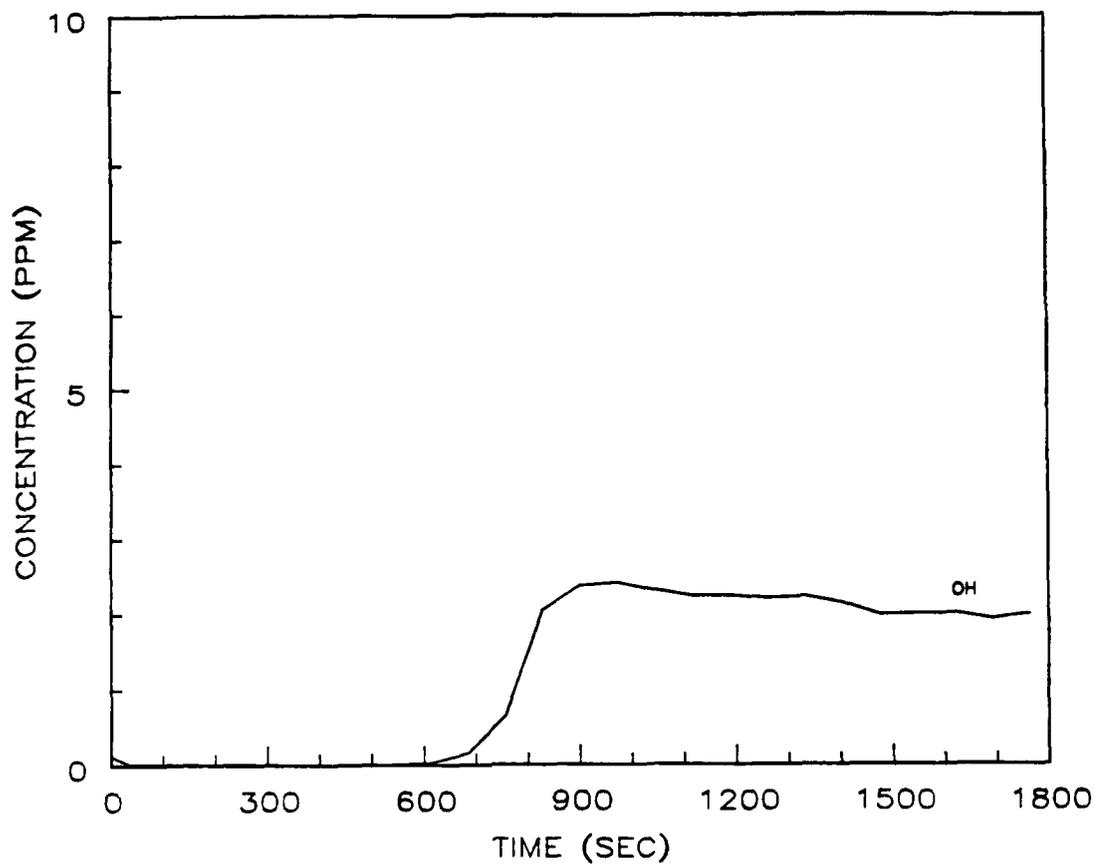


Figure 11. Transient exhaust gas hydroxyl radical concentration: Inlet temperature = 700°K, propane/air equivalence ratio = 0.35, reference velocity = 3 m/s.

concentration is actually in excess of the equilibrium concentration. Unfortunately independent calibration of the OH measurement requires an absorption measurement but this was not possible because of the low OH concentrations.

REFERENCES

1. Blazowski, W.S. and Bresowar, G.E., 1974, "Preliminary Study of the Catalytic Combustor Concept as Applied to Aircraft Gas Turbines," AFAPL TR-74-32.
2. Rosfjord, T.J., 1976, "Catalytic Combustion for Gas Turbine Engines," AIAA 14th Aerospace Sciences Meeting, Paper No. 76-46, Washington, DC, January 26-28.
3. Siminski, V.J. and Shaw, H., 1978, "Development of a Hybrid Catalytic Combustor," J. Engr. for Power 100, 267.
4. Szaniszló, A.J., 1978, "The Advanced Low-Emissions Catalytic Combustor Program," in Proceedings: Third Workshop on Catalytic Combustion, Asheville, NC, October 1978, EPO-600/7-79-038, pp. 385-388.
5. Angello, L.C. and Rosfjord, R.J., 1979, "Application of Catalytic Flame Stabilization for Aircraft Afterburners," in Proceedings: Third Workshop on Catalytic Combustion, Asheville, NC, October, 1978, EPA-600/7-79-038, pp. 61-81.
6. Osgerby, I.T., 1980, "Combustion Catalyst Studies for Simulated Aircraft Idle Mode Operation," presented at the Fourth Workshop on Catalytic Combustion, Cincinnati, OH, May 14-15, 1980.
7. Pfefferle, W.C., Carrubba, R.V., Heck, R.M., and Robert, G.W., 1975, "Catalytic Combustion: A New Process for Low-Emissions Fuel Conversion," ASME Paper No. 75-WA/Fu-1.
8. Carrubba, R.V., Chang, M., Pfefferle, W.C., and Polinski, L.M., 1976, "Catalytically Supported Thermal Combustion for Emission Control," in the Proceedings of the NO_x Control Technology Seminar, San Francisco, CA, February 5-6, Electric Power Research Institute, Palo Alto, CA, EPRI SR-39, NTIS PB-253 661, pp. 316-358.
9. DeCorso, S.M., Mumford, S., Carrubba, R., and Heck, R., 1976, "Catalysts for Gas Turbine Combustors--Experimental Test Results," ASME Paper No. 76-FT-4.
10. DeCorso, S.M. and Carl, D.C., 1969, "Structural Analysis of a Preliminary Catalytic Ceramic Design," in Proceedings: Third Workshop on Catalytic Combustion, Asheville, NC, October 1978, EPA-600/7-79-038, pp. 139-156.
11. Krill, W.V. and Kesselring, J.P., 1979, "The Development of Catalytic Combustors for Stationary Source Applications," in Proceedings: Third Workshop on Catalytic Combustion, Asheville, NC, October, 1978, EPA-600/7-79-038, pp. 258-290.
12. Ishihara, Y., 1980, "Catalytic Combustion for Gas Turbine Power Generation," presented at the Fourth Workshop on Catalytic Combustion, Cincinnati, OH, May 14-15, 1980.

13. Anderson, D.N., 1977a, "Performance and Emissions of a Catalytic Reactor with Propane, Diesel, and Jet A Fuels," NASA TM-73786.
14. Anderson, D.N., 1977b, "Effect of Catalytic Reactor Length and Cell Density on Performance," Presented at the USEPA Second Workshop on Catalytic Combustion, Raleigh, NC, June 21-22.
15. Anderson, D.N., 1978, "Effect of Inlet Temperature on the Performance of a Catalytic Reactor," NASA TM-78977.
16. Anderson, D.N., 1979, "Effect of Inlet Temperature on the Performance of a Catalytic Reactor," in Proceedings: Third Workshop on Catalytic Combustion, Asheville, NC, October, 1978, EPA-600/7-79-038, pp. 403-425.
17. Anderson, D.N., Tacina, R.R., and Mroz, T.S., 1977, "Catalytic Combustion for the Automotive Gas Turbine Engine," NASA TM X-73589.
18. Trimm, D.L. and Lam, C-W., 1980, "The Combustion of Methane on Platinum-Alumina Fibre Catalysts--I," Chem. Eng. Science 35, 1405-1413.
19. Kuijpers, E.G.M., Jansen, J.W., vanDillen, A.J. and Gues, J.W., "The Reversible Decomposition of Methane on a Ni/Si O₂ Catalyst," J. of Catalysis 72, 75-81.
20. Specchia, V., Sicardi, S. and Gianetto, A., "Methane Combustion with Catalytic Panels: Interpretation of the Internal Profiles by Means of a Longitudinal Dispersion Model," Chem. Eng. Commun. 10, 189-203.
21. Carrubba, R. and Osgerby, I.T., 1978, "Catalyst Design Studies in Low BTU Gas Combustion," in Proceedings: Third Workshop on Catalytic Combustion, Asheville, NC, October 1978, EPA-600/7-79,038, pp. 435-436.
22. Pogson, J.T. and Mansour, M.N., 1979, "#6 Fuel Oil Catalytic Combustion," in Proceedings: Third Workshop on Catalytic Combustion, Asheville, NC, October, 1978, EPA-600/7-79-038, pp. 111-137.
23. Rosfjord, T.J., 1980, "Catalytic Combustion of Heavy Partially Vaporized Fuels," presented at the Fourth Workshop on Catalytic Combustion, Cincinnati, Ohio, May, 1980, EPA-600/9-80-035, pp. 548-559.
24. Tong, H., 1980, "Catalytic Combustion of Alternate Fuels," presented at the Fourth Workshop on Catalytic Combustion, Cincinnati, OH, May 14-15, 1980.
25. Matthews, R.D. and Sawyer, R.F., 1977, "Fuel Nitrogen Conversion and Catalytic Combustion," Western States Section/The Combustion Institute, Paper No. 77-40, Fall Meeting, Stanford, CA, October 17-18.
26. Chu, E.K. and Kesselring, J.P., 1979, "Fuel NO_x Control by Catalytic Combustion," in Proceedings: Third Workshop on Catalytic Combustion, Asheville, NC, October, 1978, EPA-600/7-79-038, pp. 291-329.

27. Folsom, B.A., Courtney, C.W., and Heap, M.P., 1979, "Environmental Aspects of Low BTU Gas-Fired Catalytic Combustion," in Proceedings: Third Workshop on Catalytic Combustion, Asheville, NC, October, 1978, EPA-600/7-79-038, pp. 345-383.
28. Chu, E.K., 1980, "Evaluation of a Lean Catalytic Combustion Concept for Nitrogenous Fuels," presented at the Fourth Workshop on Catalytic Combustion, Cincinnati, OH, May 14-15, 1980.
29. Prasad, R., Kennedy, L.A. and Ruckenstein, E., "Oxidation of Fuel Bound Nitrogen in a Transition Metal Oxide Catalytic Combustor," Comb. Sci. and Tech. 27, 45-54.
30. Heck, R.M., Chang, M., Hess, H., and Carrubba, R., 1977, "Durability Testing at One Atmosphere of Advanced Catalysts and Catalyst Supports for Automotive Gas Turbine Engine Combustors-Part I," NASA CR-135132.
31. Santavicca, D.A., Stein, Y. and Royce, B.S.H., "Perovskite Catalysts for High Temperature Catalytic Combustion," presented at the Eastern States Section of the Combustion Institute Fall Meeting, December 1982.
32. Bruno, C., Walsh, P.M., Santavicca, D.A., Sinha, N., Yaw, Y. and Bracco, F.V., "Catalytic Combustion of Propane/Air Mixtures on Platinum," accepted for publication, Combustion Science and Technology.
33. Sinha, N., Bruno, C. and Bracco, F.V., "Two-Dimensional, Transient Catalytic Combustion of CO/Air on Platinum," submitted for publication to the Int'l. J. of Heat and Mass Transfer.
34. Cerkanowicz, A.E., Cole, R.B. and Stevens, J.G., "Catalytic Combustion Modelling: Comparisons with Experimental Data," J. Eng. Power 99, Series A, No. 4. 593 (1977).
35. T'ien, J.J., "Modeling of Transient Operation of Catalytic Combustion," Comb. Sci. and Tech. 26, 65 (1981).
36. Ablow, C.M. and Wise, H., "Contribution of Catalytic Wall Reaction to Combustion Initiation," presented at the Fall Meeting, Western States Section/The Combustion Institute, Stanford, CA, October 1977.
37. Ablow, C.M. and Wise, H., "Theoretical Analysis of Catalytic Combustion in a Monolith Reactor," presented at EPA Third Workshop on Catalytic Combustion, October 1978.
38. Lavid, M. and Bracco, F.V., 1976, "A Review of Boundary Layer Studies Relating to Catalytic Combustion," Report No. 1281, Dept. of Mechanical and Aerospace Engineering, Princeton University, Princeton, NJ.
39. Kelly, J.T., Kendall, R.M., Chu, E., and Kesselring, J.P., 1977, "Development and Application of the PROF-HET Catalytic Combustor Code," Western States Section/The Combustion Institute, Paper No. 77-33, Fall Meeting, Stanford, CA, October 17-18.

40. Pfefferle, W.C., 1978, "The Catalytic Combustor: An Approach to Cleaner Combustion," J. Energy 2, 142.
41. Marteney, P.J. and Kesten, A.S., "Kinetics of Surface Reactions in Catalytic Combustion," 18th Int'l. Symp. on Comb., pp. 1899-1908, 1980.
42. Bruno, C., Walsh, P.M., Santavicca, D., and Bracco, F.V., "High Temperature Catalytic Reactions of CO/O₂/N₂, A, He, CO₂/H₂O Mixtures on Platinum," submitted to Journal of Heat and Mass Transfer.
43. Hiam, L., Wise, H. and Chaikin, S., "Catalytic Oxidation of Hydrocarbon on Platinum," J. of Catalysis, 9, 10, 272-276 (1968).
44. Schwartz, A., Holbrook, L. and Wise, H., "Catalytic Oxidation Studies with Platinum and Palladium," J. of Catalysis 21, 199-207 (1971).
45. Ablow, C.M., Schechter, S. and Wise, H., "Catalytic Combustion in a Stagnation Point Boundary Layer," Comb. Sci. and Tech. 22, 107-117 (1980).
46. Prasad, R., Kennedy, L.A. and Ruckenstein, E., "A Model for the Transient Behavior of Catalytic Combustors," Comb. Sci. and Tech. 30, 59 (1983).
47. Fakhari, A. and Buckius, R.O., "Transient Catalytic Combustion on a Flat Plate," Comb. and Flame 52, 169 (1983).
48. Trevino, C. and Fernandez-Pello, A.C., "Catalytic Flat Plate Boundary Layer Ignition," Comb. Sci. and Tech. 26, 245 (1981).
49. Talley, L.D., Tevault, D.E. and Liu, M.C., "Laser Diagnostics of Matrix-Isolated OH Radicals from Oxidation of H₂ on Platinum," Chem. Phys. Lett. 66(3), 584-586 (October 1979).
50. Tevault, D.E., Talley, L.D. and Liu, M.C., "Matrix Isolation and Laser Diagnostic Studies of Catalytic Oxidation of H₂ and O₂ on Platinum," J. Chem. Phys. 72(5), 3314-3319 (March 1980).
51. Talley, L.D., Sanders, W.A., Bogan, D.J. and Liu, M.C., "Internal Energy of Hydroxyl Radicals Desorbing from Polycrystalline Pt Surfaces," Chem. Phys. Lett. 78(3), 500-503 (March 1981).
52. Dryer, F., presentation at the Army Research Office Workshop on Engine Combustion, Atlanta, GA, April 2-3, 1981.
53. Cattolica, R.J. and Schefer, R.W., "Laser Fluorescence Measurements of the OH Concentration in a Combustion Boundary Layer," Sandia Report SAND82-8649, March 1982.
54. Cattolica, R.J. and Schefer, R.W., "The Effect of Surface Chemistry on the Development of the (OH) in a Combustion Boundary Layer," Sandia Report SAND82-8617, March 1982.

55. Satterfield, C.N., Heterogeneous Catalysis in Practice, p. 10, McGraw-Hill, New York, 1980.

PERSONNEL

A. Lovell	Graduate Student
B. S. H. Royce	Professor
D. A. Santavicca	Research Engineer
Y. Stein	Technical Associate

INTERACTIONS

Stein, Y., Lovell, A., Santavicca, D.A. and Royce, G.S.H., "An Experimental Study of Transient Catalytic Combustion," presented at the Twentieth International Combustion Symposium, Works in Progress Poster Session, August 1984.

END

FILMED

7-85

DTIC