

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD-A154 462

1



SPACECRAFT, STRAIGHT-TUBE
EVAPORATOR DESIGN

THESIS
Robert E. Eastman
1Lt, USAF

AFIT/GA/AA/85M-1

Accession
NTIS GRA&
DTIC TAB
Unannounced
Justification

By _____
Distribution _____

DTIC FILE COPY

This document has been approved
for public release and sale; its
distribution is unlimited.

DTIC
SELECTED
JUN 4 1985
S E D

DEPARTMENT OF THE AIR FORCE
AIR UNIVERSITY

AIR FORCE INSTITUTE OF TECHNOLOGY

Wright-Patterson Air Force Base, Ohio

AFIT/GA/AA/85M-1

SPACECRAFT, STRAIGHT-TUBE
EVAPORATOR DESIGN

THESIS
Robert E. Eastman
1Lt, USAF

AFIT/GA/AA/85M-1

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A/1	



Approved for public release; distribution unlimited.

DTIC
SELECTED
S JUN 4 1985 D
E

AFIT/GA/AA/85M-1

SPACECRAFT, STRAIGHT-TUBE
EVAPORATOR DESIGN

THESIS

Presented to the Faculty of the School of Engineering
of the Air Force Institute of Technology
Air University
in Partial Fulfillment of the
Requirement for the
Degree of Masters of Science

by

Robert E. Eastman, B. S.

1st Lt USAF

Graduate Astronautical Engineering

March 1985

Approved for public release; distribution unlimited

PREFACE

The purpose of this study was to develop a method for designing straight-tube evaporators for use in spacecraft cooling systems. Although this study addressed the specific problems associated with designing an evaporator for 0-g operation, the method of design is applicable to all straight-tube evaporators.

While doing this study and writing this thesis I have had a great deal of help from others. I would like to especially thank my thesis advisor, Dr J. E. Hitchcock for his assistance through all aspects of this study. Furthermore, I would like to thank Larry Coulthart of the Flight Dynamics Laboratory for his assistance during the experimental portion of this study. And finally, I would like to thank Julie Roberts for her typing help and patience without which I never would have got this thesis put together.

ROBERT E. EASTMAN

CONTENTS

	<u>Page</u>
Preface	ii
List of Figures	v
Tables	vii
Notation	viii
Abstract	xi
I Introduction	1
II Review of the Forced Convective Boiling Process	4
General Discussion	4
Subcooled Boiling	7
Saturated, Nucleate Boiling	12
Two-Phase, Forced Convection	14
Liquid-Deficient Region	17
III Flow Visualization Experiment	18
Experimental Apparatus	18
Instrumentation	18
Evaporator	20
Results of Flow Visualization	21
IV Two-Phase, Heat-Transfer Equations	24
V Proposed Method for Design of Straight-Tube Evaporators	36
Design Method	36
Calculation of the Heat-Transfer Coefficient	38
Comparison with Data	42
Flow Stabilization	44
Pressure-Drop Calculation	52
VI Evaporator-Design Program	54

VII Conclusions	60
References	61
Appendix A: Sample Calculations	65
Appendix B: Evaporator-Design-Program Listing	74

LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
1. Regions associated with forced-convective boiling in tubes	5
2. Variation of the heat-transfer coefficient along a tube during forced-convective boiling	6
3. Experimental apparatus	19
4. Reynolds number factor F versus the Lockhart-Martinelli parameter X_{tt}	31
5. Supression factor S versus the Reynolds number .	31
6. Flow chart for calculating the length of an evaporator with a constant, heat flux	39
7. Flow chart for calculating the length of an evaporator with a constant, wall temperature . .	40
8. Wall temperature versus heat flux for subcooled boiling	45

9.	Difference between the wall temperature and the bulk-fluid temperature versus the heat flux for subcooled boiling	46
10.	Heat-transfer coefficient versus quality for low-heat-flux, low-quality boiling	47
11.	Heat-transfer coefficient versus quality for low-heat-flux, high-quality boiling	48
12.	Heat-transfer coefficient versus quality for high-heat-flux, low-quality boiling	49
13.	Heat-transfer coefficient versus quality for high-heat-flux, high-quality boiling	50

TABLE

- I. Pressure readings across the test section and
the orifice for various flow conditions. 23

NOTATION

<u>Symbols</u>		<u>Units</u>
a	Acceleration	m/s^2
C _p	Specific Heat	J/kgK
d	Diameter	m
f	Friction Factor	
G	Mass Flux	kg/m^2s
g	Acceleration of Gravity	m/s^2
g _c	Gravitational Constant	kgm/Nts^2
h	Heat-Transfer Coefficient	W/m^2K
h _{fg}	Latent Heat of Vaporization	J/kg
k	Conductivity	W/mK
ℓ	Length	m
N	Value Defined by Equation IV-33	
p	Pressure	N/m^2
Pr	Prandtl Number	
q	Heat Flux	W/m^2
Q	Energy	W
r	Radius	m
Re	Reynolds Number	
T	Temperature	K
u	Velocity	m/s
x	Quality	
y	Distance	m

Y	Number of Diameters per 180 Degree Twist (Twist Ratio)	
Z	Distance along tube	m
Γ	Value Defined by Equation IV-32	1/K
μ	Viscosity	kg/ms
σ	Surface Tension	N/m
ρ	Density	kg/m ³
v	Specific Volume	m ³ /kg

Subscripts

a	Axial
b	Bulk
c	Critical
f	Film
FC	Forced Convection
IB	Incipient Boiling Point
l	Liquid
L	Liquid
LO	Liquid Alone
LP	Liquid Phase
max	Maximum Value
NB	Nucleate Boiling
OTPFC	Onset of Two-Phase, Forced-Convection Boiling
ONB	Onset of Nucleate Boiling

OP	One-Phase
sat	Saturation
SC	Subcooled
SNB	Suppressed, Nucleate Boiling
tt	Turbulent Liquid - Turbulent Vapor
tang	Tangent
TP	Two-Phase
TPFC	Two-Phase, Forced Convection
tw	Tube Wall
v	Vapor
w	Wall

ABSTRACT

This study involved researching the design of straight-tube evaporators for spacecraft, cooling systems. The forced-convective-boiling phenomenon was studied to determine the characteristics of boiling flow and how gravitational acceleration affects this process. In addition to this theoretical study, an experimental evaporator was built to investigate the operation of straight-tube evaporators. It was found that pressure fluctuations caused by slug flow may hamper efforts to build two-phase, cooling systems. To overcome this problem, the use of upstream orifices and twisted-tape inserts to stabilize the flow were also investigated. Also, a method for sizing an evaporator, based on the best available method of calculating the local, heat-transfer coefficients, was developed. And finally, all of this information was used to develop a computer program to design straight-tube evaporators.

I INTRODUCTION

In the past, spacecraft waste-heat loads have been relatively small. For this reason their cooling systems have been rather simple and, in many cases, fairly inefficient. Where the heat loads of the past and present spacecraft have been at most 25 kilowatts, many future applications call for waste-heat loads as high as a megawatt^[1]. Present technology cannot be scaled up to meet these needs without severe, weight penalties^[2]. Therefore, to meet the cooling requirements of future spacecraft, new methods of transporting waste-heat loads need to be developed.

The easy method of transporting waste heat is by simple conduction through the structural members of the spacecraft. This has proven to be an extremely reliable method for very small, waste-heat loads. Unfortunately, the thermal structure quickly gets very heavy for anything but a small, waste-heat load^[2].

When the waste-heat load grew too large to use conduction through the structure, thermal-design engineers began to use liquid-cooling loops. This system which is similar to the cooling system in a car, has worked very well. In fact, the space shuttle uses a one-phase-fluid loop to transport its waste-heat load to the radiators. This system could, theoretically, be used to handle extremely large, waste-heat loads. Unfortunately, as these systems get large, they get very heavy. Not only is the actual cooling loop heavy, but the weight penalty associated with the pump drive also gets extremely large. In fact, in many cases, the equipment necessary to power the pump is much heavier than the cooling loop itself. Furthermore, the temperature drop between the source and

the radiator is quite large. Since all the heat must be radiated to space, the radiator also gets very big and heavy.

The final method presently available for transporting waste heat is the heat pipe. A heat pipe is nothing more than a tube, capped at both ends, that contains a small amount of liquid and a wick. When heat is added to one end (the evaporator) the liquid boils. Because of the increase in vapor pressure, the vapor is transported to the other end (the condenser) where it condenses as heat is taken out. The fluid is then wicked back to the evaporator to complete the cycle. The heat pipe is an extremely efficient and reliable method of transporting heat. The problem with heat pipes, however, is that they can only transport a limited amount of heat for a limited distance^[1]. It is possible to put together many heat-pipe bundles in series to overcome this problem, but, again weight becomes a problem^[2].

Due to the shortcomings of the previous methods, it has been proposed to use two-phase-fluid loops^[1]. Like a one-phase-fluid loop, these systems would involve pumping a fluid around a loop. Unlike one-phase systems, two-phase systems would use the latent heat of vaporization rather than the sensible heat of the circulating fluid. Since the latent heat is much greater than the sensible heat, this system can use a much-smaller flow rate. In fact, preliminary calculations have shown that the pump power required will be approximately two orders of magnitude less than a comparable one-phase system. Furthermore, the entire system is essentially isothermal which will mean much smaller and lighter radiators. This system, however, has many design problems that

must be worked out before it can be used. Therefore, many research programs have been started to solve the problems associated with two-phase systems.

This study deals with the design of the evaporator. More specifically, the objects of this program are to review the force-convective boiling process to determine the effect that gravity will have on it, to set up an experimental evaporator to investigate the general performance and problems of straight-tube evaporators, to investigate methods of solving the problems associated with them, to review the methods available for calculating local heat-transfer coefficients to develop a best possible approach, to develop a method for designing straight-tube evaporators, and to develop a computer program to design straight-tube evaporators.

II REVIEW OF THE FORCED-CONVECTIVE BOILING PROCESS

In order to understand the relationship between the forced-convective boiling process and gravitational acceleration, a thorough study of the boiling process was conducted. The forced-convective boiling process is explained and how gravitational acceleration affects the heat-transfer process is examined in this section.

GENERAL DISCUSSION

The forced-convective boiling process can be broken down into five regions: one-phase, forced convection; subcooled boiling; saturated, nucleate boiling; two-phase, forced convection; and the liquid-deficient region. This process is shown in Figure 1 and the variation of the heat-transfer coefficient associated with each region is shown in Figure 2. The one-phase, forced-convection region is the initial condition normally encountered in an evaporator. It is possible, however, that this region may be absent. In this region heat is conducted into and is swept away by the fluid.

As the temperature of the wall increases along the length, it reaches a point where bubble nucleation can begin. This is the start of the subcooled-boiling region. As the wall temperature increases further, the bubbles grow larger and begin to depart the surface. Since the bulk of the fluid is still subcooled, the bubbles condense upon leaving the warmer boundary layer. Although the net amount of vapor generated in this region is very small, the heat-transfer coefficient is very large.

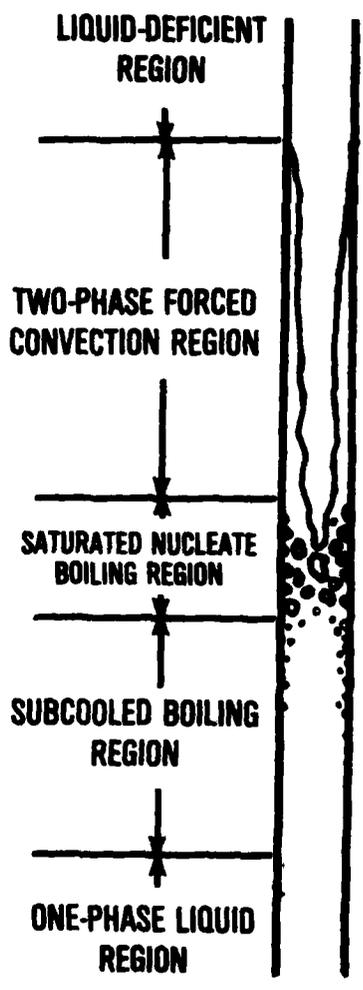


Figure 1: Regions associated with forced-convective boiling in tubes.

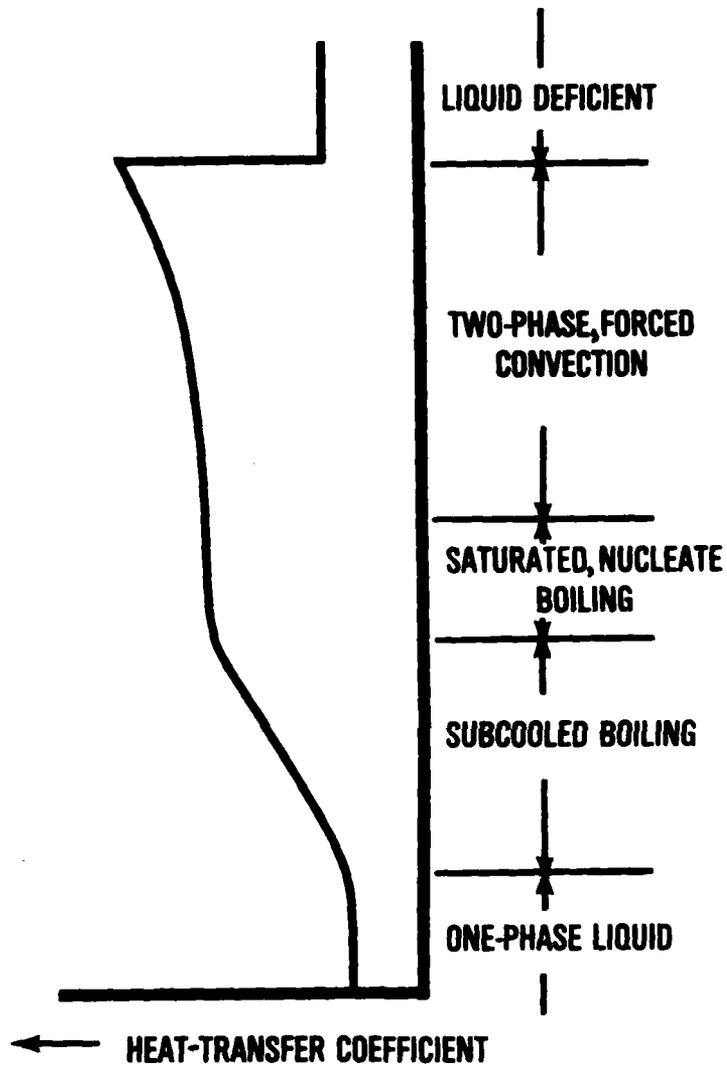


Figure 2: Variation of the heat-transfer coefficient along a tube during forced-convective boiling.

When the bulk fluid temperature reaches saturation conditions, saturated-nucleate boiling occurs. In this region normal nucleate boiling occurs with a corresponding increase in vapor quality. Over this region the heat-transfer coefficient stays essentially constant.

As more vapor is produced, the liquid layer on the surface becomes thinner. Eventually, this liquid layer becomes thin enough to prevent the liquid immediately adjacent to the wall from superheating to the point of allowing bubble nucleation. At this point the mechanism of heat transfer switches from boiling to liquid-surface evaporation. Since bubble nucleation is completely suppressed and the heat is carried away by the vapor at the liquid/vapor interface, this region is called the two-phase, forced-convection region. This region has the highest heat-transfer coefficients.

The final region occurs when the vapor quality and velocity increases to a point where all of the liquid becomes entrained in the vapor. At this point the walls dry up and the heat-transfer coefficient decreases dramatically. This "burn out" point must be avoided at all costs in evaporator design. Heat transfer in the liquid-deficient region will not be considered in this study.

In the following text two different boundary conditions will be used to further illustrate the boiling process in each region. The first boundary condition will be a constant heat flux at the evaporator wall. The second boundary condition will be a constant evaporator wall temperature. In reality a combination of both will be seen; but, for most design problems, one of the two boundary

conditions can be used with reasonable accuracy.

SUBCOOLED BOILING

Subcooled boiling occurs when the liquid adjacent to the wall is superheated to a point where bubble growth can occur. The heat-transfer coefficient associated with this region is much larger than in the one-phase region. This heat-transfer coefficient increases until saturated-nucleate boiling is achieved.

The heat-transfer coefficient begins to increase even before bubble nucleation can be detected. A photographic study by Jiji and Clark^[3] demonstrated this by showing that a considerably-higher surface heat flux is required to permit visual detection of bubbles than to cause an improvement in the heat-transfer coefficient. This increase is caused by hot jets of fluid from the boundary layer being projected into the cooler core of the flow.

For the case of a constant heat flux, the onset of subcooled boiling occurs in the following manner. In the one-phase, forced-convection region the thermal-boundary layer next to the surface heats up as more heat is absorbed. Eventually a point is reached where bubble nucleation can occur. A bubble will grow when the pressure inside the bubble is larger than the pressure outside. The equilibrium condition for the spherical, vapor bubble of radius r is:

$$P_v - P_l = \frac{2\sigma}{r} \quad (\text{II-1})$$

where P_v is the pressure of the vapor, P_l is the pressure of the liquid, and σ is the surface tension of the fluid. The liquid superheat required to maintain this equilibrium can be related to the pressure difference with the use of the Clausius-Clapeyron thermodynamic-equilibrium relation:

$$P_v - P_l = \frac{\Delta T_{sat}}{T_{sat}} \frac{h_{fg}}{1/\rho_v - 1/\rho_l} \approx \frac{\Delta T_{sat} \rho_v h_{fg}}{T_{sat}} \quad (\text{II-2})$$

where ΔT_{sat} is the superheat of the liquid at the wall ($T_w - T_{sat}$).

On any surface there are minor imperfections that contain a trace of vapor or noncondensable gas. These imperfections determine the superheat required for bubble nucleation. Therefore, by combining equations (II-1) and (II-2):

$$\frac{2\sigma}{r} \approx \frac{\Delta T_{sat} \rho_v h_{fg}}{T_{sat}} \quad (\text{II-3})$$

it can be seen that the larger the size of the imperfection the lower the superheat that is required for nucleation.

Hsu^[4] postulated that bubble nuclei on a heated wall will grow only if the lowest temperature on the bubble surface is greater than the superheat required for growth. Earlier work by this investigator^[5] confirmed this. For a bubble of radius r_c to grow

in a uniformly-heated fluid of temperature T_b [4]:

$$T_b > \frac{P_\ell T_{\text{sat}}}{h_{fg} \nu} \ln \left(1 + \frac{2\sigma}{P_\ell r_c} \right) + T_{\text{sat}} \quad (\text{II-4})$$

For a heated surface the temperature gradient can be approximated in a linear form: [6]

$$T_\ell(y) = T_w - \left(\frac{qy}{k_\ell} \right) \quad (\text{II-5})$$

where $T_\ell(y)$ is the local, liquid temperature and y is the distance away from the wall. For a nucleus of radius r_c to begin to grow equations (II-4) and (II-5) must be tangent [6]. Therefore:

$$T_\ell(y) = T_b \quad \text{and} \quad \frac{dT_\ell(y)}{dy} = \frac{dT_b}{dr} \quad (\text{II-6})$$

Bergles and Rohsenow [6] obtained a graphical solution of equations (II-4) and (II-5) subject to equations (II-6) for water over the pressure range of 15-2000 psia:

$$q_{\text{ONB}} = 15.6P^{1.156} (\Delta T_{\text{sat}}) (2.3/P^{0.0234}) \quad (\text{II-7})$$

Davis and Anderson [7] developed an analytical solution of equations (II-4), (II-5), and (II-6):

$$q_{\text{ONB}} = \frac{k_\ell h_{fg}}{8\sigma T_{\text{sat}} \nu_{fg}} (\Delta T_{\text{sat}})^2 \quad (\text{II-8})$$

which works well for water.

Frost and Dzakovic^[8] proceeded in the same manner as Davis and Anderson; but, they assumed that nucleation occurred when $T_l(y)$ equaled T_b at a distance of $r(Pr)^2$ rather than r_c . Thus:

$$q_{ONB} = \frac{k_l h_{fg}}{8\sigma T_{sat} \nu_{fg}} \left(\frac{\Delta T_{sat}}{Pr} \right)^2 \quad (II-9)$$

This equation compares favorably with experimental data for a variety of fluids.

As the temperature increases further, bubbles form on the surface, but condense before they detach. During this phase jets of warmer liquid continue to flow into the cooler core by thermocapillarity. Thermocapillarity is caused by the fact that the surface tension varies around a bubble growing in a temperature gradient. The resultant force pulls the interfacial liquid film outward (from hot to cold) which then drags adjacent warmer liquid with it. Cooler fluid then rushes in to replace the warmer fluid. Brown^[9] suggested that this phenomenon can transfer a considerable fraction of the heat flux. The turbulence induced by thermocapillarity explains why the average temperature of the boundary layer is below saturation. Thermocapillarity also causes the temperature of the interface between the one-phase core and the bubble-laden, boundary layer to fall with increasing heat flux because of increased turbulence.

In the final stage of subcooled boiling, when the temperature approaches saturation, the bubbles grow and detach from the

surface. However, they still condense as they migrate into the cooler core of the flow. The major forces affecting the flow involved in subcooled boiling are the force exerted by the fluid flowing through the tube and the thermocapillary force at the thermal-boundary-layer interface. Neither of these forces are effected by gravitational acceleration. Furthermore, gravitational acceleration has no effect on bubble nucleation. For these reasons the heat-transfer coefficient measured in a 1-g environment will be the same as that measured in a 0-g environment for subcooled, force-convective boiling.

In actual practice the equations presented in this section may predict q_{ONB} lower than what is observed, especially at lower pressures and low-heat fluxes. This is due to the fact that the equations assumed a wide range of activation sites. On metal or glass tubes there may not be large enough nucleation sites for boiling to occur even though the equations predict it.

For the case where there is a constant wall temperature, subcooled boiling will begin immediately. However, the boiling process, discussed above, will be the same.

SATURATED-NUCLEATE BOILING

When the bulk-fluid temperature reaches saturation conditions, the vapor bubbles no longer condense. Instead they continue to grow and coalesce forming even larger bubbles. Therefore, the vapor quality begins to increase.

In this region the heat-transfer mechanism is very similar to nucleate-pool boiling. In fact, the flow rate of the fluid has

very little influence on the heat-transfer coefficient^[6].

Assuming that the heat transfer is caused by two additive effects: forced-convection and nucleate boiling; the forced-convection component can be ignored. Therefore, an equation for the heat-transfer coefficient in nucleate, pool boiling can be used to calculate the heat-transfer coefficient for forced-convection, saturated, nucleate boiling. This has been done successfully by several investigators^[10, 11]. However, one must be careful in this approach because subcooling greatly affects pool boiling, while having some subcooling (the average temperature is the saturation temperature) in the liquid core for forced convection has no effect.

The reasons for the large increase in the heat-transfer coefficients for nucleate boiling have been debated for years with no concise agreement^[6]. The main mechanism, however, seems to be the turbulence caused by bubble generation and departure. Before the bubble grows, a thermal-boundary layer is built up. When the temperature near the surface gets high enough for bubble growth, the bubble grows outward, pushing the boundary layer with it. Furthermore, when the bubble detaches from the surface it then carries this thermal-boundary layer into the bulk of the fluid, thus, directly transporting energy outward. Cooler fluid then rushes back to the surface to complete the cycle.

The major factors affecting heat transfer during saturated-nucleate boiling^[6] are the heat flux and the pressure. The flow rate, quality, and core subcooling have little effect in this region. Furthermore the heat-transfer coefficient remains constant

through out the region because of the constant, bulk temperature (equal to the saturation temperature). And, the boundary conditions at the wall have no effect.

In this region the major forces acting on the fluid^[5] are surface tension, inertia, bouyancy, drag, and the Bernoulli effect. Surface tension holds the bubble to the wall while the inertia of the liquid surrounding a growing bubble attempts to pull it from the wall. The drag force caused by the fluid flowing around the bubble attempts to shear it from the wall. The bouyancy force pulls the bubble upward, pulling it from the wall or pushes it onto the wall depending on the surface orientation. Upon departure from the surface, bouyancy makes the bubble rise while the Bernoulli effect created by the velocity gradient within the tube causes the bubbles to migrate to the center. As long as the flow is not stratified, the differences between the heat-transfer coefficient in 1-g and 0-g for a round tube should be small. This is because, in 1-g, gravity helps on the bottom of the tube by helping to remove the vapor but hinders on the top by keeping the vapor near the surface. The average effect should, therefore, be similar to 0-g conditions.

TWO-PHASE, FORCED CONVECTION

As the vapor quality increases the vapor migrates towards the center creating, at first, a slug-flow pattern which is followed by an annular-flow pattern. A slug-flow pattern is where large bubbles or "slugs" of vapor are separated from one another by thin,

liquid regions. As the vapor quality increases the liquid regions, separating the slugs, disappear leaving an annular-flow pattern where the vapor core is separated from the wall by a thin, liquid layer. Flow patterns and the conditions for their appearance is discussed extensively in Reference [5].

Eventually, a point is reached where the liquid layer adjacent to the wall is thin enough that all of the heat flux is conducted through the liquid without nucleate boiling. The mechanism of heat transfer then switches from nucleate boiling to evaporation at the liquid/vapor interface. This regime, therefore, is called the two-phase, forced-convection region.

In order to suppress bubble nucleation, the effective thermal conductivity of the liquid layer must be high enough so that the liquid cannot be superheated to a point where bubble growth occurs. The equations used earlier to predict the onset of subcooled, nucleate boiling are applicable here too. As mentioned earlier, Frost and Dzakowic [8] predicted the bubble growth would begin when:

$$q_{ONB} = \frac{k_l h_{fg}}{8 \sigma T_{sat} \nu_{fg}} \left(\frac{\Delta T_{sat}}{Pr} \right)^2 \quad (II-9)$$

Combining this equation with Newton's law of cooling:

$$q_{SNB} = h_{OTPFC} \Delta T_{sat} \quad (II-10)$$

where h_{OTPFC} is the heat-transfer coefficient for the onset of two-phase, forced convection, and q_{SNB} is the heat flux for the suppression of nucleate boiling. Setting $q_{ONB} = q_{SNB}$ an expression

for h_{OTPFC} for the onset of two-phase, forced convection can be found.

$$h_{OTPFC} = \frac{k_l h_{fg} \Delta T_{sat}}{8 \sigma T_{sat} v_{fg} Pr^2} \quad (II-11)$$

This equation for h_{OTPFC} is the point where bubble nucleation is suppressed. As in subcooled boiling, this number may be lower than what is actually found in practice due to the absence of large nucleation sites.

In this two-phase, forced-convection region the heat is transferred across the liquid layer and evaporates liquid at the liquid/vapor interface. Therefore, the heat-transfer coefficient is very dependent on the thickness of the liquid layer. This thickness is governed by the quality. Therefore, h_{TPFC} is very dependent on quality. Furthermore, as the thickness of the liquid layer decreases, the temperature drop across the liquid layer decreases. Because of this extremely-high, heat-transfer coefficients can be achieved.

Another factor that affects the heat-transfer coefficient is the mass flux^[6]. Higher mass fluxes increase the vapor velocity which increases the evaporation at the liquid/vapor interface. Unlike the saturated-nucleate-boiling regime, the heat flux has no effect on the heat-transfer coefficient.

Since the heat-transfer coefficient increases along the tube with increasing quality, the wall temperature of the tube will decrease along the tube for the case of a constant heat flux. For the case of a constant wall temperature, the heat flux will

increase along the tube.

In this regime, the only contribution of gravity to the heat transfer process is in the distribution of film thickness around the circumference of the tube. However, the average value will be the same as the constant value found under 0-g conditions^[5]. Therefore, heat transfer in this regime should be relatively insensitive to gravity. Furthermore, all analytical treatments of this regime have used a constant, fluid thickness around the perimeter (0-g condition) successfully in past analyses^[5].

LIQUID DEFICIENT REGION

As the quality increases in the two-phase, forced-convection region the liquid layer gets thinner, while the vapor velocity increases. Eventually a point is reached where the liquid becomes totally entrained in the vapor core, thus causing the walls to dryout. When dryout conditions are reached, the heat-transfer coefficient decreases drastically. With a constant heat flux, this causes the wall temperature to increase tremendously. Often it will increase above the melting point of the evaporator walls, thus "burning out" the evaporator. For the case of a constant wall temperature, the heat flux decreases drastically. This causes the liquid deficient region of the evaporator to be essentially useless. This condition, therefore, must be avoided.

III FLOW-VISUALIZATION EXPERIMENT

In order to observe the general operation of and problems associated with straight-tube evaporators, a flow-visualization experiment was set up. The experimental apparatus and the results of the experiment are discussed below.

EXPERIMENTAL APPARATUS

The flow-visualization loop consisted of: an evaporator, a condenser/accumulator, a preheater, a pump, a flow meter, and an adjustable orifice. This set up is shown in Figure 3. The evaporator consisted of a long, small-diameter, glass tube and will be discussed in greater detail later. The condenser/accumulator consisted of a copper coil (condenser) submerged in a bucket of water (accumulator). The steam and water mixture from the evaporator flowed through the copper coil and emptied into the bottom of the bucket. The copper coil thus served as a condenser and as a heater for the water supply in the accumulator. The accumulator was open to the atmosphere. The preheater was a hot plate beneath the accumulator. It was used to help raise the temperature of the water to near saturation. The flow meter, a rotameter, consisted of a small, vertical, glass tube. A steel and a rubber ball rose within the tube with an increase in the flow rate. The flow meter also contained a valve that could be used to regulate the flow. The purpose of the adjustable orifice will be discussed later.

Instrumentation

Total instrumentation consisted of three pressure meters,

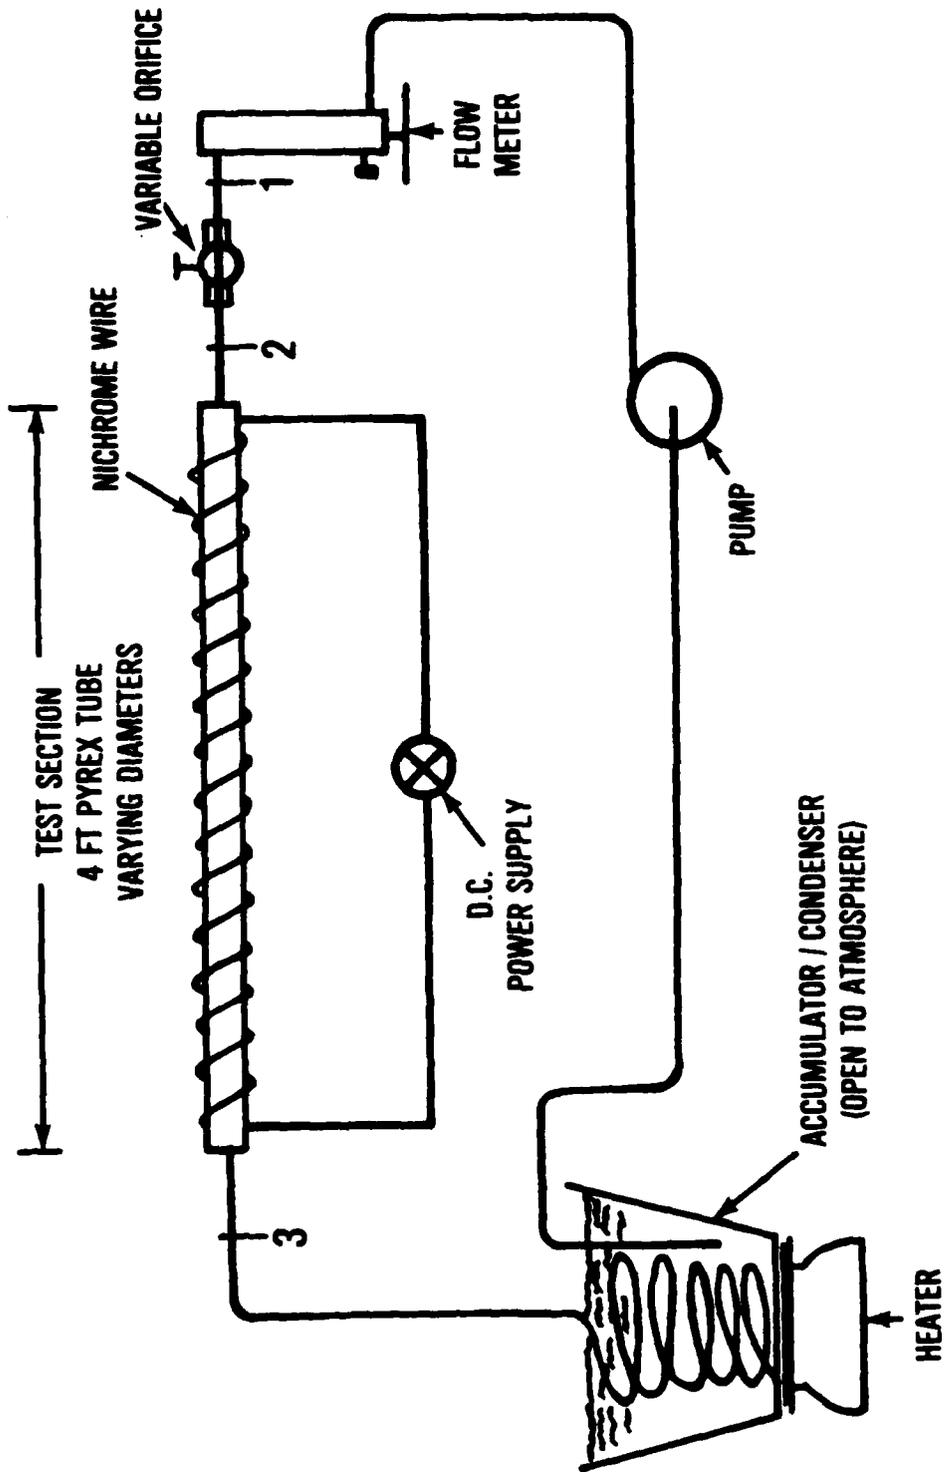


Figure 3: Experimental apparatus.

three thermocouples, an ammeter, and a voltmeter. Two of the pressure meters were set up to measure the pressure drop across the evaporator and across the adjustable orifice. The third pressure gage measured the pressure of the flow prior to entering the orifice. The three thermocouples were located before and after the evaporator and in the accumulator. The ammeter and voltmeter were used to measure the power input to the evaporator.

Evaporator

The evaporator consisted of a long, thin, glass tube. Heat was supplied to the tube by nichrome heating wire which was coiled around the tube. The heat from the wire was conducted through the glass tube which caused the water to boil as it passed through the tube.

The purpose of experiment was to visualize the boiling process in a spacecraft evaporator. To do this it was necessary to minimize the influence of gravity. On earth, gravity tends to dominate two-phase flow through tubes, while in space, surface tension tends to dominate. However, in very small-diameter tubes, surface tension dominates over gravity. For this experiment, this point was assumed to be the point where the liquid is able to wick itself completely around the tube so that a stratified-flow pattern cannot exist. From earlier work^[5] this point is:

$$r = \sqrt{\frac{2\sigma}{\rho_l g}} \quad (\text{III-1})$$

Using water properties:

$$r = \left[\frac{2(5.89 \times 10^{-2} \text{ NT/m})}{(955 \text{ kg/m}^3)(9.8 \text{ m/s}^2)} \right]^{1/2}$$

$$r = 0.0035 \text{ m} = 0.14 \text{ ft} = 1/8 \text{ in}$$

Therefore, tubes with $\frac{1}{8}$ inch diameters or less were used for the evaporator.

RESULTS OF FLOW VISUALIZATION

The flow entered the evaporator subcooled. Almost immediately very small bubbles would appear at the evaporator wall (subcooled boiling). These bubbles initially didn't grow; but, further along the tube as the bulk temperature increased, they began to grow, depart from the surface, and recondense in the flow. As the bulk temperature of the flow approached saturation, the bubbles began to grow larger and coalesce. When the bulk temperature reached saturation the flow pattern changed from bubbly flow to slug flow. In this slug-flow regime the liquid layer between the vapor core and the wall was thin enough to suppress nucleate boiling. Still further down the tube, the slugs expanded into an annular-flow pattern. This pattern established in the evaporator was always the same regardless of power input or flow rate. The only difference being whether enough power was being supplied to reach the flow quality necessary for annular flow.

Although the flow pattern established in the evaporator was consistent, it was not stable. This instability was caused by the extreme pressure oscillations associated with slug flow. In a spacecraft evaporator these pressure oscillations cannot be allowed. They

would cause vibration, disruption of flow uniformity in parallel-flow networks, wear on pumps, and instabilities in the condenser. Therefore, before straight-tube evaporators can be used, a means of stabilizing the flow must be devised.

In an effort to solve this problem, an orifice was installed immediately in front of the evaporator tube. If the orifice could be sized so that the pressure drop through the evaporator is much smaller than the pressure drop through the orifice, the flow should be stable in front of the evaporator. This would eliminate the problems of parallel-flow instability and pump wear. To test this theory, an adjustable orifice was placed ahead of the evaporator. The pressure was measured at point 1 (see Figure 3), and the pressure drop was measured between points 1 and 2 and between 2 and 3. The results of this test were very conclusive - this method will not work! The orifice in this experiment was varied until the pressure drop across the orifice was approximately an order of magnitude greater than the pressure drop through the evaporator. And still, the flow oscillations could not be damped out prior to the orifice. The pressure readings are shown in Table I for various mass flow rates. An investigation of the accumulator showed the flow to be steady to the pump, therefore the only cause of these instabilities could be the slug flow. Any further increase in the pressure drop across the orifice was deemed unacceptable because the corresponding increase in pump power required would eliminate the major advantage of the two-phase systems having a low pump-power requirement.

TABLE I. Pressure measurements of evaporator test section for $Q = 1,620$ watts

MASS VELOCITY (kg/s)	TEST SECTION $P_2 - P_3^*$ (in H ₂ O)	PRESSURE ORIFICE $P_1 - P_2^*$ (in H ₂ O)	INLET PRESS P_1^* (psia)
6.53	3 - 6	0 - 15	1 - 1.5
6.57	3 - 8	20 - 65	2.6 - 3.2
6.35	3.5 - 10	100+	5.6 - 6.75
4.00	2 - 10	71 - 79	3.65 - 3.7
3.95	2 - 8	100+	5.7 - 5.72

* See Figure 3 for location of pressure measurements

IV TWO-PHASE, HEAT-TRANSFER EQUATIONS

In order to determine a method of calculating the heat-transfer coefficients for forced-convective boiling, a thorough review of past work is done. The information obtained in this section is used to develop a better method in Section V.

Many empirical equations have been developed to predict the heat-transfer coefficients in forced-convection-boiling heat transfer. Most of the equations were developed for only one region of boiling, while others use weight factors with several equations to make a general equation. The weight given to a certain equation depends on the local flow conditions. This section describes some of the newer and/or more popular equations.

One of the easiest equations to use is that of McAdams et al.^[12] They developed an empirical equation for the heat flux for water during subcooled, nucleate boiling:

$$q = C' \Delta T_{sat}^{3.86} \quad (IV-1)$$

where C' is a dimensionless constant that ranges from 0.190 to 0.074 depending on the extent of degassing of the water and ΔT_{sat} is the difference between the wall temperature and the saturation temperature. They found q to be independent of water velocity, pressure, degree of subcooling, and diameter. The equation is good for pressures of 30 psia to 90 psia. The main problem with this equation is that it was developed solely for water and is not applicable to other fluids.

As mentioned previously, pool-boiling equations have been used

successfully for calculating the heat-transfer coefficients in the subcooled and saturated-nucleate-boiling regions. Specifically, Lavin and Young^[11], and Myers and Katz^[10] have successfully used McNelly's equation^[13] for the nucleate, pool-boiling heat-transfer coefficient to correlate their saturated, forced-convection nucleate-boiling data. McNelly's equation is:

$$\frac{hd}{k_l} = C \left(\frac{qd}{\mu h_{fg}} \right)^{0.69} \left(\frac{C_{p_l} \mu_l}{k_l} \right)^{0.69} \left(\frac{\rho_l}{\rho_v} - 1 \right)^{0.31} \left(\frac{Pd}{\sigma} \right)^{0.31} \quad (IV-2)$$

where C was given as .225 by McNelly but modified to .25 for the inside of a plain tube by Lavin and Young. And:

$$q = h \Delta T_{sat} \quad (IV-3)$$

McNelly developed this equation by first looking very closely at the boiling process, and then doing a dimensional analysis. He also used the heat flux as the driving mechanism rather than the temperature difference. It should be noted that like McAdams equation the diameter has no effect (divides out) and the mass flux has no effect (developed for pool boiling). This equation is good for all fluids.

Lavin and Young also went on to develop an equation for the two-phase, forced-convection region. To correlate their data they develop the equation:

$$\frac{h_{TP}}{h_{LP}} \left(\frac{G h_{fg}}{q} \right)^{0.1} = 3.79 \left(\frac{1+x}{1-x} \right)^{1.16} \quad (IV-4)$$

where h_{TP} is the two-phase, forced-convection, heat-transfer coefficient; h_{LP} is the one-phase, heat-transfer coefficient for the liquid phase; G is the mass flux; and x is the quality. For h_{LP} they used the Sieder-Tate equation:

$$h_{LP} = 0.023 \frac{k}{d} Re_{\ell}^{0.8} Pr^{0.33} \left(\frac{\mu}{\mu_w} \right)^{0.14} \quad (IV-5)$$

where the Reynolds number is defined as:

$$Re_{\ell} = \frac{Gd(1-x)}{\mu} \quad (IV-6)$$

Since this equation was developed for the two-phase, forced-convection region, it is very dependent on the quality and relatively independent of the heat flux.

Lockhart and Martinelli devised a parameter, X , to correlate the pressure drop for two-phase flow in tubes. This parameter is also used to calculate the liquid-film thickness in two-phase flows. Since the heat-transfer coefficient is very dependent upon the liquid layer adjacent to the surface in two-phase, forced convection many investigators have used X to successfully correlate their data. They used an equation of the form:

$$\frac{h_{TP}}{h_L} = f \left(\frac{1}{X_{tt}} \right)^n \quad (IV-7)$$

where X_{tt} is the Lockhart-Martinelli parameter for turbulent liquid, turbulent vapor:

$$X_{tt} = \left(\frac{1-x}{x} \right)^{0.9} \left(\frac{\rho_v}{\rho_l} \right)^{0.5} \left(\frac{\mu_l}{\mu_v} \right)^{0.1} \quad (\text{IV-8})$$

Dengler and Addoms^[14] found that:

$$\frac{h_{TP}}{h_{LO}} = 3.5 \left(\frac{1}{X_{tt}} \right)^{0.5} \quad (\text{IV-9})$$

where h_{LO} is the heat-transfer coefficient for liquid alone found by setting $x=0.0$ and using equation (IV-5). Guerrieri and Talty^[15] found that:

$$\frac{h_{TP}}{h_{LP}} = 3.5 \left(\frac{1}{X_{tt}} \right)^{0.45} \quad (\text{IV-10})$$

where h_{LP} is the one-phase, heat-transfer coefficient. Bennett et al^[16] found that:

$$\frac{h_{TP}}{h_{LO}} = 0.64 \left(\frac{1}{X_{tt}} \right)^{0.74} q^{0.11} \quad (\text{IV-11})$$

All of the above correlations were compared by Chen^[17]. He found that Dengler and Addom's equation predicted values too large when compared with other experimenters data. Guerrieri and Talty's equation predicted lower coefficients than Dengler and Addom's but still lacked accuracy. And Bennet's predicts h_{TP} well for water but not for other fluids. For these reasons Chen developed his own method which covers both the saturated, nucleate-boiling region and the two-phase, forced-convection region. He assumed that the two mechanisms, nucleate boiling and forced convection, are present to some extent in both regions. Therefore, he devised a correlation using superposition:

$$h_{TP} = h_{NB} + h_{FC} \quad (IV-12)$$

Where h_{NB} is the contribution due to nucleate boiling and h_{FC} is the contribution due to forced convection. A Dittus-Boelter type equation was used for h_{FC} :

$$h_{FC} = 0.023 Re_{TP}^{0.8} Pr_{TP}^{0.4} \frac{k_{TP}}{d} \quad (IV-13)$$

Chen argued that k_{TP} and Pr_{TP} can be equated with the liquid values. Furthermore, he defined a parameter F as:

$$F = \left(\frac{Re_{TP}}{Re_l} \right)^{0.8} = \left(\frac{Re_{TP}}{G(1-x)d/\mu_l} \right)^{0.8} \quad (IV-14)$$

The only unknown in h_{FC} then is F . However, since F is a flow parameter it can be related to X_{tt} . Chen used Foster and Zuber's analysis of nucleate boiling for h_{NB} :

$$h_{NB} = 0.0022 \frac{k_l^{0.79} C_{pl}^{0.45} \rho_l^{0.45} g_c^{0.25}}{\sigma^{0.5} \mu_l^{0.29} h_{fg}^{0.24} \rho_v^{0.24}} \Delta T^{0.24} \Delta P^{0.75} \quad (IV-15)$$

He also defined a nucleate-boiling, suppression factor, S , which relates the mean superheat, ΔT , to the wall superheat, ΔT_{sat} :

$$S = \left(\frac{\Delta T}{\Delta T_{sat}} \right)^{0.99} \quad (IV-16)$$

using the Clausius-Clapeyron equation:

$$\Delta P = \frac{\Delta T h_{fg}}{T_{sat} v_{fg}} \quad (IV-17)$$

Combining equations: (IV-15), (IV-16) and (IV-17); h_{NB} equals:

$$h_{NB} = 0.00122 \frac{k_l^{0.79} C_{pl}^{0.45} \rho_l^{0.49} g_c^{0.25} h_{fg}^{0.49}}{\sigma^{0.5} \mu_l^{0.29} \rho_v^{0.24} T_{sat}^{0.75} v_{fg}^{0.75}} \Delta T S \quad (IV-18)$$

and

$$h = h_{NB} + Fh_{FC} \quad (IV-19)$$

The Parameters S and F are graphed in Figures 4 and 5. The Chen equation has been correlated with the data of many investigators with 85% of the data being within - 15.1%. The problem with the Chen equation is that it is not easy to program on a computer due to the use of charts to find S and F.

A final method for calculating h_{TP} was proposed recently by Bjorge, Hall, and Rohsenow. [18] They also used a superposition formula where:

$$q_{TP} = q_{FC} + q_{NB} - q_{IB} \quad (IV-20)$$

for the high quality region ($x > 0.05$), and

$$q_{TP} = \left[q_{FC}^2 + (q_{NB} - q_{IB})^2 \right]^{1/2} \quad (IV-21)$$

for the low quality region. q_{IB} is the heat flux at the incipient boiling point. Since q_{NB} and q_{IB} are proportioned to T^3 :

$$q_{TP} = q_{FC} + q_{NB} \left[1 - \left(\frac{\Delta T_{sat, IB}}{\Delta T_{sat}} \right)^3 \right] \quad (IV-22)$$

for the high quality region, and for the low quality region:

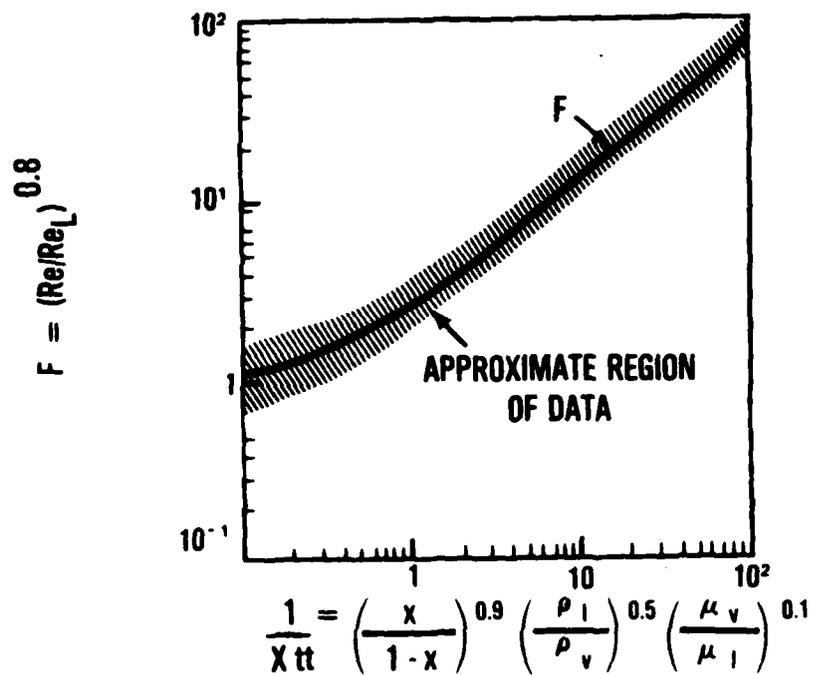


Figure 4: Reynolds number factor F versus the Lockhart-Martinelli parameter X_{tt} .

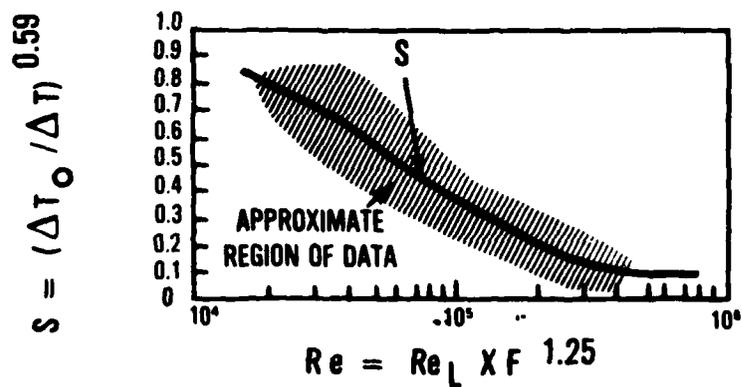


Figure 5: Suppression factor S versus the Reynolds number.

$$q_{TP} = \left\{ q_{FC}^2 + q_{NB}^2 \left[1 - \left(\frac{\Delta T_{sat, IB}}{\Delta T_{sat}} \right)^3 \right]^{2.5} \right\} \quad (IV-23)$$

For the high quality region, the equation developed by Traviss et al^[19], and modified by Hall^[20] was used for q_{FC} :

$$q_{FC} = \frac{Re_l^{0.9} Pr_l F(X_{tt}) k_l}{F_2 d} \Delta T_{sat} \quad (IV-24)$$

where:

$$F(X_{tt}) = 0.15 \left[\frac{1}{X_{tt}} + 2.0 \left(\frac{1}{X_{tt}} \right)^{0.32} \right] \quad (IV-25)$$

$$Re_l = \frac{Gd(1-x)}{\mu_l} \quad (IV-6)$$

and

$$F_2 = 5Pr_l + 51 \ln(1 + 5Pr_l) + 2.51 \ln(0.0031 Re_l^{0.812}) \quad (Re > 1125) \quad (IV-26a)$$

$$F_2 = 5Pr_l + 51 \ln \left[1 + Pr_l (0.0964 Re_l^{0.585} - 1) \right] \quad (50 < Re < 1125) \quad (IV-26b)$$

$$F_2 = 0.0707 Pr_l Re_l^{0.5} \quad (Re > 50) \quad (IV-26c)$$

The equation was developed by Traviss et al. as a correlation for condensation in annular flow. Since two-phase, forced-convection evaporation is the opposite of forced-convection condensation, this equation should work for two-phase evaporation. Hall found this to be true, with a slight modification of the coefficient.

For the subcooled and low-quality region, Colburn's equation was used:

$$h_{FC} = 0.023 \frac{k_b (Gd)^{0.8}}{d (\mu_f)} \left(\frac{\mu_f C_{p_f}}{k_f} \right)^{0.333} \quad (IV-27)$$

where the subscript f means that the property should be evaluated at the film temperature, $(T_w + T_b)/2$, the subscript b refers to the bulk temperature, and q_{FC} can be found with equation (IV-3)

The nucleate boiling heat flux for both regions is calculated by using the Mikic-Rohsenow correlation:

$$\frac{q_{NB}}{h_{fg}} \left(\frac{g_c \sigma}{g(\rho_l - \rho_v)} \right)^{1/2} = B_m \frac{k_l^{1/2} \rho_l^{17/8} C_{p_l}^{19/8} \rho_v^{1/8}}{h_{fg}^{7/8} (\rho_l - \rho_v)^{9/8} \sigma^{5/8} T_{sat}^{1/8}} \Delta T_{sat}^3 \quad (IV-28)$$

where B_m is 1.89×10^{14} in SI units for forced-convection boiling of water.

For the wall superheat at the incipience of boiling, they used the equation derived by Davis and Anderson for the high quality region:

$$\Delta T_{sat, IB} = \frac{8 \sigma T_{sat} \rho_v h_{fg}}{k_l h_{FC}} \quad (IV-29)$$

In the subcooled and low quality region, this equation is modified to account for the fact that there may not be large nucleation sites:

$$\Delta T_{\text{sat,IB}} = \frac{1}{1-N} \left(\frac{1}{4\Gamma N} - N\Delta T_{\text{sc}} \right) \quad (r_{\text{tang}} > r_{\text{max}}) \quad (\text{IV-30})$$

where r_{tang} is the radius of tangency between equation II-4 and II-5 in the subcooled-boiling section or:

$$r_{\text{tang}} = \frac{4\sigma T_{\text{sat}} v_{fg}}{h_{fg} \Delta T_{\text{sat,IB}}} \quad (\text{IV-31})$$

Furthermore:

$$\Gamma = \frac{k_l h_{fg}}{8\sigma T_{\text{sat}} v_{fg} h_{FC}} \quad (\text{IV-32})$$

and

$$N = \frac{h_{FC} r_{\text{max}}}{k_l} \quad (\text{IV-33})$$

Where $r_{\text{max}} = 10^{-6}$ m.

It should be noted that, in the method devised by Bjorge, Hall and Rohsenow, h_{FC} for the high-quality region is completely different from h_{FC} in the low-quality and subcooled regions. In

the low-quality and subcooled region h_{FC} represents the one-phase, forced-convection, heat-transfer coefficient, equation (IV-27).

While in the high-quality region, h_{FC} represents the heat transfer coefficient for forced convection with a phase change at the boundary, equation (IV-24).

V PROPOSED METHOD FOR DESIGN OF STRAIGHT-TUBE EVAPORATORS

In this section the information that was presented in the preceding three sections is combined to develop a new approach to designing straight-tube evaporators and a new method for sizing the length of the evaporator tube is developed. Next a new way of calculating the local heat-transfer coefficients and how to stabilize the flow is presented. This is followed by a way to calculate the pressure drop. And finally all of this information was used to develop a computer design program which is also explained in this section.

DESIGN METHOD

Presently, the length of the tube necessary for a certain size of evaporator is calculated by treating the one-phase and two-phase sections separately. First the length of the one-phase section is calculated by using the one-phase heat-transfer coefficient, the energy it takes to reach saturation conditions, and the desired wall temperature. This, of course, gives a certain heat flux in the one-phase section.

After the calculations are finished for the one-phase section, the length of the two-phase section is calculated in the same way, using appropriate two-phase equations. For this calculation it is assumed that boiling begins when the bulk temperature reaches saturation. The total length can then be calculated by adding the lengths and multiplying by a safety factor.

The problem with this approach is that by breaking up the tube into two separate parts the heat flux is considerably different in

the two sections. In fact, since Q/A is proportional to h and h_{OP} is less than h_{TP} , Q/A_{OP} will be much less than Q/A_{TP} . This, however, will not be the case in an actual evaporator. Instead, there will nearly be a constant heat flux, such as with electronics cooling, or a constant wall temperature, such as with exchanging heat with a heat pipe. Furthermore, with a constant, wall temperature, subcooled boiling will occur rather than one-phase heat transfer. With a constant heat flux the wall temperature will vary with the heat-transfer coefficient, h , while with a constant wall temperature the local heat flux will vary with h .

Because of the inaccuracies of the past approach, the following two methods of "sizing" an evaporator have been developed. These methods are depicted in Figures 6 and 7 for a constant heat flux, and for a constant wall temperature, respectively. For a constant heat flux, first calculate the incipient-boiling point. This is the point where the wall temperature is high enough above the saturation temperature that boiling can begin. Next, calculate h_{OP} and h_{TP} , h_{TP} will vary along the length of the two-phase section. Using the allowable $\Delta T_{sat} = T_w - T_{sat}$, calculate the length using Q_{total} , average h_{TP} , d and T_{sat} . This is the length of tube necessary for the evaporator. The length of the subcooled section is the length necessary to get $\Delta T_{total} - \Delta T_{SC} = \Delta T_{IB}$, where $\Delta T_{total} = T_w - T_b$, $\Delta T_{sc} = T_{sat} - T_b$, and $\Delta T_{IB} = T_{IB} - T_{sat}$. From the incipient boiling point to the saturation point, subcooled boiling will take place and h_{TP} must be used. Prior to that point h_{OP} can be used to determine the wall temperature.

For a constant wall temperature, the heat flux will vary along the tube. Since the wall temperature will be higher than the incipient-boiling point, boiling will start immediately. Therefore, using appropriate two-phase equations, h_{TP} and the heat flux can be calculated. And finally, the length can be found.

CALCULATION OF THE HEAT-TRANSFER COEFFICIENT:

To calculate the heat-transfer coefficient, the superposition method of Rohsenow^[18] was employed. This method was used because of its success in the past and its adaptability to a computer solution. This method assumes that the forced-convection boiling, heat flux can be found by summing the heat fluxes for pool boiling and forced-convection. More specifically, for subcooled boiling flow ($x=0$):

$$q_{TP} = \left\{ q_{FC}^2 + q_{NB}^2 \left[1 - \left(\frac{\Delta T_{sat, IB}}{\Delta T_{sat}} \right)^3 \right]^{2.5} \right\} \quad (IV-23)$$

and for saturated-boiling flow ($x > 0$):

$$q_{TP} = q_{FC} + q_{NE} \left[1 - \left(\frac{\Delta T_{sat, IB}}{\Delta T_{sat}} \right)^3 \right] \quad (IV-22)$$

and for high-quality flows where nucleate boiling is suppressed

$$q_{TP} = q_{FC} \quad (V-1)$$

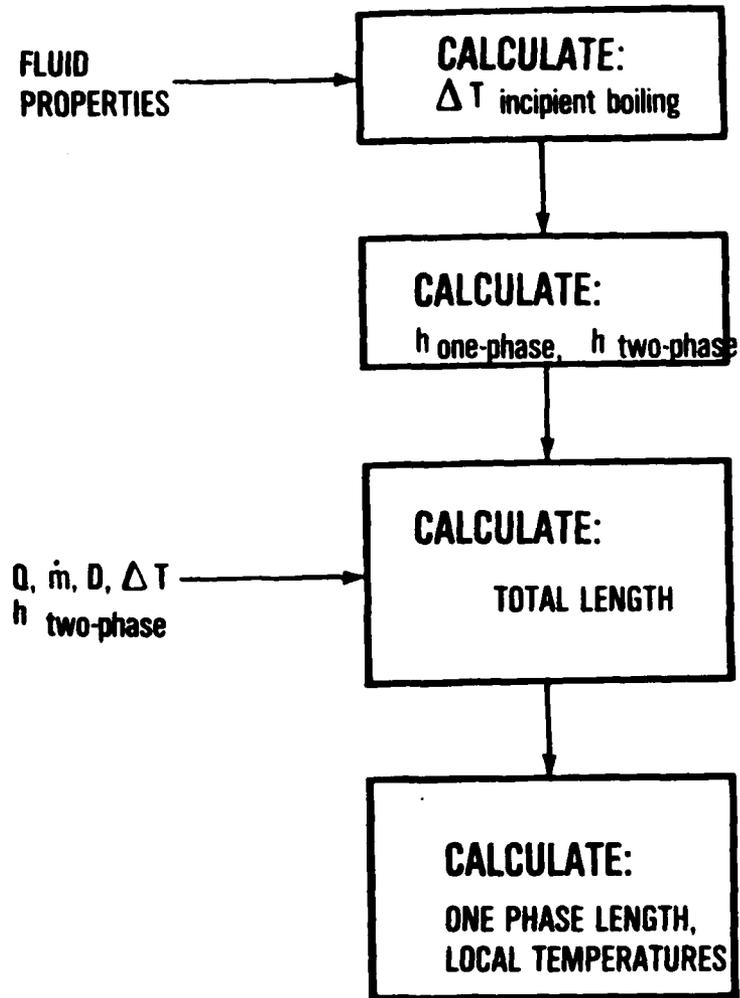


Figure 6: Flow chart for calculating the length of an evaporator with a constant, heat flux.

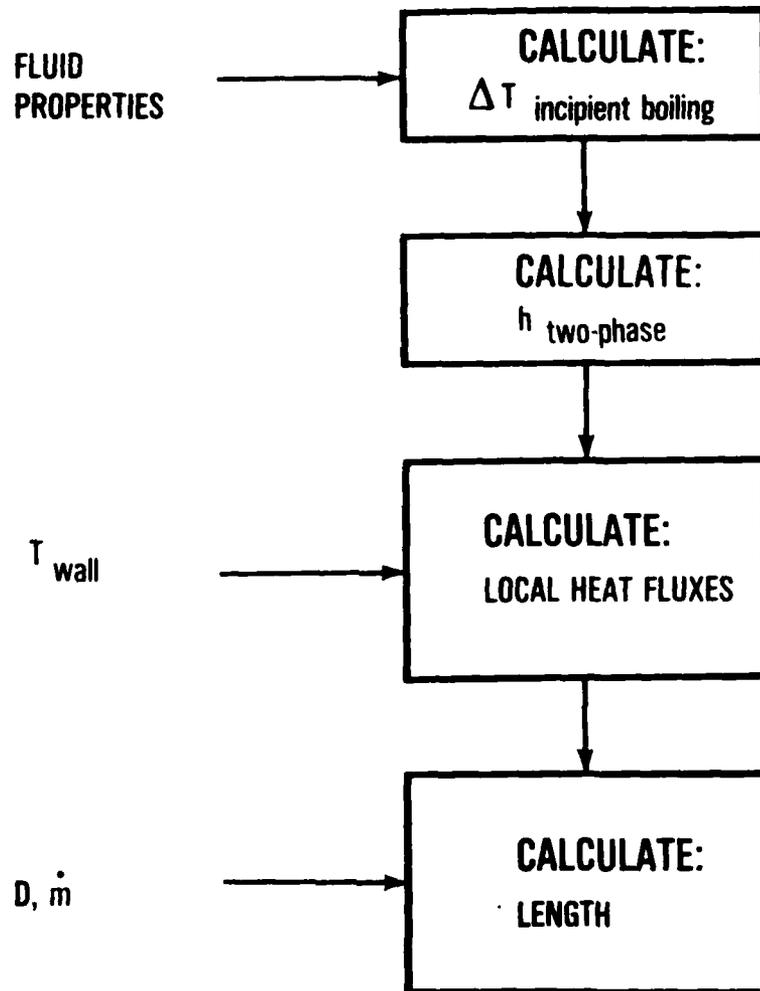


Figure 7: Flow chart for calculating the length of an evaporator with a constant, wall temperature.

Where q_{FC} for the subcooled regions is the one-phase, forced-convection heat flux, equations (IV-27) and (IV-2), and q_{FC} is the forced-convection, evaporative heat flux equations (IV-24), for the saturated regions. The force-convective heat flux for the subcooled region can be calculated by Colburn's equation:

$$h_{FC} = 0.023 \frac{k_b (Gd)^{0.8}}{d (\mu_f)} \left(\frac{\mu_f C_{p_f}}{k_f} \right)^{0.333} \quad (IV-27)$$

with:

$$q_{FC} = h_{FC} (\Delta T_{sat} + \Delta T_{sc}) \quad (V-2)$$

q_{FC} for the high-quality region can be found by Traviss's equation:

$$q_{FC} = \frac{Re_l^{0.9} Pr_l F(X_{tt}) k_f}{F_2 d} \Delta T_{sat} \quad (IV-24)$$

$$F(X_{tt}) = 0.15 \left[\frac{1}{X_{tt}} + 2.0 \left(\frac{1}{X_{tt}} \right)^{0.32} \right] \quad (IV-25)$$

$$Re_l = \frac{Gd(1-x)}{\mu_l} \quad (IV-6)$$

$$F_2 = 5Pr_l + 5 \ln(1 + 5Pr_l) + 2.5 \ln(0.0031 Re_l^{0.812}) \quad (Re > 1125) \quad (IV-26a)$$

$$F_2 = 5Pr_l + 5 \ln \left[1 + Pr_l (0.0964 Re_l^{0.585} - 1) \right] \quad (50 < Re < 1125) \quad (IV-26b)$$

$$F_2 = 0.0707 Pr_l Re_l^{0.5} \quad (IV-27c)$$

q_{NB} for both equations can be found by using McNelly's equation:

$$\frac{h_B^d}{k_l} = c \left(\frac{q_{TP}^d}{\mu h_{fg}} \right)^{0.69} \left(\frac{Cp_l \mu_l}{k_l} \right)^{0.69} \left(\frac{\rho_l}{\rho_v} - 1 \right)^{0.31} \left(\frac{Pd}{\sigma} \right)^{0.31} \quad (IV-2)$$

where q_{TP} is the total heat flux and:

$$q_{NB} = h_B \Delta T_{sat} \quad (V-3)$$

And finally, $\Delta T_{sat, IB}$ can be found with Frost and Dzakovic's equation:

$$\Delta T_{sat, IB} = \frac{8 \sigma T_{sat}^3 v_{fg} h_{FC}}{k_l h_{fg}} Pr^2 \quad (V-4)$$

where h_{FC} is found from equation (IV-27).

COMPARISON WITH DATA

The method outlined above was compared with data from Cheng, et.al. [21]; Latsh, et.al. [22] and Wright [23]. Cheng's data was for subcooled boiling water and is shown in Figure 8. In this figure both the method outlined above and the original method by Bjorge, Hall and Rohsenow is shown. Notice that there is very little

difference between the two. This is due to the fact that both methods are the same except for the equation used to calculate q_{NB} . For water both these equations give essentially the same answers. However, the equation used by Bjorge, Hall, and Rohsenow is only applicable to water, where the new method developed in this study is applicable to any fluid.

Latsh's data for one-phase, forced-convection and subcooled boiling is shown in Figure 9. This figure shows where the calculated incipient boiling point is. Notice that this point is where the data makes a bend upward. This upward bend is also evident in the computer generated lines.

Wright's data for low-quality and high-quality flow is shown in Figures 10 through 13. The accuracy of the low-quality predictions clearly shows that convective evaporation is taking place under low-quality conditions. In fact, in Appendix A where a sample calculation is shown, forced-convective evaporation comprises all of the heat transfer at qualities lower than five percent under the flow condition.

It should be noted that this method is similar to that developed by Bjorge, et. al. They chose $X = 0.05$ as the boundary between equation (IV-23) and (IV-22) and did not use equation (V-1). However, the flow visualization experiment done in this study and a comparison of the equations with Wright's^[23] data showed that the boundary between equation (IV-23) and (IV-22) should be between zero and one percent quality. For computational ease, this value was chosen as zero percent quality. Furthermore, sample calculations (see Appendix A) showed that nucleate boiling is

suppressed at relatively low qualities. If equation (IV-22) continues to be used for suppressed, nucleate-boiling conditions the nucleate-boiling term is actually being subtracted off. This, of course, is inaccurate. Therefore equation (V-1) must be used under suppressed, nucleate-boiling conditions.

FLOW STABILIZATION

A method of stabilizing the flow is to prevent slug flow from occurring. This can be done by inducing an artificial, body force so that stratified flow occurs instead of slug flow. The simplest way of accomplishing this is to induce swirl in the flow so that there is a large centrifugal force. To induce swirl a twisted tape inside the tube can be used. If the wicking height of the fluid is used as a transition point between slug and stratified flow^[5]:

$$\frac{r}{2} = \sqrt{\frac{2\sigma}{\rho_l g}} \quad (V-5)$$

or:

$$g = \frac{8\sigma}{\rho_l r^2} \quad (V-6)$$

The tangential acceleration due to fluid swirl is:

$$a_{\text{tang}} = \frac{u_{tw}^2}{r} \quad (V-7)$$

9

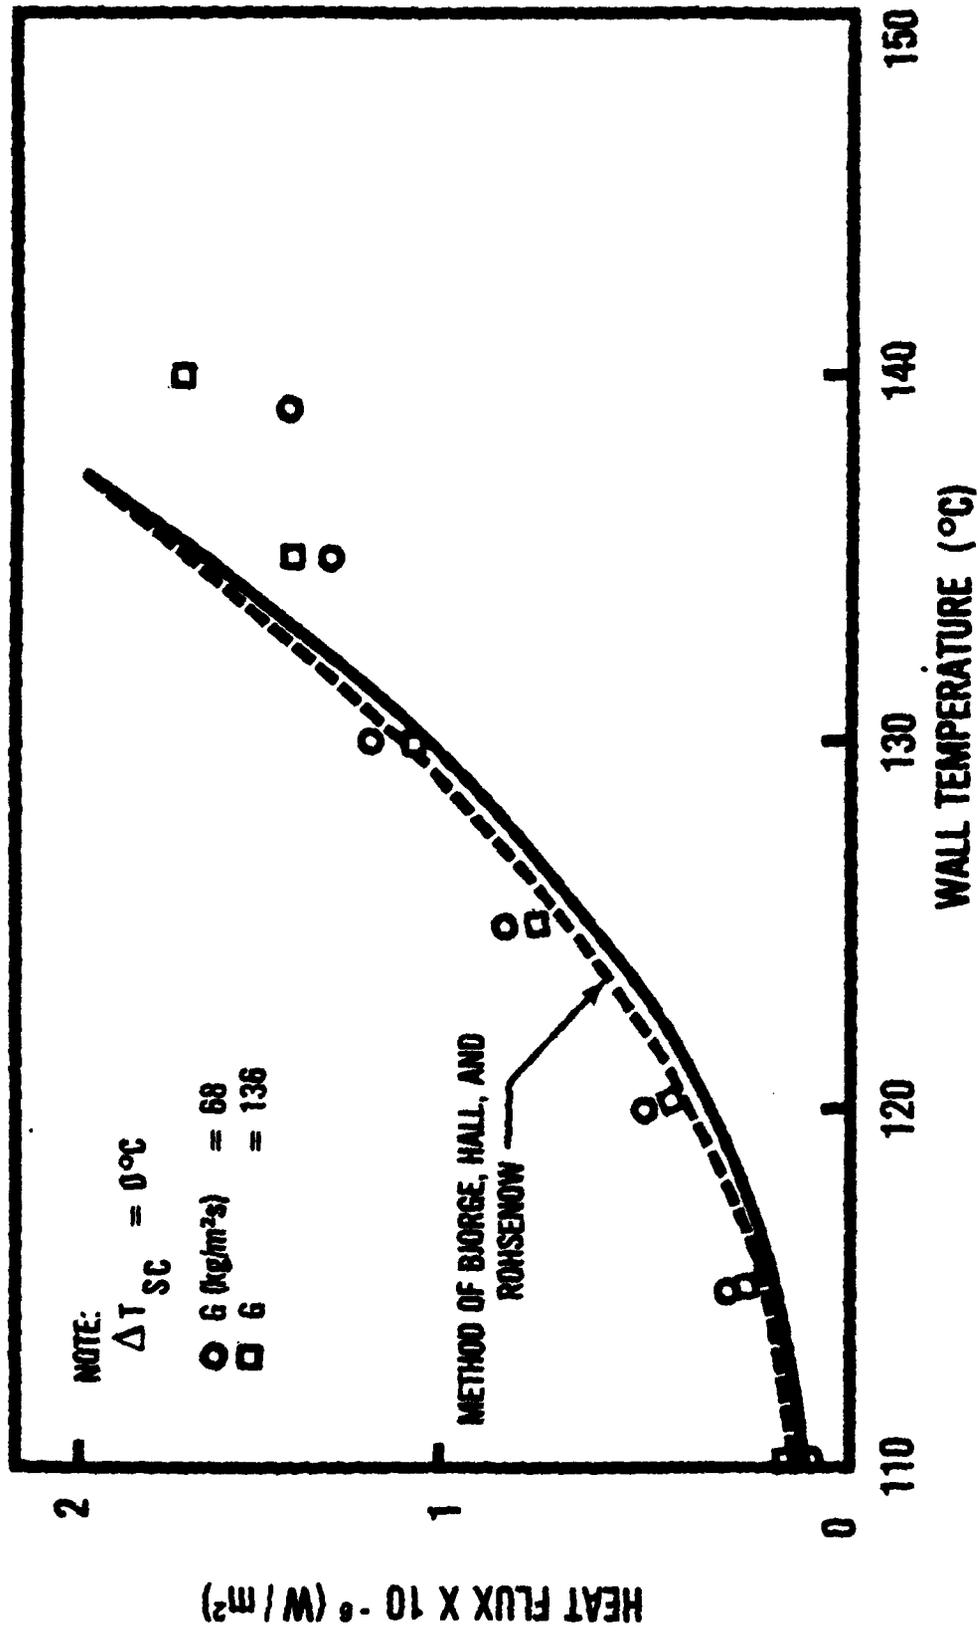


Figure 8: Wall temperature versus heat flux for subcooled boiling. Data from Reference 21.

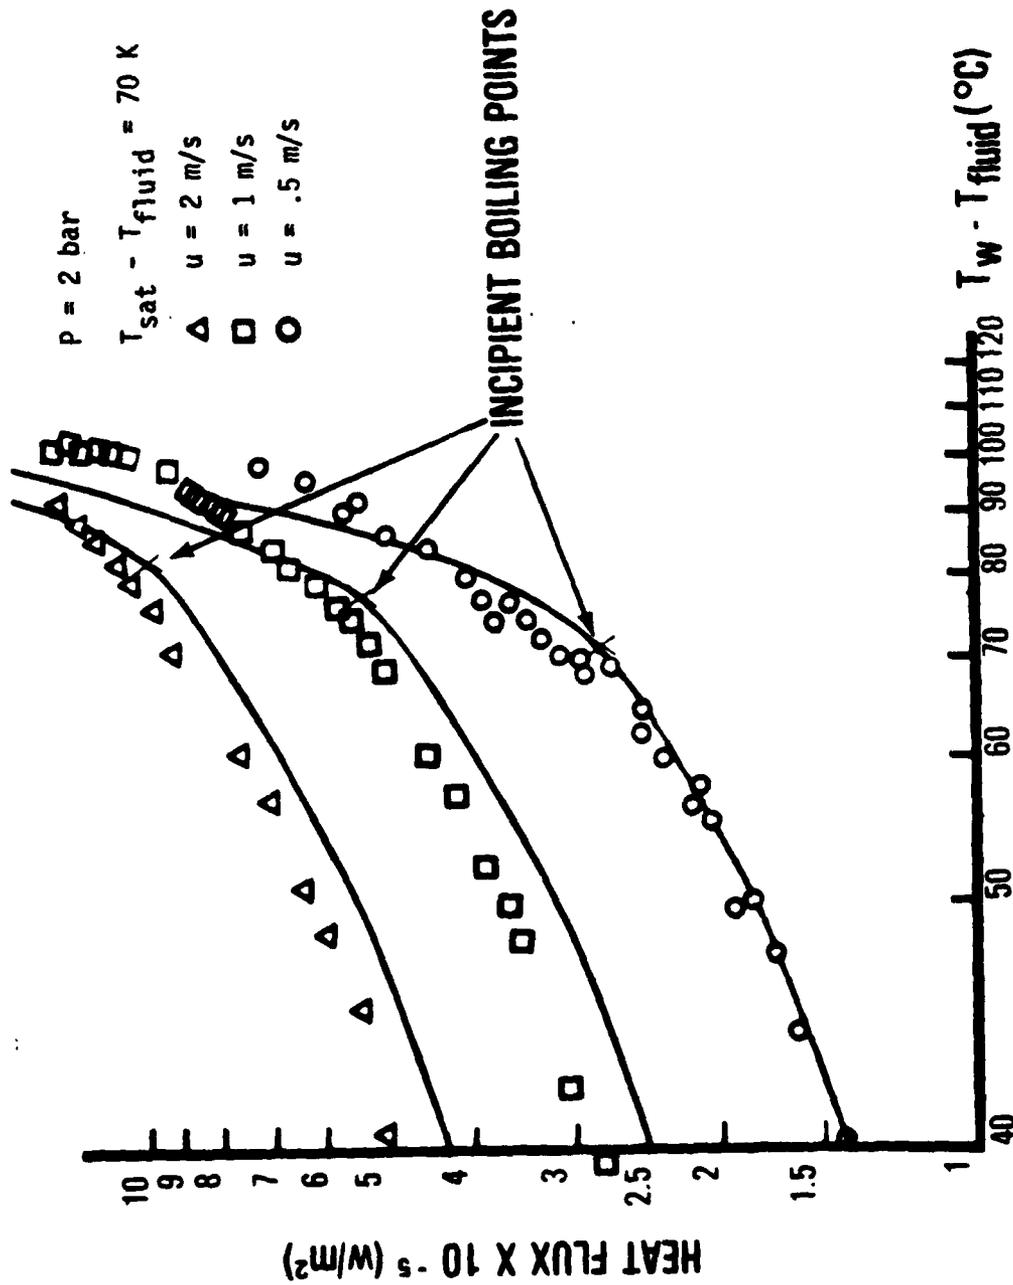


Figure 9: Difference between the wall temperature and the

bulk-fluid temperature versus the heat flux for

subcooled boiling. Data from Reference 22.

$q = 43525 \text{ W/m}^2$
 $p = 21 \text{ psia}$
 $\dot{m} = .21 \text{ kg/s}$

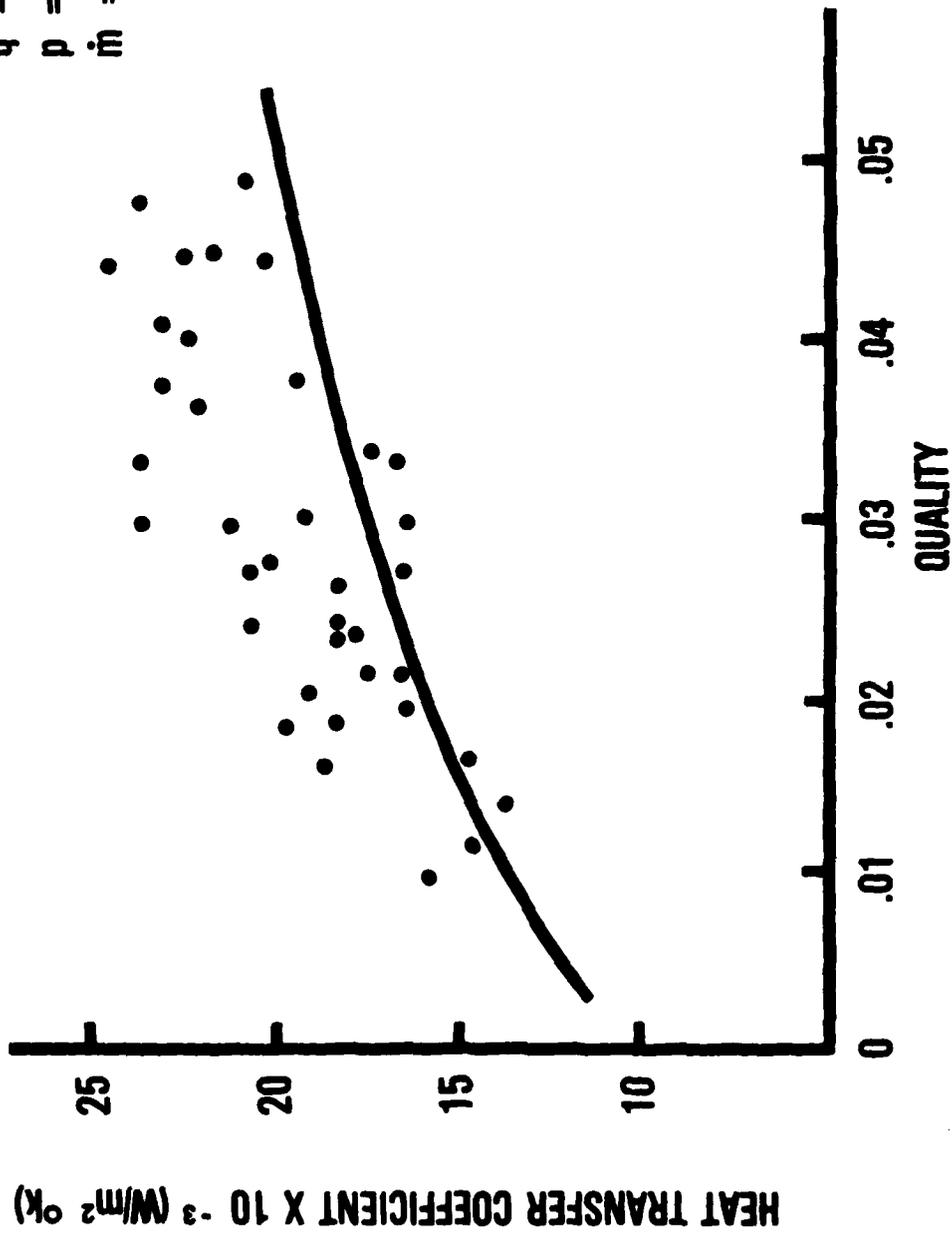


Figure 10: Heat-transfer coefficient versus quality for low heat-flux, low-quality boiling. Data from Reference 23

7

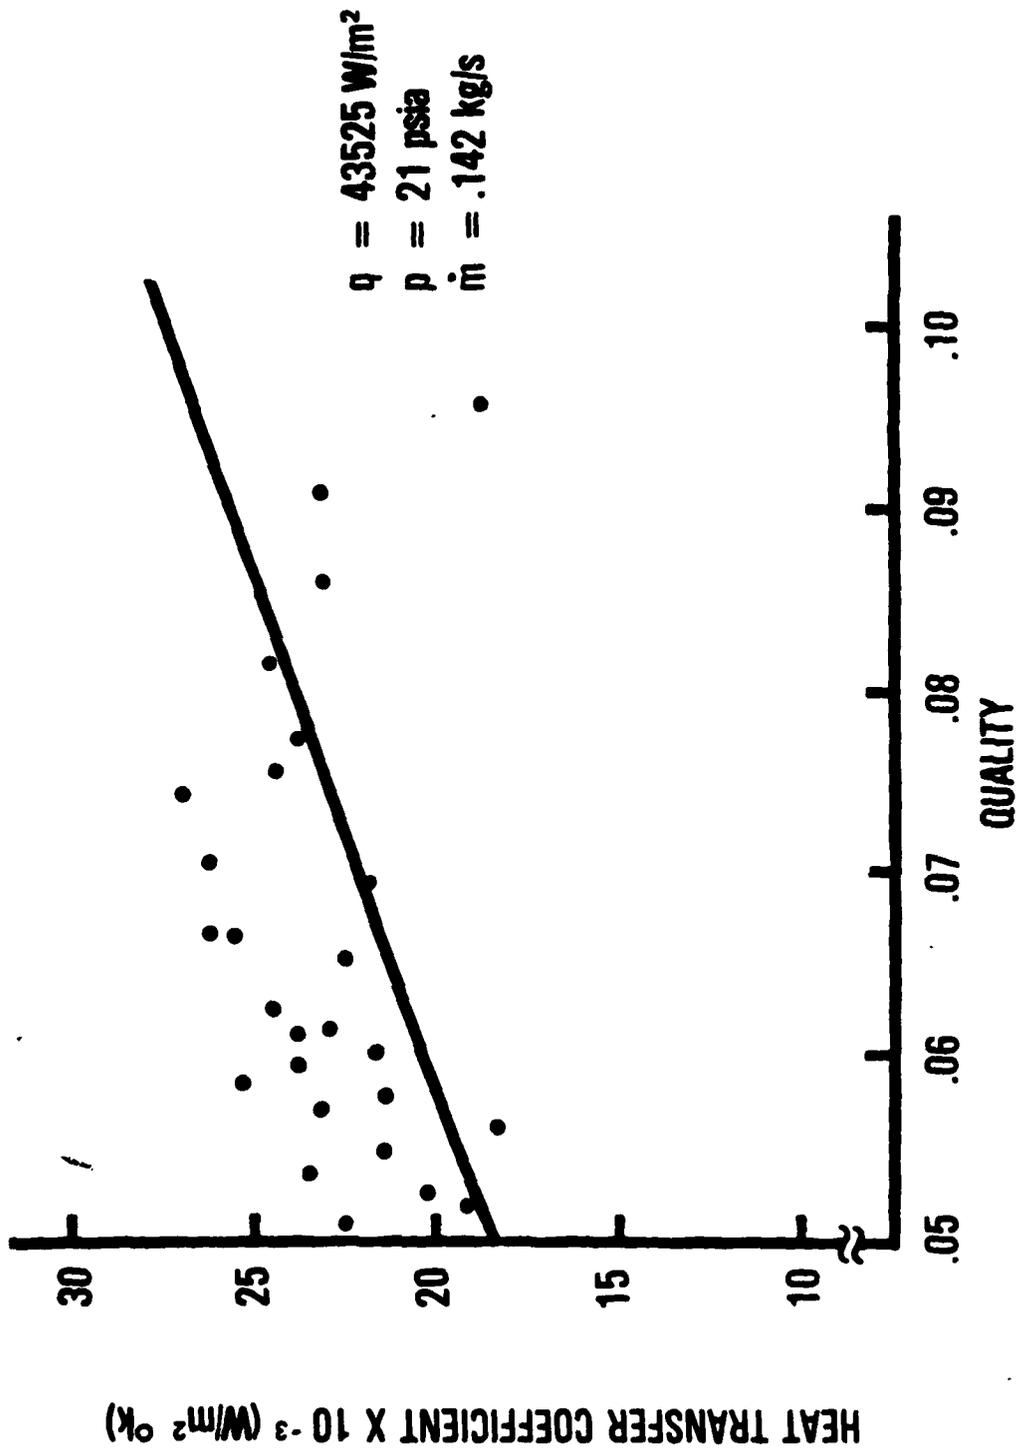


Figure 11: Heat-transfer coefficient versus quality for low heat-flux, high-quality boiling. Data from Reference 23

7


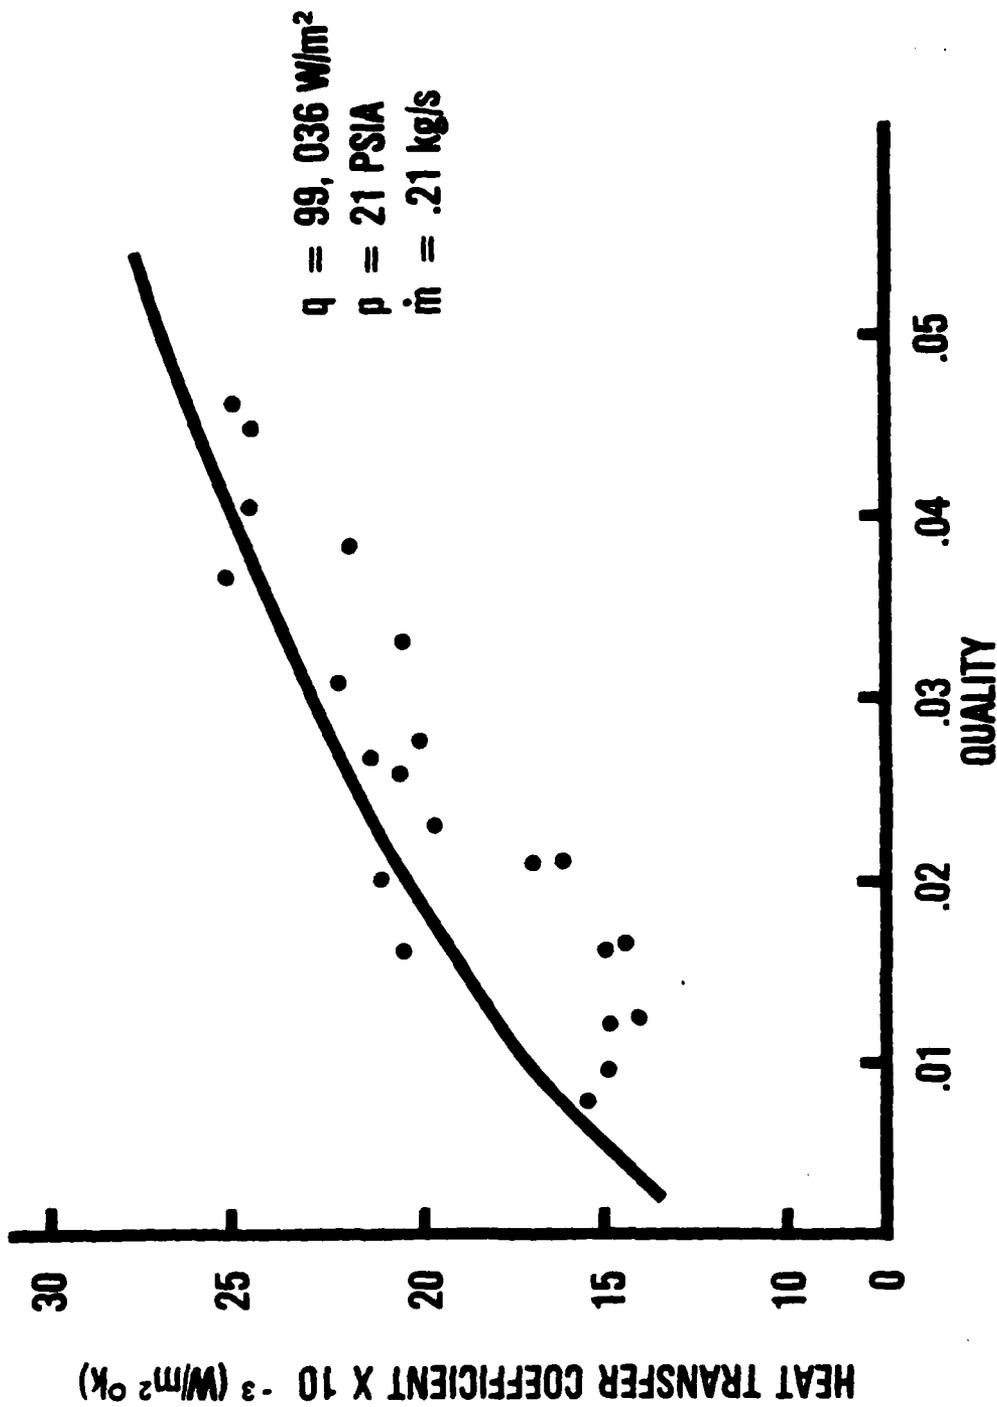


Figure 12: Heat-transfer coefficient versus quality for high heat-flux, low-quality boiling. Data from Reference 23.

HEAT TRANSFER COEFFICIENT - X 10⁻³ (W/m² °K)

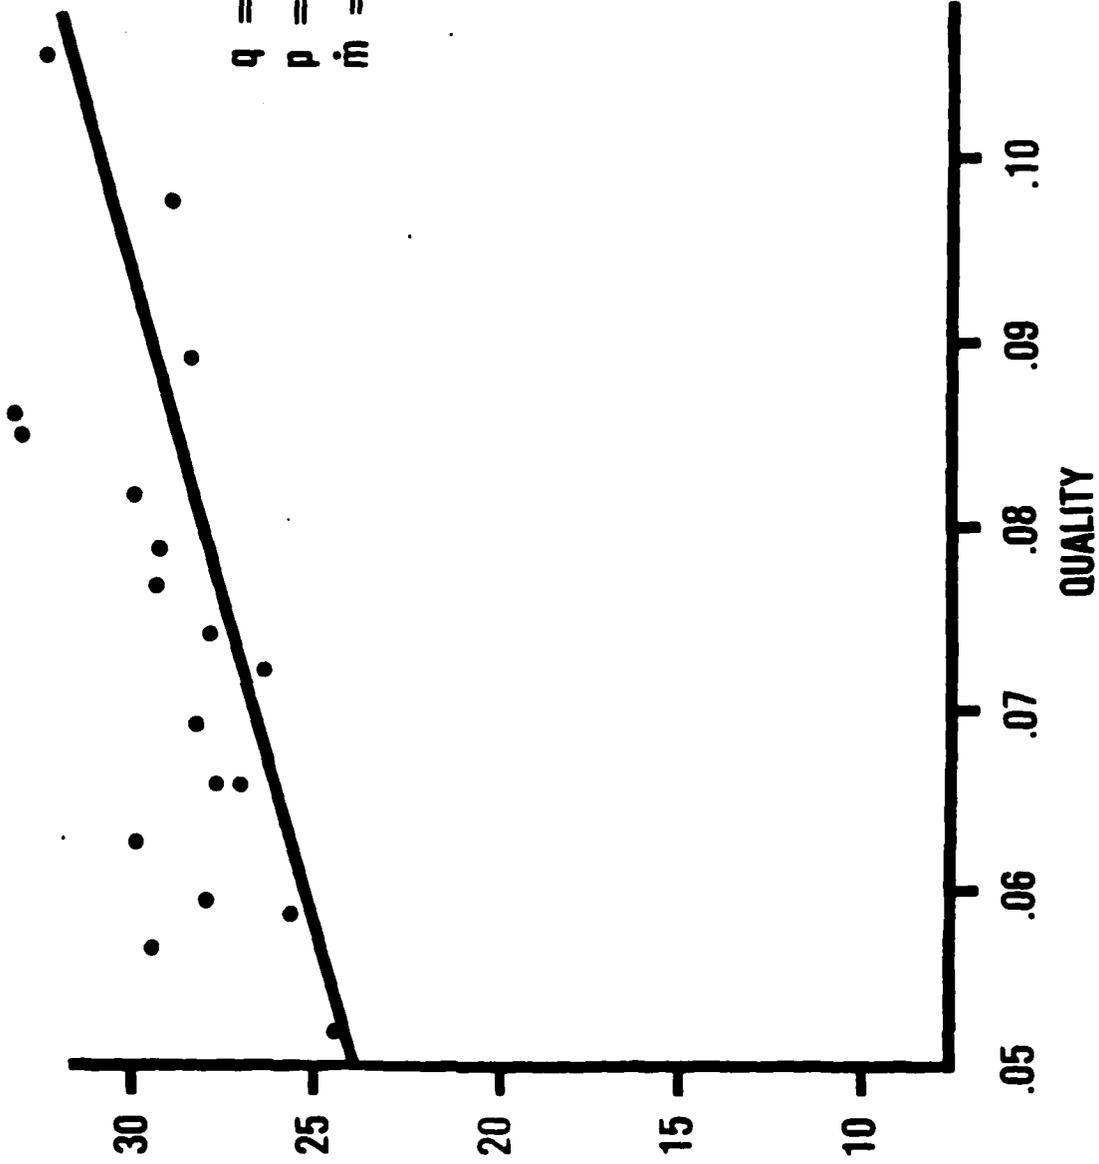

$q = 99,036 \text{ W/m}^2$
 $p = 21 \text{ psia}$
 $\dot{m} = .142 \text{ kg/s}$

Figure 13: Heat-transfer coefficient versus quality for high heat-flux, high-quality boiling. Data from Reference 23.

where u_{tw} is the tangential velocity at the tube wall. u_{tw} can be calculated from:

$$u_{tw} = \frac{2\pi}{60} r(\text{RPM}) \quad (\text{V-8})$$

where:

$$\text{RPM} = 15 \frac{u_a}{Yr} \quad (\text{V-9})$$

u_a is the axial velocity and Y is the number of diameters per 180-degree twist (twist ratio). Therefore:

$$a_{tang} = \frac{2.47}{r} \left(\frac{u_a}{Y} \right)^2 \quad (\text{V-10})$$

Setting a_{tang} equal to g :

$$\frac{8\sigma}{\rho_l r^2} = \frac{2.47}{r} \left(\frac{u_a}{Y} \right)^2$$

or

$$Y = \frac{0.31\rho_l r}{\sigma} u_a \quad (\text{V-11})$$

The Y value calculated for the experiment with a mass-flow rate of 5×10^{-3} kg/s and an evaporator diameter of 0.25 inches was 0.66. All attempts to make a twisted ribbon with this twist ratio, with the facilities available, failed. Therefore, this method could not be experimentally verified.

PRESSURE-DROP CALCULATION

In a report published by Bae et al.^[24] the pressure gradient in a tube for two-phase flow is:

$$\frac{dP}{dz} = \left(\frac{dP}{dz}\right)_{\text{frict}} + \left(\frac{dP}{dz}\right)_{\text{mom}} + \left(\frac{dP}{dz}\right)_{\text{grav}} \quad (\text{V-12})$$

where $dP/dz)_{\text{frict}}$ is the frictional-pressure gradient, $dP/dz)_{\text{mom}}$ is the pressure gradient due to a change in momentum as the liquid changes to a vapor, and $dP/dz)_{\text{grav}}$ is the gravitational-pressure gradient. The frictional-pressure gradient can be calculated with:

$$\begin{aligned} \left(\frac{dP}{dz}\right)_{\text{frict}} = & \frac{2G^2}{\rho_v d g_c} \left\{ 0.045 \left(\frac{Gd}{\mu_v}\right)^{-0.2} \left[x^{1.8} + 5.7 \left(\frac{\mu_l}{\mu_v}\right)^{0.0523} \right. \right. \\ & \left. \left. x (1-x)^{0.47} x^{1.33} \left(\frac{\rho_v}{\rho_l}\right) + 8.11 \left(\frac{\mu_l}{\mu_v}\right) \right. \right. \\ & \left. \left. x (1-x)^{0.94} x^{0.86} \left(\frac{\rho_v}{\rho_l}\right)^{0.522} \right] \right\} \quad (\text{V-13}) \end{aligned}$$

The momentum-pressure gradient can be found with:

$$\begin{aligned} \left(\frac{dP}{dz}\right)_{\text{mom}} = & \frac{2G^2}{\rho_v d g_c} \left\{ \frac{1}{2} \frac{dx}{dz} \left[2(1-x) \left(\frac{\rho_v}{\rho_l}\right)^{2/3} + \left(\frac{1}{x} - 3 + 2x\right) \right. \right. \\ & \times \left(\frac{\rho_v}{\rho_l}\right)^{4/3} + (2x - 1 - 8x) \left(\frac{\rho_v}{\rho_l}\right)^{1/3} \\ & \left. \left. + \left(2\beta - \frac{\beta}{x} - 8x\right) \left(\frac{\rho_v}{\rho_l}\right) \right] \right\} \end{aligned} \quad (\text{V-14})$$

And the gravitational-pressure gradient can be found with:

$$\left(\frac{dP}{dz}\right)_{\text{grav}} = g(\rho_l - \rho_v) \frac{dy}{dz} \quad (\text{V-15})$$

where dy is the differential vertical drop.

These equations were programmed into a computer routine and compared with data from the experimental apparatus. The equations predicted a good, average, pressure drop. However, the accuracy of the equations could not be measured because of the severe pressure fluctuations encountered in the test section.

VI EVAPORATOR DESIGN PROGRAM

The methods outlined in section V were used to develop a program to design straight-tube evaporators for electronics cooling at 10°C using either ammonia or freon-11 or at 100°C using water. Other fluids can be used, but require the addition of their fluid properties to the program. The user of the program chooses a working fluid, and supplies the total power, diameter of the tube, inlet temperature, allowable maximum temperature of wall, and the exit quality or the mass-flow rate. The program then calculates the mass-flow rate needed or the exit quality, whether it is possible to design an evaporator with the given inputs, the lengths of the one-phase, subcooled, and two-phase sections and the total length, the wall-temperature differences for each section, the average, heat-transfer coefficient for each section, the pressure drop for each section, and the total pressure drop.

To calculate the length of an evaporator, the following methods can be used. For an evaporator subjected to a constant heat flux, the incipient-boiling point must be calculated first using equation V-4. Then h_{op} and h_{tp} are calculated using equations IV-27, IV-23, IV-24 and V-1. And finally, using the allowable ΔT , average h_{tp} , Q , and d , the length can be found. For an evaporator subjected to a constant wall temperature, calculate the average two-phase heat-transfer coefficient using equations IV-23, IV-24, and V-1. Since on-phase heat-transfer cannot occur, this will be the average heat-transfer coefficient for the entire tube. Next, calculate the heat flux using the given wall temperature. And finally, calculate the length. The pressure drop can be calculated using equation V-12.

Several sample runs are shown on the following pages and a listing of the computer program is shown in the appendices.

Example 1: Water

ENTER FLUID: WATER(1),AMMONIA(2),F-11(3)1
ENTER POWER (W) >>1000
ENTER DIAMETER (M) >>1.27E-2
ENTER INLET TEMPERATURE (K) >>363.0
ENTER DELTA T (K) >>10
DO YOU WANT TO ENTER EXIT QUALITY (1) OR FLOW RATE (2)?>>1
EXIT QUALITY FRACTION >>.8

THE MASS FLOW RATE IS 0.5408E-03(kg/s)

INITIAL FLOW IS LAMINAR

BOILING STARTS IMMEDIATELY

	ONE-PHASE	SUBCOOL BOILING	TWO-PHASE	TOTAL
LENGTH (m)	0.0000E+00	0.4014E-02	0.1697	0.1737
DELTA T (K)	0.0000E+00	18.74	10.00	
h (W/m ² K)	233.6	7703.	0.1443E+05	
DELTA P (PSI)	0.0000E+00	0.1441E-06	0.3694E-02	0.3694E-02

Example 2: Ammonia

ENTER FLUID: WATER(1),AMMONIA(2),F-11(3)2
ENTER POWER (W) >>1000
ENTER DIAMETER (M) >>1.27E-2
ENTER INLET TEMPERATURE (K) >>273
ENTER DELTA T (K) >>10
DO YOU WANT TO ENTER EXIT QUALITY (1) OR FLOW RATE (2)?>>1
EXIT QUALITY FRACTION >>.8

THE MASS FLOW RATE IS 0.9731E-03(kg/s)

INITIAL FLOW IS LAMINAR

BOILING STARTS IMMEDIATELY

	ONE-PHASE	SUBCOOL BOILING	TWO-PHASE	TOTAL
LENGTH (m)	0.0000E+00	0.1626E-01	0.3433	0.3596
DELTA T (K)	0.0000E+00	10.93	10.00	
h (W/m ² K)	100.3	6377.	6970.	
DELTA P (PSI)	0.0000E+00	0.1352E-05	0.1591E-02	0.1593E-02

Example 3: Freon-11

ENTER FLUID: WATER(1),AMMONIA(2),F-11(3)3
ENTER POWER (W) >>1000
ENTER DIAMETER (M) >>1.27E-2
ENTER INLET TEMPERATURE (K) >>273
ENTER DELTA T (K) >>15
DO YOU WANT TO ENTER EXIT QUALITY (1) OR FLOW RATE (2)?>>1
EXIT QUALITY FRACTION >>.8

THE MASS FLOW RATE IS 0.6377E-02(kg/s)

INITIAL FLOW IS LAMINAR

BOILING STARTS IMMEDIATELY

	ONE-PHASE	SUBCOOL BOILING	TWO-PHASE	TOTAL
LENGTH (m)	0.0000E+00	0.1967E-01	0.3397	0.3593
DELTA T (K)	0.0000E+00	17.98	15.00	
h (W/m ² K)	35.73	3880.	4650.	
DELTA P (PSI)	0.0000E+00	0.9424E-05	0.8642E-01	0.8643E-01

Example 4: Subcooled Water

ENTER FLUID: WATER(1),AMMONIA(2),F-11(3)1
ENTER POWER (W) >>500
ENTER DIAMETER (M) >>1.27E-2
ENTER INLET TEMPERATURE (K) >>330
ENTER DELTA T (K) >>15
DO YOU WANT TO ENTER EXIT QUALITY (1) OR FLOW RATE (2)?>>2
ENTER MASS FLOW RATE (kg/s) >>6.0E-3

ENTIRE SECTION IS SUBCOOLED

VII CONCLUSIONS

1. From the review of the forced-convective boiling process:
 - 1a. The gravitational acceleration has very little effect in the subcooled-boiling and two-phase, forced-convective region. Therefore, the lack of a gravitational acceleration (0-g) should not affect the calculation of local heat-transfer coefficients.
 - 1b. The gravitational acceleration does affect the saturated nucleate-boiling region. However, since the gravitational effect tends to balance out around the circumference of the tube and since this region is generally very short, the use of equations developed for 1-g accelerations can be used to calculate the local heat-transfer coefficient without much loss of accuracy.
2. From the flow-visualization study, placing a twisted-tape insert into the evaporator should stabilize the flow by inducing a large centrifugal acceleration which prevents slug flow from occurring. The twist ratio must be large enough to ensure stratified flow under all conditions. This twist ratio can be calculated using equation V-11.
3. The length of a straight-tube evaporator can be calculated for a constant heat flux or a constant wall temperature by using the methods developed in this study and summarized in Section VI.

REFERENCES

1. Military Space Systems Technology Model, 2nd ed., SD-TR-83-01
2. Mehefky, T., "Military Spacecraft Thermal Management; The Evolving Requirements and Challenges", AIAA 82-0827
3. Jiji, L.M., and Clark, J.A., "Incipient Boiling in Forced Convection Channel Flow" ASME Paper 62-WA-202 (1962).
4. Hsu, S.T., and Ing. P.W., "Experiments in Forced Convection Subcooled Nucleate Boiling Heat Transfer", ASME Paper 62-HT-38, (1962).
5. Eastman, R.E., Feldmanis, C.J., Haskin, W.L., and Weaver, K.L., "Two-Phase Fluid Thermal Transport for Spacecraft", AFWAL TR 84-3028 (1984).
6. Collier, J.G., Convective Boiling and Condensation, McGraw Hill Book Co. (1972).
7. Davis, E.J., and Anderson, G.H., "The Incipience of Nucleate Boiling in Forced Convection Flow", A.I. Ch. E. Journal, 12, (4) 774-780, (July 1966).
8. Frost, W., and Dzakowic, G.S., "An Extension of the Method of Predicting Incipient Boiling on Commercially Finished Surfaces", ASME Paper 67-HT-61 (1967).

9. Brown, W.T., "A Study of Flow Surface Boiling", Ph. D. Thesis, M.I.T. Mechanical Engineering Department (Jan 1967).
10. Myers, J.E., and Katz, D.B., Chemical Engineering Program Symposium, Ser. No. 5., 49, 107, (1953).
11. Lavin, J.G., and Young, E.H., "Heat Transfer to Evaporating Refrigerants in Two-Phase Flow". A.I. Ch. E. Journal, VOL. II, No. 6. pp. 1124-1132, (Nov 1965).
12. McAdams, W.H., "Heat Transmission", McGraw-Hill Publishing Co. (1954).
13. McNelly, M.J., "A Correlation of the Rates of Heat Transfer to Nucleate Boiling Liquids," J. Imp. Coll. Chem. Eng. Soc., 7 19 (1953).
14. Dengler, C.E., and Addoms, J.N., "Heat Transfer Mechanism for Vaporization of Water in a Vertical Tube", Chemical Engineering Program Symposium Series, No. 18, VOL. 52 (18), pp. 95-103 (1956).
15. Guerrieri, S.A., and Talty, R.D., "A Study of Heat Transfer to Organic Liquids in Single Tube, Natural Circulation Vertical Tube Boilers", Chemical Engineering Program Symposium Series: Heat Transfer, No 18, VOL. 52, pp. 69-77 (1956).

16. Bennett, J.A.R., Collier, J.G., Pratt, H.R.C., and Thorton, J.D., "Heat Transfer to Two-Phase Gas-Liquid Systems, Part I: Steam/Water Mixtures in the Liquid Dispersed Region in an Annulus", Trans. Inst. Chemical Engineers, 39, 113 (1961).
17. Chen, J.C., "A Correlation for Boiling Heat Transfer to Saturated Fluids in Convective Flow", ASME Paper 63-HT-34 (1963).
18. Bjorge, R.W., Hall, G.R., and Rohsenow, W.M., "Correlations of Forced Convection Boiling Heat Transfer Data", Int. J. of Heat and Mass Transfer, VOL. 25, No. 6 Pages 753-758 (June 1982).
19. Traviss, D.P., Rohsenow, W.M., and Baron, A.B., "Forced Convection Condensation Inside Tubes: A Heat Transfer Equation for Design", ASHRAE Reprint No. 2272 RP-63 (1972).
20. Hall, G.R., "Method of Correlating Forced Convection Boiling Heat Transfer Data", Ocean Engineering and SM Thesis in Mechanical Engineering, Massachusetts Institute of Technology (1977).
21. Cheng, S.C., Ng, W.W.L., and Heng, K.T., "Measurements of Boiling Curves of Subcooled Water Under Forced Convective Conditions", Int. J. Heat Mass Transfer, VOL. 21, pp. 1385 (1978).

22. Latsch, K., Morell, F., and Rampg, H., "Subcooled Forced Convection Boiling Heat Transfer at Subatmospheric Pressure", Proc. Sixth Int. Heat Transfer Conference, VOL. I, pp. 287-292, (1978).
23. Wright, R.M., "Down Flow Forced Convection Boiling of Water in Uniformly Heated Tubes", UCRL-9744 (1961).
24. Bae, S., Maulbetsch, J.S., Rohsenow, W.M., "Refrigerant Force-Convection Condensation Inside Horizontal Tubes", Report No. DSR 79760-59, Contract No. ASHRAE RP63 (1 Nov 68).

APPENDIX A

This appendix shows how the calculations were done to obtain the solid lines on the graphs. More specifically sample calculations are shown for Figures 8, 9, and 10. In addition, a sample twist ratio calculation is done.

SAMPLE CALCULATION: Subcooled Boiling, Figure 8

Data:

$k = 0.68 \text{ W/m K}$	$\mu = 2.8 \times 10^{-4} \text{ kg/m s}$
$\rho_l = 958.0 \text{ kg/m}^3$	$\sigma = 5.89 \times 10^{-2} \text{ N/m}$
$\rho_v = 0.6 \text{ kg/m}^3$	$d = 1.27 \times 10^{-2} \text{ m}$
$h_{fg} = 2.258 \times 10^6 \text{ J/kg}$	$C_p = 4.21 \times 10^3 \text{ J/kg K}$
$P = 1.014 \times 10^5 \text{ N/m}^2$	$\Delta T_{sat} = 30 \text{ C}$

Equation:

$$h_{NB} = 0.25 \left(\frac{k}{d} \right) \left(\frac{q d}{h_{fg} \mu} \right)^{0.69} \left(\frac{C_p \mu}{k} \right)^{0.69} \left(\frac{P d}{\sigma} \right)^{0.31} \\ \times \left(\frac{\rho_l}{\rho_v} - 1 \right)^{0.31}$$

Calculation:

$$h_{NB} = 0.25 \left(\frac{0.68 \text{ W/m K}}{1.27 \times 10^{-2} \text{ m}} \right) \left(\frac{q (1.27 \times 10^{-2} \text{ m})}{(2.258 \times 10^6 \text{ J/kg}) (2.8 \times 10^{-4} \text{ kg/ms})} \right)^{0.69} \\ \times \left(\frac{(4.21 \times 10^3 \text{ J/kgK}) (2.8 \times 10^{-4} \text{ kg/ms})}{0.68 \text{ W/mK}} \right)^{0.69} \\ \times \left(\frac{(1.014 \times 10^5 \text{ N/m}^2) (1.27 \times 10^{-2} \text{ m})}{5.89 \times 10^{-2} \text{ N/m}} \right)^{0.31} \\ \times \left(\frac{958.0 \text{ kg/m}^3}{0.6 \text{ kg/m}^3} - 1 \right)^{0.31}$$

$$h_{NB} = 2.45 q^{0.69} \text{ W/m}^2 \text{ K}$$

$$q = h_{NB} \Delta T_{sat}$$

$$q = 18.07(30)^{3.23}$$

$$q = 1.06 \times 10^6 \text{ W/m}^2$$

SAMPLE CALCULATION: Subcooled Boiling, Figure 9

One-Phase Forced Convection:

Data:	$T_w - T_{FL} = 60 \text{ K}$	$\rho_l = 983.3 \text{ kg/m}^3$
	$T_{FL} = 30 \text{ C}$	$\mu = 4.71 \times 10^{-4} \text{ kg/m s}$
	$u = 0.5 \text{ m/s}$	$k = 0.654 \text{ W/m K}$
	$d = 1.2 \times 10^{-2} \text{ m}$	$Pr = 3.01$

Equation:

$$h_{FC} = 0.23 Re^{0.8} Pr^{0.4} \frac{k}{d}$$

Calculation:

$$T_{ref} = \frac{T_w + T_{FL}}{2} = \frac{90 + 30}{2} = 60 \text{ C}$$

$$Re = \frac{\rho u d}{\mu} = \frac{(983.3 \text{ kg/m}^3)(0.5 \text{ m/s})(1.2 \times 10^{-2} \text{ m})}{4.71 \times 10^{-4} \text{ kg/m s}}$$

$$Re = 1.253 \times 10^4$$

$$h_{FC} = 0.023 (1.253 \times 10^4)^{0.8} (3.01)^{0.4} \frac{0.654 \text{ W/mK}}{1.2 \times 10^{-2} \text{ m}}$$

$$h_{FC} = 3697 \text{ W/m}^2 \text{ K}$$

$$q = h_{FC} \Delta T$$

$$q = (3697 \text{ W/m}^2 \text{ K})(60 \text{ K}) = 2.22 \times 10^5 \text{ W/m}^2$$

Incipient Boiling Point:

Data: $k_l = 0.68 \text{ W/m K}$ $\sigma = 5.89 \times 10^{-2} \text{ N/m}$
 $\rho_l = 958.0 \text{ kg/m}^3$ $Pr = 1.66$
 $h_{fg} = 2.258 \times 10^6 \text{ J/kg}$ $v_{fg} = 1.6719 \text{ m}^3/\text{kg}$
 $\mu = 2.8 \times 10^{-4} \text{ kg/m s}$ $d = 1.2 \times 10^{-2} \text{ m}$

Equation:

$$\Delta T_{\text{sat, IB}} = \frac{8\sigma T_{\text{sat}} v_{fg} h_{FC}}{k_l h_{fg}} (Pr)^2$$

Calculation:

$$Re = \frac{\rho_l v d}{\mu} = \frac{(958 \text{ kg/m}^3)(0.5 \text{ m/s})(1.2 \times 10^{-2} \text{ m})}{2.8 \times 10^{-4} \text{ kg/m s}}$$

$$Re = 2.053 \times 10^4$$

$$h_{FC} = 0.023 Re^{0.8} Pr^{0.4} \frac{k}{d}$$

$$h_{FC} = 0.023 (2.053 \times 10^4)^{0.8} (1.66)^{0.4} \frac{0.68 \text{ W/mK}}{1.2 \times 10^{-2} \text{ m}}$$

$$h_{FC} = 4498 \text{ W/m}^2\text{K}$$

$$\Delta T_{\text{sat, IB}} = \frac{(8)(5.89 \times 10^{-2} \text{ N/m})(373 \text{ K})(1.6719 \text{ m}^3/\text{kg})}{(0.68 \text{ W/mK})(2.258 \times 10^6 \text{ J/kg})}$$

$$\times (4447 \text{ W/m}^2\text{K})(1.66)^2$$

$$\Delta T_{\text{sat, IB}} = 2.37 \text{ K}$$

Subcooled Boiling:

Data: $\rho_v = 0.6 \text{ kg/m}^3$ $P = 2 \times 10^5 \text{ N/m}^2$
 $C_p = 4.21 \times 10^3 \text{ J/kg K}$ $\Delta T_{\text{sat}} = 20 \text{ K}$

Equation:

$$h_{NB} = 0.25 \frac{k}{d} \left(\frac{qd}{h_{fg}\mu} \right)^{0.69} \left(\frac{Cp\mu}{k} \right)^{0.69} \left(\frac{Pd}{\sigma} \right)^{0.31} \\ \times \left(\frac{\rho_l}{\rho_v} - 1 \right)^{0.31}$$

$$h_{NB} = 0.25 \left(\frac{0.68 \text{ W/mK}}{1.2 \times 10^{-2} \text{ m}} \frac{q(1.2 \times 10^{-2} \text{ m})}{(2.258 \times 10^6 \text{ J/kg})(2.8 \times 10^{-4} \text{ kg/ms})} \right)^{0.69} \\ \times \left(\frac{(4.21 \times 10^3 \text{ J/kgK})(2.8 \times 10^{-4} \text{ kg/ms})}{0.68 \text{ W/mK}} \right)^{0.69} \\ \times \left(\frac{(2 \times 10^5 \text{ N/m}^2)(1.2 \times 10^{-2} \text{ m})}{5.89 \times 10^{-2} \text{ N/m}} \right)^{0.31} \left(\frac{958 \text{ kg/m}^3}{0.6 \text{ kg/m}^3} - 1 \right)^{0.31}$$

$$h_{NB} = 3.02q^{0.69}$$

$$q = h_{NB} \Delta T_{sat}$$

$$q = 3.02q^{0.69} \Delta T_{sat}$$

$$q = 35.4 \Delta T_{sat}^{3.23}$$

$$q = 35.4(20 \text{ K})^{3.23} = 5.65 \times 10^5 \text{ W/m}^2$$

SAMPLE CALCULTION: Forced-Convective Boiling Figure 10

Data:

$$k = 0.68 \text{ W/m K}$$

$$h_{fg} = 2.258 \times 10^6 \text{ J/kg}$$

$$\rho_l = 958 \text{ kg/m}^3$$

$$Cp = 4.21 \times 10^3 \text{ J/kg K}$$

$$\rho_v = 0.6 \text{ kg/m}^3$$

$$\sigma = 5.89 \times 10^{-2} \text{ N/m}$$

$$\mu_l = 2.8 \times 10^{-4} \text{ kg/m s}$$

$$\mu_v = 1.27 \times 10^{-5} \text{ kg/m s}$$

$$d = 1.91 \times 10^{-2} \text{ m} \quad q = 43525 \text{ W/m}^2$$

$$P = 1.45 \times 10^5 \text{ N/m}^2 \quad Pr = 1.66$$

$$v_{fg} = 1.67 \text{ m}^3/\text{kg} \quad x = 0.03$$

Equations:

$$h_{NB} = 0.25 \frac{k}{d} \left(\frac{qd}{h_{fg}\mu} \right)^{0.69} \left(\frac{C_{pu}}{k} \right)^{0.69} \left(\frac{Pd}{\sigma} \right)^{0.31} \left(\frac{\rho_l}{\rho_v} - 1 \right)^{0.31}$$

$$\Delta T_{sat, IB} = \frac{8\sigma T_{sat} v_{fg} h_{FC}}{k_l h_{fg}} (Pr)^2$$

$$h_{FC} = 0.023 Re^{0.8} Pr^{0.4} \frac{k}{d} \quad (\text{one-phase})$$

$$q_{FC} = \frac{Re_l^{0.9} Pr_l F(X_{tt}) k_l}{F_2 d} \Delta T_{sat} \quad (\text{two-phase})$$

$$F(X_{tt}) = 0.15 \left(\frac{1}{X_{tt}} + 2.0 \frac{1}{X_{tt}^2} \right)^{0.32}$$

$$q = q_{FC} + q_{NB} \left(1 - \left(\frac{\Delta T_{sat, IB}}{\Delta T_{sat}} \right)^3 \right)$$

$$q = q_{FC} + Cq^{0.69} \Delta T_{sat} \left(1 - \left(\frac{\Delta T_{sat, IB}}{\Delta T_{sat}} \right)^3 \right)$$

Calculations:

$$Re = \frac{\dot{m}d}{A\mu} = \frac{(.21 \text{ kg/s})(1.91 \times 10^{-2} \text{ m})}{\pi/4 (1.91 \times 10^{-2} \text{ m})^2 (2.8 \times 10^{-4} \text{ kg/ms})}$$

$$Re = 5 \times 10^4$$

$$h_{FC} = 0.023 (5 \times 10^4)^{0.8} (1.66)^{0.4} \frac{0.68 \text{ W/mK}}{1.91 \times 10^{-2} \text{ m}}$$

$$h_{FC} = 5760 \text{ W/m}^2\text{K}$$

$$\Delta T_{\text{sat, IB}} = \frac{(8)(5.89 \times 10^{-2} \text{ N/m})(373 \text{ K})(1.67 \text{ m}^3/\text{kg})}{(0.68 \text{ W/mK})(2.758 \times 10^6 \text{ J/kg})}$$

$$\times (5760 \text{ W/m}^2 \text{ K})(1.66)^2 = 2.71 \text{ K}$$

$$h_{\text{NB}} = 0.25 \left(\frac{(q)(0.68 \text{ W/mK})}{(2.258 \times 10^6 \text{ J/kg})(2.8 \times 10^{-4} \text{ kg/ms})} \right)^{0.69}$$

$$\times \left(\frac{(4.21 \times 10^3 \text{ J/kgK})(2.8 \times 10^{-4} \text{ kg/ms})}{0.68 \text{ W/mK}} \right)^{0.69}$$

$$\times \left(\frac{(1.45 \times 10^5 \text{ N/m}^2)(1.91 \times 10^{-2} \text{ m})}{5.89 \times 10^{-2} \text{ N/m}} \right)^{0.31}$$

$$\times \left(\frac{958 \text{ kg/m}^3}{0.6 \text{ kg/m}^3} - 1 \right)^{0.31}$$

$$h_{\text{NB}} = 2.735 q^{0.69} = 2.735 (43525 \text{ W/m}^2)^{0.69}$$

$$h_{\text{NB}} = 4341 \text{ W/m}^2 \text{ K}$$

$$X_{\text{tt}} = \left(\frac{0.6 \text{ kg/m}^3}{958 \text{ kg/m}^3} \right)^{0.5} \left(\frac{2.8 \times 10^{-4} \text{ kg/ms}}{1.27 \times 10^{-3} \text{ kg/ms}} \right)^{0.1} \left(\frac{1-0.03}{0.03} \right)^{0.9}$$

$$X_{\text{tt}} = 0.7788$$

$$\text{Re}_l = \text{Re}(1-x) = 4.85 \times 10^5$$

$$F(X_{\text{tt}}) = 0.15 \left(\frac{1}{.7788} + 2.0 \frac{1}{.7788} \right)^{0.32}$$

$$F(X_{\text{tt}}) = 0.5176$$

$$F_2 = 5(1.66) + 5 \ln(1 + 5(1.66)) + 2.5 \ln(0.0031)$$

$$\times (4.85 \times 10^4)^{0.812}$$

$$F_2 = 26.91$$

$$q_{FC} = \frac{(4.85 \times 10^4)^{0.9} (1.66) (.5176) (.068 \text{ W/mK}) \Delta T_{\text{sat}}}{(26.91) (1.91 \times 10^{-2} \text{ m})}$$

$$q_{FC} = 18743 \Delta T_{\text{sat}}$$

$$q = 43525 = 18743 \Delta T_{\text{sat}} + 4341 \Delta T_{\text{sat}} \left(1 - \frac{2.71}{\Delta T_{\text{sat}}}\right)^3$$

$$\Delta T_{\text{sat}} = 2.49 \text{ K}$$

since $\Delta T_{\text{sat,IB}} = 2.71 > \Delta T_{\text{sat}}$, boiling is suppressed and $q = q_{FC}$.

Therefore:

$$h = 18743 \text{ W/m}^2\text{K}$$

SAMPLE CALCULATION: Twist Ratio

Data:	$\dot{m} = 5 \times 10^{-3} \text{ kg/s}$	$d = 0.25 \text{ in} = 6.35 \times 10^{-3} \text{ m}$
	$\rho_l = 955 \text{ kg/m}^3$	$\sigma = 5.89 \times 10^{-2} \text{ N/m}$

Equation:

$$Y = \left(\frac{0.31 \rho_l r}{\sigma}\right)^{\frac{1}{2}} u_a$$

Calculation:

$$u_a = \frac{\dot{m}}{\rho A} = \frac{5 \times 10^{-3} \text{ kg/s}}{(955 \text{ kg/m}^3) (\pi/4 (6.35 \times 10^{-3} \text{ m})^2)}$$

$$u_a = 1.65 \times 10^{-1} \text{ m/s}$$

$$Y = \left(\frac{(0.31)(955 \text{ kg/m}^3)(6.35 \times 10^{-3} \text{ m})}{(2)(5.89 \times 10^{-2} \text{ N/m})} \right)^{1/2} 1.65 \times 10^{-1} \text{ m/s}$$

$\gamma = 0.66$ diameters/180 degree twist

APPENDIX B

This appendix is a listing of the straight-tube evaporator design program. It is explained in section VI and several sample runs are shown on pages 55-58.

```

PROGRAM EVAPD
DIMENSION X(25),HBH(25),DTBH(25),HTP(25)

```

```

C
C*****

```

```

C
C This program designs an evaporator given a constant heat flux
C
C*****

```

```

C This is the data section

```

```

DATA GR,IMAX,ERC/9.8,20,.036/
CALL ASSIGN(60,'TT:',3)
CALL ASSIGN(6,'TT:',3)
WRITE (60,7)

```

```

7 FORMAT(1H , 'ENTER FLUID: WATER(1),AMMONIA(2),F-11(3)', $)
READ (6,*) IFLD
IF (IFLD.EQ.1) GO TO 1
IF (IFLD.EQ.2) GO TO 2
IF (IFLD.EQ.3) GO TO 3

```

```

C
1 CALL H2O(TS,PR,XMUL,XMUV,HFG,RHOL,RHOV,CPL,SIG,VFG,XKL,P)
GO TO 6
2 CALL AM(TS,PR,XMUL,XMUV,HFG,RHOL,RHOV,CPL,SIG,VFG,XKL,P)
GO TO 6
3 CALL F11(TS,PR,XMUL,XMUV,HFG,RHOL,RHOV,CPL,SIG,VFG,XKL,P)
GO TO 6

```

```

C
C The symbols in the data section are:TS=saturation temperature,GR=
C gravitational acceleration,PR=Prandtl number,XMUL=liquid viscosity,
C XMUV=vapor viscosity,HFG=specific heat of vaporization,RHOL=liquid
C density,RHOV=vapor density,CPL=liquid specific heat,SIG=surface
C tension,VFG=specific volume,IMAX=number of two-phase sections,XKL=
C liquid conductivity,ERC=friction coefficient

```

```

6 WRITE (60,10)
10 FORMAT(1H , 'ENTER POWER (W) >>', $)
READ (6,*) Q
WRITE (60,30)

```

```

30 FORMAT(1H , 'ENTER DIAMETER (M) >>', $)
READ (6,*) D
WRITE (60,60)

```

```

60 FORMAT(1H , 'ENTER INLET TEMPERATURE (K) >>', $)
READ (6,*) TI
IF (TI.GE.TS) GO TO 2120
WRITE (60,62)

```

```

-62 FORMAT(1H , 'ENTER DELTA T (K) >>', $)
READ (6,*) DELT
WRITE (60,65)

```

```

65 FORMAT(1H , 'DO YOU WANT TO ENTER EXIT QUALITY (1) OR
+ FLOW RATE (2)?>>', $)
READ(6,*) ID
IF (ID.EQ.1) GO TO 91
WRITE (60,90)

```

```

90  FORMAT(1H , 'ENTER MASS FLOW RATE (kg/s) >>', $)
    READ(6,*) XMD
    GO TO 99

91          WRITE (60,95)
95  FORMAT(1H , 'EXIT QUALITY FRACTION >>', $)
    READ(6,*) XE
    XMD=Q/(CPL*(TS-TI)+HEG*XE)
          WRITE (60,96) XMD
96  FORMAT(1H0, 'THE MASS FLOW RATE IS ', G10.4, '(kg/s)')
    GO TO 150
99  QOP=XMD*CPL*(TS-TI)
    IF (QOP.GE.Q) GO TO 2100
    XE=(Q-QOP)/(HEG*XMD)
    IF (XE.GT.1.0) GO TO 2000
          WRITE (60,101) XE
101  FORMAT(1H0, 'THE EXIT QUALITY IS ', G10.4)
C
C*****
C
C This section calculates the one-phase Reynolds number
C
C
150  G=XMD/(3.1416/4.0*(D**2))
    RE=G*D/XMUL
    T=2300
C
C Calculate the one-phase heat transfer coefficient
C
    CALL SHOP(RE,XKL,D,PR,HOP)
C
C Find the incipient boiling point
C
    CALL TIB(SIG,TS,VEG,XKL,HEG,HOP,DTIB)
C
C Find the amount of energy needed to reach saturation
C
    QSC=XMD*CPL*(TS-TI)
    IF (QSC.GE.Q) GO TO 2020
C
C This part divides the two-phase section into parts
C
    QTP=Q-QSC
    XMAX=1.0
    X(IMAX)=QTP/(XMD*HEG)
    IF(X(IMAX).GE.XMAX) GO TO 2000
    IMPO=IMAX+1
    DELX=X(IMAX)/IMAX
    X(1)=0.0
    DO 300 I=2,IMPO
    X(I)=X(I-1)+DELX
300  CONTINUE
C
C Calculate two-phase heat transfer coefficients
C

```

C Estimate the length

C

CALL SHMN(XKL,D,Q, XMUL, HEG, DELT, PR, RHOV, RHOL, P, SIG, HMN)
ZLTG=Q/(3.1416*D*HMN*DELT)

350 QOA=Q/(3.1416*D*ZLTG)

C

C Begin two-phase calculations

C

400 HTPA=0.0

DO 500 I=1, IMPO

CALL SHBH(DTIB, TS, X(I), XIA, XKL, D, Q, XMUL, XMUV, HEG, ZLTG,

* PR, RHOL, RHOV, P, SIG, HOP, RE, HBH(I))

HTPA=HTPA+HBH(I)

500 CONTINUE

HTPA=HTPA/IMPO

C

C Calculate lengths

C

ZLT=Q/(3.1416*D*HTPA*DELT)

QOA=Q/(3.1416*D*ZLT)

IF (ABS(ZLT-ZLTG).LE.0.01) GO TO 510

ZLTG=ZLT

GO TO 400

510 DTOP=QOA/HOP

ZLOP=CPL*XMD*(DTIB+TS-QOA/HOP-TI)/(QOA*3.1416*D)

IF (ZLOP.LE.0.0) GO TO 2040

ZLSCB=(TS-(DTIB+TS-QOA/HOP)*CPL*XMD)/(QOA*3.1416*D)

ZTEST=ZLOP+ZLSCB

IF (ZTEST.GE.ZLT) GO TO 535

GO TO 530

520 ZLSCB=(TS-TI)*XMD*CPL/(QOA*3.1416*D)

ZTEST=ZLOP+ZLSCB

IF (ZTEST.GE.ZLT) GO TO 535

530 ZLTP=ZLT-ZLOP-ZLSCB

GO TO 540

535 ZLIP=0.0

ZLSCB=ZLT-ZLOP

C

C Calculate delta wall temperature

C

540 DTSCB=QOA/HBH(1)

DTIP=QOA/HTPA

C

C Calculate pressure drops

C

CALL SDPOP(XMD, RHOL, D, XMUL, ZLOP, FRC, RE, T, DPOP, DPOPE)

CALL SDPOP(XMD, RHOL, D, XMUL, ZLSCB, FRC, RE, T, DPSC, DPSCE)

DELL=ZLTP/IMAX

CALL SDPTP(XMUL, XMUV, X, RHOL, RHOV, XMD, D, IMPO, VEG, DELL, DPTP)

DPTP=DPOPE+DPSCE+DPTP

C

C*****

C

C This section prints out the calculated values

```

C
C*****
C
      WRITE (60,1000)
1000  FORMAT(1H0,T20,'ONE-PHASE',T32,'SUBCOOL BOILING',T50,
      + 'TWO-PHASE',T62,'TOTAL')
      WRITE (60,1020) ZLOP,ZLSCB,ZLTP,ZLT
1020  FORMAT(1H0,'LENGTH (m)',T20,G10.4,T32,G10.4,T50,G10.4,T62,G10.4)
      WRITE (60,1040) DTOP,DTSCB,DTTP
1040  FORMAT(1H0,'DELTA T (K)',T20,G10.4,T32,G10.4,T50,G10.4)
      WRITE (60,1060) HOP,HBH(1),HTPA
1060  FORMAT(1H0,'h (W/m^2 K)',T20,G10.4,T32,G10.4,T50,G10.4)
      WRITE (60,1080) DPOPE,DPSCE,DPTP,DPTI
1080  FORMAT(1H0,'DELTA P (PSI)',T20,G10.4,T32,G10.4,
      + T50,G10.4,T62,G10.4)
      GO TO 3000
2000  WRITE (60,2015)
2015  FORMAT(1H0,'BURN OUT OF EVAPERATOR')
      GO TO 3000
2020  WRITE (60,2030)
2030  FORMAT(1H0,'THE ENTIRE SECTION IS ONE-PHASE FLOW')
      GO TO 3000
2040  WRITE (60,2050)
2050  FORMAT(1H0,'BOILING STARTS IMMEDIATELY')
      ZLOP=0.0
      DTOP=0.0
      GO TO 520
2100  WRITE (60,2110)
2110  FORMAT (1H0,'ENTIRE SECTION IS SUBCOOLED')
      GO TO 3000
2120  WRITE (60,2130)
2130  FORMAT (1H0,'ENTIRE SECTION IS SUPERHEATED VAPOR')
3000  STOP
      END

```

```

C
C*****
C
C Start of subroutines
C
C*****

```

```

      SUBROUTINE TIB(SIG,TS,VEG,XKL,HEG,HOP,DTIB)

```

```

C
C This calculates the incipient boiling piont
C

```

```

      DTIB=8.0*SIG*TS*VEG*HOP/(XKL*HEG)*PR**2
      RETURN
      END

```

```

C
      SUBROUTINE SHOP(RE,XKL,D,PR,HOP)

```

```

C
C This subroutine calculates the one-phase heat transfer coefficient
C

```

```

      T=2300.0
      IF (RE.LE.T)GO TO 120
C
C This section calculates the turbulent one-phase heat transfer
C coefficient
C
      WRITE (60,100)
100  FORMAT(1H0,'INITIAL FLOW IS TURBULENT')
      HOP=0.023*XKL/D*(RE**0.8)*(PR**0.4)
      GO TO 150
C
C This section calculates the laminar one-phase heat transfer
C coefficient
C
120  WRITE (60,130)
130  FORMAT(1H0,23HINITIAL FLOW IS LAMINAR)
      HOP=48.0*XKL/(11.0*D)
150  RETURN
      END
C
      SUBROUTINE SDPOP(XMD,RHOL,D,XMUL,ZLOP,FRC,RE,T,DPOP,DPOPE)
C
C This section calculates the one-phase pressure drop
C
      VOP=XMD/(RHOL*3.1416/4.0*D**2)
      IF (RE.GT.T)GO TO 180
      DPOP=32.0*XMUL*ZLOP*VOP/D**2
      GO TO 190
180  DPOP=FRC*ZLOP/D*VOP**2*RHOL/2.0
190  DPOPE=DPOP*1.45E-4
      RETURN
      END
C
      SUBROUTINE SHMN(XKL,D,Q,XMUL,HFG,DELT,PR,RHOV,RHOL,P,SIG,HMN)
C
C This caculates the two-phase heat transfer coefficient using
C McNelly's method
C
      HMN=0.225*XKL/D*((DELT*D/(XMUL*HFG))**0.69)
      HMN=HMN*PR**0.69*(RHOL/RHOV-1.0)**0.31
      HMN=(HMN*(PA*6.895E3*D/SIG)**0.31)**3.226
      RETURN
      END
C
      SUBROUTINE SHBH(DTIB,TS,X,XIA,XKL,D,Q,XMUL,XMUV,HFG,ZLIG,PR,
+ RHOL,RHOV,P,SIG,HOP,RE,HBH)
C
C This section calculates the equation derived by Bjorge, Hall, and
C Rohsenow
C
C Initial calculations
C
      ZERO=0.0

```

```

HB=0.225* $X_{KL}/D$ (( $Q/(3.1416*X_{MUL}*H_{FG}*Z_{LTG})$ ))*0.69)
HB=HB* $PR^{0.69}$ ( $R_{HOL}/R_{HOV}-1.0$ ))*0.31
HB=HB*( $P*6.895E3*D/SIG$ ))*0.31
QOA= $Q/(3.1416*D*Z_{LTG})$ 
AC=0.01

C
XINC=10000.0
DTG=XINC

C
C Test for flow regime
C
IF (X.GT.0.0) GO TO 450

C
C Subcooled Regime
C
410 E=(1.0-(DTIB/DTG)**3)**2*HB**2
C=HOP**2*DTG**2
A=QOA**2.0-C

C
C Test for negative square root
C
IF (A.LE.ZERO) GO TO 430
DTBH=A**0.5/(E**0.5)
ER=DTBH-DTG
IF (ER.LT.ZERO) GO TO 430
ERAB=ABS(ER)

C
C Test for accuracy
C
IF (ERAB.LE.AC) GO TO 440
DTG=DTG+XINC
GO TO 410
430 XINC=XINC/10.0
DTG=DTG-XINC*10.0+XINC
GO TO 410
440 HBH=QOA/DTBH
GO TO 490

C
C High quality section
C
450 REL=RE*(1.0-X)
FO=50.0
FT=1125.0

C
C Test for proper equation use
C
IF (REL.GE.FT) GO TO 470
IF (REL.GE.FO) GO TO 460
FTWO=0.0707* $PR*REL^{0.5}$ 
GO TO 475
460 C=1.0+ $PR*(0.0964*REL^{0.585}-1.0)$ 
FTWO=5.0* $PR+5.0*ALOG(C)$ 
GO TO 475

```

```

470     FTWO=5.0*PR+5.0*ALOG(1.0+5.0*PR)
        FTWO=FTWO+2.5*ALOG(0.0031*REL**0.812)
475     XTT=(RHOL/RHOV)**0.5*(XMUV/XMUL)**0.1
        XTT=XTT*(X/(1.0-X))**0.9
        EXTT=0.15*(XTT+2.0*XTT**0.32)
        HFC=REL**0.9*PR*EXTT*XKL/(FTWO*D)
480     DTBH=(QOA-HB*DTG*(1.0-(DTIB/DTG)**3))/HFC
        ER=DTBH-DTG
        IF (ER.LT.ZERO) GO TO 485
C
C test for accuracy
C
        ERAB=ABS(ER)
        IF (ERAB.LE.AC) GO TO 487
C
C Test for negative difference
C
        IF (ER.LE.ZERO) GO TO 485
        DTG=DTG+XINC
        GO TO 480
485     XINC=XINC/10.0
        DTG=DTG-XINC*10.0+XINC
        GO TO 480
487     IF (DTBH.LT.DTIB) GO TO 488
        HBH=QOA/DTBH
        GO TO 490
488     HBH=HFC
        DTBH=QOA/HBH
490     RETURN
        END
C
        SUBROUTINE SDPTP(XMUL,XMUV,X,RHOL,RHOV,XMD,D,IMPO,VFG,DELL,
+ DPTP)
        DIMENSION X(25)
C
CThis section calculates the two-phase pressure drop
C
        DPF=0.0
        DO 920 I=2,IMPO
        A=5.7*(XMUL/XMUV)**0.0523*(1.0-X(I))**0.47
        A=A*X(I)**1.33*(RHOV/RHOL)**0.261
        B=8.11*(XMUL/XMUV)**0.105*(1.0-X(I))**0.94
        B=B*X(I)**0.86*(RHOV/RHOL)**0.522
        C=X(I)**1.8+A+B
        DP=0.1459*XMD**2/(RHOV*D**5)*C*1.347E-5
        DP=DP*(1.2732*XMD/(D*XMUV))**(-0.2)*DELL*3.281
        DPF=DPF+DP
920 CONTINUE
        DPM=1.6211*XMD**2/D**4*X(IMPO)*VFG*1.45E-4
        DPTP=DPF+DPM
        RETURN
        END
C

```

SUBROUTINE H20(TS,PR, XMUL, XMUV, HEG, RHOL, RHOV, CPL, SIG, VEG, XKL, P)
TS=373.15
PR=1.66
XMUL=0.28E-3
XMUV=1.27E-5
HEG=2.258E6
RHOL=958.0
RHOV=0.6
CPL=4210.0
SIG=5.89E-2
VEG=1.6719
XKL=0.68
P=15.7
RETURN
END

C

SUBROUTINE AM(TS,PR, XMUL, XMUV, HEG, RHOL, RHOV, CPL, SIG, VEG, XKL, P)
TS=283.0
PR=3.74
XMUL=0.235E-3
XMUV=0.965E-5
HEG=1.2265E6
RHOL=624.8
RHOV=4.864
CPL=4647.3
SIG=2.307E-2
VEG=0.206
XKL=0.292
P=89.19
RETURN
END

C

SUBROUTINE F11(TS,PR, XMUL, XMUV, HEG, RHOL, RHOV, CPL, SIG, VEG, XKL, P)
TS=283.0
PR=4.126
XMUL=0.5E-3
XMUV=1.04E-5
HEG=1.853E5
RHOL=1511.0
RHOV=3.632
CPL=858.3
SIG=2.05E-2
VEG=.2747
XKL=0.104
P=8.783
RETURN
END

VITA

Robert E. Eastman was born on 15 May 1959 in Portland, Oregon. He graduated from Lakeridge High School in Lake Oswego, Oregon in June of 1977. He then attended Oregon State University where he graduated with honors in Mechanical Engineering. While at Oregon State University, he was a member of the Pi Kappa Alpha Fraternaty, The Phi Kappa Phi, Thanos and Pi Tau Sigma honor societies, and the American Institute of Aeronautics and Astronautics. He also received the Engineering in Training certificate.

He enlisted in the Air Force on 18 Feb 1981 under the College Senior Education Program. Upon finishing his degree he was commissioned through the Air Force Officer Training School where he graduated as a distinguished graduate. Lt Eastman was then assigned to the Flight Dynamics Laboratory at Wright-Patterson Air Force Base, Dayton, Ohio. His assignment entailed the development of advanced cooling systems for high power spacecraft. While assigned at the Lab, he attended the Air Force Institute of Technology (AFIT) part time. In July of 1984 he was reassigned to AFIT full time.


AD-A154 462 SPACECRAFT STRAIGHT-TUBE EVAPORATOR DESIGN(U) AIR FORCE 2/2
INST OF TECH WRIGHT-PATTERSON AFB OH SCHOOL OF
ENGINEERING R E EASTMAN MAR 85 AFIT/GA/AA/85M-1

UNCLASSIFIED

F/G 13/1

NL

			END
			FILED
			DTIC

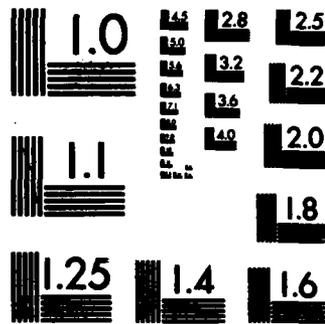

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1. REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b. RESTRICTIVE MARKINGS	
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited.	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			
4. PERFORMING ORGANIZATION REPORT NUMBER(S) AFIT/ GA/AA/85M-1		5. MONITORING ORGANIZATION REPORT NUMBER(S)	
6a. NAME OF PERFORMING ORGANIZATION School of Engineering	6b. OFFICE SYMBOL (If applicable) AFIT/ENA	7a. NAME OF MONITORING ORGANIZATION	
6c. ADDRESS (City, State and ZIP Code) Air Force Institute of Technology Wright-Patterson AFB, OH 45433		7b. ADDRESS (City, State and ZIP Code)	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION	8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
8c. ADDRESS (City, State and ZIP Code)		10. SOURCE OF FUNDING NOS.	
		PROGRAM ELEMENT NO.	PROJECT NO.
		TASK NO.	WORK UNIT NO.
11. TITLE (Include Security Classification) see box 19			
12. PERSONAL AUTHOR(S) Robert E. Eastman, B.S., 1st Lt. USAF			
13a. TYPE OF REPORT MS Thesis	13b. TIME COVERED FROM _____ TO _____	14. DATE OF REPORT (Yr., Mo., Day) 1985 March	15. PAGE COUNT 95
16. SUPPLEMENTARY NOTATION			
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB. GR.	
22	02	Two-phase boiling, Boiling, Forced convection, Spacecraft cooling systems, spacecraft evaporators. ←	
19. ABSTRACT (Continue on reverse if necessary and identify by block number)			
Title: Spacecraft, Straight-Tube Evaporator Design		Approved for public release: LAW AFR 150-17. Lynn E. Wolaver 17 Feb 85 Dean for Research and Professional Development Air Force Institute of Technology (AIC) Wright-Patterson AFB OH 45433	
Thesis Chairman: James E. Hitchcock Professor of Mechanical Engineering			
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS <input type="checkbox"/>		21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL James E. Hitchcock	22b. TELEPHONE NUMBER (Include Area Code) (513) 255-3517	22c. OFFICE SYMBOL AFIT/ENY	

Cont.

and

Student

thesis is to involve

This ~~study involved~~ researching the design of straight-tube evaporators for spacecraft, cooling systems. The forced-convective boiling phenomenon was studied to determine the characteristics of boiling flow and how gravitational acceleration affects this process. In addition to this theoretical study, an experimental evaporator was built to investigate the operation of straight-tube evaporators. It was found that pressure fluctuations caused by slug flow may hamper efforts to build two-phase, cooling systems. To overcome this problem, the use of upstream orifices and twisted-tape inserts to stabilize the flow were also investigated. Also, a method for sizing an evaporator, based on the best available method of calculating the local, heat-transfer coefficients, was developed. And finally, all of this information was used to develop a computer program to design straight-tube evaporators.

Keywords:

END

FILMED

6-85

DTIC