

DOT/FAA/AM-86/5

Office of Aviation Medicine  
Washington, D.C. 20591

# INHALATION TOXICOLOGY: VII. Times to Incapacitation and Death for Rats Exposed Continuously to Atmospheric Acrolein Vapor

~~(S)~~  
(12)

Charles R. Crane  
Donald C. Sanders  
Boyd R. Endecott  
John K. Abbott

Civil Aeromedical Institute  
Federal Aviation Administration  
Oklahoma City, Oklahoma 73125

AD-A169 666

DTIC  
ELECTE  
JUL 08 1986  
S D  
D

May 1986

Technical Report

This document is available to the public  
through the National Technical Information  
Service, Springfield, Virginia 22161



U.S. Department of Transportation  
Federal Aviation Administration

**DISTRIBUTION STATEMENT A**

Approved for public release  
Distribution Unlimited

DTIC FILE COPY

86 7 8 025

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

The animals used for this experiment were lawfully acquired and treated in accordance with the "Guide for the Care and Use of Laboratory Animal Resources," National Research Council, DHEW Publication No. (NIH) 74-23.

1. Report No. DOT/FAA/AM-86/5		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle INHALATION TOXICOLOGY: VII. TIMES TO INCAPACITATION AND DEATH FOR RATS EXPOSED CONTINUOUSLY TO ATMOSPHERIC ACROLEIN VAPOR				5. Report Date May 1986	
				6. Performing Organization Code AAM-114A	
7. Author(s) Charles R. Crane, Donald C. Sanders, Boyd R. Endocott, and John K. Abbott				8. Performing Organization Report No. DOT/FAA/AM-86/5	
9. Performing Organization Name and Address FAA Civil Aeromedical Institute P.O. Box 25082 Oklahoma City, OK 73125				10. Work Unit No. (TRAIS)	
				11. Contract or Grant No.	
12. Sponsoring Agency Name and Address Office of Aviation Medicine Federal Aviation Administration 800 Independence Avenue SW. Washington, D.C. 20591				13. Type of Report and Period Covered TECHNICAL REPORT Oct. 1982 to July 1983	
				14. Sponsoring Agency Code	
15. Supplementary Notes This work was performed under task AM-B-83-TOX-43.					
16. Abstract Acrolein, an organic aldehyde (CH <sub>2</sub> =CH-CHO), is extremely irritating to the respiratory passages at very low concentrations. It is known to be present in the smoke from certain materials used in aircraft cabin interiors and could contribute, therefore, to an individual's failure to escape from a burning aircraft. In order to assess acrolein's ability to produce physical incapacitation in a mammal, laboratory rats were exposed continuously to measured atmospheric concentrations of acrolein vapor until they expired. The exposure time required to produce lethality was measured, as was the time at which physical incapacitation occurred. Incapacitation was defined operationally as loss of the ability to walk in a motor-driven wheel, which was enclosed in the exposure chamber. Dose-response curves were generated by equating these two endpoints, time-to-incapacitation and time-to-death, to the atmospheric acrolein concentration via statistically derived regression equations. Experimental results suggest that the acrolein dose that will produce physical incapacitation could be 10 to 100 times greater than has been predicted in the past. The possible relationship between the effective toxic doses of acrolein for rats, and those reported for humans, is discussed.					
17. Key Words Combustion toxicology; smoke; irritant gas; time-to-incapacitation; time-to-death; aircraft cabin fire.			18. Distribution Statement This document is available to the public through the National Technical Information Service, Springfield, VA 22161.		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 27	22. Price

INHALATION TOXICOLOGY: VII. TIMES TO INCAPACITATION AND DEATH FOR RATS EXPOSED CONTINUOUSLY TO ATMOSPHERIC ACROLEIN VAPOR

INTRODUCTION

Acrolein, an unsaturated aliphatic aldehyde ( $\text{CH}_2=\text{CH}-\text{CHO}$ ), is a known product of the thermal decomposition of certain materials used in aircraft cabin interiors, and a suspected component of the combustion products of others<sup>1</sup>. Since lachrymation and the irritation of exposed mucous membranes have been reported for humans exposed to acrolein concentrations of less than 1 part per million (ppm), the presence of even small quantities of this compound in smoke from an inflight or postcrash fire could be postulated to at least impede passenger escape<sup>2,3</sup>.

In a 1978 study conducted by the Harvard School of Public Health, and reported by Burgess<sup>4</sup>, acrolein was identified in 91 percent of the 120 building fires that were monitored, and reached concentrations 98 times greater than the "tolerable" level in over half of these. Jacobs<sup>5,6</sup> reported that acrolein was used as a war gas in World War I. Cases of accidental poisoning have also been reported<sup>7,8</sup>, but the possibility that more than one toxic gas was involved has precluded the estimation of time-concentration effects from such data.

Inhalation studies have been conducted with several animal species. Early studies were Lewin's<sup>9,10</sup> turn-of-the-century experiments with rabbits and guinea pigs, and Iwanoff's<sup>11</sup> cat studies in 1910. More recent work has utilized rats, mice, rabbits, and guinea pigs. Skog<sup>12</sup> exposed rats for 30-minute periods to acrolein concentrations of 0.1 to 0.7 mg/L (45 to 310 ppm) establishing a 30-min  $\text{LC}_{50}$  of 0.3 mg/L (135 ppm). Salem and Cullumbine<sup>13</sup> exposed mice, guinea pigs, and rabbits to acrolein concentrations of 5,225 mg/m<sup>3</sup> (2,330 ppm) and found the lethal doses ranged from 70,000 to 140,000 mg·min/m<sup>3</sup> (31,250 to 62,500 ppm·min). For the same three species, Pattle and Cullumbine<sup>14</sup> reported the  $\text{LC}_{50}$  to be 24.4 mg/m<sup>3</sup> (10.5 ppm) for a 6-hour exposure. Other workers<sup>15,16</sup> have explored the biochemical effects on, and the adaptation of, rats exposed to extremely low levels of acrolein.

Our primary interest was in acrolein levels that cause irritation sufficient to incapacitate within 30 min and that could be potentially lethal for persons attempting to escape from a fire situation. Our earlier work<sup>17</sup> with carbon monoxide (CO) and hydrogen cyanide (HCN) has shown that time-to-incapacitation ( $t_i$ ), as measured with rats in a rotating cage assembly, is a useful tool for comparing the relative toxicity of combustion



Dist	Special	or
A-1		

des

gases from aircraft interior materials. A similar system was used in this study to establish  $t_0$ , as well as time-to-death ( $t_d$ ) for the laboratory rat subjected to preestablished concentrations of acrolein in air. These concentrations ranged from 530 to over 40,000 ppm.

## MATERIALS AND METHODS

Animals. Albino rats of Sprague-Dawley origin were obtained from Charles River Breeding Laboratories, Wilmington, MA. They were ordered in a weight range of 100 to 120 g and were held in isolation for 8 days prior to use. All were maintained on drinking water containing 1.5 g/L of sulfathiazole for the first 4 days, then normal tap water for the remaining 4 days' isolation.

Rats were fasted overnight before testing in order to establish equivalent metabolic states; just before use, each animal was weighed and marked with an identifying color code.

Exposure chamber design. The animal exposure chamber utilized in this study differs somewhat from that used in previous studies; its design is detailed in Figure 1. It was constructed of 1/2-in polymethylmethacrylate (PMMA) with internal dimensions 50.8 cm long by 26.2 cm wide by 50.6 cm high. The two-compartment cylindrical rotating cage assembly, 40.6 cm in diameter by 25.0 cm wide, had a plastic mesh floor (perimeter) with a perforated internal divider. The cage was suspended across the width of the chamber by a central axle attached to the perforated divider; the outer chamber walls function as the end walls of the cage. A door (10 by 10 cm), equipped with gaskets, was installed in each side of the chamber at the level of the rotating cage floor, to allow rapid insertion or removal of test animals. The rotating cage was driven by a 4-rpm geared motor (Dayton model 3M098) providing a linear (circumferential) velocity of 8.5 cm/s. Two plastic-bladed fans mounted on opposite sides of the chamber provided uniform mixing of the chamber atmosphere.

Test atmosphere generation. The amount of acrolein required for a given experiment was calculated from the desired atmospheric concentration and the enclosed chamber volume, 67.35 L. A side door was removed from the dry, empty chamber, and the calculated amount of freshly redistilled liquid acrolein was introduced by pipet into a 10-cm glass Petri dish centered on the chamber floor. The door was replaced and the fans turned on to hasten evaporation and atmospheric mixing; equilibration was considered to be complete when all liquid acrolein had evaporated, a period of 15 to 45 min depending on the quantity added. A sample of this preexposure atmosphere was then taken for analysis.

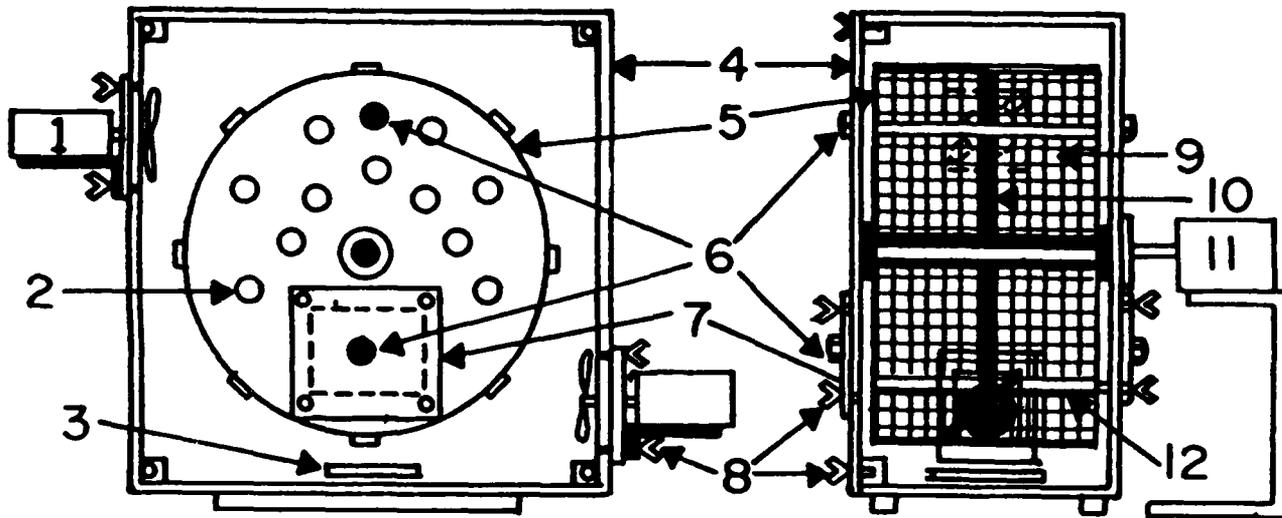


Figure 1. Animal exposure chamber.

1. Mixing fan assembly, consisting of Dayton model 2M033 motor, 1/15 hp, 5,000 rpm, 120 VAC, 60 Hz, fitted with a 4-bladed, 7-cm dia nylon fan.
2. Ventilation holes, 12-mm dia, cut through center divider of rotating cage.
3. Petri dish, 9-cm dia.
4. Exposure chamber walls constructed of  $\frac{1}{4}$ -in (12-mm) thick polymethylmethacrylate (PMMA).
5. Rotating cage assembly, center divider and outer rim constructed from  $\frac{1}{4}$ -in (6-mm) PMMA.
6. Gas sampling ports sealed with serum vial stoppers.
7. Chamber access port for animal insertion and removal.
8. Thumbscrew fasteners.
9. Polyethylene mesh cover for rotating cage; mesh openings are approximately 7-mm square.
10. Center divider and support for rotating cage, constructed from  $\frac{1}{4}$ -in (6-mm) thick PMMA.
11. Cage drive motor; Dayton model 3M098, 4 rpm, 120 VAC, 60 Hz.
12. Cross supports for chamber rims and plastic mesh perimeter.

Acrolein analysis. The routine measurement of acrolein concentration in the chamber was accomplished gas chromatographically (GC). The accuracy of this GC technique was verified originally, and rechecked periodically, by analysis of duplicate standard and test gas samples using a second, independent spectrophotometric analytical technique. The differences in results obtained by the two methods never exceeded 5 percent.

The GC method utilized a 12-ft by 1/8-in column of Porapak Q, a nitrogen gas carrier flow of 20 mL/min, an oven temperature of 210 °C, and a hydrogen flame ionization detector. The retention time for acrolein under these conditions was 4.95 min.

Samples of chamber atmosphere were taken for this analysis in a glass syringe and used immediately to flush and fill a 200-microliter ( $\mu$ L) gas sample loop on the GC. The areas of the resulting acrolein peaks were measured with an electronic integrator and converted to equivalent parts-per-million in the sampled atmosphere by means of a standard curve.

The acrolein standard curve, consisting of three to five concentration points, was constructed daily using the following procedure. A 30- to 50- $\mu$ L aliquot of freshly redistilled acrolein was drawn into a Hamilton GC syringe and the needle tip inserted into a small cork disk to prevent evaporation. The corked syringe was weighed to the nearest 0.01 mg, the cork disk removed, and the acrolein sample immediately injected into a plastic bag (saran film) that had been previously evacuated and filled with a known volume of air. The syringe-cork assembly was then reweighed, and the quantity of acrolein that had been added to the bag was calculated by difference, the concentration being expressed as ppm (volume/volume) at ambient temperature and pressure.

A separate gas sample bag was prepared by this procedure for each point on the standard curve. Each bag was then kneaded gently to mix the contents, and a syringe sample was removed and used to fill the 200- $\mu$ L GC gas sample loop. The areas of the resulting acrolein peaks were quantified by an electronic integrator and plotted against concentration. The equation for the resulting standard curve was calculated by a linear least-squares regression, and the concentrations of unknown samples were then calculated using that equation.

The procedure that was used to confirm the performance of the GC method is based on the quantitative conversion of acrolein to its 2,4-dinitrophenylhydrazone (2,4-DNP) followed by spectrophotometric assay of this highly colored derivative<sup>2</sup>. One problem associated with the quantitative conversion of trace amounts (micromolar) of low molecular weight aldehydes to their corresponding 2,4-DNP derivatives is that the solubility of the 2,4-DNP in an aqueous medium is sufficient to prevent the reaction

from proceeding to completion. To force the reaction to completion, we employed a modification of the procedure suggested by Selim<sup>24</sup>, which utilized a two-phase reaction medium in which the derivative is continuously extracted into a nonaqueous (isooctane) layer. The details of this analytical procedure are presented in the Appendix.

The concentration of acrolein in the chamber atmosphere was plotted as a function of exposure time for each experiment. The areas under this curve, from time=0 to  $t_1$  and to  $t_d$ , were integrated to obtain C·t products (concentration X exposure time) for both incapacitation and death, C· $t_1$  and C· $t_d$ . An average concentration for each exposure was then calculated as the quotient of C·t divided by the appropriate response time; e.g., the average concentration for incapacitation equals C· $t_1$  divided by  $t_1$ .

Animal exposure procedure. Once the test atmosphere had reached equilibrium, a chamber air sample was collected and analyzed gas chromatographically for acrolein concentration. The cage rotation and fan motors were turned off, and a fasted, weighed rat was inserted into the cage. The chamber door was immediately sealed, the exposure timer activated, and the cage and fan motors restarted.

After an elapsed time of 1 min, a second chamber air sample was withdrawn for GC analysis to determine the new equilibrium concentration. Additional samples were collected for analysis at 9- to 10-min intervals throughout the exposure, this being the time required for all major peaks from the previous injection to clear the GC column.

Time-to-incapacitation was recorded as the elapsed time at which the rat could no longer perform the coordinated act of walking in the rotating cage--the animal would begin stumbling, sliding, or tumbling. Cage rotation was stopped at  $t_1$ , and the rat was observed until visible signs of breathing ceased; this time interval (from initiation of exposure) was called  $t_d$ . A final chamber atmosphere sample was collected following the rat's death to provide a complete time-concentration record for the exposure period.

## RESULTS AND DISCUSSION

A total of 22 rats were exposed, one at a time, to selected concentrations of acrolein in air. The observed response times,  $t_1$ , and  $t_m$ , are listed in Table 1 along with the Ct-product calculated for each response time, and the average concentration calculated as the area under the Ct-curve divided by the response time.

Visually observed behavioral responses, in addition to  $t_1$ , and  $t_m$ , can be summarized best as general observations made at different acrolein levels.

At concentrations between 500 and 750 ppm, the rats exhibited immediate agitation and rubbing of the nose (with forepaws) when inserted into the chamber, followed by normal walking in the rotating cage. Gasping was noted at about 15 min, and abnormal walking (crawling, sliding, etc.) began at about 30 min. The  $t_1$ 's ranged from 27 to 36 min. Convulsions preceded death by 1 to 2 min; no cyanosis of the extremities was observed.

At concentrations around 1,000 ppm, gasping began at 3 to 6 min, becoming severe by 6 to 11 min. Walking appeared normal for the first 6 to 10 min, after which there would be alternating periods of crawling and walking--this crawling was a sufficiently coordinated type of locomotion that it was not scored as incapacitation. The  $t_1$ 's occurred in the range 14 to 20 min, and severe convulsions began about 1 min before death.

At the 10,000-ppm level, gasping began by 1.5 to 2.5 min. Between 4 and 5 min the animals became hyperactive (running, climbing, frantic grooming, etc.) and occasional tremors or mild convulsions were noted during this period of heightened activity. One or more severe convulsions followed soon after the 5- to 6-min  $t_1$ , with cyanosis occurring in a few animals in the interval between  $t_1$  and  $t_m$ . Death occurred at 7 to 10 min.

In the 20,000-ppm range, the rats became hyperactive immediately on being placed in the chamber; they were gasping by 1.5 min and cyanotic by 2.0 to 2.5 min. Muscle tremors either preceded or coincided with  $t_1$ , which occurred at 3 to 4 minutes. Following incapacitation the cyanosis became more pronounced, muscular fasciculation became generalized, and sporadic whole-body convulsions preceded death, which occurred at 6 to 7 min.

At the highest concentrations, 35,000 to 40,000 ppm, gasping was severe by 1 to 2 min, and even an occasional short convulsion, with recovery, was noted prior to incapacitation. Although  $t_1$ , 2.8 min, was shorter than for the 20,000-ppm exposures, behavior was not appreciably different. Cyanosis and fairly continuous convulsive activity occurred from  $t_1$  until death--which was at 4.7 to 4.9 min.

TABLE 1

## RESPONSE TIMES AND ACROLEIN CONCENTRATIONS\*

$t_i$ , min	C· $t_i$ , ppm·min	Acrolein Concn., ppt	$t_d$ , min	C· $t_d$ , ppm·min	Acrolein Concn., ppt
2.8	116.35	41.55	4.7	194.71	41.43
2.8	98.03	35.01	4.9	170.73	34.84
2.9	65.52	22.59	5.8	130.43	22.49
3.8	69.06	18.17	6.0	108.50	18.08
3.8	57.24	15.06	8.6	128.01	14.89
3.9	80.77	20.71	7.3	150.07	20.56
4.2	46.16	10.99	9.4	102.29	10.88
4.4	73.59	16.72	7.5	124.62	16.62
4.9	49.31	10.06	9.2	91.66	9.96
5.1	53.75	10.54	6.7	70.14	10.47
7.3	63.03	8.63	10.3	88.40	8.58
7.4	38.11	5.15	9.3	47.78	5.14
7.7	45.19	5.87	13.9	80.71	5.81
10.0	52.82	5.28	20.2	105.24	5.21
13.2	32.88	2.49	24.5	57.96	2.37
13.5	57.20	4.24	15.6	65.78	4.22
14.1	27.38	1.94	18.0	34.63	1.92
19.7	24.02	1.22	30.8	36.11	1.17
19.8	24.91	1.26	28.6	34.75	1.22
27.0	15.71	0.58	36.4	20.16	0.55
34.0	19.67	0.58	50.4	26.48	0.57
36.5	25.01	0.69	56.2	36.67	0.65

\*Concentrations and C·t-products are in parts per thousand, ppt.

Along with the expected decreases in  $t_i$  and  $t_d$  that were observed with exposure to increasing concentrations of acrolein, certain other response patterns became apparent. At concentrations of 1,000 ppm or less, convulsions were noted only just prior to death, while at higher concentrations, tremor and convulsions appeared before incapacitation. A surface muscle tremor or fasciculation, which differed from the whole-body convulsions, was noted at the 10,000-ppm level following periods of extreme physical activity and was a common observation at the higher concentrations, independent of physical exertion. One unexpected result was the absence of any evidence of severe eye irritation. While "grooming" motions about the nose were common on all experiments, only at the 20,000-ppm level did any abnormally rapid eye blinking occur, and then only in a single experimental animal.

All rats' eyes remained open during the exposure periods, and we observed none of the profuse lachrymation that we have noted previously in rats exposed to other irritant gases, such as hydrogen chloride, or smoke from halogen-containing polymers.

Figure 2 is a combination scattergraph of the two measured response times,  $t_1$  and  $t_2$ , as a function of acrolein concentration. In this and all subsequent figures, response times are in minutes and acrolein concentrations are in parts per thousand (ppt). The relationship between time-to-effect and magnitude of the noxious agent is, once again, the familiar rectangular hyperbola that we have obtained for all toxic gases studied to date and also for the measure of time-to-collapse as the result of exposure to hyperthermic atmospheres.

An equation was derived, for each response, that relates time-to-effect and concentration; this curve fitting was accomplished with the aid of a nonlinear least squares regression algorithm proposed by Marquardt<sup>16</sup>. When the model equation for the regression was of the form,

$$(y-a)(x-b)=k, \quad \text{Eq. 1}$$

where  $y$  represents response time and  $x$  represents acrolein concentration, the resulting curves fit the data acceptably well, as can be seen in Figures 3 and 4. The log-log, linearized versions of these two equations are presented as Figures 5 and 6. For these two equations, the values for the parameters,  $a$ ,  $k$ , and  $b$ , are as follows,

for incapacitation:	$a = 1.50$	$k = 40$	$b = -0.5,$
for lethality:	$a = 3.75$	$k = 50$	$b = -0.5.$

Although these equations are acceptably descriptive of the experimental data and obviously useful in predicting the continuum of response-time versus concentration relationships, and despite the fact that the form of the equation is the toxicologically meaningful one of a rectangular hyperbola with nonzero asymptotes, the negative sign of the derived values for the parameter,  $b$ , does present a modeling problem.

Equation 1 can be rewritten as follows,

$$t_r = a + k/(C-b), \quad \text{Eq. 2}$$

where  $t_r$  is response time in minutes, and  $C$  is acrolein concentration in ppt. In the biophysical interpretation of this equation model, the parameters,  $a$  and  $b$ , represent the asymptotic values for the two ends of the hyperbola; i.e., " $a$ " is the shortest possible response time that can be achieved from exposure to an overwhelming concentration, and " $b$ " is the lowest acrolein concentration that can incapacitate (or kill) as the result of an

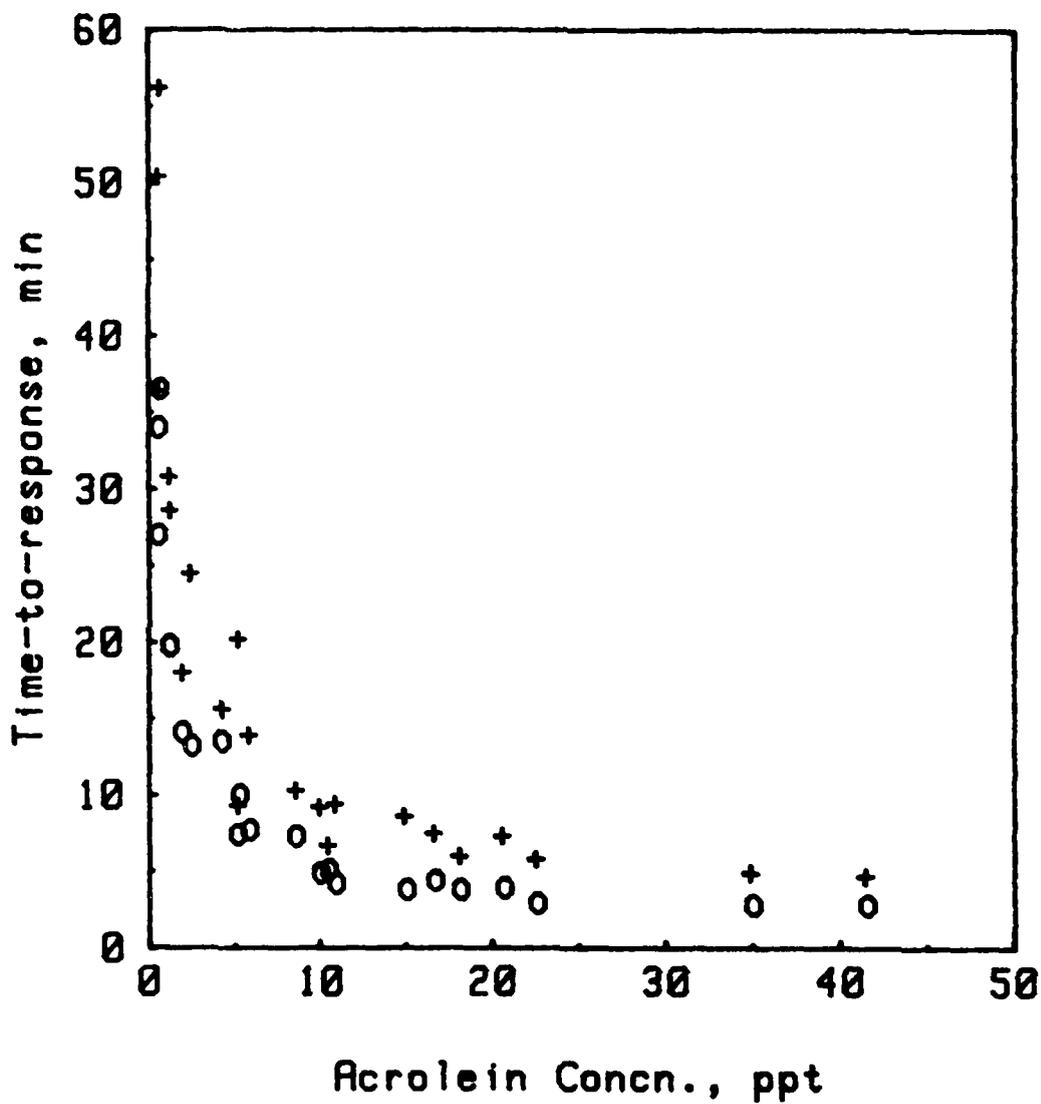


Figure 2. Times-to-incapacitation (O) and times-to-death (+) plotted against the average chamber concentration of acrolein. Each point represents one rat, exposed individually; N=22.

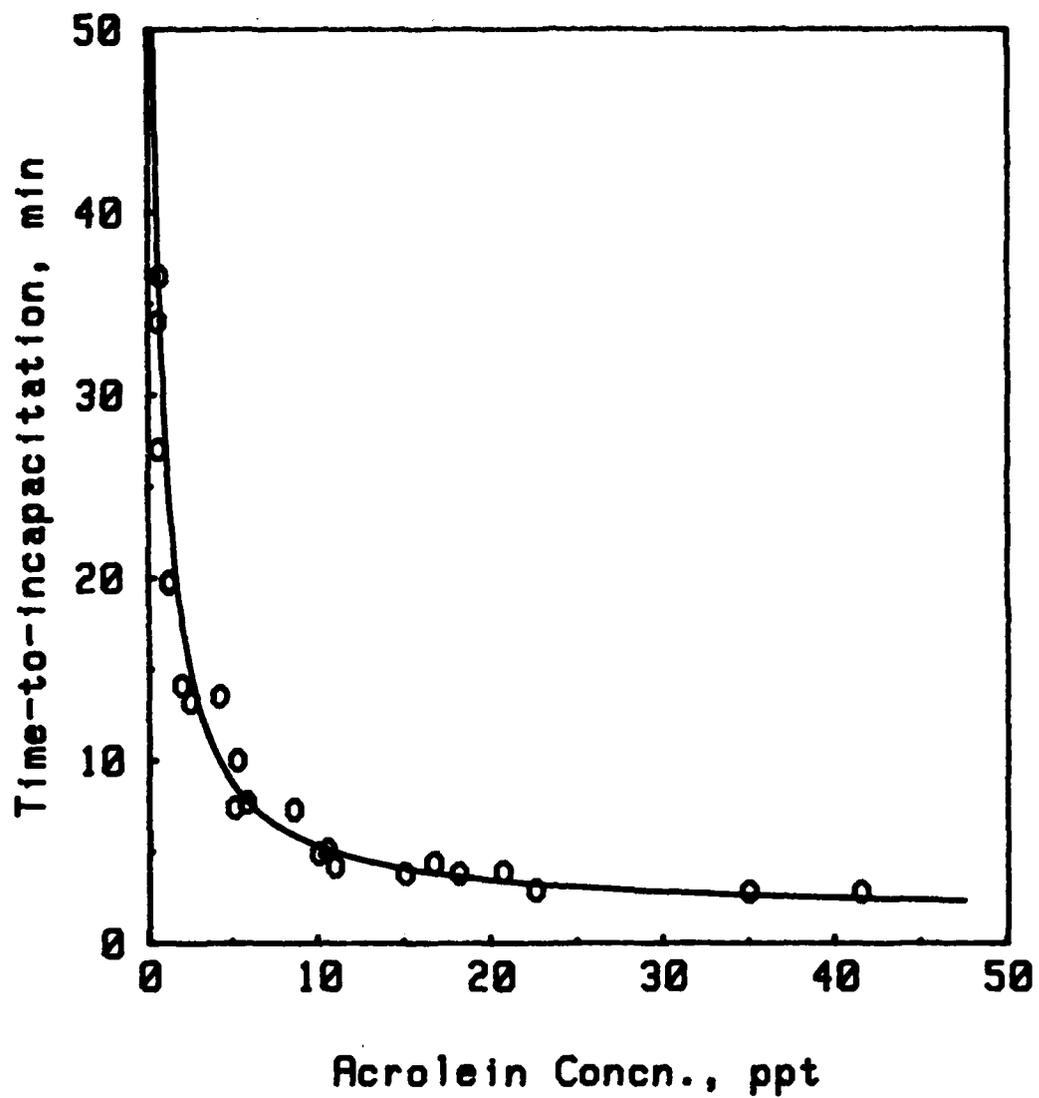


Figure 3. Time-to-incapacitation as a function of the average chamber concentration of acrolein. Fitted regression equation:  $t_i = 1.5 + 40/(C+0.5)$ ,  $RSSQ = 238$ .

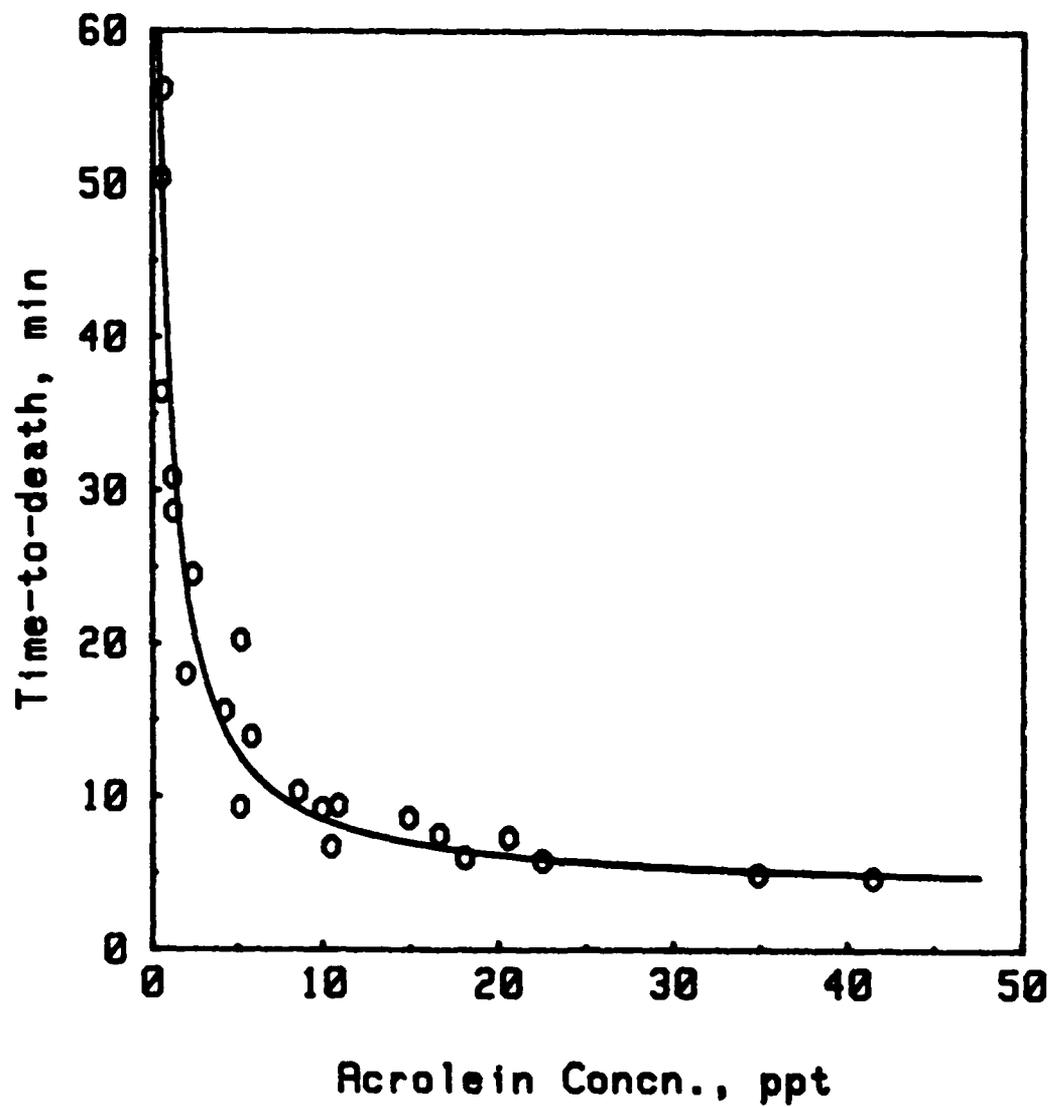


Figure 4. Time-to-death as a function of the average chamber concentration of acrolein. Fitted regression equation:  $t_d = 3.75 + 50/(C+0.5)$ , RSSQ = 473.

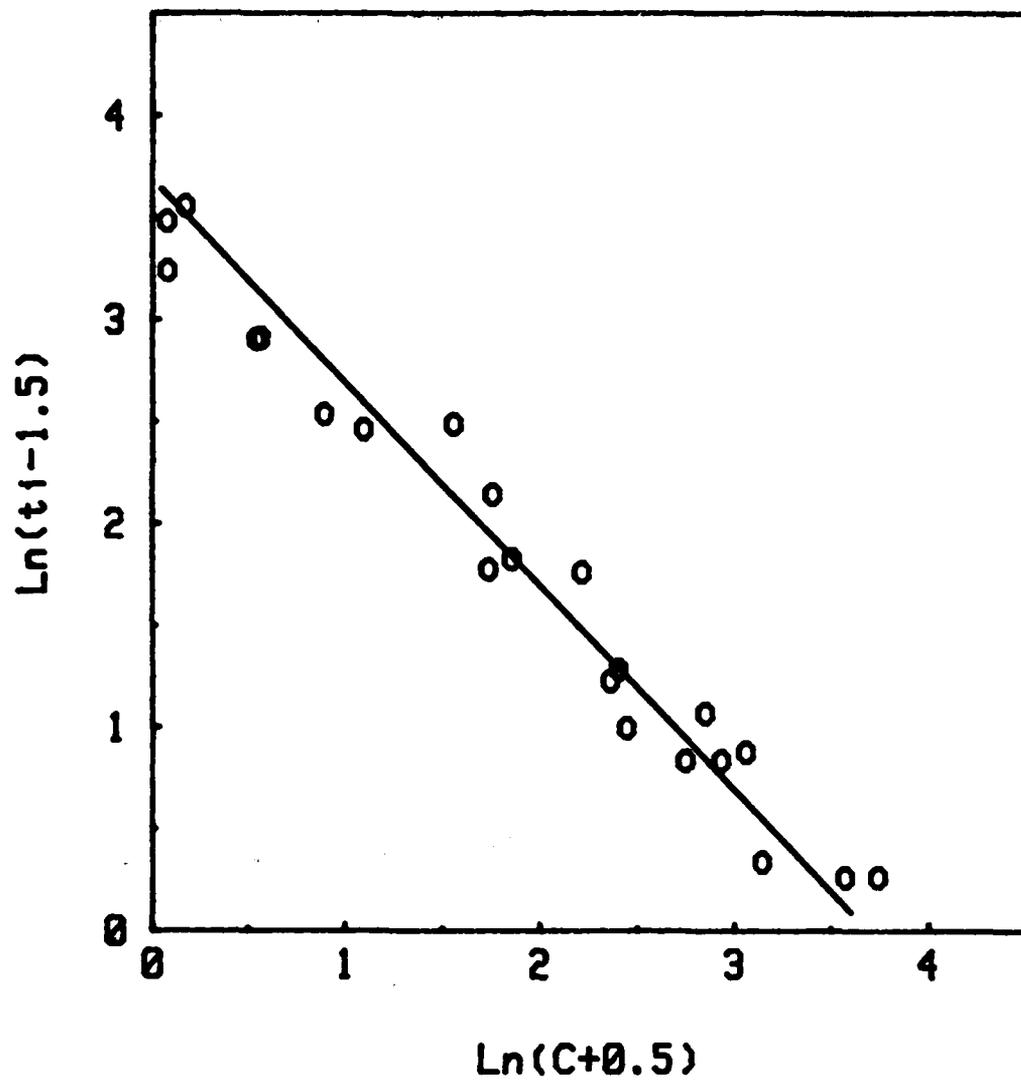


Figure 5. Log-log plot of  $(t,-1.5)$  versus  $(C+0.5)$ , a linearized transformation of Fig. 3. Fitted regression equation:  $\ln(t-1.5) = \ln(40) - \ln(C+0.5)$ .

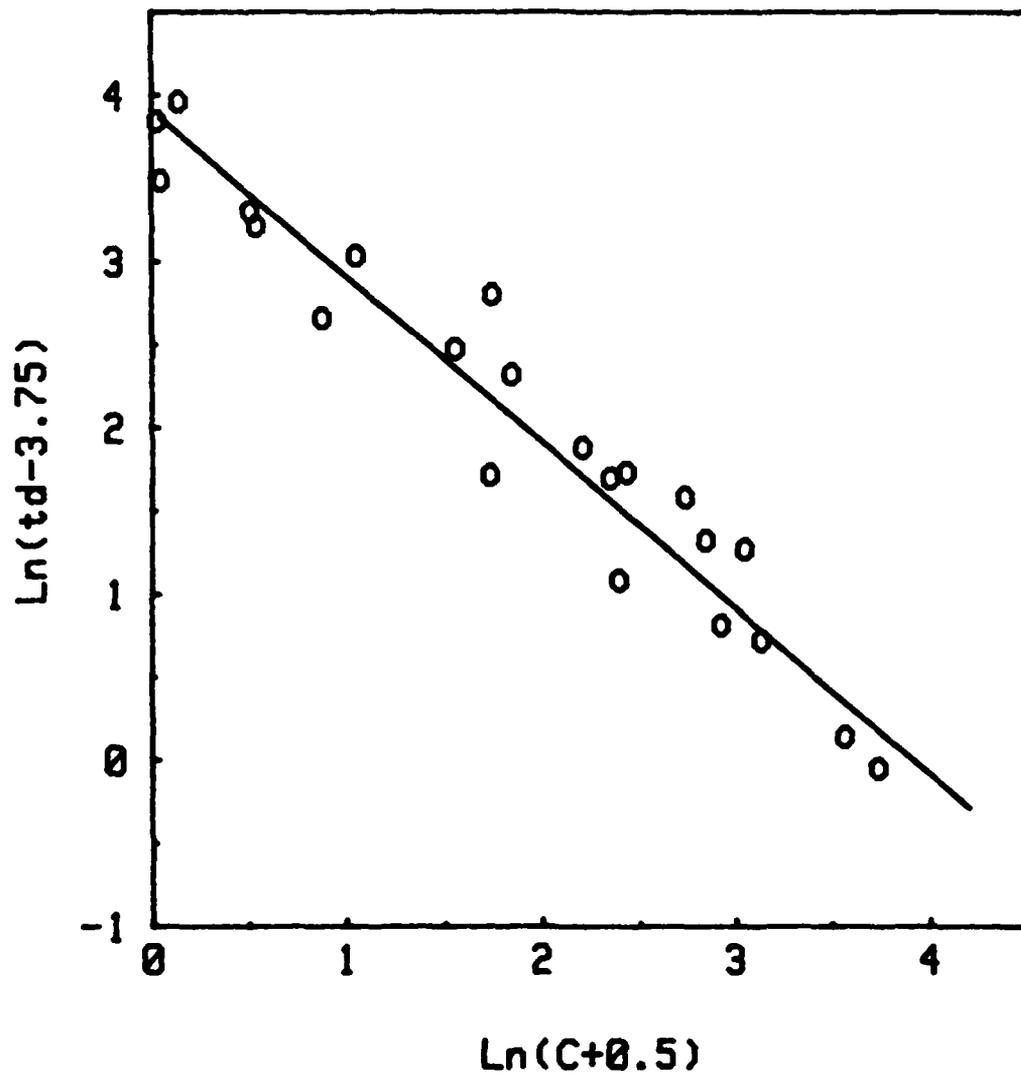


Figure 6. Log-log plot of  $(t_d - 3.75)$  versus  $(C + 0.5)$ , a linearized transformation of Fig. 4. Fitted regression equation:  $\ln(t_d - 3.75) = \ln(50) - \ln(C + 0.5)$ .

exceedingly long exposure time. Logically, both of these parameters should have positive values, since there could hardly be a physiological effect from a zero concentration and, correspondingly, no effect could result from an exposure of zero minutes.

The fact that the model equation, [2], could not be fit to the acrolein data using a positive value for the parameter, b, suggests that the specific form of that equation may be inappropriate for describing the toxicokinetics of acrolein. A likely possibility is that acrolein is exerting its toxic effect differentially at two or more specific biological sites and, as a consequence, the overall effect on response time is a function of something other than the first power of the effective concentration, (C-b). If the concentration is functioning at some power other than one--that is, if the effective concentration is (C-b)<sup>n</sup>, where n is not equal to one--then n must have a value that lies between zero and one; otherwise the fit with the data gets worse rather than better.

If response time were related to the square root of the effective acrolein concentration, the value of n would be 0.5. The model equation would then be:

$$t_r = a + k/(C-b)^{0.5}. \quad \text{Eq. 3}$$

Fitting this equation to the data resulted in reasonable and positive values for the three parameters (a, k, and b) and a residual sum of squares (RSSQ) that was smaller than with equation [2]. (The RSSQ is a measure of the "goodness of fit" between the data and the model equation; the smaller RSSQ representing the better fit.) The values for the three parameters in equation [3] are as follows,

for incapacitation:	a = 0.1	k = 18	b = 0.3,
for lethality:	a = 1.0	k = 25	b = 0.3.

Figure 7 is the plot, for equation [3], of t<sub>r</sub> as a function of concentration, and Figure 8 is that for t<sub>d</sub>. The corresponding log-log transformations are shown in Figures 9 and 10.

Reasonable predictions of response time for a given acrolein concentration can be made using either equation [2] or equation [3], provided one does not exceed the concentration limits utilized in the study. However, the values obtained for the coefficients in equation [3] should be more meaningful in the physiological sense. Comparison of the values from the two equations suggests, for example, that the limiting (asymptotic) response times are more likely to be 0.1 and 1.0 minutes rather than 1.50 and 3.75 minutes (for t<sub>r</sub> and t<sub>d</sub> respectively), and the limiting effective concentration for infinite exposures is much more likely to be 300 ppm than a negative 500 ppm.

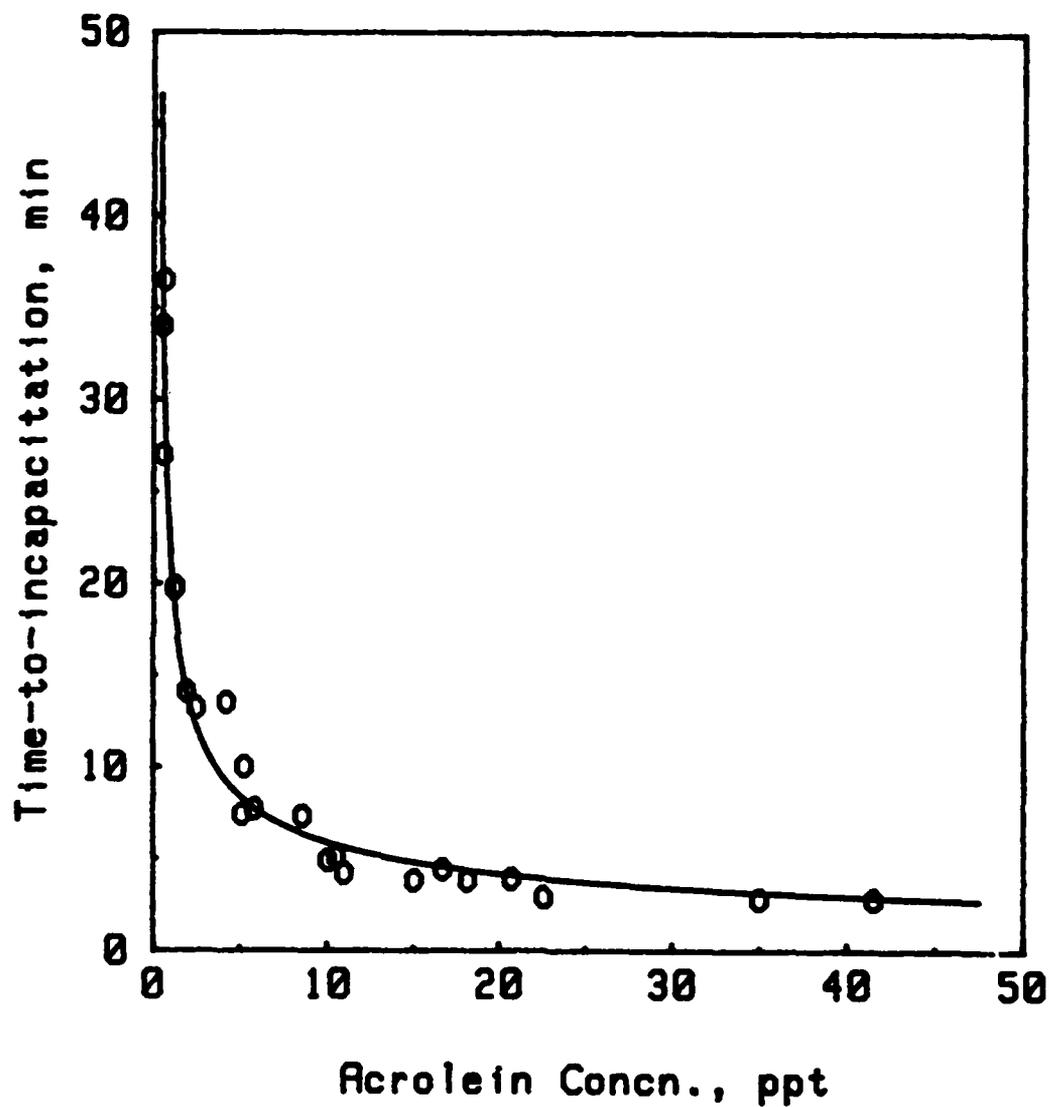


Figure 7. Time-to-incapacitation as a function of the square root of the effective acrolein concentration. Fitted regression equation:  $t_i = 0.1 + 18/\sqrt{C-0.3}$ , RSSQ = 141.

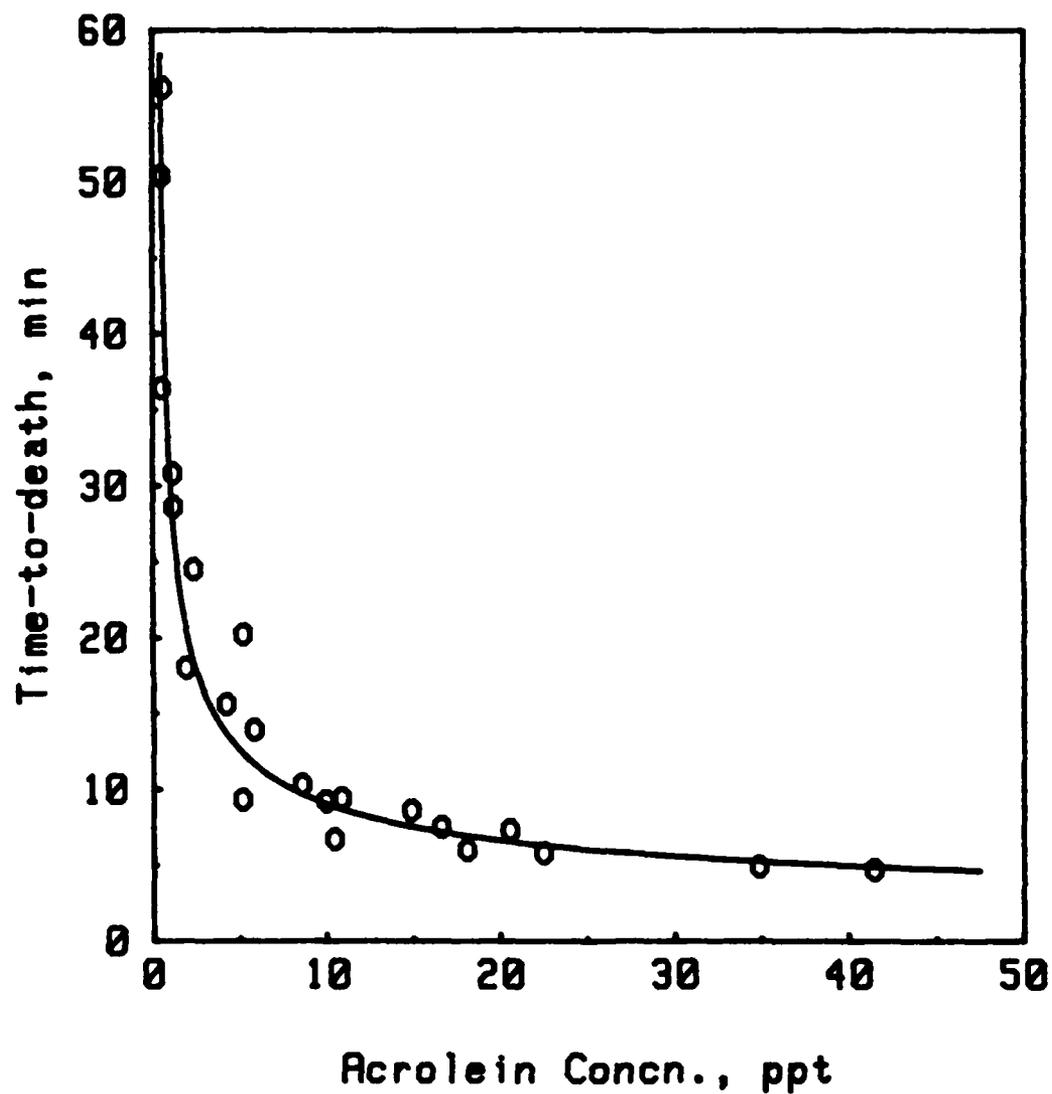


Figure 8. Time-to-death as a function of the square root of the effective acrolein concentration. Fitted regression equation:  $t_d = 1.0 + 25/\sqrt{C-0.3}$ , RSSQ = 533.

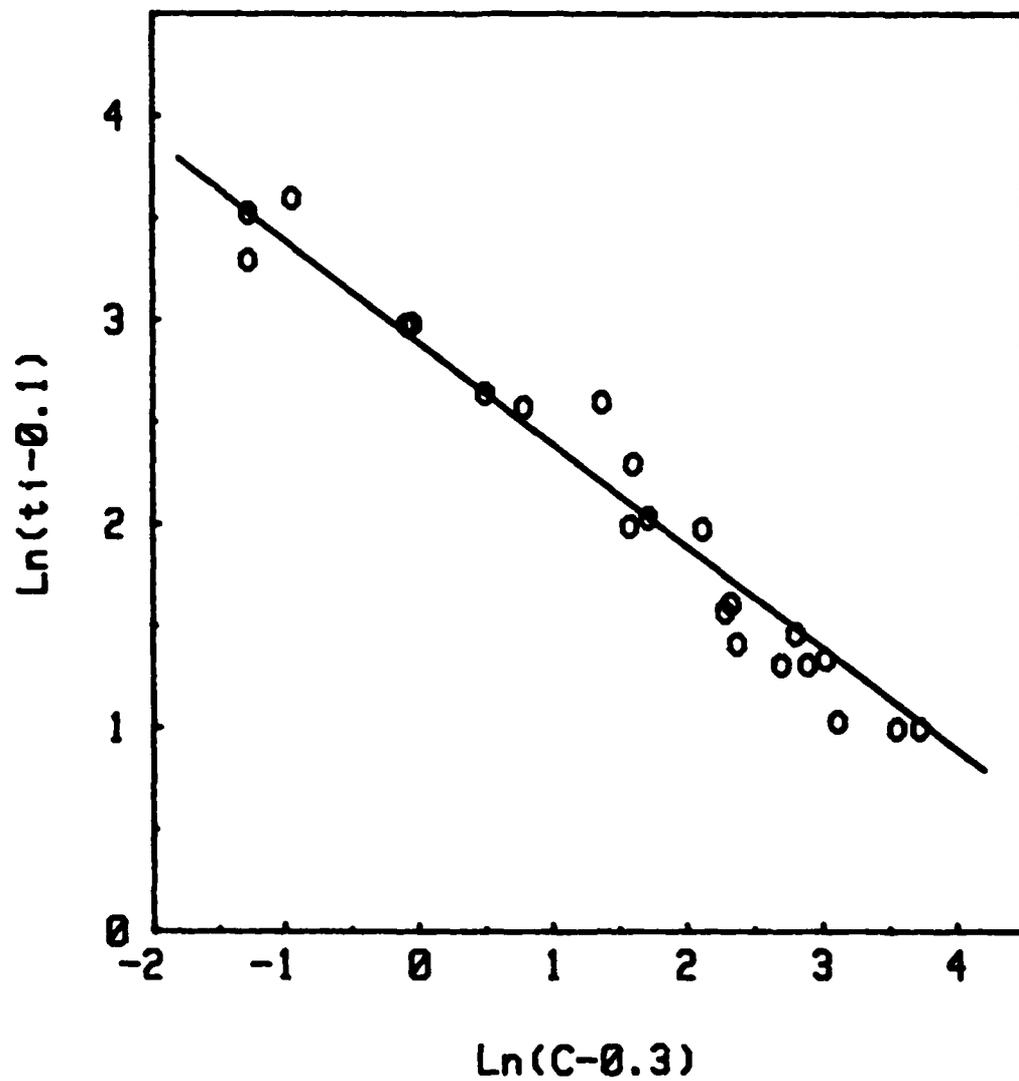


Figure 9. Log-log plot of  $(t_i - 0.1)$  versus  $\sqrt{C - 0.3}$ , a linearized transformation of Fig. 7. Fitted regression equation:  $\ln(t_i - 0.1) = \ln(18) - \frac{1}{2}\ln(C - 0.3)$ .

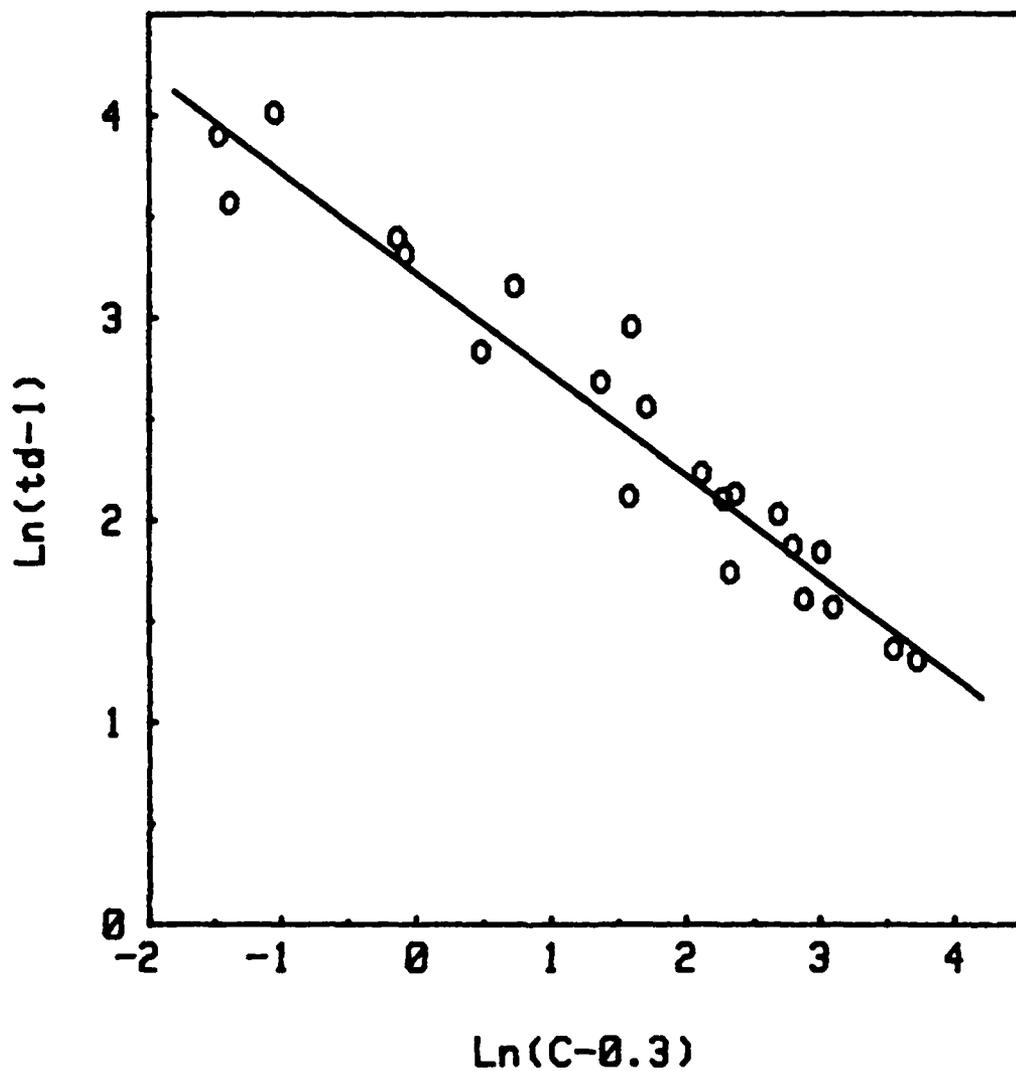


Figure 10. Log-log plot of  $(t_d-1.0)$  versus  $J(C-0.3)$ , a linearized transformation of Fig. 8. Fitted regression equation:  $\ln(t_d-1.0) = \ln(25) - \frac{1}{4}\ln(C-0.3)$ .

We have been unable to locate in the scientific literature any other studies of the incapacitating effects of acute exposures to acrolein using rats as subjects. However, since this study was completed (in 1981) there has been a report by Kaplan et al.<sup>17</sup> of acute exposures using baboons as subjects. In this study, baboons were exposed to known concentrations of acrolein for 5 min and then given the opportunity to physically escape from the exposure chamber. For all acrolein concentrations tested, up to a maximum of 2.78 ppt, the subjects escaped successfully; i.e., there were no instances of physical incapacitation. If equation [3], derived for rats, can be applied to baboons, it would predict a time-to-incapacitation of 11.5 min for baboons exposed to 2.78 ppt acrolein.

Salem and Cullumbine<sup>17</sup> found that lethal exposure times ranged from 13 to 27 min when mice, guinea pigs, and rabbits were exposed to an acrolein concentration of 5,225 mg/m<sup>3</sup>, which would be equivalent to approximately 2,300 ppm acrolein depending on the ambient atmospheric pressure and temperature. This is reasonable agreement with a t<sub>50</sub> of 18.7 min predicted from equation [3] for a rat exposed to 2.3 ppt.

Since the acrolein concentration-response time relationship derived from our experimental data can predict, within an acceptable margin, the response times for three other rodent species, and, since it is not inconsistent with data obtained from baboon exposures, it would seem reasonable that it could be used to approximate human exposure responses.

There are no documented dosages for lethal or truly incapacitating human exposures; however, Alarie et al.<sup>1</sup> have suggested that human exposure to 20 ppm would be lethal--or at least would result in extremely severe injury to the respiratory tract. The most common statement in the literature, however, seems to be that exposure to 10 ppm or more would prove lethal for humans "in a few minutes" or "in a short time"<sup>3,8,10</sup>. These predictions that 10 to 20 ppm could be incapacitating or lethal in a few minutes are not reconciled easily with the reported animal experiments in which concentrations 100 times greater are required to achieve a response time of about 10 min. A possible explanation is that the acrolein toxicity previously predicted for humans is an overly conservative estimate based on (dis)comfort indices as endpoints rather than on actual incapacitation or mortality--as we suspect is also the case for hydrogen chloride gas<sup>7</sup>.

## SUMMARY AND CONCLUSIONS

Rats were exposed in the Civil Aeromedical Institute (CAMI) inhalation toxicity assay system to selected atmospheric concentrations of acrolein vapor in air; these concentrations ranged from 530 ppm to over 40,000 ppm. The CAMI system utilizes an enclosed rotating wheel that allows the measurement of a physical incapacitation endpoint as well as the traditional one of mortality. These two endpoints were measured as time-to-incapacitation ( $t_i$ ) and time-to-death ( $t_d$ ); the measured response times ranged from 2.8 to 56.2 min. Results were graphed as scatterplots (response time versus acrolein concentration), and regression equations were fitted to each data set using a nonlinear least squares technique. The resulting response equations are:

$$t_i = 0.1 + 18/(C-0.3)^{0.5} \text{ for incapacitation and}$$
$$t_d = 1.0 + 25/(C-0.3)^{0.5} \text{ for lethality,}$$

where response times are in minutes and acrolein concentrations,  $C$ , are in parts per thousand.

These results suggest that acrolein, an almost universal component of smoke, is not so incapacitating as had been previously thought. Concentrations necessary to produce incapacitation in 10 min are likely to be 10 to 100 times greater than those suggested by the scientific literature.

## REFERENCES

1. Alarie Y, Kane L, Barrow C. Sensory Irritation: The Use of an Animal Model to Establish Acceptable Exposure to Airborne Chemical Irritants. In: Reeves AL, ed. Toxicology: Principles and Practice, Vol. I. New York: John Wiley and Sons, 1981:48-92.
2. American Conference of Governmental Industrial Hygienists. Threshold Limit Values for Chemical Substances and Physical Agents in the Workroom Environment. Cincinnati, OH: ACGIH, 1977.
3. Bouley G, Dubreuil A, Godin J, Boisset M, Boudene CL. Phenomena of Adaptation in Rats Continuously Exposed to Low Concentrations of Acrolein. Ann. Occup. Hyg. 1976; 19:27-32.
4. Burgess WA, Treitman RD, Gold A. Air Contaminants in Structural Fire-Fighting. Cambridge, MA: Harvard School of Public Health, 1979.
5. Cohen IR, Altshuller AP. A New Spectrophotometric Method for the Determination of Acrolein in Combustion Gases and in the Atmosphere. Anal. Chem. 1961; 33:726-33.
6. Crane CR, Sanders DC, Endecott BR, Abbott JK, Smith PW. Inhalation Toxicology: I. Design of a Small-Animal Test System. II. Determination of the Relative Toxic Hazards of 75 Aircraft Cabin Materials. Report No. FAA-AM-77-9. Washington, DC: Federal Aviation Administration, Office of Aviation Medicine, 1977.
7. Crane CR, Sanders DC, Endecott BR, Abbott JK. Inhalation Toxicology: IV. Times to Incapacitation and Death for Rats Exposed Continuously to Atmospheric Hydrogen Chloride Gas. Report No. FAA-AM-85-4. Washington, DC: Federal Aviation Administration, Office of Aviation Medicine, 1985.
8. Deichmann WB, Gerarde HW. Symptomatology and Therapy of Toxicological Emergencies. New York: Academic Press, 1964.
9. Einhorn IN. Physico-Chemical Study of Smoke Emission by Aircraft Interior Materials, Part 1. Report No. FAA-RD-73-50,1. Washington, DC: Federal Aviation Administration, 1973.
10. Henderson Y, Haggard HW. Noxious Gases. New York: Reinhold Publishing Co., 1943.

11. Iwanoff N. Experimentelle Studien über den Einfluss Technisch und Hygienisch Wichtiger Gase und Dämpfe auf den Organismus; Teil XVI, XVII, XVIII; Über einige Praktisch Wichtige Aldehyde (Formaldehyd, Acetaldehyd, Akrolein). Arch. f. Hyg. 1910; 73:307-40.
12. Jacobs MB. The Analytical Chemistry of Industrial Poisons, Hazards, and Solvents, 2nd ed. New York: Interscience Publishers, Inc., 1949.
13. Kaplan HL, Grand AF, Rogers WR, Switzer WG, Hartzell GE. A Research Study of the Assessment of Escape Impairment by Irritant Combustion Gases in Postcrash Aircraft Fires. Report No. DOT/FAA/CT-84/16. Washington, DC: Department of Transportation/ Federal Aviation Administration, 1984.
14. Koelsch F. Zentralbl. f. Gewerbehyg. 1928; 5:353 (quoted by Jacobs<sup>12</sup>).
15. Lewin L. Über die Giftwirkungen des Akrolein; ein Beitrag zur Toxikologie der Aldehyde. Arch. f. exp. Pathol. und Pharmakol. 1900; 43:351-66.
16. Marquardt D. An Algorithm for Least Squares Estimation of Nonlinear Parameters. J. Soc. Indust. Appl. Math. 1963; 11(2):431-41.
17. Murphy SD, Davis HV, Ulrich CE. Functional Effects of Acrolein Exposure. Fed. Proc. 1962; 21:221.
18. Fattle RE, Cullumbine H. Toxicity of Some Atmospheric Pollutants. Brit. Med. J. 1956; 2:913-16.
19. Salem H, Cullumbine H. Inhalation Toxicities of Some Aldehydes. Toxicol. Appl. Pharmacol. 1960; 2:183-87.
20. Selim S. Separation and Quantitative Determination of Traces of Carbonyl Compounds as Their 2,4-Dinitrophenylhydrazones by High-Pressure Liquid Chromatography. J. Chromatogr. 1977; 136:271-77.
21. Sim VM, Fattle RE. Effect of Possible Smog Irritants on Human Subjects. J. Am. Med. Assoc. 1957; 165:1908-13.
22. Skog E. A Toxicological Investigation of Lower Aliphatic Aldehydes: 1. Toxicity of Formaldehyde, Acetaldehyde, Propionaldehyde, and Butyraldehyde; as well as of Acrolein and Crotonaldehyde. Acta Pharmacol. 1950; 6:299-318.

## APPENDIX

### Spectrophotometric Assay of Acrolein As Its 2,4-Dinitrophenylhydrazone

Acrolein that was to be used in the preparation of aqueous standards was purified daily by distillation. Its significant volatility required special handling during the preparation of liquid standards; therefore, the approximate required volumes (0.1 to 0.2 mL) were transferred by pipet to tared, glass weighing bottles (with ground-glass stoppers) and reweighed to the nearest 0.01 mg. These small-diameter weighing bottles were of a size that would allow them to drop freely down the neck of a 500-mL volumetric flask. The volumetric flask was filled to the calibration mark with deionized water and a volume of water equal to the volume of acrolein to be added was withdrawn by pipet. The weighing bottle was held over the flask mouth, the cover was loosened, and the bottle, contents, and cover were dropped into the water. The flask was stoppered immediately and the contents mixed by repeated inversion. Working standards were prepared by dilution from this solution into additional 500-mL flasks; this approach allowed relatively large volumes (10 to 25 mL) of stock standard to be transferred, which minimized the relative magnitude of pipetting errors. These transfers and subsequent dilutions to volume were accomplished quickly to minimize acrolein loss due to vaporization.

The 2,4-dinitrophenylhydrazine reagent was prepared daily as a saturated solution in 2N aqueous hydrochloric acid (HCl); the solution was filtered immediately prior to use.

Isooctane (2,2,4-trimethylpentane), used to extract the 2,4-DNP, was chromatographic quality analytical reagent grade (Mallinckrodt ChromAR).

The spectrophotometric analysis of aqueous acrolein standards was accomplished by mixing, in a screw-cap glass centrifuge tube, 3 mL of the standard with 1 mL of saturated 2,4-dinitrophenylhydrazine (in 2N HCl) and adding 10 mL of isooctane. The reaction tube was capped and shaken vigorously at 5-min intervals over a 20-min period. After the final shaking, the tube was allowed to stand until the two layers had separated, then allowed to stand for an additional 5 min. The isooctane layer was then removed from the aqueous layer and centrifuged to remove the last trace of suspended water droplets. Absorbance of the isooctane solution was measured in a quartz cuvette at 350 nm against a reagent blank. The resulting absorbances were used to construct a standard curve by plotting absorbance against acrolein concentration.

Gaseous samples, either of known concentration from the saran bags or of unknown concentration from the exposure chamber, were obtained by withdrawing a 15-mL aliquot of the appropriate atmosphere into a 30-mL glass syringe, followed immediately by 15 mL of deionized water. The syringe needle was replaced with a cap and the syringe shaken intermittently for 30 min. All samples were kept in the capped syringes until they could be analyzed for acrolein using the spectrophotometric procedure described above for aqueous standards. Acrolein concentrations equivalent to the measured absorbances were calculated using the equation derived from the aqueous standard curve.