



US Army Corps of Engineers
Hydrologic Engineering Center

AD-A225 193

Estimating Sediment Delivery and Yield on Alluvial Fans

Technical Paper No. 130
June 1990

DTIC
ELECTE
JUL 18 1990
S E D

Approved for Public Release. Distribution is Unlimited.

Papers in this series have resulted from technical activities of the Hydrologic Engineering Center. Versions of some of these have been published in technical journals or in conference proceedings. The purpose of this series is to make the information available for use in the Center's training program and for distribution within the Corps of Engineers.

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

ESTIMATING SEDIMENT DELIVERY AND YIELD ON ALLUVIAL FANS

Robert C. MacArthur¹, M.ASCE, Michael D. Harvey², and
Edward F. Sing³, M.ASCE



Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

Abstract

This paper summarizes the procedures used for computing the basinwide annual yields and single event sediment production for ephemeral channels located on an incised alluvial fan in Central California. Unique geomorphic characteristics of the basin and alluvial fan are discussed in light of data and analytical methods necessary to compute sediment delivery and yield at a proposed damsite.

Introduction

A Sediment Engineering Investigation (SEI) of the Caliente Creek watershed (470 sq. mi.) in Kern County, California was conducted to determine the watershed sediment yield upstream from a proposed flood detention reservoir located on the Caliente Fan. Previous studies estimated annual sediment yields at the proposed reservoir site based on traditional soil loss methods and sediment accumulation rates observed in impoundments along the Sierra Nevada, Tehachapi and Transverse Mountain Ranges. Initial project feasibility was considered based on preliminary cost/benefit analyses using the rough sediment yield estimates. Further review of the potential annual maintenance requirements led to the conclusion that the economic viability of the project depended heavily on annual O & M costs potentially required to remove the yearly accumulation of sediment within the proposed reservoir. Accurate estimates for the average annual sediment yield and single event sediment delivery were essential.

Further studies were undertaken to (1) identify specific geomorphic characteristics of the stream channels and watersheds upstream from the proposed flood control reservoir that could effect the sediment yield at the damsite, and (2) to relate channel and basin processes to sediment production and yields for various frequency precipitation and flood flow events in the watershed. This paper summarizes the procedures used for computing the basinwide annual yields and single event sediment production, along with conclusions and recommendations for other project design modifications.

¹ Hydraulic Engineer, U.S. Army Corps of Engineers, Hydrologic Engineering Center, 609 Second Street, Davis, CA 95616 U.S.A.

² Principal Geomorphologist, Water Engineering & Technology, Inc., 419 Canyon, Suite 225, Fort Collins, CO 80521, U.S.A.

³ Hydraulic Engineer, U.S. Army Corps of Engineers, Sacramento District, 650 Capitol Mall, Sacramento, CA 95814, U.S.A.

Paper prepared for the International Symposium on the Hydraulics/Hydrology of Arid Lands, ASCE Hydraulics Division, July 30-August 3, 1990, San Diego, CA

Approach

A two element SEI was conducted to address the sediment yield question: (1) geomorphic analyses (Harvey et al., 1990) were conducted to determine those unique characteristics of the basin and channels important to estimating sediment yield, and (2) sedimentation analyses (HEC, 1990) were conducted to determine the sediment yield in light of the findings from the geomorphic analyses.

To determine the amount of sediment that can possibly enter the proposed reservoir during its design life (100 years), both the average annual sediment yield and single event sediment yields are estimated using a variety of sediment engineering procedures as reported in EM 1110-2-4000, "Sediment Investigations of Rivers and Reservoirs," (COE, 1989) and recommended by others. Available scientific and engineering literature was reviewed, a three-day field reconnaissance and sediment data collection investigation was conducted, persons familiar with the Caliente Creek Project and watershed were interviewed, and a series of sediment engineering analyses to determine the possible sedimentation characteristics of the drainage basin at the damsite were carried out. Morphometric data for the alluvial fan in the vicinity of the proposed reservoir site were obtained from 2-foot contour mapping. Sixteen bed and bank material samples and two Wolman Counts were collected at representative locations throughout the drainage basin.

Average Annual Sediment Yield - The possible range of average annual sediment yield at the proposed reservoir site is estimated from the results from eight different sources of data and/or methods for estimating sediment yield. The following sources of data and procedures were used: (1) Previous reports and publications were thoroughly reviewed, (2) U.S.D.A. (1977) reservoir sedimentation rates were examined, (3) recent COE reservoir sedimentation survey data were analyzed, (4) sediment yield maps for the Western United States (U.S.D.A., SCS, 1975) were examined, (5) the average annual sediment yield was estimated from computations of the total event sediment volumes for single events ranging from the 2-year event up to the PMF based on channel transport capacity rather than watershed sediment production and delivery, (6) a similar flow duration and sediment load curve integration method (see EM 1110-2-4000, COE, 1989) was used to estimate the average annual sediment production and yield to the reservoir site, (7) the Pacific Southwest Inter-Agency Committee (PSIAC) method was used to estimate basin-wide sediment yield from the entire watershed, and (8) the Dendy and Bolton (1976) Regional Analysis Method for sediment yield was applied. Results from these analyses are discussed next. Detailed procedures for conducting such investigations are presented in the references cited and in Engineering Manual 1110-2-4000 (COE, 1989).

Table 1 presents the estimated sediment yields computed using the various computational procedures listed above and from measured reservoir surveys conducted by the Corps of Engineers and SCS. Based on measured sediment accumulation rates recorded in the six Tulare, Kings, and Kern County reservoirs, the approximate range of observed sediment yields is from 0.2 AF/sq mi/yr to 2.2 AF/sq mi/yr with an average of approximately 1.0 AF/sq mi/yr. Sediment yield rates determined for the Western United States are reported by the U.S.D.A., SCS (1975). From the mapping of yield rates, it appears that the upper Caliente watershed area has sediment yield rates from 0.2 to 0.5 AF/sq mi/yr, with pockets as high as 0.5 to 1.0 AF/sq mi/yr. In the lower portions of the basin, on the valley floor and on portions of the broad alluvial fan, the estimated yields are reported to be in the 0.1 to 0.2 AF/sq mi/yr range. Using area weighting methods to sum the yields from contributing subbasins, the approximate annual yield appears to range from 0.2 to about 0.75 AF/sq mi/yr, with an average of about 0.47 AF/sq mi/yr for the entire watershed.

Harvey et al., (1990) determined that the sediment delivery and yield at the damsite depends on the channel transport capacity in the fan area upstream from the reservoir rather than the watershed production of sediment. The broad (3,000 to 6,600 feet wide) alluvial fan contains an unlimited supply of easily mobilized sediment materials. This result lead to the following approach based on the transport capacity of the channels in the supply reach. The supply reach is a 4-mile section of the channel considered to be representative of the channel hydraulic conditions and sediment transport characteristics

TABLE 1

Sediment Surveys for Reservoirs in the Vicinity
of Caliente Creek, Kern County, California,
and Estimated Sediment Yields Based on Various
Computational Methods

Data Source	See References	Drainage Basin, Reservoir or Computational Method Used	Drainage Area (sq mi)	Yield (AF/sq mi/yr)
SCS	10	Blackburn	7.1	2.20
SCS	10	Antelope Canyon	4.4	1.50
CESPK	5	Isabella	2,074	0.37
CESPK	9	Pine Flat	1,542	0.20
CESPK	9	Success	393	0.76
CESPK	9	Terminus	560	0.75
SCS	8	SCS Yield Map of Western US (HEC)	470	0.47
Computed	7	Integration of the Event Volume vs. Frequency Curve (HEC)	470	0.55
Computed	7	Flow Duration Method (HEC)	470	0.50
Computed	7	Dendy & Bolton Method (HEC)	470	0.71
Computed	4	PSLAC Method (HEC)	470	0.75
Computed	6	Kern County Water Agency Study (SLA)	470	0.97

upstream from the dam site. Single event total sediment volumes were computed for each of the 2, 5, 10, 20, 50, 100, SPF, and PMF events. The total sediment production for each event was based on the sediment transport capacity of the alluvial channel (supply reach) upstream from the reservoir and the flow hydrographs used for each of the flood events evaluated.

A total sediment load versus percent exceedance curve was developed from these data and the area under the total load frequency curve was computed to give an estimate for the expected average annual sediment delivery to the reservoir based on channel transport capacity upstream from the reservoir. Two different transport relationships were used to develop the total load curves. The resulting average annual sediment delivery ranged from 0.1 AF/sq mi/yr to 1.0 AF/sq mi/yr due to the difference in transport capacity computed with the transport functions. Using these results as a representative range in expected yields based on channel capacity, an average of the two yields seems reasonable. Therefore, based on the channel transport capacity above the reservoir site and the estimated total sediment production from a range of single events, an approximate sediment yield at the reservoir is 0.55 AF/sq mi/yr. This method does not account for the additional contribution of sediment from dry ravel erosion, wind-blown sand transport into the channel or reservoir, channel bank caving, local scour, or toe failure that may occur along the Santa Hills. Therefore, the sediment yield to the reservoir may be as high as the higher of the two transport functions predicts, especially during periods of exceptionally wet years.

The "flow duration sediment discharge rating curve method," (COE, 1989) is a simple method where the flow duration curve is integrated with the sediment discharge rating curve developed for the damsite. It is very similar to the method just described, however, the average annual sediment yield is based on the transport capacity and flow duration relationship at the damsite rather than the total event volume frequency. The resulting annual sediment yield is approximately 438 AF/year, or 0.9 AF/sq mi/yr.

Further examination of the U.S.D.A., SCS (1975) "Sediment Yield Rates for the Western United States" shows areas in the vicinity of the proposed damsite with estimated yields from 0.5 to 1.0 AF/sq mi/yr. These areas may correspond to the broad floodplain channels (4000 to 6500 feet wide) immediately upstream from the proposed reservoir site. If that is the case, then the higher yield values estimated with the channel transport capacity method (1.0 AF/sq mi/yr) and the flow duration method (0.9 AF/sq mi/yr) are supported by SCS yield mapping estimates.

The Dendy and Bolton (1976) method produces an average annual sediment yield of approximately 0.71 AF/sq mi/yr for the Caliente Basin at the Sivert damsite, while the application of PSIAC procedures to the Caliente Creek watershed produces an estimated average annual sediment yield of 0.75 AF/sq mi/yr at the dam site. These values are right in line with the range of values predicted from the channel capacity approach and the measured reservoir accumulation results from Tulare County.

Others (Simons, Li & Associates, 1989) conducted an independent assessment of the proposed Caliente Creek Project. The authors report the arithmetic average of their yield estimates (0.97 AF/sq mi/yr) in Table 1. Figure 1 shows all thirteen yield values and the drainage basin area associated with each yield. A best fit line through these data points gives an average annual sediment yield of 0.75 AF/sq mi/yr. This is more than twice the original annual estimate.

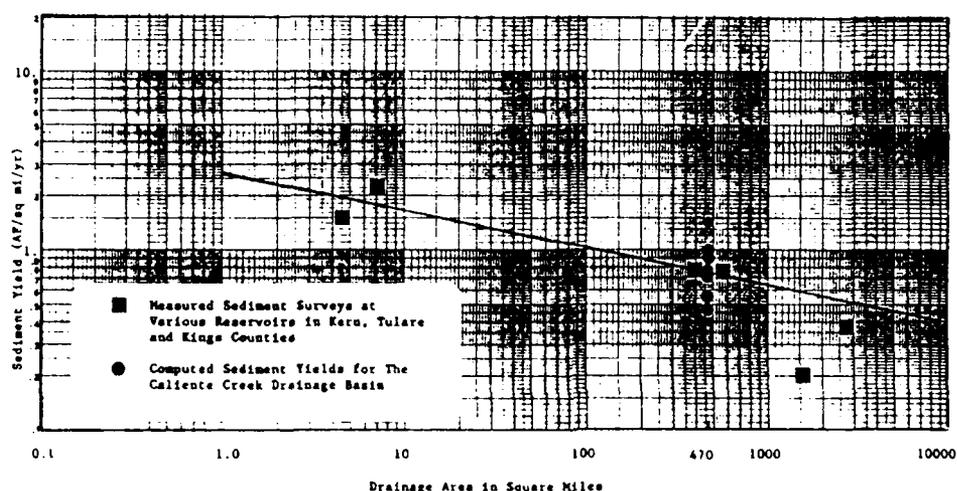


Figure 1

Measured and Computed Values of Average Annual Sediment Yield Versus Drainage Basin Area

It is important to note that arid and semi-arid basins, such as Caliente Creek, are very episodic in nature. During dry years (perhaps even normal years) the sediment production and delivery (and, therefore, annual yield) is small. During large runoff events the sediment production and delivery can produce tremendous loads of sediment in the channels. The annual yield during an excessively wet year can be quite high. Therefore, the presentation of a single average annual yield value may be misleading. For planning purposes, the consideration of the range of possible annual yields is more meaningful.

Single Event Analyses

In addition to the average annual sediment yield, it is important to estimate the sediment production and delivery from possible single events ranging from small 5-year flows to the design event (100 year flood) and, perhaps the SPF and PMF. It is possible that one or more single events during the design life of the project can significantly affect the operation and maintenance of the reservoir.

The study reach upstream from the proposed damsite was partitioned into four different zones or subreaches based on distinct hydraulic and geomorphic characteristics. The transport capacity is computed for each reach and is compared to the others with different hydraulic and geomorphic characteristics. The channel averaged sediment grain size and averaged channel hydraulic conditions for a range of discharges are used with several different total bed material load transport functions to develop representative water discharge versus total bed material load relationships for each of the subreaches and flow conditions.

Table 2 presents the computed sediment inflow to the proposed damsite for the various flood events. The 100 year flood event can possibly produce enough sediment during the single design event to remove 43.7 percent of the gross pool storage capacity (6992 AF). It also suggests that events greater than about the 15 year event can possibly remove 10 percent or more of the gross pool storage in one 5 day period. This indicates that the present design capacity of the reservoir may be undersized. The computed total sediment loads account for the total bed material load with an additional 15 percent estimated for the wash load. Typical wash loads can account for as much as 90 to 95 percent of the total load in most sand bed rivers (Vanoni, 1975). However, in the Caliente River Basin the availability of fines (silts and clays) may be limited due to the nature of the granitic parent materials throughout the basin (see Harvey et al., 1990). The authors postulate that the wash load near the damsite will have an inverted bed load/wash load relationship, and may only account for approximately 15 percent of the total sediment load being transported by each event.

TABLE 2
Computed Single Event Sediment Inflow to the Proposed Reservoir and Comparison to Planned Detention Storage Volume of 16,000 Feet

Event	Total Load Per Event (acre-feet) (dry volume)	Percent of the Planned Detention Storage Volume Associated with Single Event Sediment Delivery
5	245	1.5%
10	760	4.8%
20	1,794	11.2%
50	4,709	29.4%
100	6,992	43.7%
SPF	11,615	72.3%
PMF	29,440	184.0%

Harvey et al., (1990) estimate that there may have been approximately 9 inches of sediment deposited in the reach upstream from the Highway 58 crossing during the 1983 flood event. That event is estimated to be approximately a 50 year event according to the Kern County Water Agency. Comparing the total sediment loads entering and leaving the reach it is seen that there is approximately 575 acre feet more sediment transported into the reach from the upstream supply reach than leaves the reach. The approximate surface area of the reach is one square mile (640 acres). Assuming that the 575 acre feet of sediment deposits uniformly over the reach, this gives an approximate sediment deposition thickness of 10.8 inches. This matches the observed deposition depth for a 50 year event reasonably well.

Large events such as a 50 year flood or greater may produce large amounts of sediment material that enter the water course due to mass wasting, channel bank failure and erosion of prograded alluvial fans that often extend into the channel in the upper basin. It may be that single event sediment production can contribute significant quantities of sediment materials to the reservoir in a short period of time (a few days) and affect the operation and storage characteristics of the project.

Conclusions

The following conclusions are drawn from the results of this investigation:

- 1) The morphology of the Caliente Creek drainage basin and the nature of the sediments delivered to the channels and the potential for sediment storage within the drainage basin are controlled by the basin geology (Harvey et al., 1990).
- 2) Sediment transport in the basin is episodic and is governed by the occurrence of large runoff events. Sediment is stored in the broad valley washes (3000 to 6600 feet wide) in the lower portions of the Caliente Basin. There is sufficient material located in these expansive washes to provide sediment supply to the lower fan areas somewhat independently of the production and delivery of sediments from the upper watershed areas. Therefore, sediment yield at the proposed damsite may be more dependent upon the transport capacity of the channels and washes upstream from the damsite, than the watershed production of sediment materials during a flood event.
- 3) Examination of eight different sources of yield data and methods for estimating yield at the damsite concludes that the approximate average annual sediment yield at the Sivert Reservoir is 0.75 AF/sq mi/yr. This is more than twice the initial yield estimate developed during the planning studies. Annual sediment yields can range from 0.47 AF/sq mi/yr to approximately 1.5 AF/sq mi/yr.
- 4) Single event floods may produce significantly more sediment per event than the annual sediment yield would indicate. As much as 43 percent of the total gross pool storage volume (16,000 AF) may be lost due to sediment deposition during a 100 year event. This would necessitate the removal of approximately 7,000 AF of sediment material (dry volume) from the reservoir prior to the next flood season. It also indicates that the design capacity of the reservoir may be undersized.

Acknowledgements

The study reported herein was conducted by the Hydrologic Engineering Center, Davis, California at the request of the Sacramento District, Corps of Engineers. The views expressed herein are those of the authors and not necessarily those of the U.S. Army Corps of Engineers.

References

1. Dendy, F.E. and G.C. Bolton (1976). "Sediment Yield - Drainage Area Relationships in the United States," *Journal of Soil and Water Conservation*.
2. Harvey, Michael D., E.F. Sing and Robert C. MacArthur (1990). "Sediment Sources, Transport and Delivery to An Alluvial Fan, Caliente Creek, CA," *Proceedings of the International Symposium on Hydraulics and Hydrology of Arid Lands*, ASCE, July 30 - Aug 2, San Diego, CA.
3. Hydrologic Engineering Center (1990). "Phase I Sediment Engineering Investigation of the Caliente Creek Drainage Basin," *Final Project Report No. 90-03*, prepared for CESPCK, Sacramento, CA.
4. Pacific Southwest Inter-Agency Committee (1968). Report of the Water Management Subcommittee on "Factors Affecting Sediment Yield in the Pacific Southwest Areas and Selection and Evaluation of Measures for Reduction of Erosion and Sediment Yield," Sedimentation Task Force, PSILAC.
5. Personal Communication with CESPCK-ED-H/Herb Hereth (11/21/89).
6. Simons, Li & Associates, Inc. (1989). "Sedimentation Study of Caliente Creek Watershed, Kern County, CA," a report prepared for Kern County Water Agency, Bakersfield, CA.
7. U.S. Army Corps of Engineers (1989). "Sedimentation Investigations of Rivers and Reservoirs; Engineering Manual EM 1110-2-4000, Office of the Chief of Engineers, Washington, D.C.
8. U.S. Department of Agriculture (1975). "Erosion, Sediment and Related Salt Problems and Treatment Opportunities," Special Projects Division, Soil Conservation Service, Golden, CO.
9. U.S. Department of Agriculture (1977). "Supplement to Sediment Deposition in U.S. Reservoirs: Summary of Data Reported Through 1975," *Miscellaneous Publication No. 1362* compiled by the Sedimentation Committee, Water Resources Council at the USDA Sedimentation Laboratory, Oxford, MS.
10. U.S. Department of Agriculture (1980). "Watershed Plan and Environmental Impact Statement - Tehachapi Watershed," Soil Conservation Service, Tehachapi, CA.
11. Vanoni, Vito A., ed. (1975). Sedimentation Engineering, American Society of Civil Engineers, New York, NY.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No 0704-0188

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b. RESTRICTIVE MARKINGS	
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION / AVAILABILITY OF REPORT	
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE			
4. PERFORMING ORGANIZATION REPORT NUMBER(S) Technical Paper No. 130		5. MONITORING ORGANIZATION REPORT NUMBER(S)	
6a. NAME OF PERFORMING ORGANIZATION Hydrologic Engineering Center	6b. OFFICE SYMBOL (If applicable) CEWRC-HEC	7a. NAME OF MONITORING ORGANIZATION Water Resources Support Center	
6c. ADDRESS (City, State, and ZIP Code) 609 Second Street Davis, California 95616		7b. ADDRESS (City, State, and ZIP Code) Casey Building 2594 Fort Belvoir, Virginia 22060	
8a. NAME OF FUNDING / SPONSORING ORGANIZATION	8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
8c. ADDRESS (City, State, and ZIP Code)		10. SOURCE OF FUNDING NUMBERS	
		PROGRAM ELEMENT NO.	PROJECT NO.
		TASK NO.	WORK UNIT ACCESSION NO.
11. TITLE (Include Security Classification) Estimating Sediment Delivery and Yield on Alluvial Fans			
12. PERSONAL AUTHOR(S) Dr. Robert C. MacArthur, Michael D. Harvey and Edward Sing			
13a. TYPE OF REPORT Technical Paper	13b. TIME COVERED FROM _____ TO _____	14. DATE OF REPORT (Year, Month, Day) June 1990	15. PAGE COUNT 6
16. SUPPLEMENTARY NOTATION			
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB-GROUP	
		Alluvial Fans, Sediment Production, Sediment Yield, Transport Capacity, Geomorphology, Single Event Floods, Episodic Flows, Average Annual Sediment Yield, (continued)	
19. ABSTRACT (Continue on reverse if necessary and identify by block number) This paper summarizes the procedures used for computing the basinwide annual yields and single event sediment production for ephemeral channels located on an incised alluvial fan in Central California. Unique geomorphic characteristics of the basin and alluvial fan are discussed in light of data and analytical methods necessary to compute sediment delivery and yield at a proposed damsite.			
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS		21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL DARRYL W. DAVIS, Director, HEC		22b. TELEPHONE (Include Area Code) 916 745-1104	22c. OFFICE SYMBOL CEWRC-HEC

SUBJECT TERMS (Continued)

Flow Duration Methods, Regional Methods

TECHNICAL PAPER SERIES
(\$2.00 per paper)

- | | | | |
|-------|---|-------|---|
| TP-1 | Use of Interrelated Records to Simulate Streamflow | TP-37 | Downstream Effects of the Levee Overtopping at Wilkes-Barre, PA, During Tropical Storm Agnes |
| TP-2 | Optimization Techniques for Hydrologic Engineering | TP-38 | Water Quality Evaluation of Aquatic Systems |
| TP-3 | Methods of Determination of Safe Yield and Compensation Water from Storage Reservoirs | TP-39 | A Method for Analyzing Effects of Dam Failures in Design Studies |
| TP-4 | Functional Evaluation of a Water Resources System | TP-40 | Storm Drainage and Urban Region Flood Control Planning |
| TP-5 | Streamflow Synthesis for Ungaged Rivers | TP-41 | HEC-5C, A Simulation Model for System Formulation and Evaluation |
| TP-6 | Simulation of Daily Streamflow | TP-42 | Optimal Sizing of Urban Flood Control Systems |
| TP-7 | Pilot Study for Storage Requirements for Low Flow Augmentation | TP-43 | Hydrologic and Economic Simulation of Flood Control Aspects of Water Resources Systems |
| TP-8 | Worth of Streamflow Data for Project Design - A Pilot Study | TP-44 | Sizing Flood Control Reservoir Systems by Systems Analysis |
| TP-9 | Economic Evaluation of Reservoir System Accomplishments | TP-45 | Techniques for Real-Time Operation of Flood Control Reservoirs in the Merrimack River Basin |
| TP-10 | Hydrologic Simulation in Water-Yield Analysis | TP-46 | Spatial Data Analysis of Nonstructural Measures |
| TP-11 | Survey of Programs for Water Surface Profiles | TP-47 | Comprehensive Flood Plain Studies Using Spatial Data Management Techniques |
| TP-12 | Hypothetical Flood Computation for a Stream System | TP-48 | Direct Runoff Hydrograph Parameters Versus Urbanization |
| TP-13 | Maximum Utilization of Scarce Data in Hydrologic Design | TP-49 | Experience of HEC in Disseminating Information on Hydrological Models |
| TP-14 | Techniques for Evaluating Long-Term Reservoir Yields | TP-50 | Effects of Dam Removal: An Approach to Sedimentation |
| TP-15 | Hydrostatistics - Principles of Application | TP-51 | Design of Flood Control Improvements by Systems Analysis: A Case Study |
| TP-16 | A Hydrologic Water Resource System Modeling Techniques | TP-52 | Potential Use of Digital Computer Ground Water Models |
| TP-17 | Hydrologic Engineering Techniques for Regional Water Resources Planning | TP-53 | Development of Generalized Free Surface Flow Models Using Finite Element Techniques |
| TP-18 | Estimating Monthly Streamflows Within a Region | TP-54 | Adjustment of Peak Discharge Rates for Urbanization |
| TP-19 | Suspended Sediment Discharge in Streams | TP-55 | The Development and Servicing of Spatial Data Management Techniques in the Corps of Engineers |
| TP-20 | Computer Determination of Flow Through Bridges | TP-56 | Experiences of the Hydrologic Engineering Center in Maintaining Widely Used Hydrologic and Water Resource Computer Models |
| TP-21 | An Approach to Reservoir Temperature Analysis | TP-57 | Flood Damage Assessments Using Spatial Data Management Techniques |
| TP-22 | A Finite Difference Method for Analyzing Liquid Flow in Variably Saturated Porous Media | TP-58 | A Model for Evaluating Runoff-Quality in Metropolitan Master Planning |
| TP-23 | Uses of Simulation in River Basin Planning | TP-59 | Testing of Several Runoff Models on an Urban Watershed |
| TP-24 | Hydroelectric Power Analysis in Reservoir Systems | TP-60 | Operational Simulation of a Reservoir System with Pumped Storage |
| TP-25 | Status of Water Resource Systems Analysis | TP-61 | Technical Factors in Small Hydropower Planning |
| TP-26 | System Relationships for Panama Canal Water Supply | TP-62 | Flood Hydrograph and Peak Flow Frequency Analysis |
| TP-27 | System Analysis of the Panama Canal Water Supply | TP-63 | HEC Contribution to Reservoir System Operation |
| TP-28 | Digital Simulation of an Existing Water Resources System | TP-64 | Determining Peak-Discharge Frequencies in an Urbanizing Watershed: A Case Study |
| TP-29 | Computer Applications in Continuing Education | TP-65 | Feasibility Analysis in Small Hydropower Planning |
| TP-30 | Drought Severity and Water Supply Dependability | TP-66 | Reservoir Storage Determination by Computer Simulation of Flood Control and Conservation Systems |
| TP-31 | Development of System Operation Rules for an Existing System by Simulation | TP-67 | Hydrologic Land Use Classification Using LANDSAT |
| TP-32 | Alternative Approaches to Water Resource System Simulation | TP-68 | Interactive Nonstructural Flood-Control Planning |
| TP-33 | System Simulation for Integrated Use of Hydroelectric and Thermal Power Generation | TP-69 | Critical Water Surface by Minimum Specific Energy Using the Parabolic Method |
| TP-34 | Optimizing Flood Control Allocation for a Multipurpose Reservoir | TP-70 | Corps of Engineers Experience with Automatic Calibration of a Precipitation-Runoff Model |
| TP-35 | Computer Models for Rainfall-Runoff and River Hydraulic Analysis | | |
| TP-36 | Evaluation of Drought Effects at Lake Atitlan | | |

- TP-71 Determination of Land Use from Satellite Imagery for Input to Hydrologic Models
- TP-72 Application of the Finite Element Method to Vertically Stratified Hydrodynamic Flow and Water Quality
- TP-73 Flood Mitigation Planning Using HEC-SAM
- TP-74 Hydrographs by Single Linear Reservoir Model
- TP-75 HEC Activities in Reservoir Analysis
- TP-76 Institutional Support of Water Resource Models
- TP-77 Investigation of Soil Conservation Service Urban Hydrology Techniques
- TP-78 Potential for Increasing the Output of Existing Hydroelectric Plants
- TP-79 Potential Energy and Capacity Gains from Flood Control Storage Reallocation at Existing U. S. Hydropower Reservoirs
- TP-80 Use of Non-Sequential Techniques in the Analysis of Power Potential at Storage Projects
- TP-81 Data Management Systems for Water Resources Planning
- TP-82 The New HEC-1 Flood Hydrograph Package
- TP-83 River and Reservoir Systems Water Quality Modeling Capability
- TP-84 Generalized Real-Time Flood Control System Model
- TP-85 Operation Policy Analysis: Sam Rayburn Reservoir
- TP-86 Training the Practitioner: The Hydrologic Engineering Center Program
- TP-87 Documentation Needs for Water Resources Models
- TP-88 Reservoir System Regulation for Water Quality Control
- TP-89 A Software System to Aid in Making Real-Time Water Control Decisions
- TP-90 Calibration, Verification and Application of a Two-Dimensional Flow Model
- TP-91 HEC Software Development and Support
- TP-92 Hydrologic Engineering Center Planning Models
- TP-93 Flood Routing Through a Flat, Complex Flood Plain Using a One-Dimensional Unsteady Flow Computer Program
- TP-94 Dredged-Material Disposal Management Model
- TP-95 Infiltration and Soil Moisture Redistribution in HEC-1
- TP-96 The Hydrologic Engineering Center Experience in Nonstructural Planning
- TP-97 Prediction of the Effects of a Flood Control Project on a Meandering Stream
- TP-98 Evolution in Computer Programs Causes Evolution in Training Needs: The Hydrologic Engineering Center Experience
- TP-99 Reservoir System Analysis for Water Quality
- TP-100 Probable Maximum Flood Estimation - Eastern United States
- TP-101 Use of Computer Program HEC-5 for Water Supply Analysis
- TP-102 Role of Calibration in the Application of HEC-6
- TP-103 Engineering and Economic Considerations in Formulating
- TP-104 Modeling Water Resources Systems for Water Quality
- TP-105 Use of a Two-Dimensional Flow Model to Quantify Aquatic Habitat
- TP-106 Flood-Runoff Forecasting with HEC-1F
- TP-107 Dredged-Material Disposal System Capacity Expansion
- TP-108 Role of Small Computers in Two-Dimensional Flow Modeling
- TP-109 One-Dimensional Model For Mud Flows
- TP-110 Subdivision Froude Number
- TP-111 HEC-5Q: System Water Quality Modeling
- TP-112 New Developments in HEC Programs for Flood Control
- TP-113 Modeling and Managing Water Resource Systems for Water Quality
- TP-114 Accuracy of Computed Water Surface Profiles - Executive Summary
- TP-115 Application of Spatial-Data Management Techniques in Corps Planning
- TP-116 The HEC's Activities in Watershed Modeling
- TP-117 HEC-1 and HEC-2 Applications on the MicroComputer
- TP-118 Real-Time Snow Simulation Model for the Monongahela River Basin
- TP-119 Multi-Purpose, Multi-Reservoir Simulation on a PC
- TP-120 Technology Transfer of Corps' Hydrologic Models
- TP-121 Development, Calibration and Application of Runoff Forecasting Models for the Allegheny River Basin
- TP-122 The Estimation of Rainfall for Flood Forecasting Using Radar and Rain Gage Data
- TP-123 Developing and Managing a Comprehensive Reservoir Analysis Model
- TP-124 Review of the U.S. Army Corps of Engineering Involvement With Alluvial Fan Flooding Problems
- TP-125 An Integrated Software Package for Flood Damage Analysis
- TP-126 The Value and Depreciation of Existing Facilities: The Case of Reservoirs
- TP-127 Floodplain-Management Plan Enumeration
- TP-128 Two-Dimensional Floodplain Modeling
- TP-129 Status and New Capabilities of Computer Program HEC-6: "Scour and Deposition in Rivers and Reservoirs"
- TP-130 Estimating Sediment Delivery and Yield on Alluvial Fans