

DTIC FILE COPY

2

ARL-SYS-PD-003

AR-006-071

AD-A230 858



**DEPARTMENT OF DEFENCE**  
**DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION**  
**AERONAUTICAL RESEARCH LABORATORY**  
MELBOURNE, VICTORIA

Aircraft Systems Project Document 003

**FATIGUE TESTING OF THE MK3 MOD0 2000 LB BAIL LUGS:**  
**TEST REPORT**

by

J.L. JAEGER

**DTIC**  
**ELECTE**  
**JAN 29 1991**  
**S B D**

Approved for public release

(C) COMMONWEALTH OF AUSTRALIA 1990

AUGUST 1990

optical contains color  
plates: All DTIC reproductions  
will be in black and white

This work is copyright. Apart from any fair dealing for the purpose of study, research, criticism or review, as permitted under the Copyright Act, no part may be reproduced by any process without written permission. Copyright is the responsibility of the Director Publishing and Marketing, AGPS. Inquiries should be directed to the Manager, AGPS Press, Australian Government Publishing Service, GPO Box 84, CANBERRA ACT 2601.

**DEPARTMENT OF DEFENCE  
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION  
AERONAUTICAL RESEARCH LABORATORY**

Aircraft Systems Project Document 003

**FATIGUE TESTING OF THE MK3 MOD0 2000 LB BAIL LUGS: TEST REPORT**


**REQUESTING AUTHORITY:** No. 1 Central Ammunition Depot, RAAF

**ITEMS TESTED:** Sixty one MK3 MOD0 2000 lb bail lugs from four different lot numbers

**SUMMARY:** This report details the procedure and results obtained for fatigue tests conducted on 2000 lb bail lugs in accordance with MIL-HDBK-5E.

**PREPARED:** J.L. JAEGER

**REFERENCE:** WA 800519

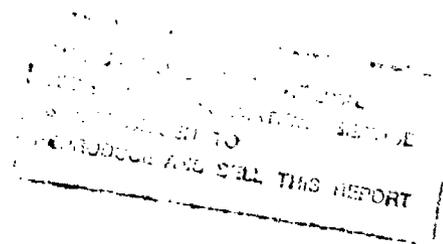

**(C) COMMONWEALTH OF AUSTRALIA 1990**

---

**POSTAL ADDRESS:** Director, Aeronautical Research Laboratory  
506 Lorimer Street, Fishermans Bend Victoria 3207  
Australia

CONTENTS

1. APPLICABLE DOCUMENTS..... 1

2. EQUIPMENT USED FOR TESTING ..... 1

3. TEST REQUIREMENT..... 2

    3.1 Preliminary Tests to Establish the General Shape of the S/N Curves .... 2

    3.2 The Fatigue Tests ..... 2

    3.3 Load and Cycle Monitoring ..... 2

    3.4 Visual Examination ..... 2

4. TEST DETAILS..... 3

5. TEST RESULTS..... 3

    TABLE 1 ..... 5

    TABLE 2 ..... 7

6. REFERENCES..... 8

FIGURES 1-5

DISTRIBUTION LIST

DOCUMENT CONTROL DATA

|                           |                                     |
|---------------------------|-------------------------------------|
| <b>Accession For</b>      |                                     |
| NTIS GRA&I                | <input checked="" type="checkbox"/> |
| DTIC TAB                  | <input type="checkbox"/>            |
| Unannounced               | <input type="checkbox"/>            |
| Justification             |                                     |
| By                        |                                     |
| Distribution/             |                                     |
| <b>Availability Codes</b> |                                     |
| Dist                      | Avail and/or<br>Special             |
| A-1                       |                                     |

**1. APPLICABLE DOCUMENTS**

1.1 MIL-HDBK-5E

**2. EQUIPMENT USED FOR TESTING**

2.1 Instron Hydraulic Actuator, 306 Series, Serial No.8025.

2.2 Hydraulic Power Supply.

2.3 MOOG DC Servo Controller.

2.4 Load Cell, 400 kN.

2.5 Strain Gauge Signal Conditioner, Serial No.11331.

2.6 Function Generator BWD 160A, Serial No. 60474.

2.7 Control Box EEDL071.

2.8 Control Box EEDL074.

2.9 Auto Ranging Digital Voltmeter, B & K Type 2427, Serial No. 579958.

2.1 Oscilloscope UP-5220A, National, Plant No. E107901.

2.11 Timer Counter TC8, Advance Instruments, Plant No. E104445.

2.12 Power Supply,  $\pm 15$  Volts, Power Products.

### 3. TEST REQUIREMENT

The bail lugs shall be mounted into the testing rig, as shown in Figure 1 and Figure 2, and be subjected to selected levels of cyclic loading as detailed below, until such time as a failure occurs. All testing shall be carried out in accordance with MIL-HDBK-5E.

#### 3.1 PRELIMINARY TESTS TO ESTABLISH THE GENERAL SHAPE OF THE S/N CURVES

For each of the two selected stress ratios of  $R = 0.1$  and  $R = 0.6$ , four to six lugs shall be tested in order to establish the general shape of the S/N curves. The proposed maximum loads for these preliminary tests are 180 kN, 150 kN, 120 kN and 90 kN which are similar to the loads used in tests described in References 6.1 and 6.2.

#### 3.2 THE FATIGUE TESTS

Once the general fatigue curves have been established, replicate tests shall be conducted at a minimum of three evenly spaced maximum load levels, in order to statistically define the fatigue curves. The number of lugs tested at each load level shall depend on the variability of the results. In accordance with MIL-HDBK-5E a minimum of two lugs is required, but for large variability the recommended number is four or more.

#### 3.3 LOAD AND CYCLE MONITORING

The output from the calibrated load cell placed in series with the bail lug shall be monitored visually on an oscilloscope to ensure correct loading of the lugs. A frequency counter shall be used to count the number of cycles that the lugs have been subjected to.

#### 3.4 VISUAL EXAMINATION

Each test item shall be subjected to a visual examination at the end of the test to note the failure mode.

#### 4. TEST DETAILS

- 4.1 The bail lug is screwed into a threaded mount which is in turn connected to the calibrated load cell. A U-hook made to dimensions resembling those of an Ejector Release Unit hook is then placed through the lug and held in an upright position between two serrated plates. See Figure 3. The two plates are clamped together with six high tensile bolts and this unit is then held with a steel pin, between the two plates making up the load beam. See Figure 1 and Figure 2.
- 4.2 For each of the selected replicate load levels at least one lug from each lot number shall be tested in order to obtain representative curves. For the preliminary tests and the tests for identifying run-out, lugs from lot numbers 1 and 4 shall be used due to the availability of a larger quantity of these lugs in comparison to the others.

#### 5. TEST RESULTS

A summary of the test results can be seen in Table 1 and Table 2. These tables contain the results from the preliminary testing as well as those from the replicate testing at the selected maximum loads. At the lower end of the load spectrum there are results which have been obtained whilst trying to locate the load resulting in run-out. These results are presented graphically in Figure 5. The lug identification in these tables refers to lugs from four different lot numbers as follows:

F1/\*\* = MK3 MOD0  
(ET)  
30003-1380540  
ETW-1 277

F2/\*\* = MK3 MOD0  
30003-1380540  
SMN81J 001008

F3/\*\* = MK3 MOD0  
30003-1380540  
SMN80G001 001

F4/\*\* = MK3 MOD0  
30003-1380540  
SMN83F 001009

The results from the preliminary testing indicated that for the stress ratio of  $R = 0.1$  the replicate tests should be carried out at loads of 180 kN, 135 kN, 90 kN and 60 kN. For the stress ratio of  $R = 0.6$  the selected loads were 210 kN, 180 kN, 150 kN, 120 kN and 90 kN.

The items tested appear to exhibit several different failure modes, however, on closer examination it is noticed that for most of the lugs, the crack growth initiates horizontally at the base of the inside corner radius where it joins the vertical leg. After this initial cracking the failure either continues horizontally, at 45° across the corners, vertically up, or some combination of these. There were some lugs however, which broke in the centre of the bail, and these have been identified in the tables of results. Examples of these failures can be seen in Figure 4.

The lugs which failed in the centre of the bail also exhibited crack growth in the vertical legs. The sequence in which these cracks occurred is not known, however, it was thought most likely that the lug broke at the centre first, followed by the failures in the side legs. If the failures had initiated at the vertical legs there appears to be no reason for the occurrence of the central failure.

TABLE 1. FATIGUE RESULTS FOR A STRESS RATIO OF R = 0.1

| LOAD, S<br>kN | LUG ID. | NO. CYCLES TO<br>FAILURE, N | FAILURE MODE<br>& COMMENTS |
|---------------|---------|-----------------------------|----------------------------|
| 180 - 18      | F1/11   | 3949                        | CENTRE OF BAIL             |
| 180 - 18      | F2/10   | 5192                        |                            |
| 180 - 18      | F3/1    | 5068                        | CENTRE OF BAIL             |
| 180 - 18      | F4/7    | 3897                        |                            |
| 180 - 18      | F1/12   | 4093                        |                            |
| 180 - 18      | F1/13   | 5593                        | CENTRE OF BAIL             |
| 150 - 15      | F1/77   | 8691                        |                            |
| 150 - 15      | F1/80   | 5612                        |                            |
| 135 - 13.5    | F1/4    | 8511                        |                            |
| 135 - 13.5    | F2/5    | 11667                       | CENTRE OF BAIL             |
| 135 - 13.5    | F3/10   | 9138                        |                            |
| 135 - 13.5    | F4/1    | 9625                        |                            |
| 135 - 13.5    | F4/11   | 10716                       |                            |
| 120 - 12      | F1/78   | 12187                       |                            |
| 120 - 12      | F1/73   | 13750                       |                            |
| 90 - 9        | F1/5    | 23454                       |                            |
| 90 - 9        | F2/3    | 35637                       |                            |
| 90 - 9        | F3/5    | 29067                       |                            |
| 90 - 9        | F4/3    | 40883                       |                            |
| 90 - 9        | F1/8    | 27184                       |                            |
| 90 - 9        | F1/7    | 28884                       |                            |
| 90 - 9        | F1/53   | 23493                       |                            |
| 60 - 6        | F1/10   | 85533                       |                            |
| 60 - 6        | F2/9    | 84160                       |                            |
| 60 - 6        | F3/3    | 74083                       |                            |
| 60 - 6        | F2/2    | 62794                       |                            |
| 60 - 6        | F3/7    | 96349                       |                            |
| 60 - 6        | F4/2    | 1000000                     | NOT BROKEN                 |

| LOAD, S<br>kN | LUG ID. | NO. CYCLES TO<br>FAILURE, N | FAILURE MODE<br>& COMMENTS |
|---------------|---------|-----------------------------|----------------------------|
| 60 - 6        | F1/68   | 85067                       |                            |
| 55 - 5.5      | F4/12   | 163703                      |                            |
| 55 - 5.5      | F4/14   | 177295                      |                            |
| 55 - 5.5      | F4/15   | 177170                      |                            |
| 55 - 5.5      | F4/16   | 1000000                     | NOT BROKEN                 |
| 50 - 5        | F4/5    | 1000000                     | NOT BROKEN                 |

TABLE 2. FATIGUE RESULTS FOR A STRESS RATIO OF R = 0.6

| LOAD, S<br>kN | LUG ID. | NO. CYCLES TO<br>FAILURE, N | FAILURE MODE<br>& COMMENTS |
|---------------|---------|-----------------------------|----------------------------|
| 210 - 126     | F1/2    | 14693                       |                            |
| 210 - 126     | F2/7    | 21084                       |                            |
| 210 - 126     | F3/4    | 15671                       |                            |
| 210 - 126     | F4/9    | 15576                       |                            |
| 210 - 126     | F3/2    | 16694                       |                            |
| 180 - 108     | F1/14   | 14446                       | CENTRE OF BAIL             |
| 180 - 108     | F1/6    | 23388                       | CENTRE OF BAIL             |
| 180 - 108     | F4/17   | 28976                       |                            |
| 180 - 108     | F4/8    | 26031                       |                            |
| 150 - 90      | F1/1    | 22029                       | CENTRE OF BAIL             |
| 150 - 90      | F3/6    | 45451                       | CENTRE OF BAIL             |
| 150 - 90      | F4/10   | 35168                       |                            |
| 150 - 90      | F2/1    | 53062                       |                            |
| 120 - 72      | F3/8    | 89100                       |                            |
| 120 - 72      | F1/3    | 79184                       | CENTRE OF BAIL             |
| 120 - 72      | F4/6    | 121828                      |                            |
| 120 - 72      | F2/4    | 145346                      |                            |
| 90 - 54       | F1/9    | 192731                      |                            |
| 90 - 54       | F2/8    | 228300                      |                            |
| 90 - 54       | F3/9    | 396006                      |                            |
| 90 - 54       | F4/4    | 405788                      |                            |
| 80 - 48       | F1/23   | 235612                      |                            |
| 80 - 48       | F1/24   | 290562                      |                            |
| 70 - 42       | F2/6    | 551698                      |                            |
| 70 - 42       | F1/20   | 357666                      |                            |
| 70 - 42       | F1/21   | 558290                      |                            |
| 60 - 36       | F1/22   | 737156                      |                            |

## 6.0 REFERENCES

- 6.1 Kerrison, R. Fatigue test on No. 51 Mk 1 suspension lugs. Warwick: Cape Engineering Co. Ltd., Report No.480/TD/73, Dec. 1972
- 6.2 NATO suspension lug evaluation program for 1000 pound class and 2000 to 3500 pound class stores. New York: Dayton T. Brown Inc., Engineering and Test Division, Report No. DTB02R83-1408, 15 Dec. 1983.

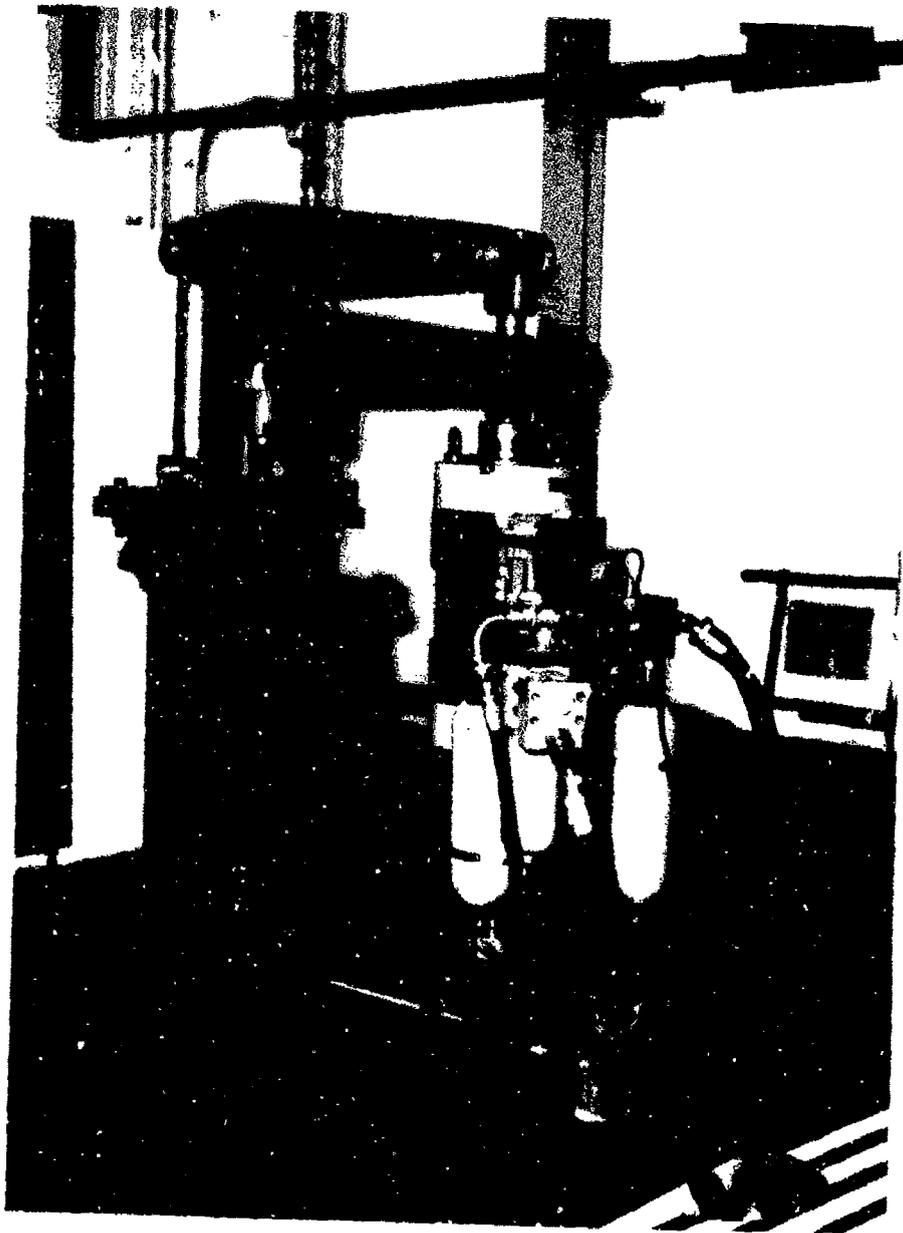


FIGURE 1: FATIGUE TESTING RIG

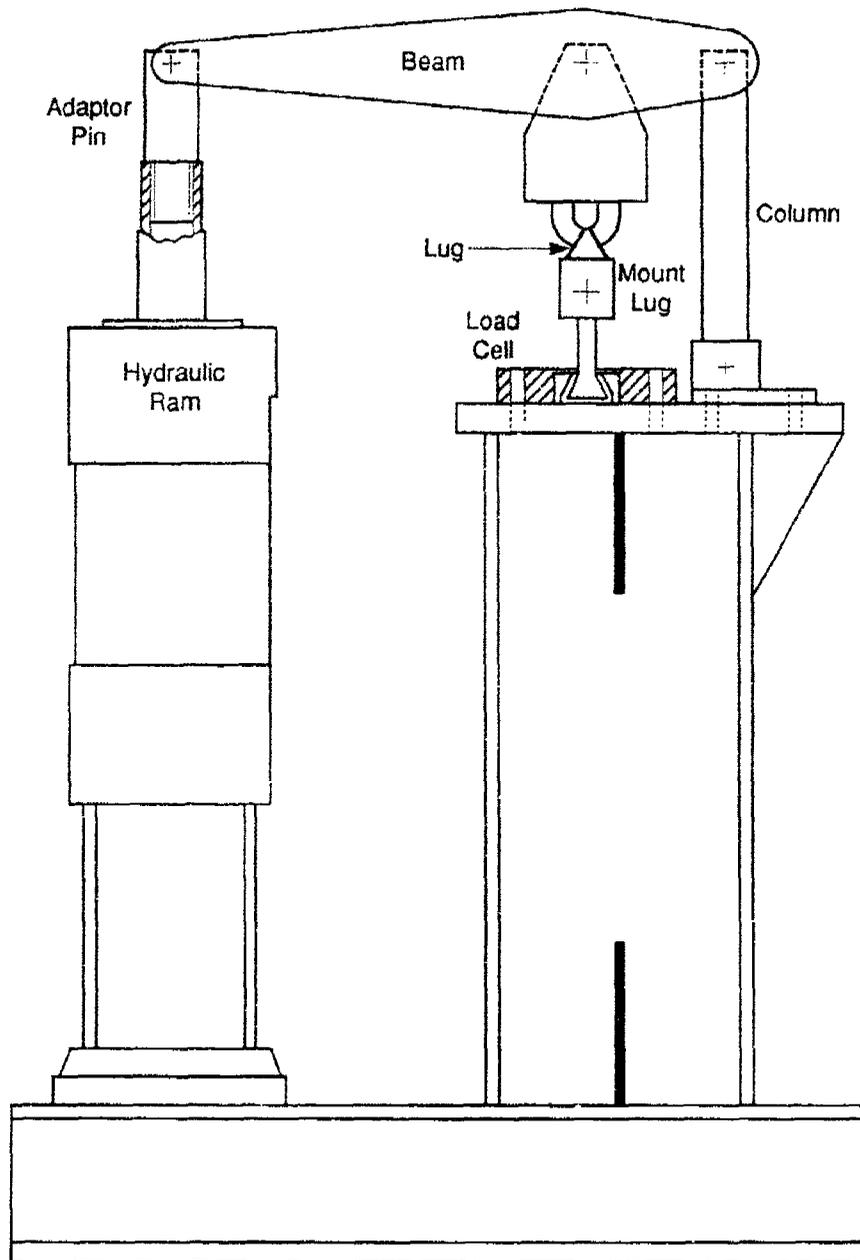


FIGURE:2 SKETCH OF FATIGUE TESTING RIG GIVING LOAD CELL DETAIL



FIGURE: 3 BAIL LUG LOAD TRAIN

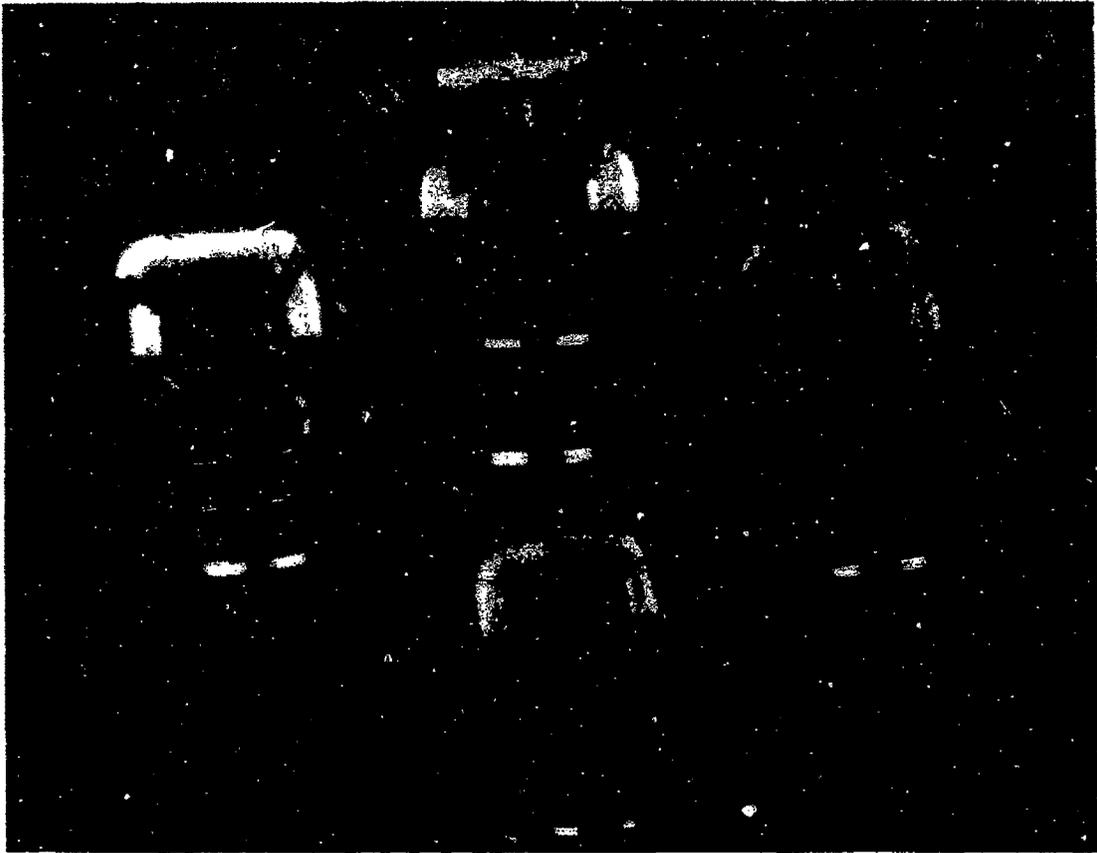


FIGURE 4: LUG FAILURE MODES

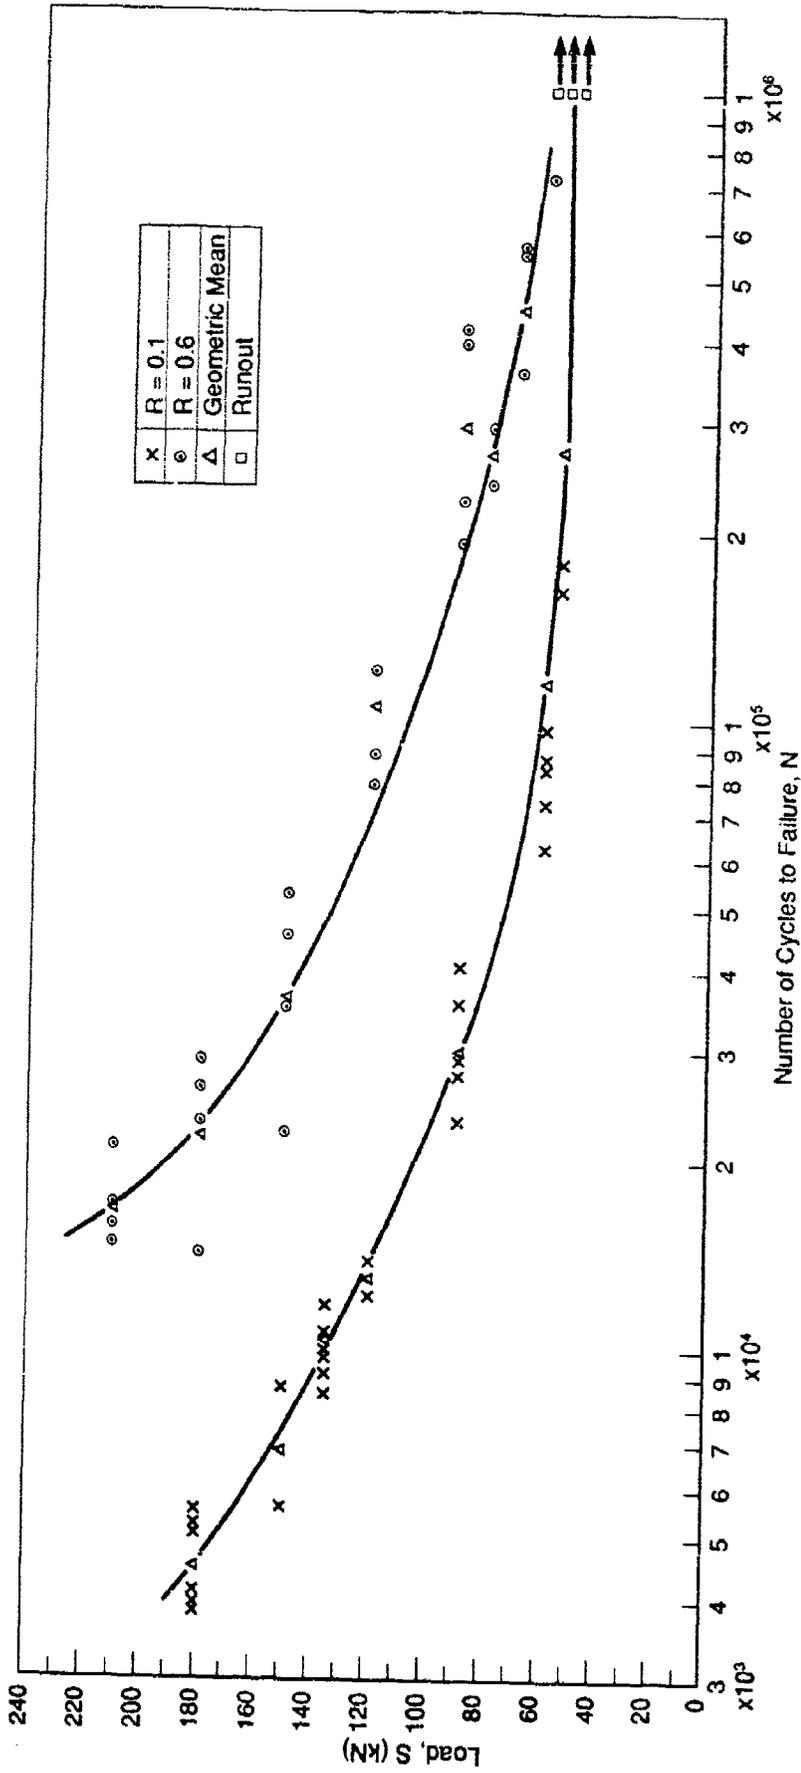


FIGURE 5: MAXIMUM LOAD vs NUMBER OF CYCLES TO FAILURE

## DISTRIBUTION

### AUSTRALIA

#### Department of Defence

##### Defence Central

Chief Defence Scientist  
AS, Science Corporate Management (shared copy)  
FAS Science Policy (shared copy)  
Director, Departmental Publications  
Counsellor, Defence Science, London (Doc Data Sheet Only)  
Counsellor, Defence Science, Washington (Doc Data Sheet Only)  
OIC TRS, Defence Central Library  
Document Exchange Centre, DSTIC (8 copies)  
Joint Intelligence Organisation  
Librarian H Block, Victoria Barracks, Melbourne

##### Aeronautical Research Laboratory

Director  
Library  
Chief Aircraft Systems Division  
Author: J.L. Jaeger  
D. Anderson  
B. Solowij  
J. Grandage

##### Air Force Office

No. 1 Central Ammunition Depot, RAAF

SPARES (10 COPIES)

TOTAL (31 COPIES)

## DOCUMENT CONTROL DATA

PAGE CLASSIFICATION  
UNCLASSIFIED

PRIVACY MARKING

|   |  |   |   |
|---|--|---|---|
| 1a. AR NUMBER<br>AR-006-071   | 1b. ESTABLISHMENT NUMBER<br>ARL-SYS-PD-003 | 2. DOCUMENT DATE<br>AUGUST 1990   | 3. TASK NUMBER<br>DST 90/078                        |
| 4. TITLE<br>FATIGUE TESTING OF<br>THE MK3 MOD0 2000 LB<br>BAIL LUGS: TEST REPORT  |  | 5. SECURITY CLASSIFICATION<br>(PLACE APPROPRIATE CLASSIFICATION<br>IN BOX(S) IE. SECRET (S), CONF. (C)<br>RESTRICTED (R), UNCLASSIFIED (U)).<br><br><input type="checkbox"/> U <input type="checkbox"/> U <input type="checkbox"/> U<br>DOCUMENT    TITLE    ABSTRACT | 6. NO. PAGES<br><br>16<br><br>7. NO. REFS.<br><br>2 |
| 8. AUTHOR(S)<br>J.L. JAEGER   |  | 9. DOWNGRADING/DELIMITING INSTRUCTIONS<br>Not applicable  |   |
| 10. CORPORATE AUTHOR AND ADDRESS<br>AERONAUTICAL RESEARCH LABORATORY<br><br>506 LORIMER STREET<br>FISHERMENS BEND VIC 3207  |  | 11. OFFICE/POSITION RESPONSIBLE FOR:<br>SPONSOR <u>DST</u><br><br>SECURITY <u>-</u><br><br>DOWNGRADING <u>-</u><br><br>APPROVAL <u>CSYD</u>   |   |
| 12. SECONDARY DISTRIBUTION (OF THIS DOCUMENT)<br>Approved for public release<br><br>OVERSEAS ENQUIRIES OUTSIDE STATED LIMITATIONS SHOULD BE REFERRED THROUGH DSTIC, ADMINISTRATIVE SERVICES BRANCH,<br>DEPARTMENT OF DEFENCE, ANZAC PARK WEST OFFICES, ACT 2601 |  |   |   |
| 13a. THIS DOCUMENT MAY BE ANNOUNCED IN CATALOGUES AND AWARENESS SERVICES AVAILABLE TO ....<br><br>No limitations  |  |   |   |
| 13b. CITATION FOR OTHER PURPOSES (IE. CASUAL<br>ANNOUNCEMENT) MAY BE <input checked="" type="checkbox"/> UNRESTRICTED OR <input type="checkbox"/> AS FOR 13a.   |  |   |   |
| 14. DESCRIPTORS<br>Fatigue limit<br>* Fatigue tests (Mechanics), * Lugs,<br>* Cyclic loads,<br>Aircraft attachment lugs, Fatigue limit, Australia.  |  |   | 15. DISCAT SUBJECT<br>CATEGORIES<br><br>1305        |
| 16. ABSTRACT<br>This report details the procedure and results obtained for fatigue tests conducted on 2000 lb bail lugs in<br>accordance with MIL-HDBK-5E. 25   |  |   |   |

PAGE CLASSIFICATION  
**UNCLASSIFIED**

PRIVACY MARKING

THIS PAGE IS TO BE USED TO RECORD INFORMATION WHICH IS REQUIRED BY THE ESTABLISHMENT FOR ITS OWN USE BUT WHICH WILL NOT BE ADDED TO THE DISTIS DATA UNLESS SPECIFICALLY REQUESTED.

16. ABSTRACT (CONT).

17. IMPRINT

**AERONAUTICAL RESEARCH LABORATORY, MELBOURNE**

18. DOCUMENT SERIES AND NUMBER

Aircraft Systems Project Document 003

19. COST CODE

77 7415

20. TYPE OF REPORT AND PERIOD COVERED

21. COMPUTER PROGRAMS USED

22. ESTABLISHMENT FILE REF.(S)

23. ADDITIONAL INFORMATION (AS REQUIRED)