

NASA Contractor Report 194888

ICASE Report No. 94-14

AD-A279 020



2



# ICASE

## CANONICAL-VARIABLES MULTIGRID METHOD FOR STEADY-STATE EULER EQUATIONS

Shlomo Ta'asan

DTIC  
ELECTE  
MAY 11 1994  
S F D

94-14071



This document has been approved  
for public release and sale; its  
distribution is unlimited.

Contract NAS1-19480  
March 1994

Institute for Computer Applications in Science and Engineering  
NASA Langley Research Center  
Hampton, VA 23681-0001



Operated by Universities Space Research Association

94 5 10 007

103

# Canonical-Variables Multigrid Method for Steady-State Euler Equations

Shlomo Ta'asan \*  
The Weizmann Institute of Science  
and  
Institute for Computer Applications in Science and Engineering

## Abstract

In this paper we describe a novel approach for the solution of inviscid flow problems for subsonic compressible flows. The approach is based on canonical forms of the equations, in which subsystems governed by hyperbolic operators are separated from those governed by elliptic ones. The discretizations used as well as the iterative techniques for the different subsystems, are inherently different. Hyperbolic parts, which describe, in general, propagation phenomena, are discretized using upwind schemes and are solved by marching techniques. Elliptic parts, which are directionally unbiased, are discretized using *h-elliptic* central discretizations, and are solved by pointwise relaxations together with coarse grid acceleration. The resulting discretization schemes introduce artificial viscosity only for the hyperbolic parts of the system; thus a smaller total artificial viscosity is used, while the multigrid solvers used are much more efficient. Solutions of the subsonic compressible Euler equations are achieved at the same efficiency as the full potential equation.

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification .....	
By .....	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

\*This research was supported in part under the Incumbent of the Lilian and George Lytle Career Development Chair and in part by the National Aeronautics and Space Administration under NASA Contract No. NAS1-19480 while the author was in residence at ICASE, NASA Langley Research Center, Hampton, Va 23681.

# 1 Introduction

In the past decade a substantial effort has been invested in solving the Euler equations, with multigrid methods playing a central role. The two major directions of research in multigrid solution of the Euler equations are the use of coarse grids to accelerate the convergence of the fine grid relaxations, and the use of defect correction as an outer iteration, coupled with use of multigrid to solve for the low order operator involved [3]. Extensive research has been conducted in both directions. Unfortunately, both approaches can be shown to have limited potential. Methods based on defect correction have  $h$ -dependent convergence rates for hyperbolic equations, where  $h$  is the mesh spacing; other multigrid methods have  $p$ -dependent convergence rates, where  $p$  is the order of the scheme involved. This unacceptable situation motivated the research outlined here.

The poor behavior of coarse grid acceleration for hyperbolic equations, which becomes even worse with high order discretizations, leads us to conclude that coarse grids should not be used to accelerate convergence for hyperbolic problems. Rather, the relaxation process alone should converge all components of such problems. This is possible, since hyperbolic problems describe propagation phenomena for which marching in the appropriate direction is a highly effective solver. For elliptic problems, on the other hand, local relaxation with good smoothing properties can be greatly accelerated by coarse grid correction. Moreover, elliptic problems cannot be solved efficiently by local relaxation alone, so that coarse grid acceleration is essential. In short, hyperbolic equations do not need coarse grid acceleration, while elliptic equations require such acceleration.

These observations have motivated a study concerning the separation of the hyperbolic and elliptic parts in steady state inviscid flow calculations. The result is a canonical form for the inviscid equations, where the hyperbolic and elliptic parts reside in different blocks of an upper triangular matrix for the system [5]. These canonical forms are the analog of the decomposition of the time dependent one-dimensional Euler equations into characteristic directions and Riemann invariants. The insight gained by the use of the canonical variables enables one to construct genuinely multidimensional schemes for these equations. It unifies the treatment of the compressible subsonic case with the incompressible case, although these two cases have been studied by different methods until now. Canonical boundary conditions [5] which enable the proper numerical treatment of general boundary conditions are also obtained. Moreover, these canonical forms enable the construction of new solvers having much better efficiency than existing solvers.

The new discretization schemes, which are based on these canonical forms, use upwind discretization only for the hyperbolic variables, and use a central  $h$ -elliptic discretization for the elliptic variables. This gives a better representation for the physical phenomena, since elliptic problems do not have a bias in any spatial direction, a property that should hold true for the discretization as well, if possible. Upwind discretization for hyperbolic problems, on the other hand, is compatible with the bias of information flow in the physical problem. The canonical form, therefore, allows for a better treatment of the inviscid equations. The resulting schemes are also compatible with the uniqueness properties of the inviscid equations under

different geometries and boundary conditions. In particular, the nonuniqueness of solutions for exterior flows around smooth bodies is clearly evident with these schemes; only the addition of a global condition, such as circulation at infinity, insures uniqueness. In existing schemes this issue is much more obscure and there seems to be no direct analog of the physical behavior.

We discretize the elliptic part of the system with staggered grid schemes, which are *h-elliptic*. The importance of *h-elliptic* discretizations is that they yield solutions free of spurious or weakly spurious modes, in the limit as the Mach number goes to zero. The construction of fast solvers for such discretizations is well understood, even in the case of systems, and is quite straightforward. By contrast, the *non-staggered* schemes commonly used would require special techniques for the construction of optimally efficient multigrid solvers (having efficiency comparable to that of the full potential equation). Such solvers require multiple coarse grids on each level, even for regular grids having cell aspect ratios near one [2].

The elliptic and hyperbolic parts of the equations are treated differently by the solver. Unlike existing solvers, which use coarse grids to accelerate the hyperbolic part of the system as well, the new method computes the hyperbolic part via relaxations based on the canonical forms. This involves marching in the streamwise direction for the hyperbolic quantities, which are the entropy  $s$  and total enthalpy  $H$ . The rest of the unknowns, e.g., the velocity components, are relaxed by a Kaczmarz relaxation using preconditioned residuals, yielding a smoothing rate identical to that for the full potential equation.

Numerical results are given for a two dimensional flow around an ellipse and flow in nozzle. These problems already include the major difficulties in real problems and serve as a good test for the method proposed. Second order schemes are used for both cases and the solutions are obtained with convergence rates similar to that of the full potential equation (although the work involved here is larger accounting for the multiple equations).

## 2 Canonical Forms and Discretization Rules

The discretization and efficient solution of elliptic systems of partial differential equations is quite well understood. One of the important concepts here is *h-ellipticity* [1]. It guarantees that the stability of high frequencies for the discrete problem is in correspondence to that of the differential system. For the latter, ellipticity is defined in terms of the symbol  $\hat{P}(\omega)$  as

$$\det \hat{P}(\omega) \geq C|\omega|^{2m}, \quad (2.1)$$

while *h-ellipticity* is defined as

$$\det \hat{P}^h(\theta) \geq C|\theta|^{2m}, \quad |\theta| \leq \pi \quad (2.2)$$

Discretizations which are *h-elliptic* admit local relaxation methods with good smoothing properties. This, together with efficient coarse grid acceleration for smooth components, makes standard multigrid methods very efficient for such discretizations. Although other types of discretization also admit fast multigrid solvers, we restrict our focus to *h-elliptic* discretization for elliptic problems.

The discretization of hyperbolic equations, which usually describe propagation phenomena, can be done naturally using upwind biased schemes. However the application of the above ideas to the steady state inviscid incompressible and subsonic compressible equations is not straightforward, since these equations are neither elliptic nor hyperbolic, but rather mixed hyperbolic-elliptic. The optimal treatment of the problem should therefore include an identification of these two parts, which have inherently different behavior and call for different numerical treatment both on the level of the discretization and the solver. The device for this is a canonical form of the equations, described in detail in [5].

For a two dimensional flow, the canonical form of the compressible Euler equations is

$$\left( \begin{array}{cc|cc} D_1 & D_2 & 0 & 0 \\ qD_y & -qD_x & -\frac{c^2}{\gamma(\gamma-1)}D_0 & \frac{1}{q}D_0 \\ \hline 0 & 0 & -T\rho Q & 0 \\ 0 & 0 & 0 & \rho Q \end{array} \right) \begin{pmatrix} u \\ v \\ s \\ H \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \\ 0 \\ 0 \end{pmatrix} \quad (2.3)$$

where:

$$\begin{aligned} D_1 &= \rho/c^2((c^2 - u^2)D_x - uvD_y) \\ D_2 &= \rho/c^2((c^2 - v^2)D_y - uvD_x) \\ D_0 &= vD_x - uD_y \end{aligned} \quad (2.4)$$

In view of these canonical forms we can use the following discretization rule for the inviscid equations:

1. Use central (unbiased) h-elliptic discretizations for elliptic subsystems
2. Use upwind biased schemes for hyperbolic subsystems

### 3 Discretization

Let a domain  $\Omega \in \mathbb{R}^2$  be divided into arbitrary cells. Let the vertices, edges, and cells be V, E, and C respectively. The well known Euler formula

$$\#V + \#C + \#holes = \#E + 1 \quad (3.1)$$

suggests several possibilities for discretization of different systems on structured and unstructured meshes.

Rewriting the Euler formula as

$$\#V + \#V + \#C + \#C + \#holes = \#C + \#V + \#E + 1 \quad (3.2)$$

one obtains the following choice of discretization. Let H be associated with the cell centers, the normal velocity components be at the edges, and the entropy be at the vertices. Quantities other than these are calculated by well known algebraic relations for the thermodynamic quantities and by averaging for the tangential velocity components. With each cell, we associate one continuity equation and one energy equation, while the two momentum equations are associated with each vertex. The following diagram is then obtained:

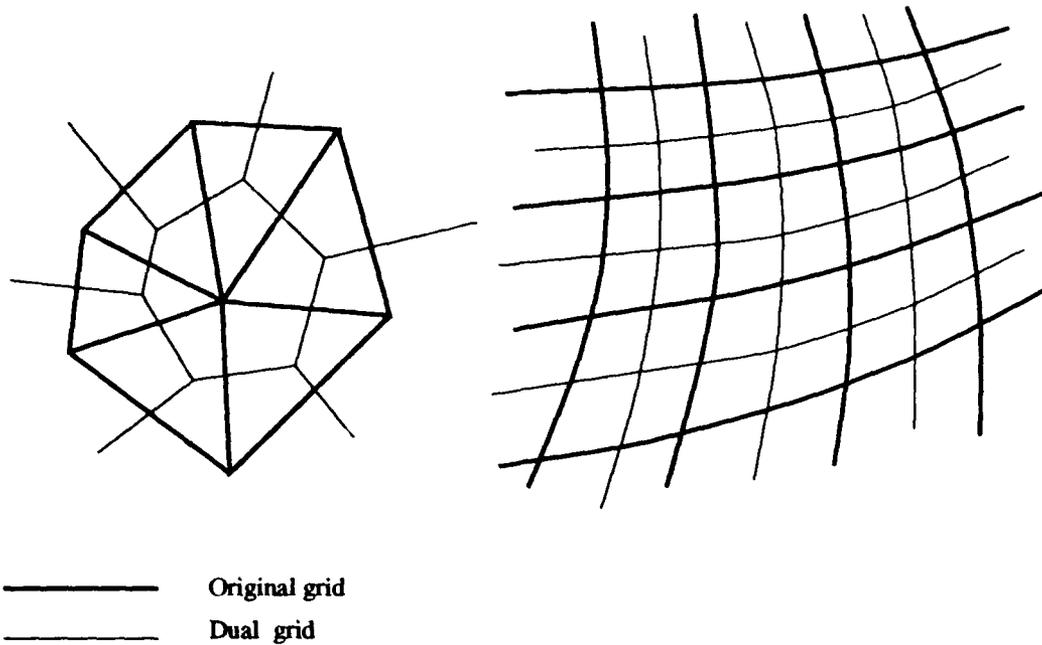


Figure 1:

$$\begin{array}{ll}
 \mathbf{V} \cdot \mathbf{n} & \iff \#E \\
 s & \iff \#V \\
 H & \iff \#C \\
 \text{div} \rho \mathbf{V} = 0 & \iff \#C \\
 -\mathbf{V} \times \text{curl} \mathbf{V} + \nabla P = 0 & \iff 2\#V \\
 \text{div} \rho \mathbf{V} H = 0 & \iff \#C \\
 \int_{\Gamma_{\text{hole}}} \mathbf{V} \cdot \mathbf{t} d\sigma & \iff \#\text{holes}
 \end{array} \tag{3.3}$$

The control volumes for an unstructured mesh, for the continuity, energy, and momentum equations are shown in Figure 2.

The canonical form for the compressible equations suggests that only the entropy and the total enthalpy will be discretized using upwind biased schemes, and only in the appropriate terms; that is, only those terms in which a derivative in the streamwise direction occurs will be discretized with upwind bias. Other derivatives of these quantities will be discretized using central differencing. Let  $\mathbf{e}_1 = (u/q, v/q)$ , and  $\mathbf{e}_2 = (-v/q, u/q)$ . Decomposing the unit normal vectors to the edges as

$$\mathbf{n} = (\mathbf{n} \cdot \mathbf{e}_1) \mathbf{e}_1 + (\mathbf{n} \cdot \mathbf{e}_2) \mathbf{e}_2 \tag{3.4}$$

we obtain the following discretization of the pressure terms

$$d p = \sum_{l \in \mathcal{E}} [p_l^{up} (\mathbf{n}_l \cdot \mathbf{e}_1^l) \mathbf{e}_1^l + p_l^c (\mathbf{n}_l \cdot \mathbf{e}_2^l) \mathbf{e}_2^l] ds_l \tag{3.5}$$

$$\tag{3.6}$$

where

$$p^{up} = p(S^{up}, H^c, q^2), \quad (3.7)$$

$$p^c = p(S^c, H^c, q^2). \quad (3.8)$$

and superscript "up" refers to an upwind biased approximations, while superscript "c" refers to a central approximation. The full discretization is then

$$\sum_{j \in \gamma} \bar{\rho}_j \mathbf{V}_j \cdot \mathbf{n}_j ds_j = 0, \quad (3.9)$$

$$\sum_{l \in \bar{\gamma}} ((\bar{\rho}_l \mathbf{V}_l \cdot \mathbf{n}_l) \mathbf{V}_l ds_l + \mathbf{d}p = 0, \quad (3.10)$$

$$\sum_{j \in \gamma} \bar{\rho}_j \mathbf{V}_j \cdot \mathbf{n}_j H_j^{up} ds_j = 0, \quad (3.11)$$

where  $\bar{\rho}$  is computed using a symmetric formula at subsonic points, and using an upwind biased one for supersonic points. All other quantities involved use central approximations. Control volumes for the different equations are denoted by  $\gamma$  and  $\bar{\gamma}$ . Thus the only quantities that have been upwinded are the entropy and total enthalpy. This results in a reduced artificial viscosity.

## 4 Multigrid Algorithm

The multigrid solver, like the discretization, is based on the canonical forms mentioned in section 2. The main ingredient differing from other multigrid methods is the relaxation scheme. Other elements of the multigrid method are standard and will be mentioned only briefly.

As can be seen from the canonical form, the hyperbolic and elliptic parts for subsonic flows are separated. Since these subsystems are of very different nature, it is unlikely that the same numerical process will be optimal for both. Indeed, it can be shown that coarse grids are inefficient in accelerating certain smooth components for hyperbolic problems. For these components convergence rate is roughly  $(2^p - 1)/2^p$  for a  $p$ -order method. The better the scheme, the less coarse grids help!

This behavior suggests that coarse grids are not appropriate for accelerating convergence for hyperbolic problems. The relaxation should therefore converge all hyperbolic quantities in the problem. While for elliptic problems relaxation cannot be efficient for smooth components, for hyperbolic problems the situation is different. Marching in the direction of the physical flow is very efficient in converging all hyperbolic components eliminating the need for coarse grid acceleration. For elliptic problems, on the other hand, relaxation techniques with good smoothing properties, combined with coarse grid acceleration, yield optimal solvers. The separation of the different subsystems presented by the canonical form allows one to construct an optimal solver for the full system. Marching techniques will be used for the hyperbolic quantities, while local relaxation with good smoothing will be used for the elliptic parts.

## 4.1 Relaxation

Let the residual of the compressible Euler equations be denoted by  $(R^\rho, R^{\rho u}, R^{\rho v}, R^H)$  and the ones for the canonical form by  $(r_c^1, r_c^2, r_c^3, r_c^4)$ . Then the following relation prevails

$$\begin{pmatrix} r_c^1 \\ r_c^2 \\ r_c^3 \\ r_c^4 \end{pmatrix} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ -q^2 A & -v & u & 0 \\ -q^2 A & u & v & 0 \\ -H & 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} R^\rho \\ R^{\rho u} \\ R^{\rho v} \\ R^H \end{pmatrix} \quad (4.1)$$

The relaxation for the Euler equations is employed as follows. The total enthalpy is relaxed first, using the preconditioned residual  $r_c^4$

$$H_\gamma \leftarrow H_\gamma + (r_c^4)_\gamma / c_\gamma^H \quad (4.2)$$

Next the entropy is relaxed using

$$s_\gamma \leftarrow s_\gamma + (r_c^3)_\gamma / c_\gamma^s, \quad (4.3)$$

where  $c_\gamma^H$  and  $c_\gamma^s$  are the diagonal coefficient in the discrete version of  $uD_x + vD_y$  and  $-\rho T(uD_x + vD_y)$ , respectively. This is followed by relaxing the continuity and vorticity equations. The relaxation for the continuity equation is done by keeping the values for the density frozen, i.e.,

$$\mathbf{V}_j \cdot \mathbf{n}_j \leftarrow \mathbf{V}_j \cdot \mathbf{n}_j + (r_c^1)_\gamma \bar{\rho}_j ds_j / \sum_{k \in \gamma} (\bar{\rho}_k ds_k)^2, \quad j \in \gamma, \quad (4.4)$$

and the vorticity equation is relaxed as:

$$\mathbf{V}_l \cdot \mathbf{t}_l \leftarrow \mathbf{V}_l \cdot \mathbf{t}_l + (r_c^2 / (q\rho))_{\bar{\gamma}} ds_l / \sum_{k \in \bar{\gamma}} (ds_k)^2 \quad l \in \bar{\gamma} \quad (4.5)$$

Note that the preconditioning of the discrete system does not result in an exact upper triangular form. Lower diagonal terms exist, but these are of order  $O(h^2)$  and do not affect the design of the relaxation and other numerical processes.

The coarsening part of the multigrid method used is standard, so its details are omitted. Coarse grids are created by combining neighboring fine grid cells into a coarse grid cell. Linear interpolation of corrections and full weighting of residual and functions are used in an FMG-FAS formulation [1].

## 5 Numerical Results

We present here numerical results for subsonic cases of flow in a nozzle and around an ellipse. These cases already present most of the difficulties encountered in subsonic compressible flows. For both cases body fitted grid were used. In the case of the ellipse the grid extended to to a distance of 7 chords.

Figure 3 and 4 show results for flow in a nozzle. Mach lines as well as relative errors in entropy are shown. Cases of inflow Mach number of .2 and .02 are shown. Observe the small size of the errors in entropy, as

well as the symmetry of the solution. The convergence rate of the multigrid method used is shown in Figure 5, in the top two pictures. A reduction of eight orders of magnitude in 10 cycles is obtained. Note that the rate of convergence is independent of the Mach number.

Figure 5 shows results for a flow around an ellipse at a 10 degrees angle of attack, with free stream Mach number of 0.1, with zero circulation at infinity. This is a case of special difficulty. The exact values for the lift and drag coefficient are zero. The calculated values are  $C_L = 2.3 \times 10^{-3}$ ,  $C_D = -7.7 \times 10^{-3}$ . A grid refinement study shows that the lift and drag coefficient approach zero with mesh refinement. The convergence history for this problem is shown in the bottom picture of figure 6. The full FMG history (including coarse levels) is shown. The convergence rate in this case is slower than for the nozzle flow cases but still very fast compared with existing methods.

## 6 Conclusion

A new approach for the discretization and the solution of the Euler equations have been presented. It is based on a canonical form of the equations which allows for discretization which involve upwind biased discretization only for the physically biased quantities, that is, entropy and total enthalpy. The multigrid method used for that discretization shows essentially optimal convergence rates for the second order schemes used. Moreover, nonlifting solutions around smooth bodies at angle of attack are obtained. Unlike most other methods, the performance of the method does not degrade as the Mach number approaches zero.

## References

- [1] A. Brandt: Multigrid Techniques 1984 Guide with Applications to Fluid Dynamics. GMD Studien Nr 85.
- [2] A. Brandt and S. Ta'asan: Multigrid Solutions to Quasi-Elliptic Schemes. In *Progress and Supercomputing in Computational Fluid Dynamics* Proceedings of the U.S.-Israel Workshop 1984, Earl M. Murman and Saul Abarbanel (Eds.), Birkhauser 1985
- [3] Heuker, P.W.: Defect Correction and Higher Order Schemes for the Multigrid Solution of the Steady Euler Equations, *Multigrid Methods II*, W. Hackbusch and U. Trottenberg (Eds), (*Lecture Notes in Mathematics*) Springer Verlag, Berlin, 149-165.
- [4] A. Jameson: Solution of the Euler Equations for Two Dimensional Transonic Flow by Multigrid Method, *Appl. Math. and Computat.*, 13, 327-355.
- [5] S. Ta'asan: Canonical forms of Multidimensional Inviscid Flows. ICASE Report No. 93-34

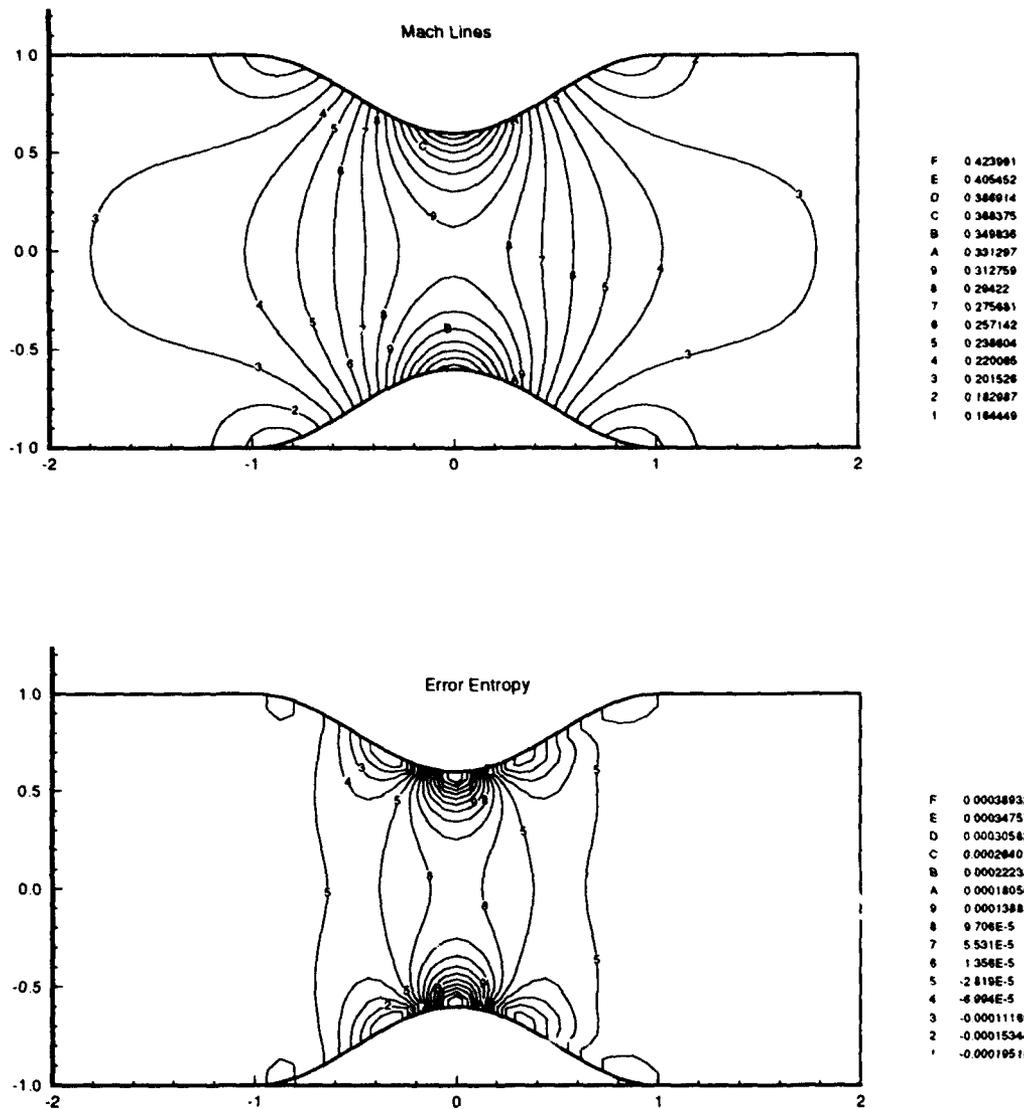


Figure 2:  $M_\infty = .2$ ,  $64 \times 32$  grid

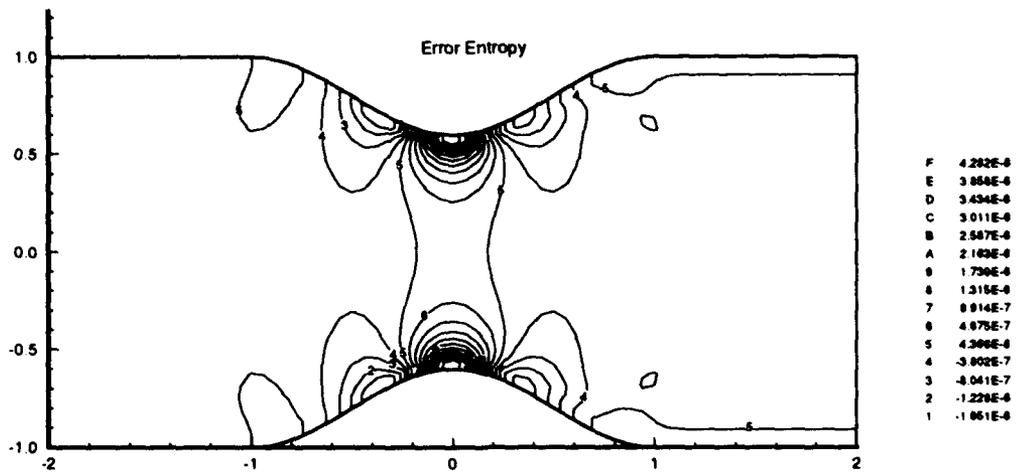
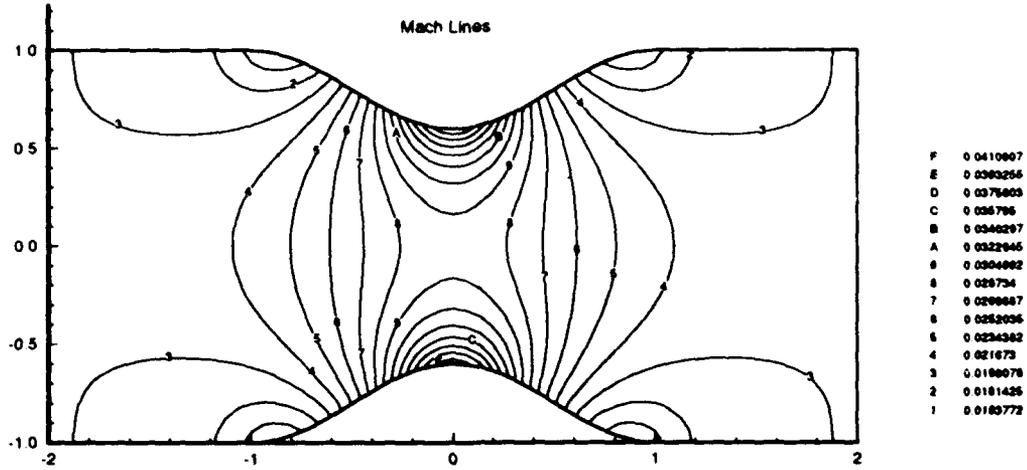


Figure 3:  $M_\infty = .02$ ,  $64 \times 32$  grid




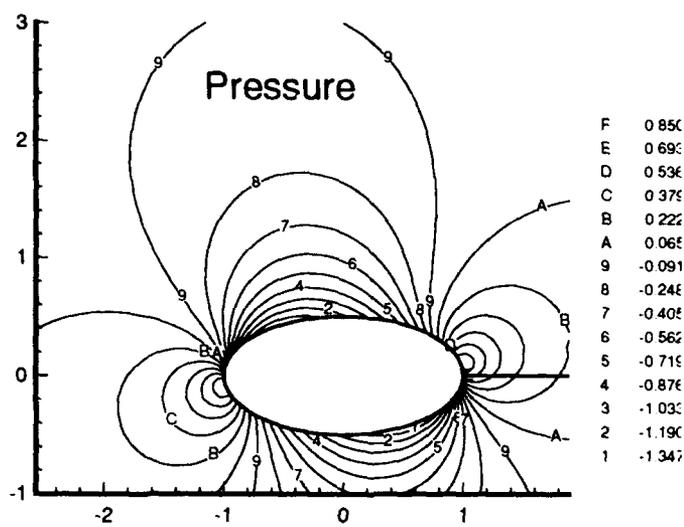



Figure 4:  $M_\infty = .1, \alpha = 10, 128 \times 64, \text{ grid}$

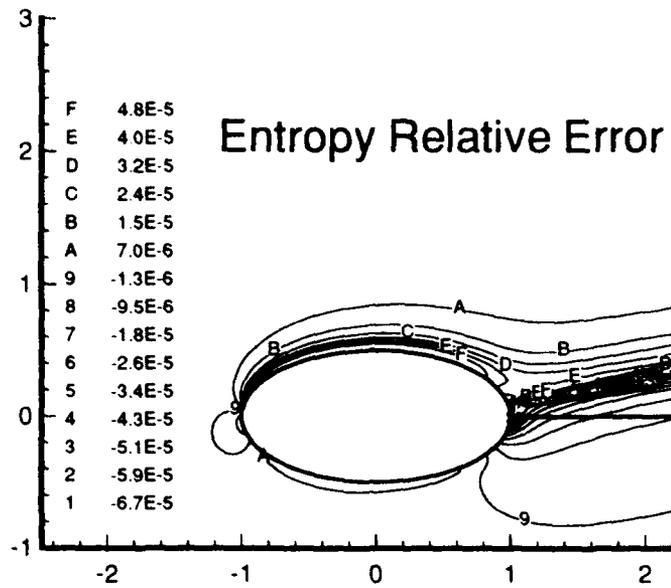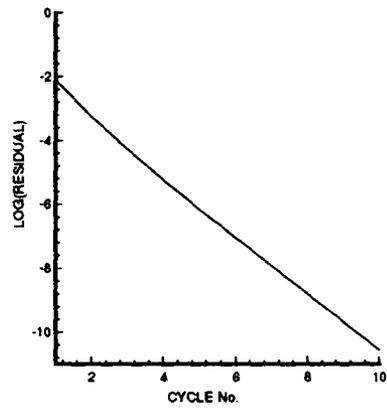

Nozzle Flow:  $M_\infty = .2$

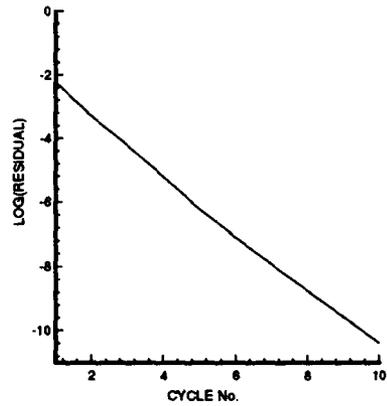

Nozzle Flow:  $M_\infty = .02$

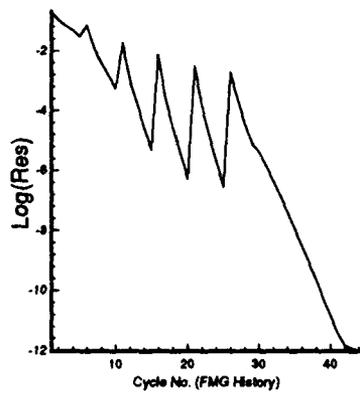

Flow around ellipse:  $M_\infty = .1, \alpha = 10$

Figure 5: Residuals History

REPORT DOCUMENTATION PAGE			Form Approved OMB No 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE March 1994	3. REPORT TYPE AND DATES COVERED Contractor Report		
4. TITLE AND SUBTITLE CANONICAL-VARIABLES MULTIGRID METHOD FOR STEADY-STATE EULER EQUATIONS			5. FUNDING NUMBERS C NAS1-19480 WU 505-90-52-01	
6. AUTHOR(S) Shlomo Ta'asan				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Institute for Computer Applications in Science and Engineering Mail Stop 132C, NASA Langley Research Center Hampton, VA 23681-0001			8. PERFORMING ORGANIZATION REPORT NUMBER ICASE Report No. 94-14	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681-0001			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA CR-194888 ICASE Report No. 94-14	
11. SUPPLEMENTARY NOTES Langley Technical Monitor: Michael F. Card Final Report Submitted to Proc. of the 14th Int'l Conf. on Numerical Methods in Fluid Dynamics, Bangalore, India, July 1994				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified-Unlimited  Subject Category 64			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) In this paper we describe a novel approach for the solution of inviscid flow problems for subsonic compressible flows. The approach is based on canonical forms of the equations, in which subsystems governed by hyperbolic operators are separated from those governed by elliptic ones. The discretizations used as well as the iterative techniques for the different subsystems, are inherently different. Hyperbolic parts, which describe, in general, propagation phenomena, are discretized using upwind schemes and are solved by marching techniques. Elliptic parts, which are directionally unbiased, are discretized using <i>h-elliptic</i> central discretizations, and are solved by pointwise relaxations together with coarse grid acceleration. The resulting discretization schemes introduce artificial viscosity only for the hyperbolic parts of the system; thus a smaller total artificial viscosity is used, while the multigrid solvers used are much more efficient. Solutions of the subsonic compressible Euler equations are achieved at the same efficiency as the full potential equation.				
14. SUBJECT TERMS multigrid method; Euler equations; canonical variables			15. NUMBER OF PAGES 13	
			16. PRICE CODE A03	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT	

NSN 7540-01-280-5500

\*U.S. GOVERNMENT PRINTING OFFICE: 1994 - 528-864/8647

Standard Form 298 (Rev. 2-89)  
Prescribed by ANSI Std Z39-18  
298-102