

# On the Stability of Higher-Order Continuum (HOC) Equations for Hybrid HOC/DSMC Solvers

Foluso Ladeinde<sup>\*</sup>, Xiaodan Cai<sup>†</sup>, Ramesh Agarwal<sup>‡</sup>

<sup>\*</sup>*Mechanical Engineering Department, SUNY Stony Brook, Stony Brook, NY 11794-2300 USA*

<sup>†</sup>*Thaerocomp Technical Corp., 2100 Middle Country Road, Centereach, NY 11720 USA*

<sup>‡</sup>*Mechanical and Aerospace Engineering Department, Washington University in St. Louis  
St. Louis, MO 63130 USA*

**Abstract.** Our interest in the stability analysis of the high-order continuum (HOC) equations is motivated by the relevance to the development of a hybrid method combining such equations with the Direct Simulation Monte-Carlo (DSMC) technique for the computation of hypersonic flows in all regimes – continuum, transition, and rarefied. The hybrid approach allows the effects of thermophysics (thermal and chemical non-equilibrium) and turbulence to be included much more easily than in other approaches, and can easily be developed into a robust and efficient engineering tool for practical 3D hypersonic computations. Stability characteristics of model HOC equations when subjected to small disturbances are investigated. We explore the feasibility of simplified, yet accurate and numerically stable, versions of the HOC equations and extend our previous work<sup>2</sup> to include multidimensional Burnett equations, with the specific example of the Augmented Burnett models. The latter is shown to have a much wider stability regime than Lumpkin’s model.

## INTRODUCTION

Hypersonic flows about space vehicles produce flow fields with local Knudsen numbers,  $K_n$ , which may lie in all the three regimes – continuum, transition, and rarefied. The Navier-Stokes (NS) equations and the direct simulation Monte-Carlo (DSMC) methods can accurately and efficiently model flows in the continuum and rarefied regimes, respectively. The kinetic approach considers an ensemble of small particles or molecules whose distribution function can be determined as a solution of the Boltzmann equation, while the continuum approach is based on the representation of the gas as a fluid continuum governed by the mass, momentum, and energy conservation laws. Though, theoretically, the kinetic approach is appropriate for simulating gas flows in any regime, in practice, it can require large computer resources if the gas flow is dense. DSMC remains the most efficient numerical technique for solving the Boltzmann equation [1]. It enables the computation of flows with high Knudsen number. Nevertheless, DSMC computations are still too expensive in many cases, especially for 3D engineering applications. Although a rather efficient tool for supersonic and particularly hypersonic flows, the DSMC procedure becomes more resource-consuming for low Mach number subsonic flows, due to difficulties with boundary condition implementation on subsonic inflow/outflow boundaries. Furthermore, obtaining gas interactions with DSMC is a difficult task. The continuum approach is much cheaper and more versatile in these regards. There is, therefore, a strong motivation for its utilization at the low  $K_n$  values. The traditional continuum model is based on the Navier-Stokes equations, which are the first order approximations to the Boltzmann equation with respect to the (small) parameter  $K_n$ . Coupled with no velocity slip/no temperature jump solid wall boundary conditions, they are valid if the Knudsen number is small, say, less than 0.001. More rarefied flows should be described using the Navier-Stokes equations with velocity slip/temperature jump boundary conditions.

The flows in the transitional regime require higher-order continuum (HOC) models; the most well-known being the Burnett equations, obtained as second order approximations. Though there are some difficulties with the stability of their solutions and the development of relevant solid wall boundary conditions, recent advancements [2] allow the consideration of the (properly modified) Burnett equations as a potential continuum model for transitional flows. In recent years, Burnett equations have been successfully employed to compute 3D hypersonic flows in continuum-transition regime [3], although it has been difficult to compute flows for  $K_n > 1$ .

The other high-order continuum (HOC) equations, such as Eu’s [4] and Grad’s 13-moment equations [5], are significantly more expensive to compute than the Burnett equations, and have been tested only for 1D and for 2D geometrically simple problems. Another approach is due to Aristov and Tcheremissin [6],

# Report Documentation Page

*Form Approved*  
*OMB No. 0704-0188*

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE <b>13 JUL 2005</b>	2. REPORT TYPE <b>N/A</b>	3. DATES COVERED <b>-</b>	
4. TITLE AND SUBTITLE <b>On the Stability of Higher-Order Continuum (HOC) Equations for Hybrid HOC/DSMC Solvers</b>		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Mechanical Engineering Department, SUNY Stony Brook, Stony Brook, NY 11794-2300 USA</b>		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)	
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release, distribution unlimited</b>			
13. SUPPLEMENTARY NOTES <b>See also ADM001792, International Symposium on Rarefied Gas Dynamics (24th) Held in Monopoli (Bari), Italy on 10-16 July 2004. , The original document contains color images.</b>			
14. ABSTRACT			
15. SUBJECT TERMS			
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>	<b>UU</b>
			18. NUMBER OF PAGES <b>6</b>
			19a. NAME OF RESPONSIBLE PERSON

wherein the left-hand side of the Boltzmann equation is solved with a finite-difference scheme and a special quadrature formula is employed for the collision integral on the right-hand side. This method has recently been applied to solve 2D problems involving a mono-atomic gas. Application of the approach to gases with internal degrees of freedom is problematic at the moment because of the difficulty with the inclusion of chemical reactions. We therefore investigate the Burnett equations for use as the HOC component of our hybrid procedure.

In this paper, we examine the stability of a few versions of the Burnett equations, to guide the selection of the model for a robust hybrid procedure for hypersonic flows. In specifics, we will examine Lumpkin's simplified model [7], the generalized Burnett equations, and the Augmented Burnett equations for their relative stability characteristics. Although the stability analysis of the Burnett equations have been reported in the literature,<sup>8</sup> the studies did not include Lumpkin's model or considered the presence of rotational temperature in the analysis.

## ANALYSIS OF LUMPKIN'S SIMPLIFIED BURNETT EQUATIONS

The one-dimensional equations are considered for the analysis of Lumpkin's simplified model, with  $\varpi = 8$  and  $\theta = \left( \theta_1 + \frac{8}{3}\theta_2 + \frac{2}{3}\theta_3 + \frac{2}{3}\theta_5 \right)$  in the standard Burnett equations.<sup>2,3,8</sup> The resulting equations can be written as follows:

$$\frac{\partial \rho}{\partial t} + \frac{\partial(\rho u)}{\partial x} = 0, \quad (1)$$

$$\frac{\partial(\rho u)}{\partial t} + \frac{\partial}{\partial x}(p + \rho u^2) = -\frac{\partial \tau_{xx}}{\partial x}, \quad (2)$$

$$\frac{\partial(\rho E)}{\partial t} + \frac{\partial}{\partial x}(p u + \rho E u) = -\frac{\partial}{\partial x}(u \tau_{xx}) - \frac{\partial q}{\partial x}, \quad (3)$$

$$\frac{\partial(\rho T_R)}{\partial t} + \frac{\partial}{\partial x}(\rho u T_R) = \mu \frac{\partial^2 T_R}{\partial x^2} + \frac{4 \rho p (6 T_t - T_R)}{5 \pi \mu Z_R}, \quad (4)$$

where

$$\tau_{xx} = \left( -\frac{4}{3} \mu + \frac{\pi \mu (\gamma - 1)^2 Z_R}{4} \right) \frac{\partial u}{\partial x} + \frac{8 \mu^2}{p} \left( \frac{\partial u}{\partial x} \right)^2, \quad (5)$$

$$q = -\frac{15}{4} \mu R \frac{\partial T_t}{\partial x} + \frac{40}{9} \frac{\mu^2}{\rho T_t} \left( \frac{\partial u}{\partial x} \right) \left( \frac{\partial T_t}{\partial x} \right) - \mu R \frac{\partial T_R}{\partial x}, \quad (6)$$

and  $E = \frac{1}{2}(3RT_t + 2RT_R + u^2)$ ,  $p = \rho RT_t$ ,  $T_t$ ,  $T_R$ ,  $\mu$ , and  $Z_R$  are the total energy/unit mass, hydrodynamic pressure, rotational temperature, translational temperature, molecular viscosity, and the rotational collision number. Note that  $\tau_R$  is the relaxation time for rotational energy, so that  $Z_R \tau_c = Z_R \left( \frac{\pi \mu}{4 p} \right)$ , where  $\tau_c$  is the mean collision time.

## Linearization of the Equations

Consider a diatomic gas in equilibrium with density  $\rho_0$ , pressure  $p_0$ , translational temperature  $T_{t0}$  and rotational temperature  $T_{R0}$ . The gas is subjected to small perturbations defined as the non-dimensional variables:

$$\rho' = \frac{\rho - \rho_0}{\rho_0}, \quad T_t' = \frac{T_t - T_{t0}}{T_{t0}}, \quad T_R' = \frac{T_R - T_{R0}}{T_{R0}}, \quad u' = \frac{u}{\sqrt{RT_{t0}}}, \quad t' = \frac{t}{\mu_0 / \rho_0}, \quad x' = \frac{x}{L_0},$$

$$L_0 = \frac{\mu_0}{\rho_0 \sqrt{RT_{t0}}}. \quad \text{Note that } T_{R0} = T_{t0} \text{ is assumed.}$$

The linearized equations can be written as:

$$\frac{\partial V'}{\partial t'} + L_1 \frac{\partial V'}{\partial x'} + L_2 \frac{\partial^2 V'}{\partial x'^2} + L_0 V' = A, \quad (7)$$

where  $V' = [\rho' \quad u' \quad T'_t \quad T'_R]^T$  and

$$L_1 = \begin{bmatrix} 0 & 1 & 0 & 0 \\ 1 & 0 & 1 & 0 \\ 0 & 2/3 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}, \quad L_2 = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & \left\{ -\frac{4}{3} + \frac{\pi}{4}(\gamma-1)^2 Z_R \right\} & 0 & 0 \\ 0 & 0 & -5/2 & 0 \\ 0 & 0 & 0 & -1 \end{bmatrix}, \quad L_0 = C \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ \frac{20}{3} & 0 & \frac{22}{3} & -\frac{2}{3} \\ -10 & 0 & -11 & 1 \end{bmatrix}, \quad (8)$$

and  $A = [0, 0, -\frac{10}{3}C, 5C]^T$ , where “T” denotes the transpose operator.

### Solution of the Linearized Equations

Consider the homogeneous portion of the linearized equations and assume  $V' = \bar{V} e^{i\alpha x'} e^{\phi t'}$ , where  $\phi = \alpha + i\beta$  and  $\omega = \frac{2\pi}{L/L_0}$ . Since  $L_0 = \frac{\mu_0}{\rho_0 \sqrt{RT_0}} = 0.783\lambda$ , we have  $\omega = 4.92 \frac{\lambda}{L} = 4.92 K_n$ , where  $K_n$  is the

Knudsen number. The dispersion relation is

$$\det[\phi I + i\omega L_1 - \omega^2 L_2 + L_0] = 0, \quad (9)$$

which can be simplified to

$$\begin{aligned} &\phi^4 + \left[ \left( \frac{29}{6} - \frac{\gamma-1}{5C} \right) \omega^3 + \frac{25}{3} C \right] \phi^3 + \omega^2 \left[ \omega^2 \left\{ \frac{43}{6} - \frac{7}{10} \frac{\gamma-1}{C} \right\} \omega^2 + \frac{377}{18} C - \frac{5\gamma}{3} + \frac{10}{3} \right] \phi^2 \\ &+ \omega^2 \left[ \left( \frac{10}{3} - \frac{\gamma-1}{2C} \right) \omega^4 + \left\{ 59 \left( \frac{2C}{9} - \frac{\gamma-1}{30} \right) + \frac{25}{6} \right\} \omega^2 + \frac{7}{3} C \right] \phi \\ &+ \frac{5}{2} \omega^6 + \frac{19}{6} \omega^4 C = 0; \quad C \equiv \frac{4}{5\pi Z_R}. \end{aligned} \quad (10, 11)$$

This equation was solved using MATLAB to determine the stability boundaries for  $Z_R = 4, 10, 18$ , and  $23$ . Note that Lumpkin recommended  $18 \leq Z_R \leq 23$  for his model and that Jean’s equation has been used in the source term.

The stability boundaries are shown in figures 1 and 2 for various values of  $Z_R$ . Regions with  $\alpha < 0$  (on the  $x$ -axis) are stable, whereas regions with  $\alpha > 0$  are unstable.  $\gamma$  is taken as 1.4 for a diatomic gas.

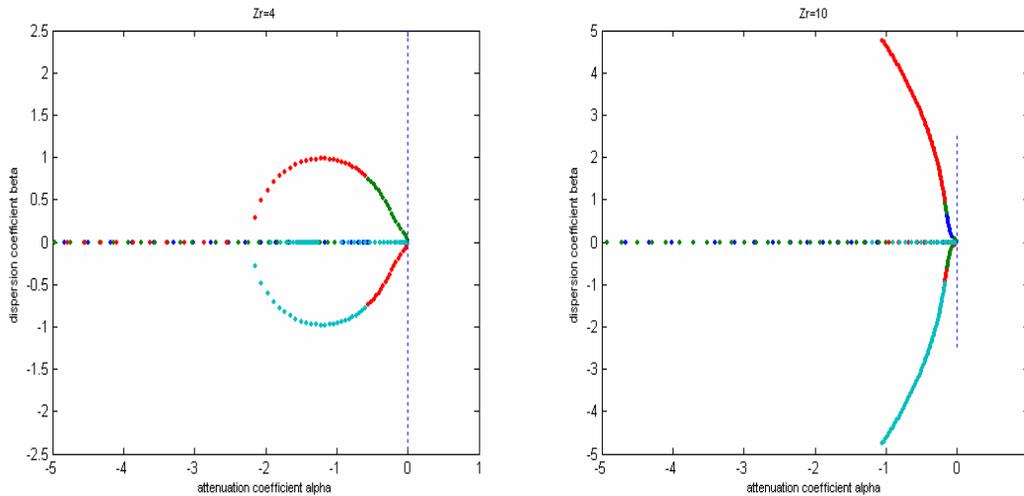
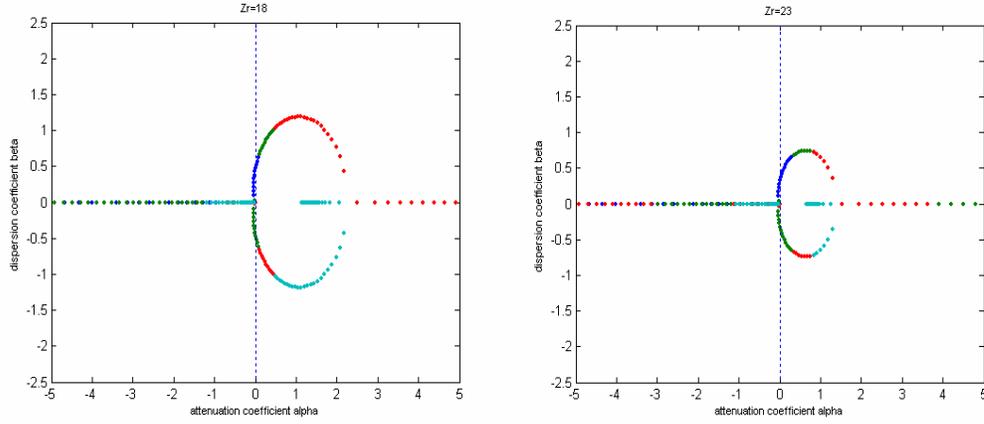


FIGURE 1. Stability boundaries of Lumpkin’s simplified Burnett model for  $Z_R = 4$  and  $10$



**FIGURE 2.** Stability boundaries of Lumpkin's simplified Burnett model for  $Z_R = 18$  and  $23$

## ANALYSIS OF THE GENERALIZED 3D BURNETT EQUATIONS

The governing equations considered for the stability analysis of the 3D Burnett equations with translational and rotational thermal non-equilibrium are as follows:

$$\frac{\partial \rho}{\partial t} + \frac{\partial(\rho u)}{\partial x} + \frac{\partial(\rho v)}{\partial y} + \frac{\partial(\rho w)}{\partial z} = 0, \quad (12)$$

$$\frac{\partial(\rho u)}{\partial t} + \frac{\partial}{\partial x}(P + \rho u^2) + \frac{\partial}{\partial y}(\rho uv) + \frac{\partial}{\partial z}(\rho uw) = -\frac{\partial \tau_{xx}}{\partial x} - \frac{\partial \tau_{xy}}{\partial y} - \frac{\partial \tau_{xz}}{\partial z}, \quad (13)$$

$$\frac{\partial(\rho v)}{\partial t} + \frac{\partial}{\partial x}(\rho vu) + \frac{\partial}{\partial y}(\rho v^2 + P) + \frac{\partial}{\partial z}(\rho vw) = -\frac{\partial \tau_{xy}}{\partial x} - \frac{\partial \tau_{yy}}{\partial y} - \frac{\partial \tau_{yz}}{\partial z}, \quad (14)$$

$$\frac{\partial(\rho w)}{\partial t} + \frac{\partial}{\partial x}(\rho wu) + \frac{\partial}{\partial y}(\rho wv) + \frac{\partial}{\partial z}(\rho w^2 + P) = -\frac{\partial \tau_{xz}}{\partial x} - \frac{\partial \tau_{yz}}{\partial y} - \frac{\partial \tau_{zz}}{\partial z}, \quad (15)$$

$$\begin{aligned} & \frac{\partial(\rho E)}{\partial t} + \frac{\partial}{\partial x}(pu + \rho Eu) + \frac{\partial}{\partial y}(pv + \rho Ev) + \frac{\partial}{\partial z}(pw + \rho Ew) = \\ & - \left\{ \frac{\partial}{\partial x}(u\tau_{xx} + v\tau_{xy} + w\tau_{xz}) + \frac{\partial}{\partial y}(u\tau_{xy} + v\tau_{yy} + w\tau_{yz}) + \frac{\partial}{\partial z}(u\tau_{xz} + v\tau_{yz} + w\tau_{zz}) \right\} - \left( \frac{\partial q_x}{\partial x} + \frac{\partial q_y}{\partial y} + \frac{\partial q_z}{\partial z} \right), \end{aligned}$$

$$\frac{\partial(\rho e_r)}{\partial t} + \frac{\partial}{\partial x}(\rho Eu) + \frac{\partial}{\partial y}(\rho e_r v) + \frac{\partial}{\partial z}(\rho e_r w) = - \left( \frac{\partial q_r}{\partial x} + \frac{\partial q_r}{\partial y} + \frac{\partial q_r}{\partial z} \right) + \frac{\rho \Delta e_r}{Z_r \tau_c}. \quad (16)$$

Note that the last equation is for the rotational energy and that

$$\tau_{ij} = (\tau_{ij})_{N.S} + (\tau_{ij})_{Burnett} + (\tau_{ij})_{augmented}, \quad (17)$$

$$q_i = (q_i)_{N.S} + (q_i)_{Burnett} + (q_i)_{augmented}, \quad E = \frac{3}{2}RT_i + RT_R + \frac{1}{2}(u^2 + v^2 + w^2), \quad (18)$$

$$\Delta e_r = \frac{4}{5} \left[ E - \frac{1}{2}(u^2 + v^2 + w^2) \right] - e_r = \frac{R}{5}(6T_i - T_R), \quad \tau_c = \frac{\pi\mu}{4p} \text{ is mean collision time, as before, so that}$$

$$\frac{\rho \Delta e_r}{Z_r \tau_c} = \frac{4p\rho R(6T_i - T_R)}{5\pi\mu Z_R}. \quad (19)$$

## The Linearized Equations

Using a similar non-dimensionalization scheme as above, the equations can be written as

$$\begin{aligned} & \frac{\partial V'}{\partial t'} + L_1 \frac{\partial V'}{\partial x'} + M_1 \frac{\partial V'}{\partial y'} + N_1 \frac{\partial V'}{\partial z'} + L_2 \frac{\partial^2 V'}{\partial x'^2} + M_2 \frac{\partial^2 V'}{\partial y'^2} + N_2 \frac{\partial^2 V'}{\partial z'^2} + L_3 \frac{\partial^3 V'}{\partial x'^3} \\ & + M_3 \frac{\partial^3 V'}{\partial y'^3} + N_3 \frac{\partial^3 V'}{\partial z'^3} + M_4 \left( \frac{\partial^4 V'}{\partial x'^4} + \frac{\partial^4 V'}{\partial y'^4} + \frac{\partial^4 V'}{\partial z'^4} \right) + L_0 V' = S \end{aligned} \quad (20)$$

Define  $A = \frac{4}{3} + \frac{\pi}{4}(\gamma - 1)^2 Z_R$ ,  $V' = [\rho, u', v', w', T_l', T_R']^T$ , where

$$\begin{aligned} L_1 &= \begin{bmatrix} 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{2}{3} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}, & M_1 &= \begin{bmatrix} 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & \frac{2}{3} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}, & N_1 &= \begin{bmatrix} 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & \frac{2}{3} & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}, & L_2 &= \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -A & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 \\ 0 & 0 & 0 & 0 & -\frac{5}{2} & 0 \\ 0 & 0 & 0 & 0 & 0 & -1 \end{bmatrix}, \\ \\ M_2 &= \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & 0 \\ 0 & 0 & -A & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 \\ 0 & 0 & 0 & 0 & -\frac{5}{2} & 0 \\ 0 & 0 & 0 & 0 & 0 & -1 \end{bmatrix}, & N_2 &= \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & -A & 0 & 0 \\ 0 & 0 & 0 & 0 & -\frac{5}{2} & 0 \\ 0 & 0 & 0 & 0 & 0 & -1 \end{bmatrix}, & L_3 &= \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ -\frac{4}{3} & 0 & 0 & 0 & \frac{2}{3} & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -\frac{7}{6} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}, & M_3 &= \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ -\frac{4}{3} & 0 & 0 & 0 & \frac{2}{3} & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -\frac{7}{6} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}, \\ \\ N_3 &= \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ -\frac{4}{3} & 0 & 0 & 0 & \frac{2}{3} & 0 \\ 0 & 0 & 0 & -\frac{7}{6} & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}, & M_4 &= \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & \omega_7 & 0 & 0 & 0 & 0 \\ 0 & 0 & \omega_7 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & \omega_7 & 0 \\ \frac{2}{3}\theta_6 & 0 & 0 & 0 & \frac{2}{3}\theta_7 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}, \\ \\ L_0 &= \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ \frac{20}{3}C & 0 & 0 & 0 & \frac{22}{3}C & -\frac{2}{3}C \\ -10C & 0 & 0 & 0 & -11C & C \end{bmatrix}, & S &= \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ -\frac{10}{3}C \\ \frac{5}{3}C \end{bmatrix}. \end{aligned} \quad (21)$$

We assume a solution of the form  $V' = \bar{V} e^{i\pi x'} e^{i\pi y'} e^{i\pi z'} e^{\phi t'}$ ,  $\phi = \alpha + i\beta$ ,  $\pi = \frac{2\pi}{L/L_0}$  and obtain the characteristic

equation for  $\phi$ :

$$\left| \phi I + i\pi(L_1 + M_1 + N_1) - \pi^2(L_2 + M_2 + N_2) - i\pi^3(L_3 + M_3 + N_3) + 3\pi^4 M_4 \right| = 0. \quad (22)$$

This results in a sixth-order polynomial in  $\phi$ , whose trajectories determine the stability boundary. The following three limits can be observed:

- A.  $L_3, M_3, N_3, M_4 = 0 \rightarrow$  Navier-Stokes equations with translational and rotational non-equilibrium. This limit has been analyzed for various values of  $Z_R$ , and they are known to be stable for  $Z_R = 0$ .
- B.  $M_4 = 0 \rightarrow$  conventional Burnett equations with translational and rotational non-equilibrium. The equations are known to be unstable for all  $Z_R$  including  $Z_R = 0$ .
- C.  $M_4 \neq 0 \rightarrow$  Augmented Burnett equations. We studied their stability for various values of  $Z_R$ . For  $Z_R = 0$ , they are known to be stable if

$$\omega_7 = \frac{2}{9} \quad \theta_6 = \frac{-5}{8} \quad \theta_7 = \frac{11}{16}. \quad (23)$$

We will consider  $0 < Z_R < 23$  in Case C. By changing the values of  $\omega_7$ ,  $\theta_6$ , and  $\theta_7$ , we will try to extend the stability for the largest  $Z_R$  value.

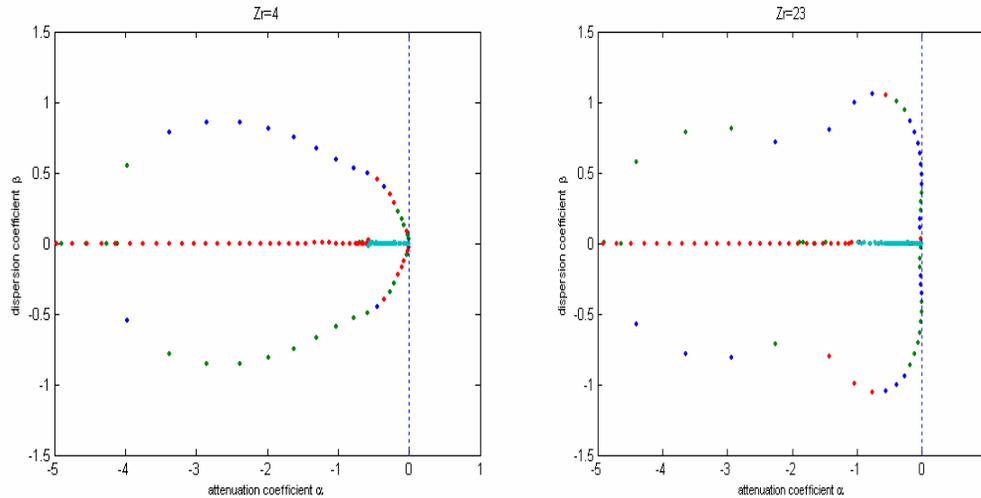


FIGURE 3. Stability boundaries of the Augmented Burnett equations for  $Z_R=4$  and 23

## RESULTS SUMMARY

It is apparent that the Lumpkin's equations are unstable to small perturbations in a quiescent fluid when  $Z_R > 0$  and stable otherwise. Although the simplified model seems to work well in some cases,<sup>2</sup> it will be necessary to use either the Augmented or BGK-Burnett model to include the rotational non-equilibrium. However, detailed stability characteristics of these equations are of interest and will be carried out in further studies. Note that  $\omega = 4.92K_n$ , and that the stability boundaries have been determined by varying  $K_n$  from 0 to 1 using 100 points. We have also examined the stability of the 1D Augmented Burnett equations for  $Z_R=4, 18$ , and 23. The results for  $Z_R=4$  and 3 are shown in figure 3. The results for the Case  $Z_R=18$  are similar to those for  $Z_R=23$  and are therefore not shown in this paper. As the figures show, we have found that, with the appropriate coefficients, the Augmented equations are stable for  $Z_R$  values up to 23. This suggests the superiority of the Augmented Burnett equations over Lumpkin's simplified model. Hence, the former might be more appropriate for subsequent work on hybrid HOC/DMSC procedures. We have incorporated a few physically realizable and computationally stable versions of the Burnett equations into LAURA [9] and combined this with a DSMC procedure. Details are available in [10].

## ACKNOWLEDGEMENTS

The work reported in this paper has been supported by the United States Air Force Research Laboratory under Contract F33615-03-M-3332. The authors appreciate many helpful discussions and the support of Eswar Josyula, the Technical Monitor for the contract.

## REFERENCES

- [1] G. A. Bird, *Molecular Gas Dynamics and Direct Simulation of Gas Flows*, Clarendon Press, Oxford, 1994.
- [2] R. K. Agarwal, R. Balakrishnan and K. -Y. Yun, *Annual Review of Computational Physics*, Vol. IX, Dietrich Stauffer Editor, World Scientific Press, pp. 211-252 (2001).
- [3] K.-Y. Yun and R. K. Agarwal, *Journal of Thermophysics and Heat Transfer*, Vol. 38, (2001).
- [4] B.C. Eu, *Kinetic Theory and Irreversible Thermodynamics*, John Wiley & Sons, New York, 1992.
- [5] H. Grad, *Commun. Pure Appl. Math.*, Vol. 2, pp. 325-331 (1949).
- [6] V.V. Aristov and F.G. Tcheremissin, "The Kinetic Numerical Method for Rarefied and Continuum Gas Flows," in *Rarefied Gas Dynamics*, Vol. 1, Plenum Press, New York, pp. 269-276 (1985).
- [7] Lumpkin, F. E. 1990. Ph.D. Thesis, Department of Aeronautics and Astronautics, Stanford University.
- [8] R. K. Agarwal, K.-Y. Yun and R. Balakrishnan, *Phys. Fluids*, Vol. 13 (10), pp.3061-3085, (2001).
- [9] F. M. Cheatwood and P. A. Gnoffo. NASA TM-4674 (1996)
- [10] F. Ladeinde, X. Cai, W. Li, and R. K. Agarwal. AIAA Paper 2004-1178 (2004)