

## **Controlled Hypersonic Flight Air Data System and Flight Instrumentation**

Georg Koppenwallner  
HTG Hyperschall Technology Göttingen, Germany  
Max Planck Strasse 19  
37191 Katlenurg Lindau

### **Summary**

The main task of an air data system, namely to deduce from measurement on the body the aerodynamic free stream conditions will be outlined. Emphasis will also be given to the limitations of aerodynamic systems.

A short review of the aerodynamic probe functions relating measured quantities to the desired free stream conditions and vehicle orientation will be given.

After explaining the principle elements of an air data system the design of individual components will be outlined.

The design of an air data system depends strongly on the flight envelope, re-entry trajectory and vehicle structure. Flight envelope and re-entry trajectory influence primarily the sensor range and sensor head design. Vehicle structure has a strong influence on the probe installation.

The principal components are: Probe heads, Probe mounting elements, sensors, sensor electronics, harness and data acquisition system.

In a similar way the design of calorimetric heat flux sensors will be explained.

Testing and flight qualification are one of the mayor efforts during development of an air data system and flight instrumentation. Therefore the principal steps for these activities will also be outlined.

# Report Documentation Page

*Form Approved  
OMB No. 0704-0188*

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE <b>01 JUN 2007</b>	2. REPORT TYPE <b>N/A</b>	3. DATES COVERED -			
4. TITLE AND SUBTITLE <b>Controlled Hypersonic Flight Air Data System and Flight Instrumentation</b>		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S)		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>HTG Hyperschall Technology Göttingen, Germany Max Planck Strasse 19 37191 Katlenurg Lindau</b>		8. PERFORMING ORGANIZATION REPORT NUMBER			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)			
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release, distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>See also ADM002057., The original document contains color images.</b>					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>UU</b>	18. NUMBER OF PAGES <b>30</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

**Content**

**1. Introduction..... 3**

**2. Tasks and requirement and of an air data system ..... 3**

    2.1 Air data system tasks..... 3

    2.2 Air data system requirements ..... 4

**3. The aerodynamic probe functions ..... 5**

    3.1 Free-stream dynamic pressure determination at  $Ma \gg 1$  ..... 5

    3.2 Mach number  $Ma$  and static pressure determination for  $Ma \gg 1$ ..... 6

    3.3 Flight Wind angles and basic considerations ..... 6

    3.4 *Derivation of  $\alpha, \beta$  sensor functions* ..... 8

    3.5 *Sensitivity and error analysis.* ..... 10

**4. Simple tools for pressure and heat load dimensioning of sensor heads..... 11**

**5 Some typical air data systems for re-entry vehicles ..... 13**

    5.1 The Shuttle Entry Air Data System SDS..... 13

    5.2 The ARD capsule ..... 14

    5.3 The RAFLEX Air Data System and Instrumentation..... 14

**6. RAFLEX design principles..... 16**

    6.1 The basic principle of RAFLEX of combined sensor heads ..... 17

    6.2 Mission specific design influence ..... 18

    6.3 The influence of vehicle mechanical and thermal structure ..... 19

**7. Electronic components and mass budget ..... 22**

**8. Validation and qualification testing of the probes..... 23**

**9. Some flight results with RAFLEX system..... 25**

**10. Conclusions ..... 27**

**Literature..... 28**

## 1. Introduction

Air data systems have to provide information on the ambient air and on the vehicle state of flight relative to ambient air. For an operational vehicle these state quantities are important for the vehicle control and guidance. For an experimental research vehicle these quantities are necessary for reduction of quantities measured on the vehicle itself. Thus the air data system should in combination with other on board or remote measurement quantify the state of the ambient atmosphere and the state of the vehicle. Typical supplementary onboard or remote measurements are acceleration vector sensing and radar tracking.

## 2. Tasks and requirement and of an air data system

### 2.1 Air data system tasks.

Air data systems have in general a specific task and they have in addition to comply with a set of requirements [1].

The main task concerns information on ambient air and on the vehicle state as outlined below.

#### a. Information on ambient atmosphere

As the main aerodynamic re-entry occurs in the homosphere ( $H < 120$  km) with constant molecular mass we need only 2 quantities to determine the atmospheric state

Pressure  $p$  or density  $\rho$

Temperature  $T$

For  $H < 120$  km the molecular mass is constant with a value of  $M = 28,96$  kg/kmol

#### b. Information on vehicles aerodynamic state

Vehicles aerodynamic state is in principle determined by the flight velocity vector relative to ambient air in a body fixed coordinate system. This requires the determination of the three scalar quantities.

In principle this measurement is achieved by determination of magnitude of velocity  $V$  and the aerodynamic angle of attack  $\alpha$  and the angle of side slip  $\beta$ .

In summary one needs 5 combinations of quantities in order to completely describe the vehicle state in an aerodynamic reference plane

Quantity	
1 Free stream dynamic pressure	$q = (\rho/2)V^2$
2 Angles of attack	$\alpha$
3 Angle of sideslip	$\beta$
4 Free stream pressure or temperature	$p$ or $T$
5 Flight velocity or density	$V$ or $\rho$

In a flush mounted Air Data System (FADS) the vehicle itself acts as an aerodynamic probe. Thus one has to relate physical quantities measured at the vehicle surface to the atmospheric free stream and to the vehicle's velocity and aerodynamic orientation. [Fig.1](#) shows that the atmospheric free stream and the vehicle flow field determine the local surface properties.

$$p(\text{surface}) = \text{Function} ( V, \rho, T, \alpha, \beta, \text{vehicle shape, location} )$$

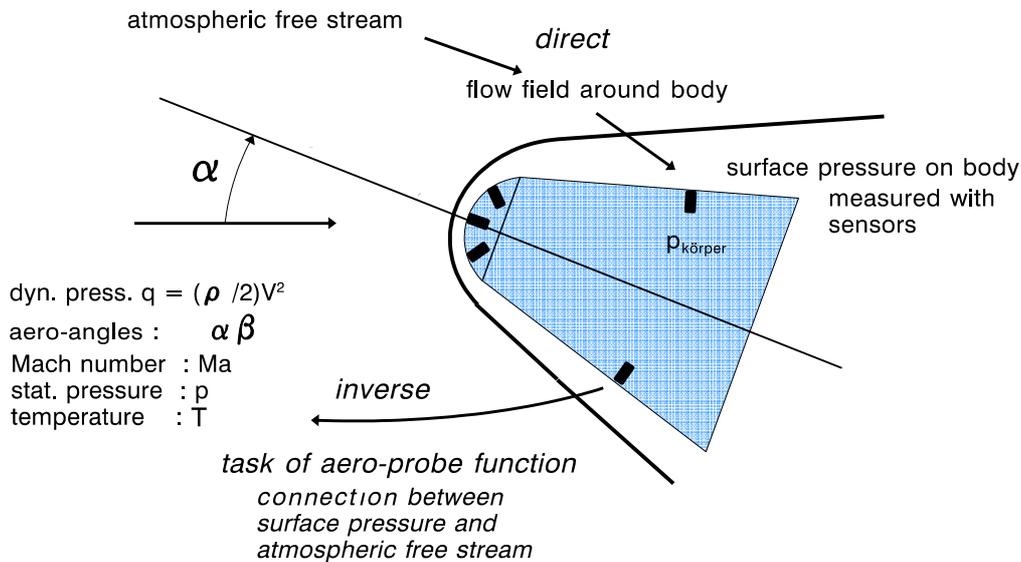


Fig.1. The main tasks of an aerodynamic air-data system (inverse problem has to be solved)

**Fig. 1 The main tasks of an aerodynamic air data system**

A flush mounted air data system has, however, to solve the inverse problem, namely to deduce from a surface measurement the state of the atmosphere and the vehicle orientation. The solution of this inverse problem is by nature much more complex because one identical surface quantity can result from a variety of free-stream conditions and vehicle orientations. In order to find the unique inverse solution, a set of surface quantities have to be measured. From this set of measurements the compatible solutions have to be isolated in order to obtain a unique solution for the free stream quantity.

**2.2 Air data system requirements**

The requirements may be split up in mission dependent, operational and vehicle specific.

Mission dependent requirements

- a. Altitude- velocity range of mission to be covered
- b Accuracy , response time
- c. Availability of evaluated information (Immediately as input for flight control or after flight for reconstruction of aerodynamic environment)

Operational requirements

- a. Heat loads ( mainly for sensor heads)
- b. Dynamic, vibration loads (sensors and electronics)
- c . Response time

Vehicle dependent requirements

- a. Location for installation
- b. Compatibility with vehicles external internal structure

### 3. The aerodynamic probe functions

The aerodynamic probe functions establish relations between the measured quantity of the sensor head (in our case surface pressure) and the aerodynamic free stream quantities. This is mathematically an inverse problem, which only in simple cases can be solved directly. In order to simplify the situation we select as representative vehicle shape a blunted cone similar to EXPERT [2] and restrict the analysis to the hypersonic part of the re-entry regime.


#### 3.1 Free-stream dynamic pressure determination at $Ma \gg 1$

Free stream dynamic pressure should be determined with a pressure port installed in the vehicle's nose. We then can use the classical Raleigh- Pitot relation [3] given below.

$$\frac{P_{t,2}}{p_1} = \left( \frac{\kappa + 1}{2} Ma_1^2 \right)^{\kappa/(\kappa-1)} \left( \frac{\kappa + 1}{2\kappa Ma_1^2 - (\kappa - 1)} \right)^{1/(\kappa-1)}$$

with  $\frac{p_1}{q_1} = \frac{2}{\kappa} Ma_1^2$  and  $q_1 = \frac{\rho_1}{2} V_1^2$  we obtain

$$\frac{P_{t,2}}{q_1} = \frac{2}{\kappa} \frac{1}{Ma_1^2} \left( \frac{\kappa + 1}{2} Ma_1^2 \right)^{\kappa/(\kappa-1)} \left( \frac{\kappa + 1}{2\kappa Ma_1^2 - (\kappa - 1)} \right)^{1/(\kappa-1)}$$

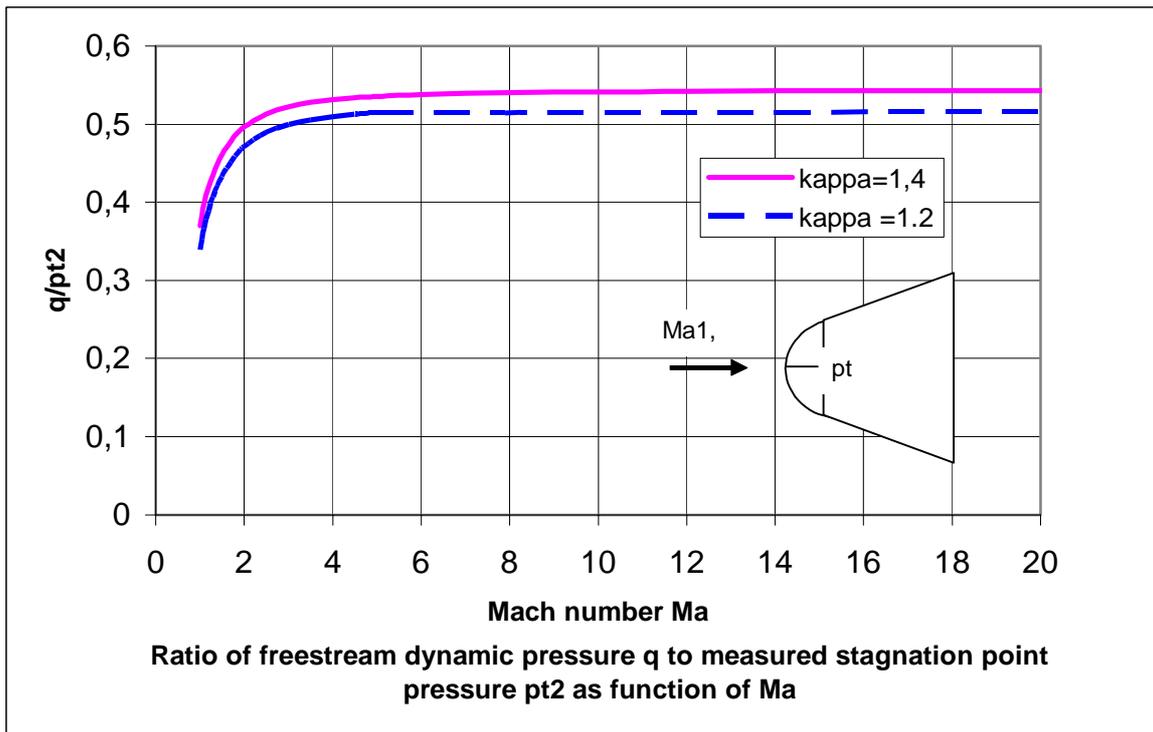


**Fig 2 Ratio of free stream dynamic to Pitot pressure- as function of Mach number**

Fig. 2 shows the ratio of actual free stream dynamic pressure to measured Pitot pressure as function of Mach number  $Ma$ . It is evident that for  $Ma > 4$  this pressure ratio becomes independent from  $Ma$ . Thus the free stream dynamic pressure can directly be determined by the measured Pitot pressure. It is also important to note that real gas effects have only a minor

influence on the stagnation point pressure. Equilibrium chemistry [4] reduces the  $q/p_{t2}$  ratio from  $q/p_{t2} = 0.54$  for  $\kappa = 1.4$  to a value of  $q/p_{t2} = 0.52$  which corresponds to  $\kappa = 1.2$ .

### 3.2 Mach number Ma and static pressure determination for $Ma \gg 1$

Mach number determination requires beside of the Pitot pressure also a static pressure determination. For our test case vehicle this can only be done on the lateral conical surface.

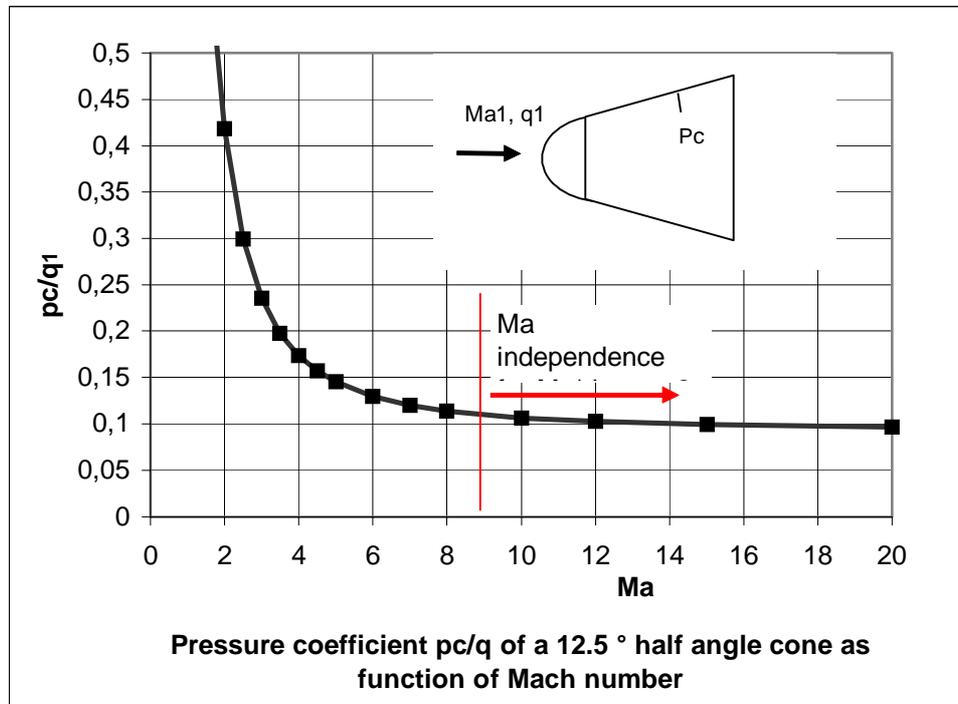

**Fig 3 Pressure coefficient of a  $12.5^\circ$  half angle cone and Mach number independence**

In Fig. 3 we show the pressure coefficient of a cone half angle  $\Theta = 12.5^\circ$  as function of Mach number. It is evident that due to the hypersonic Mach number independence principle, which holds also for slender bodies with  $Ma \cdot \sin \theta > 2$  the cone pressure is only a function of the free stream dynamic pressure and the cone angle. We therefore can not use the combination of Pitot- and cone pressure in order to determine the free stream Mach number because both quantities are only functions of the free stream dynamic pressure  $q$ . For angle of attack and angle of sideslip determination the Mach number independence principle can however be used to derive simple analytic expressions.

### 3.3 Flight Wind angles and basic considerations

The definition of the US standard aerodynamic coordinate system [5] and the corresponding angle of attack  $\alpha$  and side slip  $\beta$  are used in the following.

The Newtonian impact method states, that the local surface pressure depends only on the angle  $\Theta$  between local surface normal and free stream vector as shown below.

$$\begin{aligned}
 p(\Theta) &= p(\Theta = 0^\circ) \cdot \cos^2 \Theta & \text{for } -90^\circ < \Theta < 90^\circ \\
 p(\Theta) &= 0 & \text{for } 90^\circ < \Theta < 270^\circ
 \end{aligned}
 \tag{4.1}$$

Newtonian method is an acceptable approximation for  $Ma \cdot \cos(\Theta) > 2$ .

We analyze the probe function for 5 sensors installed in an axis symmetric body with a blunt nose. The following Table shows in a general way the angles  $\phi$  and  $\theta$  defining the installation conditions of the five probes.

Fig 4 explains for an axis-symmetric body the sensor installation angles and the flight wind angles  $\alpha$ ,  $\beta$ . In order to achieve a simple formulation for the probe functions a symmetric installation with  $\theta_1 = \theta_2 = \theta_3 = \theta_4 = \theta$  will be used for the following analysis.

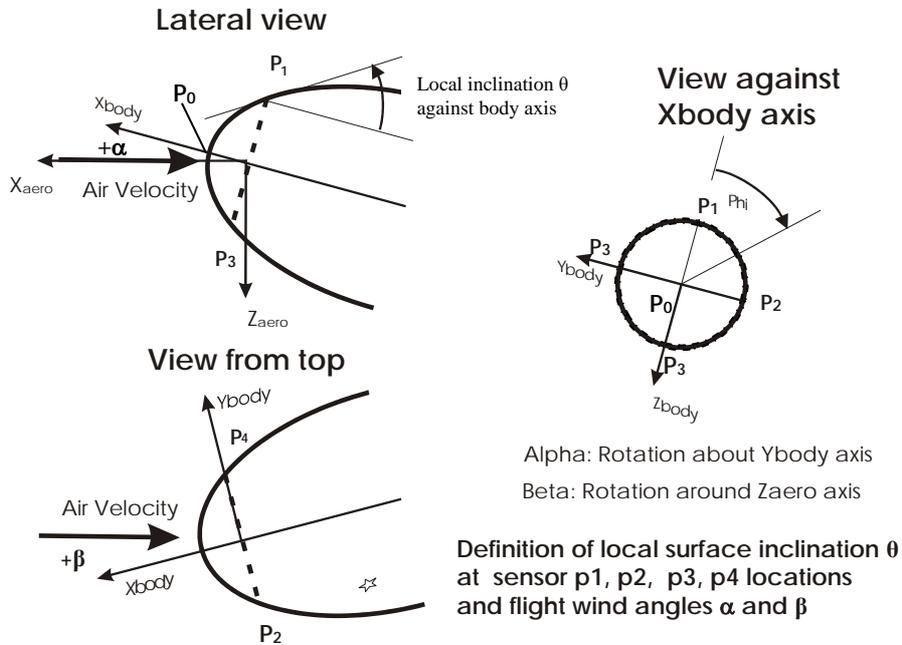


Fig 4 Definition of local surface inclination and flight wind angles

Table 1 Conditions for sensor installation

No	Pressure	Probe	Circumference Angle $\phi$ , °	Local surface inclination $\theta$ against body x axis
0	P <sub>0</sub>	Stagn. Point	0	$\theta = 90$
1	P <sub>1</sub>	Alpha 1	$\phi_1 = 0$	$\theta_1$
2	P <sub>2</sub>	Beta 1	$\phi_2 = 90$	$\theta_2$
3	P <sub>3</sub>	Alpha 2	$\phi_3 = 180$	$\theta_3$
4	P <sub>4</sub>	Beta 2	$\phi_4 = 270$	$\theta_4$

In the NASA TR R 127 [6] formula for the ‘Newtonian’ pressure distribution on axis-symmetric bodies in dependence of the flight wind angles are presented.

The circumferential pressure distribution of a general axis-symmetric body is given as function of flight wind angles  $\alpha$ ,  $\beta$  and the local angles of inclination  $\theta$  and circumference  $\phi$ .

$$c_p = k_N (\sin \theta \cos \alpha \cos \beta - \cos \theta \sin \phi \sin \beta - \cos \phi \sin \theta \sin \alpha \cos \beta)^2$$

For the spherical stagnation point the following expression holds

$$cp_0 = k_N (\cos \alpha \cos \beta)^2$$

With  $k_N$  given by  $k_N = \frac{\kappa + 3}{\kappa + 1}$  for modified Newtonian theory

Based on this formula simple probe functions have been derived in [1] which are shortly outlined below

**3.4 Derivation of  $\alpha$ ,  $\beta$  sensor functions**

For a symmetric circumferential installation of 5 pressure probes the angular functions  $\cos \phi$  and  $\sin \phi$  have values as shown in the following table

Table Pressure probe installation on blunted axis symmetric body

No	Pressure	Probe	Circumference Angle $\phi$ , °	Cos $\phi$	sin $\phi$
0	P <sub>0</sub>	Stagn. Point	0		
1	P <sub>1</sub>	Alpha 1	$\phi_1 = 0$	1	0
2	P <sub>2</sub>	Beta 1	$\phi_2 = 90$	0	1
3	P <sub>3</sub>	Alpha 2	$\phi_3 = 180$	-1	0
4	P <sub>4</sub>	Beta 2	$\phi_4 = 270$	0	-1

Using these values one obtains for the Alpha1, Alpha3, Beta2 and Beta4 sensors the following pressure formula set

$$cp(\alpha1) = k_N \cos^2 \beta (\sin \theta \cos \alpha - \cos \theta \sin \alpha)^2$$

$$cp(\alpha3) = k_N \cos^2 \beta (\sin \theta \cos \alpha + \cos \theta \sin \alpha)^2$$

$$cp(\beta2) = k_N (\sin \theta \cos \alpha \cos \beta - \cos \theta \sin \beta)^2$$

$$cp(\beta4) = k_N (\sin \theta \cos \alpha \cos \beta + \cos \theta \sin \beta)^2$$

These four equations have to be solved in order to determine with the 4 measured pressures the two flight wind angles  $\alpha$ ,  $\beta$ .

The solution procedure can substantially be simplified when the probe positions are selected at local surface inclination with  $\theta = 45^\circ$ . We then have  $\sin 45^\circ = \cos 45^\circ$  and the equations are further simplified to

$$cp(\alpha1) = k_N \sin^2 45^\circ \cos^2 \beta (\cos \alpha - \sin \alpha)^2$$

$$cp(\alpha3) = k_N \sin^2 45^\circ \cos^2 \beta (\cos \alpha + \sin \alpha)^2$$

$$cp(\beta2) = k_N \sin^2 45^\circ (\cos \alpha \cos \beta - \sin \beta)^2$$

$$cp(\beta4) = k_N \sin^2 45^\circ (\cos \alpha \cos \beta + \sin \beta)^2$$

For the differential pressures  $cp(\alpha3 - \alpha1)$  and  $cp(\beta4 - \beta2)$  we obtain:

$$\Delta cp(\alpha3 - \alpha1) = k_N 4 \sin^2 45^\circ \cos^2 \beta \cos \alpha \sin \alpha$$

$$\Delta cp(\beta4 - \beta2) = k_N 4 \sin^2 45^\circ \cos \beta \sin \beta \cos \alpha$$

We arrive at an explicit solution if we normalize 4.9 and 4.10 by the geometric stagnation point values  $cp_0$ . The beta dependence in the alpha formula is then compensated by the stagnation point pressure.

$$\frac{\Delta cp(\alpha_3 - \alpha_1)}{cp_0} = \frac{k_N 4 \sin^2 45^\circ \cos^2 \beta \cos \alpha \sin \alpha}{k_N \cos^2 \beta \cos^2 \alpha} = 4 \sin^2 45^\circ * \operatorname{tg} \alpha$$

$$\frac{\Delta cp(\beta_4 - \beta_2)}{cp_0} = \frac{k_N 4 \sin^2 45^\circ \cos \beta \sin \beta \cos \alpha}{k_N \cos^2 \beta \cos^2 \alpha} = 4 \sin^2 45^\circ \frac{\operatorname{tg} \beta}{\cos \alpha}$$

We note that due to the normalization with  $cp_0$  the Newton factor  $k_N$  and the dynamic pressure are eliminated from the functions and we obtain as final probe functions:

$$\alpha = \operatorname{arctg} \left( \frac{1}{4 \sin^2 45^\circ} \frac{(p_3 - p_1)}{p_0} \right)$$

$$\beta = \operatorname{arctg} \left( \frac{\cos \alpha}{4 \sin^2 45^\circ} \frac{(p_4 - p_2)}{p_0} \right)$$

The angle of attack  $\alpha$  can now directly determined by the measured pressure ratio  $(cp_3 - cp_1)/cp_0$  and in a second step the sideslip angle  $\beta$  can be determined with  $(cp_4 - cp_2)/cp_0$ . It is evident that there exists only a small influence of alpha on the beta pressure ratio function..

Fig 5 and Fig 6 show the alpha pressure ratio  $(p_3 - p_1)p_0$  and the beta pressure ratio  $(p_4 - p_2)p_0$  as function of the corresponding angles. It should be noted that the formula are only valid for  $\alpha < 45^\circ$  and  $\beta < 45^\circ$ . For  $\alpha > 45^\circ$  or  $\beta > 45^\circ$  the sensors will move into the shadowed flow regime with  $p = 0$ , a situation which in the above derivation has not been considered.

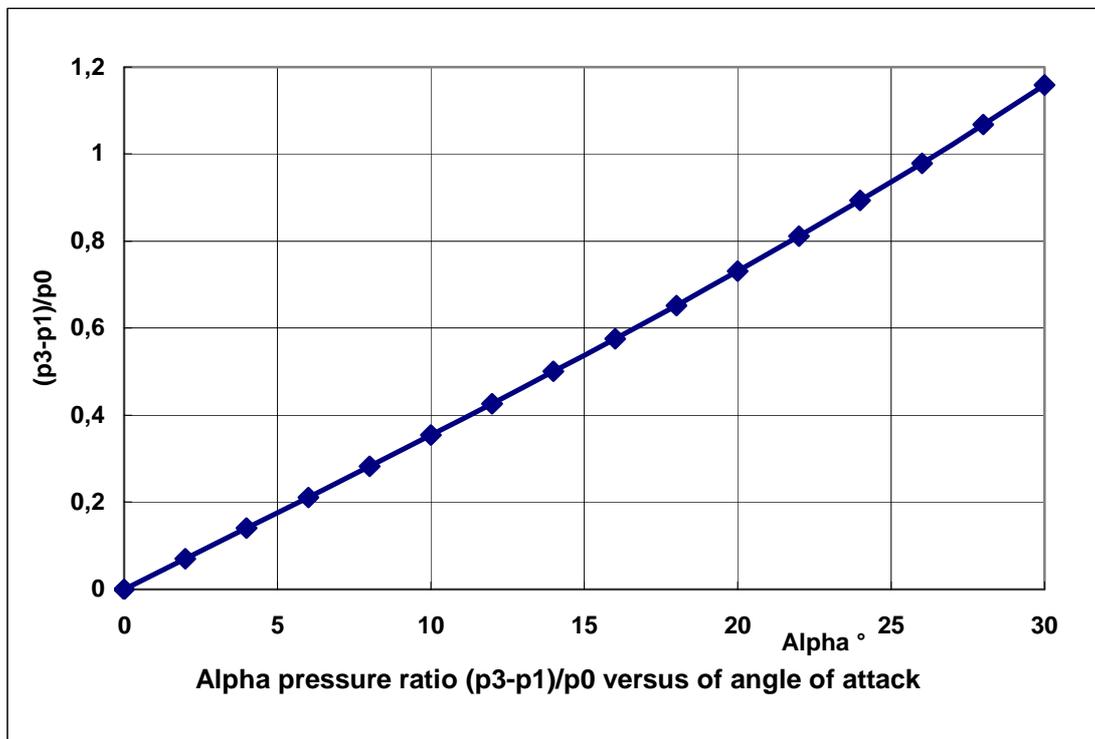


Fig. 5 Alpha pressure ratio  $(p_3 - p_1)/p_0$  versus angle of attack, Newtonian pressure law, Sensor installation at  $\theta = 45^\circ$

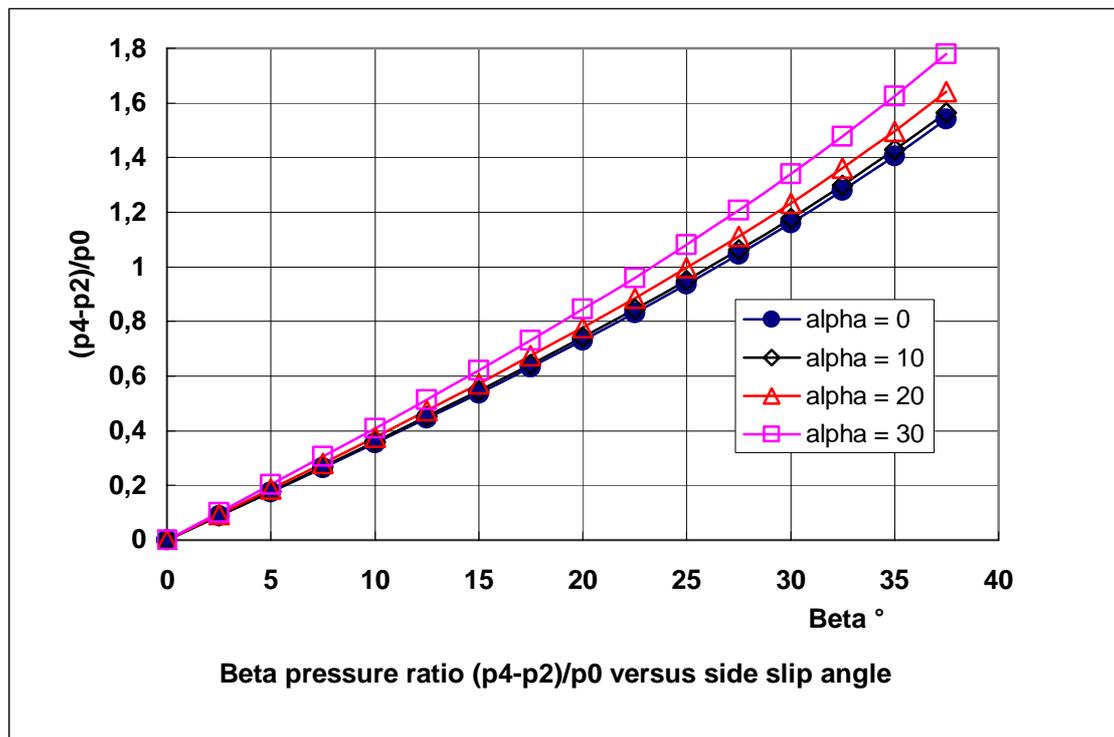


Fig. 6 Beta pressure ratio  $(p_4-p_2)/p_0$  versus angle of attack, Newtonian pressure law, Sensor installation at  $\theta = 45^\circ$

In a CFD study [7] conducted at CLE with Navier Stokes codes the above analytical formulation has been tested for EXPERT [2] vehicle conditions along the entry trajectory. It was found that viscous boundary and real gas effects have only a minor influence on the analytical derived probe functions for Mach numbers  $Ma > 5$ .

Based on this study small correction terms for the probe functions, which amount to about 6%, have been developed by CLE.

### 3.5 Sensitivity and error analysis.


For primary importance for the directional sensitivity of one pressure sensing orifice is the local inclination  $\Theta$ . Newtonian pressure is given by  $p/p(\Theta=0) = \cos^2\Theta$

Taking the derivative  $d(p/p_0)/d\Theta$  we obtain

$$\frac{d(p/p_0)}{d\Theta} = -2\cos\Theta * \sin\Theta$$

Fig 7 shows for one pressure tap the Newtonian pressure and the directional sensitivity. It is evident that the sensor installation at  $\Theta = 45^\circ$  provides the largest directional sensitivity. In blunt capsule like bodies of the Apollo and ARD type only a ver small angular sensitivity can be achieved.

Thus the selected pressure port locations with  $\Theta = 45^\circ$  and  $\Delta\phi = 90^\circ$  are the optimum positions for flight wind angle determination. This special angular arrangement provides not only an explicit probe function but also the highest angular resolution.

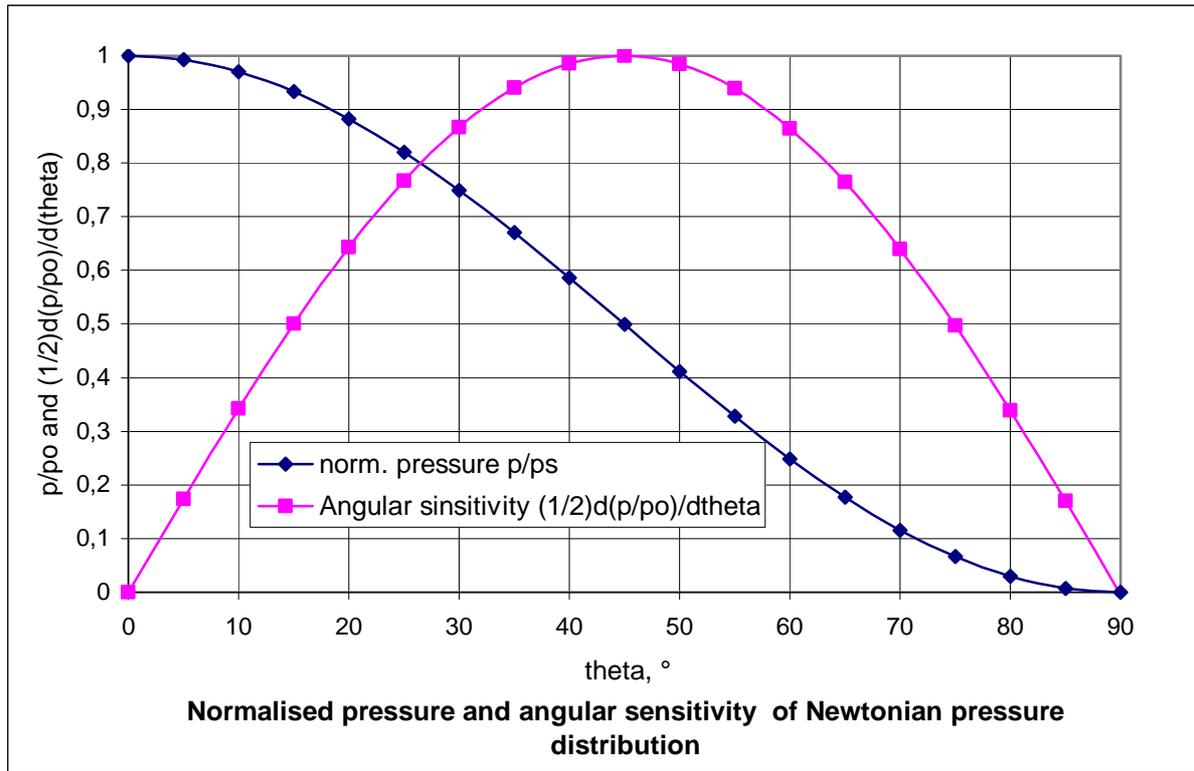

**Fig. 7 Normalized Newtonian pressure distribution and angular sensitivity for one pressure tap**

The relative angle of attack error is obtained by logarithmic differentiation of the probe function.  $p_{3-1} / p_0 = 4 \sin^2 45^\circ \cdot \tan \alpha$  ; At small angle of attacks  $\alpha < 10^\circ$  (with  $\sin \alpha \sim \alpha$  and  $\cos \alpha \sim 1$ ) we obtain :

$$\left| \frac{\Delta \alpha}{\alpha} \right| = \left| \frac{\Delta p_{1-3}}{p_{1-3}} \right| + \left| \frac{\Delta p_0}{p_0} \right|$$

This means if we measure both pressures  $p_0$  and  $p_{3-1}$  with an accuracy of 1% the resulting angle of attack accuracy will be 2% of the alpha value.

It should however be noted that this analysis applies only if we have identical Newton factor  $k_N$  between the different pressure taps.

Real gas effects may influence the Newton factors between tap 0 taps 31 which would result in Newton factors of  $k_{N0}$  and  $k_{N13}$ . In this case the error formula would contain the following additional term:

$$\left| \frac{\Delta \alpha}{\alpha} \right| = \left| \frac{\Delta p_{1-3}}{p_{1-3}} \right| + \left| \frac{\Delta p_0}{p_0} \right| + \left| \frac{\Delta K_N}{K_N} \right|$$

#### 4. Simple tools for pressure and heat load dimensioning of sensor heads


Principal tasks of the dimensioning are:

- > Determination of the pressure measurement range for each sensor head.
- > Determination of heat load measurement range for calorimetric sensor heads.


> Thermal dimensioning to withstand the maximum heat load and the time integrated heat load during the mission.

Fast engineering analysis methods are extremely useful for the dimensioning during the design phase. Simple ballistic trajectory analysis codes like the Allen-Eggers [8] or Chapman's method [9] combined analytical pressure and heat flux formula allow a fast analysis of the pressure, heat load and thermal response of the sensor heads along the complete trajectory. HTG relies on Allen Egger' entry dynamics combined with modified Newtonian surface pressure analysis and Lees [10] heat flux analysis.

As typical analysis example we show in Fig. 8 the dynamic pressure and velocity for the re-entry trajectory case B of the EXPERT vehicle [ 2 ]. In Fig. 9 we show as function of entry time the stagnation point heat flux and the resulting temperature of a calorimetric heat flux sensor of the RAFLEX type [11]. It should be noted that the thermal design of sensor heads has to consider both the maximum heat load during re-entry and the time integrated heat load during the whole re-entry phase. In the present analysis case the copper sensor head reaches a maximum temperature of 1300 K, which is only 60° below the melting temperature of 1360 K. Thus the calorimetric constant of the head has to be increased.

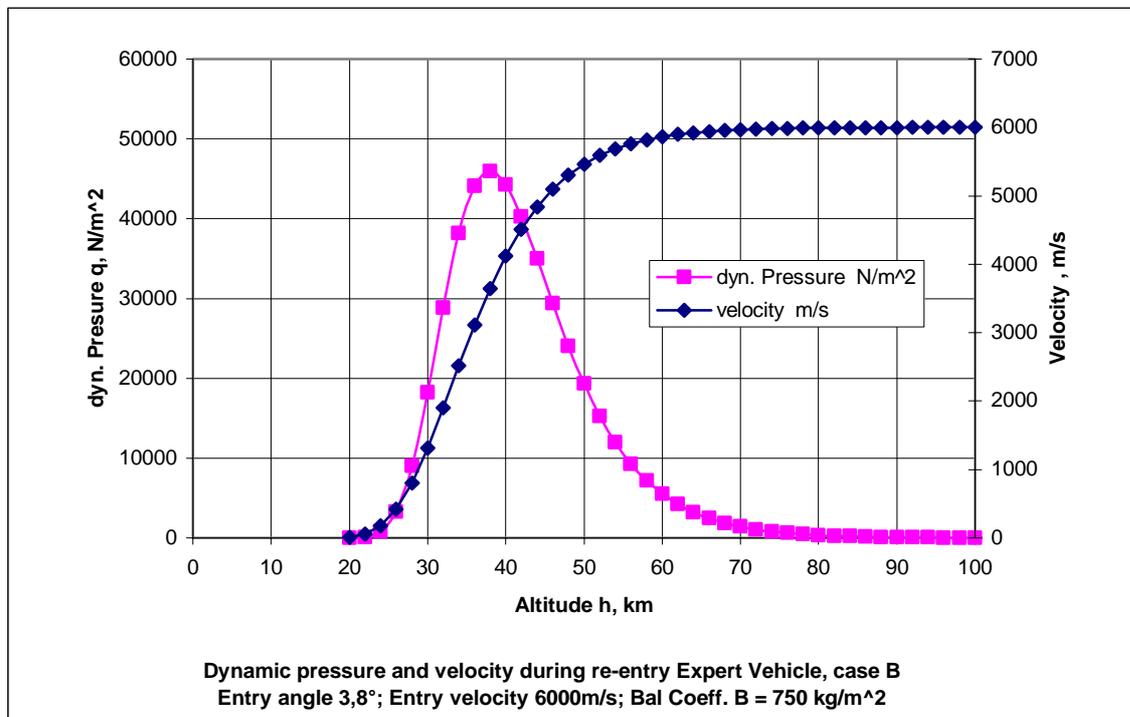

**Fig. 8 Dynamic pressure and velocity EXPERT Case B, Sensor length 30 mm;  
B = 750 kg/m<sup>2</sup>, entry angle = 3,8°**

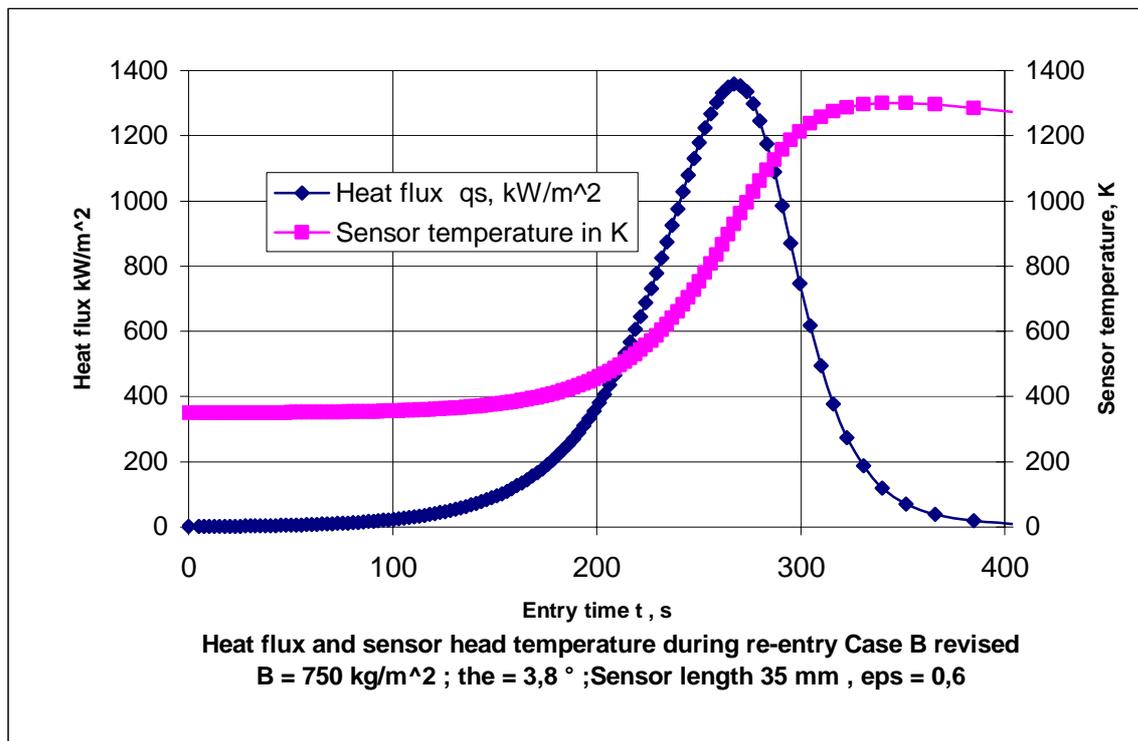


**Fig. 9 Heat flux and sensor head temperature, EXPERT Case B, Sensor length 30 mm;  $B = 750 \text{ kg/m}^2$ , entry angle =  $3,8^\circ$**

### 5 Some typical air data systems for re-entry vehicles

Typical air data systems used in re-entry vehicles are shortly summarized in the following.

#### 5.1 The Shuttle Entry Air Data System SEADS


The US Shuttle Entry Air Data System SEADS [12] consists of 14 nose cap orifices and 6 static orifices mounted behind the nose cap with smaller local surface inclination. Due to the asymmetric nose and due to safety considerations more than 5 pressure orifices had to be used. Therefore also the derivation of probe functions required a large computational and experimental effort. In order to cover the complete altitude range below 90 km each orifice is connected to a pair of 2 absolute pressure transducers with different measurement range. Fig 10 shows a sketch of the Shuttle nose with the installation locations of the 20 probes.

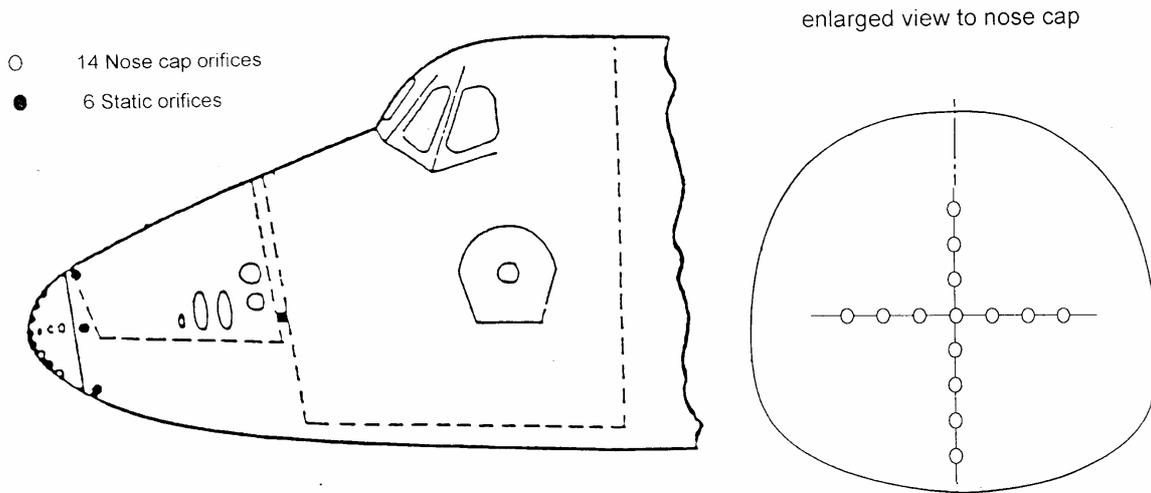

**Fig. 10 Principle of Shuttle Entry Air Data system SEADS**

**5.2 The ARD capsule**

The ARD capsule, whose geometry is shown in Fig. 11, has the Apollo shape and its spherical front part consists of a spherical segment with 22,6° half angle. This means that the maximum pressure variation amounts on the flow exposed spherical surface at  $\alpha = 0^\circ$  is only to 15% and at  $\alpha = 15^\circ$  the pressure variation increases to to 36%. Thus the air data system principally operates in the low sensitivity regime of Fig. 7.

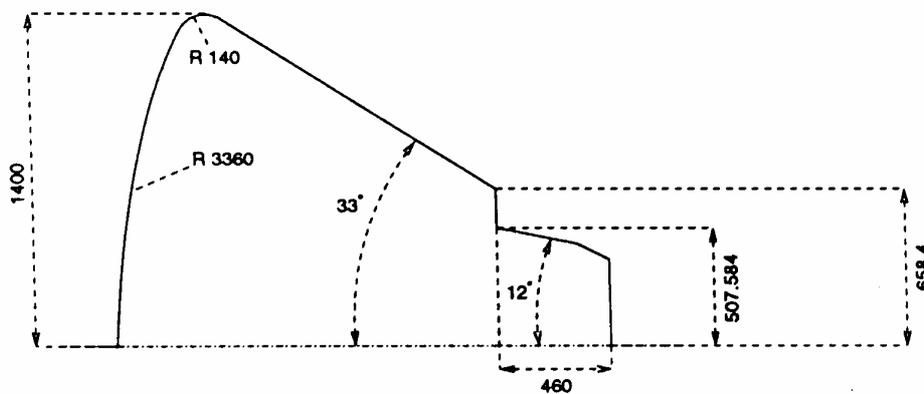

**Fig. 11 Geometry of ARD capsule, dimensions in mm**

**5.3 The RAFLEX Air Data System and Instrumentation**

The RAFLEX air data system (Re-entry Aerodynamic Flow Experiment) consists of combined flux probes measuring both pressure and heat flux. Up to now RAFLEX served for 3 entry capsules as air data system [11].

**RAFLEX for Express Capsule**

RAFLEX development started during the years 1993 – 1995 for the EXPRESS mission [ 13 ], [14]. The shape and the main dimensions of the EXPRESS capsule and sensor installation positions are shown in Fig.12

EXPRESS was launched in January 1995 and recovered after a launch failure and an unexpected recovery in Ghana in the middle of 1996. Due to these circumstances no flight data

were obtained during the uncontrolled re entry. Inspection and calibration checks after landing showed that the hardware and sensors suffered no mayor damage due to the re-entry forces and heat loads.

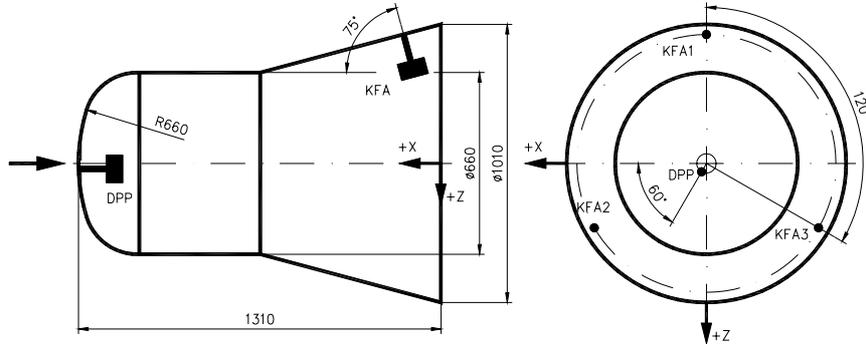


Fig 12 Raflex installation on Express Capsule

Sensor type	Measurement task
1 DPP Dynamic Pressure Probe	Free stream dynamic pressure
3 CFP Combined Flux Probe (KFA)	Particle flux, Slip flow, Heat flux Pressure (momentum flux) Combin. 1+2+3 → free stream orientation

**RAFLEX on MIRKA**

MIRKA [15] was a ballistic re-entry capsule with a spherical shape of about 1m diameter and a total mass of 154 kg. (Fig.13), it was launched and recovered after parachute landing in October 1997. For MIRKA a second improved version of RAFLEX was developed. Excellent flight data were obtained during the re-entry.

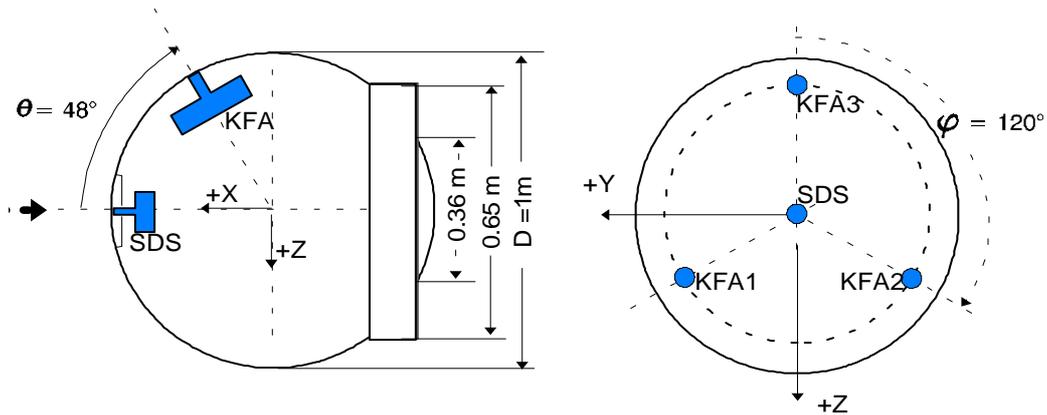



Fig. 13 Geometry of MIRKA Capsule with sensor locations

Sensor type	Measurement task
1 SDS Dyn. Pressure Probe	Free stream dynamic pressure
3 CFP (KFA) Combined Flux Probes	Heat flux Pressure (normal momentum flux) Combin. 1+2+3 → free stream orientation



### 6.1 The basic principle of RAFLEX of combined sensor heads

The RAFLEX combined sensor heads measure with on head local simultaneously pressure and heat flux .The heat load sensor is based on the calorimetric principle. This means that the heat load acting on the sensor is stored by the calorimetric sensor head. The calorimetric sensor head has in addition a pressure tap which allows pressure and heat flux measurement at identical location. Sensor heads of this type can also be used in the rarefied slip flow regime were thermal transpiration influences the sensed pressure. Fig 15 shows a principle sketch of a combined probe

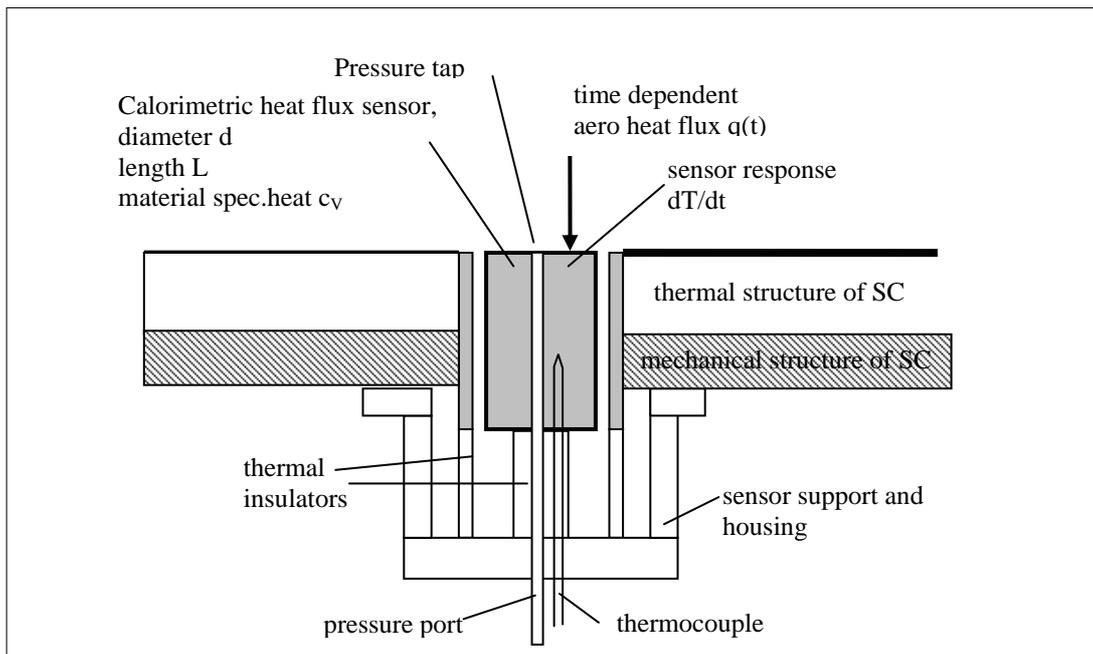

**Fig. 15 Principle of combined RAFLEX sensor head for pressure and heat flux**

As this head has also heat losses due to radiation and conduction the following simplified heat balance applies for a cylindrical calorimeter.

$$q'_{aer} A_{Sens} = H_C \frac{dT}{dt} + A_{Sens} \epsilon \sigma T^4 + A_{Sens} k(T - T_{amb})$$

With  $A_{sens}$  = the flow exposed area of sensor head

For a cylindrical calorimeter as sketched in Fig. 15 we obtain:

Sensing area:  $A_{sens} = (\pi/4)d^2 \quad m^2$

Sensor heat capacity  $H_C$ :  $H_C = c_v \frac{\pi}{4} d^2 * L \quad J/K$

Calorimeter constant  $C_c$ :  $C_c = \frac{H_C}{A} = c_v L \quad J/(m^2K)$

Neglecting heat conduction we obtain for a sensor exposed to aerodynamic heating and radiative heat loss the following simple expression.

$$q'_{aer} = c_v L \frac{dT}{dt} + \epsilon \sigma T^4$$

With this equation the aerodynamic heating can be deduced from the sensor temperature-time derivative  $dT/dt$  with a correction for radiation losses. The above formulation treats the sensor head as a lumped mass with infinite heat capacity. This means that the heating  $dT/dt$  is uniform within the sensor volume. This assumption is only valid in case the heat penetration time  $t_p$  through the sensor is smaller than a characteristic time for a heat flux change during the re-entry  $t_p \ll t_q$ .

The penetration time is given by Fourier number  $Fo_L = 0.1$ , which gives

$$t_p = 0.1 * L^2 c_v / k$$

The characteristic time for a heat flux change  $t_q$  is given by a change of re-entry heat flux  $q(t)$  by a factor  $1/e$ .

$$\left| \frac{dq(t)}{dt} \right|_{t_q} = \frac{q(t)}{e} \text{ which gives : } t_q = \frac{q(t)}{e} \left/ \left| \frac{dq(t)}{dt} \right| \right.$$

The material selection of the sensor head has to consider the following demands:

- High melting temperature
- High specific heat
- High heat conduction

In the following table we compare thermal properties of candidate materials.

Table Thermal data of candidate materials for calorimetric head

Material	Density g/cm <sup>3</sup>	c <sub>M</sub> J/(g K)	c <sub>v</sub> J/(cm <sup>3</sup> K)	K J/cm s K)	a cm <sup>2</sup> /s	T <sub>melt</sub> K	t(Fo =0.1) for L= 1 cm Second
<b>Copper</b>	<b>8.96</b>	<b>0.396</b>	<b>3.53</b>	<b>3.84</b>	<b>1.18</b>	<b>1356</b>	<b>0.0847</b>
<b>Silver</b>	10.5	0.239	2.52	4.19	1.67	1235	0.0493
<b>Gold</b>	19.3	0.130	2.51	3.06	1.226	1336	0.0816
<b>Nickel</b>	8.9	0.444	3.95	0.623	0.158	1731	0.633
<b>Titanium</b>	4.5	0.523	2.35	0.219	0.093	1933	1.08
<b>Molybdenum</b>	10,22	0.251	2.56	1.38	0.539	2890	0.186

It is evident that copper has the best material properties. Sensor heads with 20mm length have a penetration time of 0,3 sec whereas characteristic times for heat load change are during the re-entry heating phase larger than  $t_q > 10$  sec. Thus an adequate time resolution can be achieved with this heads.

### 6.2 Mission specific design influence

Mission and trajectory dependent design influences are the maximum heat flux  $q'_{max}$ , the local heat flux profile  $q'(t)$  as function of re-entry time, its integral  $Q = \int q'(t)dt$ , the maximum dynamic pressure  $q_{max}$  and the pressure profile  $p(t)$ . This quantities influence primarily the sensor head dimensioning and the range of pressure transducers.

With the given data for a new mission, like capsule shape and mass, re-entry trajectory and location for the sensor installation in the capsule, we evaluated the heat flux and pressure profiles over the flight time.

In the next table the maximum stagnation point heat flux and dynamic pressures are shown for the three RAFLEX missions. Express capsule had an extreme high ballistic coefficient B and had thus a low altitude re-entry trajectory, whereas the inflatable demonstrator IRDT re-entered at high altitudes.

Table Mission and trajectory specific design loads

Mission	Ball. Coefficient $B=m/C_D \cdot A$ kg/m <sup>2</sup>	Altitude h max. deceler. Km	Max.heat flux stagnation point [kW/m <sup>2</sup> ]	Max. dynamic pressure [mbar]
EXPRESS	972	37,7	3000	2000
MIRKA	200	52	2000	500
IRDT2	36	68	800	150

The design values for the RAFLEX sensors had to be based on heat flux and pressure on local installation position. These values are shown in the next Table.

Table Design values for heat flux sensor heads and pressure transducer range

Mission	Installation position	Design heat flux	Calorimeter dimensions	Peak dyn. Pressure	Pressure Transducer.
		[kW/m <sup>2</sup> ]	Ø·L [mm]	mb	mb
EXPRESS	Stagn. Point	3000	-	2000	3000 1000
	Conical Flare	600	Ø16 x 30		1000 abs. 10 abs. 10 diff.
MIRKA	Stagn. Point	2000	-	500	1000 abs. 10 abs
	48°-position	1200	Ø10 x 40		1000 abs. 10 abs
IRDT2	Stag. point	800	Ø10 x 30	150	330 diff.
	Cone	400	Ø10 x 16		330 diff.

In the EXPRESS and MIRKA capsule we had limited access to the stagnation point and therefore only pressure sensing ports could be installed. As port materials were used SIC In the EXPRESS capsule and TZM (a molybdenum alloy) in the MIRKA capsule.

### 6.3 The influence of vehicle mechanical and thermal structure

The principal dimensioning of heat load sensors and pressure transducer can in principle be performed without knowledge of local vehicle structure. The local structure of the vehicle has however dominant influence of on the final design of a probe.

As explained in the following table each probe assembly consists of the 4 basic components each with specific tasks.

The sensor housing with mounting socket is the primary interface to the vehicles mechanical and thermal structure. The mounting socket has to compensate the hazardousness which results from putting holes into the external thermal and internal mechanical structure of the vehicle.




Within the MIRKA double walled structure a surface protected ablator SPA is located. The ablator is covered by the thin outer skin made of C/SIC, and the inner load carrying structure is made of CFRP. The ablator is positioned in a honey comb like structure, which allows the ablating gases to flow to the base where they are discharged, Fig 16 shows that a very complex installation design of RAFLEX sensors was necessary. The installation had to provide sealing between outside and ablating room and sealing between ablating room and the vehicle inside. The installation had in addition to compensate various thermal expansions.

**RAFLEX III installation on IRDT.**

The rigid part of the IRDT capsule consists of a load bearing aluminum shell covered with ablator. At each installation location of a Raflex Probe the ablator was replaced by ceramic tile with 100 mm diameter. Thus the REFLEX III had only to pass through the aluminum shell the ceramic tile. Fig. 17 shows the installation detail.

Due to experience gained with MIRKA smaller pressure transducers were selected and the total mass of one probe unit could be reduced from 1800 gram at MIRKA to 500 gram.

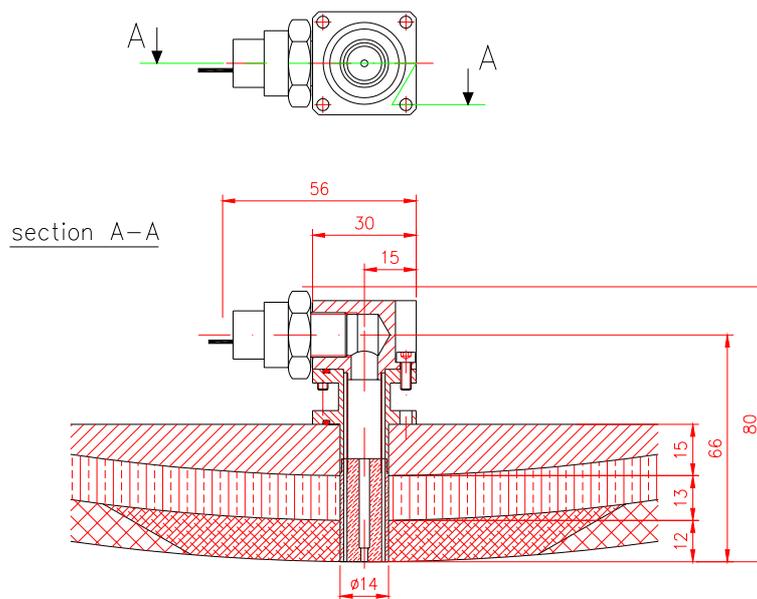

**Fig.17 Installation drawing of RAFLEX III in stagnation point of IRDT**

**7. Electronic components and mass budget**

The following table shows as example the electrical supply and output data of RAFLEX III on IRDT.

Electrical supply and output data of RAFLEX III

	Supply Voltage	Current	Output Voltage
DPP Dyn. pressure probe	± 15 V	15 mA	0-10 V
CFP 1 Static probe	± 15 V	15 mA	0-10 V
CFP 2 Static probe	± 15 V	15 mA	0-10 V
CFP 3 Static probe CFP	± 15 V	15 mA	0-10 V
CFP 4 Static probe CFP	± 15 V	15 mA	0-10 V
Thermocouples	0		
2 DPP , Type K			0- 50 mV
8 CFP1-CFP4 Type K			0-50 mV
<b>Total</b>	<b>5* ± 15 V</b> 5 supply lines	<b>75 mA</b>	<b>15 output lines</b>

Power supply for sensors and acquisition of these data can either be provided by a central on board unit or by a experiment dedicated separate unit.

We usually us for each pressure signal a scan rate of 30 HZ and for temperatures scan rates of 3-5 Hz.

**Typical mass budget of air data system**

Typical for the mass of 5 probe air data system may be the mass budget of the HTG RAFLEX III system mounted on IRDT2. The detailed component data are given in the following table

Table Mass budget RAFLEX III air data system for pressure heat flux measurement

Component	Mass total gram	Component mass, gram	Explanation	Type of Interface
<b>Dyn. pressure probe</b>	<b>390</b>			
Sensor head with mounting unit		200	Head for pressure and calorimeter	Mechanical. and thermal structure
Pressure Transducer with signal conditioner		110		Electric
Thermocouples		30	3 Thermocouples	Electric
Local harness		50		
<b>4 Combined flux probes</b>	<b>1360</b>			
Sensor head with mounting unit		150	Head for pressure and calorimeter	Mechanical. and thermal structure
Pressure Transducer with signal conditioner		110		Electric
Thermocouples		30	3 Thermocouples	Electric
Local harness		50		
<b>Total mass</b>	<b>1750</b>			

It also should be remembered that in the instrumentation mass budget the contributions of electrical wiring, which establish connection to the data logger ,can not be neglected.

### 8. Validation and qualification testing of the probes

Validation and qualification testing shall assure the correct operation of a measurement system during flight operation. In principle we distinguish between the testing on the component and on the system level. As demonstrative examples for the different activities we use our RAFLEX system.

#### Calibration tests of sensors.

Calibration test of sensors are usually conducted at simulated vacuum and pressure conditions during the development and before delivery of an instrumentation system.

These tests also serve to identify appropriate transducers and electronic equipment

#### Wind tunnel tests for determination of sensor functions

Wind tunnel tests are usually necessary to validate the numerically derived sensor functions. Therefore either a complete model of the vehicle or a model of the vehicle nose section instrumented with pressure ports and pressure sensors will be required.

Fig 18 shows the rigid nose part of the IRDT capsule during a wind tunnel test at  $Ma = 9$  in our HHK facility.


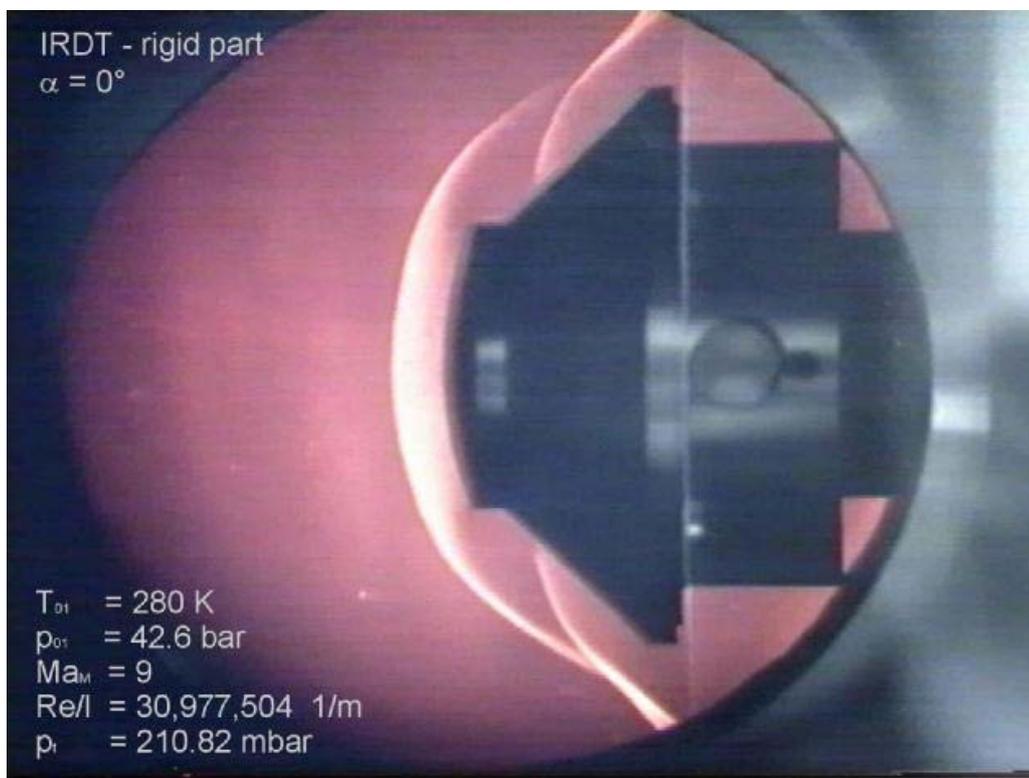


Fig. 18 Schlieren picture of IRDT2 model in HHK win tunnel at  $Ma= 9$

### Heat load testing

Heat load testing is part of the flight qualification for a re-entry experiment. A complete probe unit mounted in a simulated installation environment has to be tested. During these tests the actual heat load and pressure profile during re-entry shall be duplicated in a ground facility. These type of tests we had to conduct for each of our 3 RAFLEX systems. As the flight dependent time profile of  $q'$  is difficult to simulate the model is usually tested with maximum heat load  $q'_{max}$  for a time period, which assures that also the time integral of heat load is simulated. Fig 19 shows the e IRDT RAFLEX III stagnation point probe after the heat load test in a Plasma Jet Facility (U-13UHFP at Babakin).

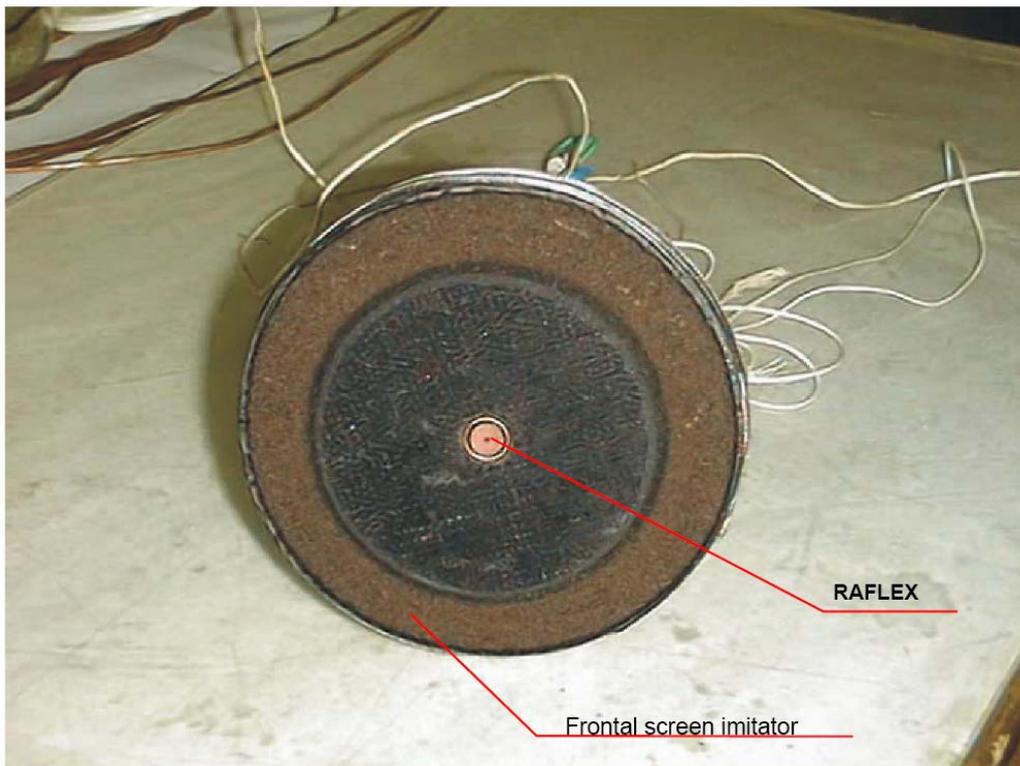

**Fig. 19 IRDT2 RAFLEX III stagnation point probe after the heat load testing**

### Vibration testing

Vibration testing is also part of the instrument qualification and is usually conducted on the subsystem and on complete system level. The test have to demonstrate that the instrument payload will accept the dynamic launch loads and that the instrument will not damage the vehicle. It should be noted that vibrational tests show often unexpected failure of sensitive mechanical components.


## ***9. Some flight results with RAFLEX system.***

### **RAFLEX I on EXPRESS**

Due to the start failure EXPRESS didn't reach the nominal orbit and the experiments could not be activated. EXPRESS capsule re-entered uncontrolled after some orbits and was one year after launch recovered in Ghana in the middle of 1996. We thus were able to recover also our RAFLEX sensor system. The instrumentation showed no damage due to re-entry forces and heat loads. Even a re-calibration of the pressure transducers was possible. Thus EXPRESS was partially successful for direct flight qualification of our system

### **RAFLEX II on MIRKA**

MIRKA was launched on 9. October 1997 together with the Russian FOTON-11 by a SOJUS rocket from Plesetsk. After 14 days in orbit MIRKA the successful re-entry of MIRKA was initiated with a final parachute landing in Kazakhstan on 23. October 1997. Our RAFLEX system worked during the whole re-entry successfully. Fig 20 shows a combined flux probe sensor head after the re-entry mission.

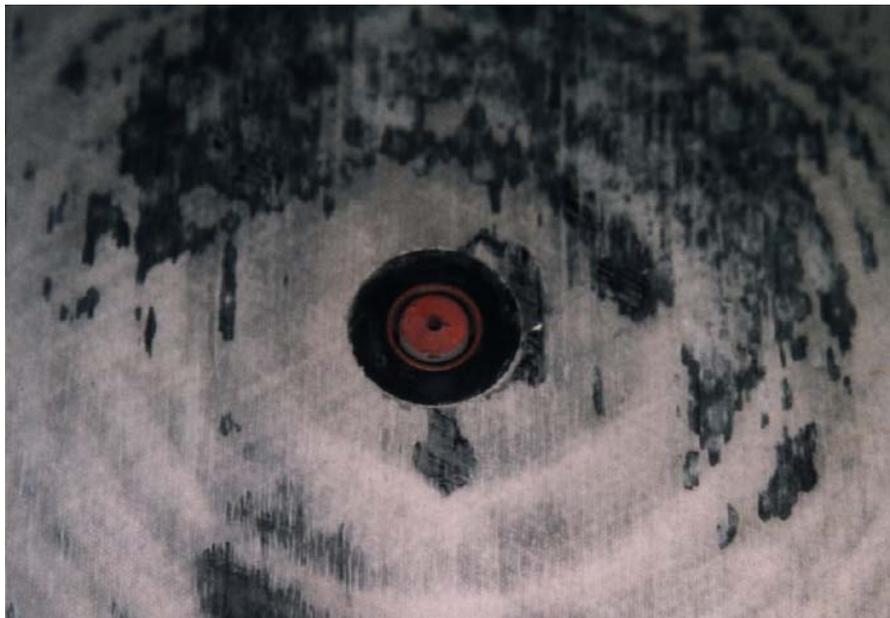

**Fig 20 RAFLEX II sensor head after MIRKA re-entry**

Fig 21 shows the recorded pressures of the 4 Raflex probes during the complete re-entry, which covered a time span from 1150 to 1500 seconds. A detailed evaluation of the pressure oscillations for the period between 1300-1320 seconds is shown in Fig. 22.

An evaluation of this data showed that MIRKA conducted a coning motion which is shown in an alpha – beta plane of Fig. 23 for a period of 6 seconds. This example demonstrates the high time resolution of the RAFEX II air data system.

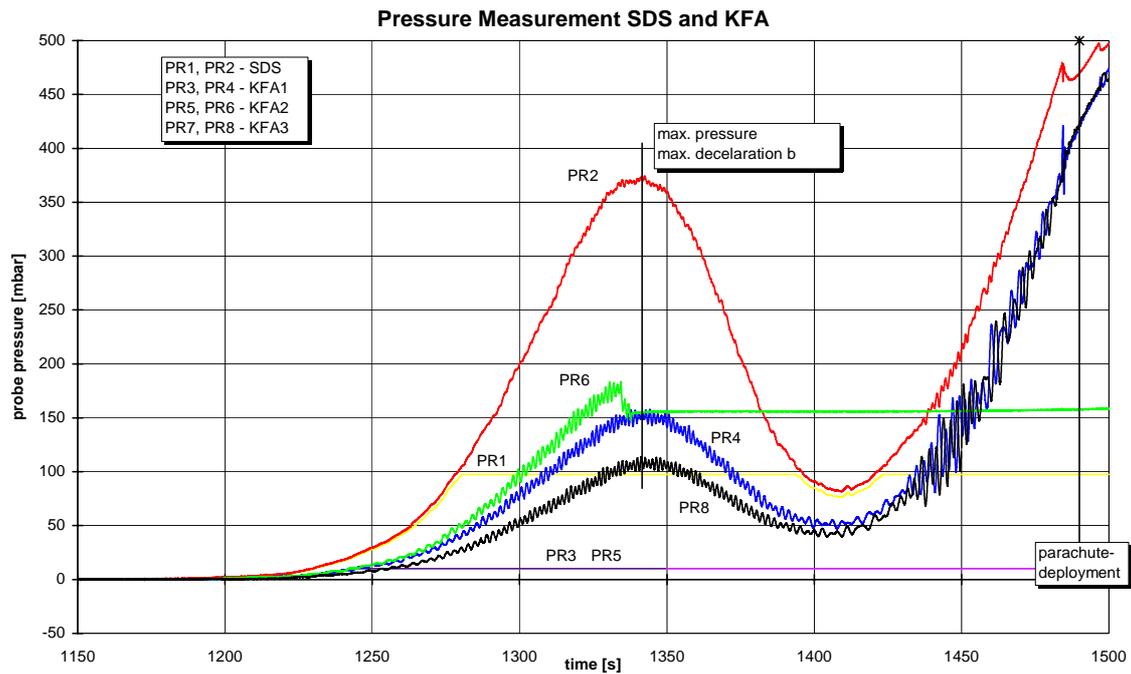


Fig. 21 Recorded RAFLEX pressure during MIRKA re-entry


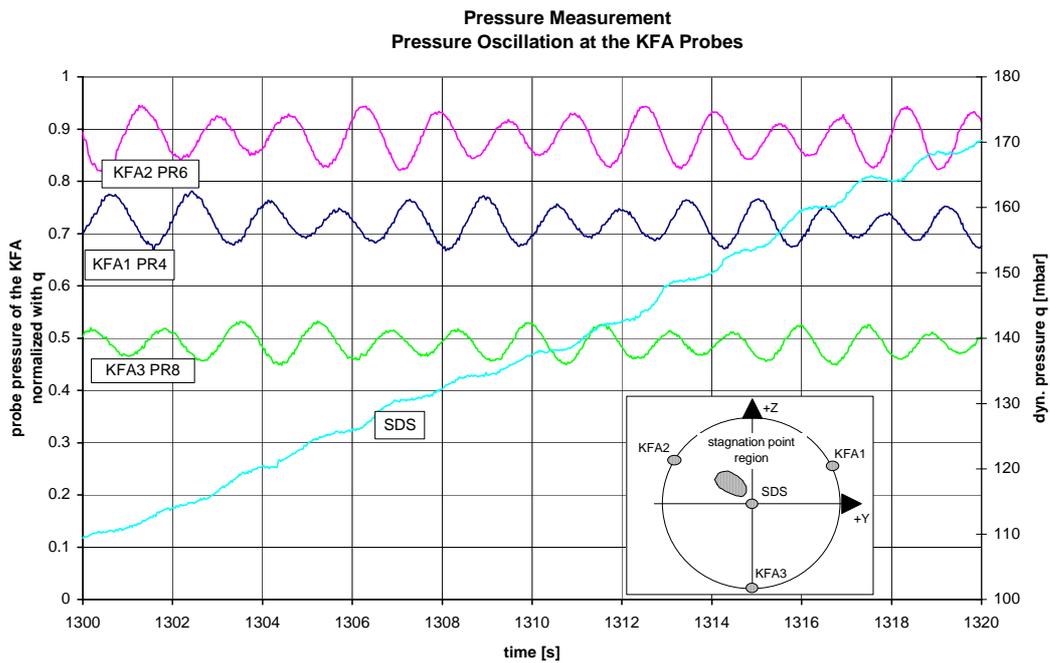


Fig. 22 Evaluated RAFLEX pressure during 20 s time period ( 1300-1320s)

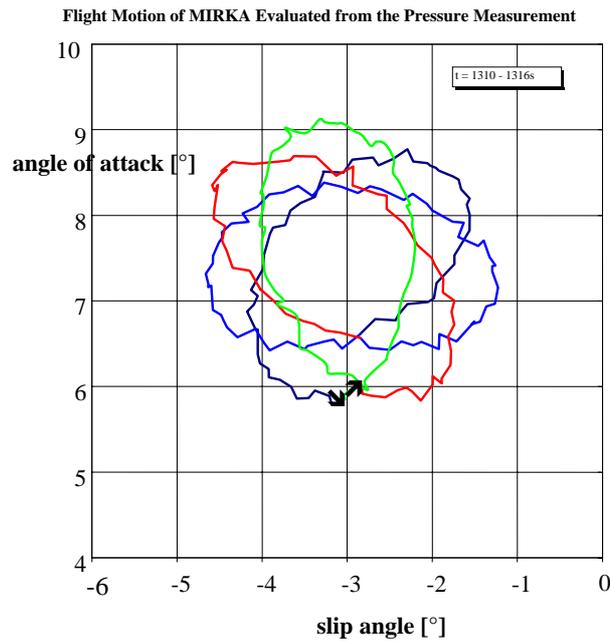

**Fig 23 MIRKA re-entry , angle of attack versus slip angle, t = 1310-1316s**

### ***10. Conclusions***

The complete development process for hypersonic air data systems and for heat flux probes has been outlined on basis of RAFLEX installed in 3 different re-entry capsules.

The experience showed that for each re-entry vehicle a new design was required by mission and vehicle structure.

Thus for each new type of re-entry vehicle a dedicated development and design of air data system seems necessary.

Only the experience, the basic design methodology and some identical type of mechanical and electronic parts may be used on different projects.

## *Literature*

- [1] G. Koppenwallner  
Definition of requirements and operational specifications for FADS  
*WPI Report, Flush and Laser Air Data System;*  
HTG TN - 03-6, 2003
- [2] L. Walpot, H. Ottens  
FESART/EXPERT Aerodynamic and Aerothermodynamic Analysis of the REV and  
KHEOPS Configuration  
ESTEC TN TOS-MPA/2718/LW
- [3] Liepmann H. W. Roshko a.  
Elements of Gas Dynamics  
John Wiley , New York 1957
- [4] Lewis C. H., Burgess III E.G.  
Altitude velocity table and charts for imperfect air  
AEDC –TDR-64-214, 1965
- [5] Anonym  
Atmospheric and Space Flight Vehicle Coordinate Systems  
AIAA recommended Practice  
ANSI/AIAA R-004-1992
- [6] W.R. Wells; W.O. Armstrong  
Tables of aerodynamic coefficients obtained from developed Newtonian expressions for complete and partial conic and spheric bodies at combined angles of attack and sideslip  
NASA TR R-127
- [7] Häuser J. Dai Wuye  
Numerical Simulation for the Flush and LASER air Data System  
WP3 Report: Flush and Laser Air Data System  
CLE- Salzgitter Germany 2004
- [8] Allen.H. J.; Eggers,jr. A. J.  
A study of the motion and aerodynamic Heating of Missiles entering the Earth's Atmosphere at High Supersonic Speeds  
NACA TN- 4047, Washington USA, 1957
- [9] Chapman D. R.  
An approximate analytical method for studying entry into planetary atmospheres  
NACA TN 4276 Washington 1958 and NASA TR-11, Washington 1959
- [10] Lees, Lester;  
Laminar Heat Transfer over Blunt –Nosed Bodies at Hypersonic Speeds.  
Jet Propulsion vol.26, no.4 1956, pp 259-269

- [11] R. Müller Eigner, G. Koppenwallner  
RAFLEX an Air Data System for Re-entry Vehicles  
4th European Symposium on Aerothermodynamics for Space Vehicles  
ESA SP 4876 2002, pp. 457-464
- [12] Cunningham J.A. et al.  
Shuttle Entry Air Data System; Pre-flight Testing and Analysis  
AIAA Journal of Spacecraft Vol. 24, No,1, 1987, pp 33-39
- [13] G. Koppenwallner, D. Johannsmeier, R. Müller Eigner  
High altitude free flight experiments and instrumentation developed for Brem-SAT and  
Express capsule  
2nd European Symposium on Aerothermodynamics of Space Vehicles  
ESA SP 358 1995, pp. 437- 444
- [14] Auweter-Kurtz M., Hald H., Koppenwallner, G., Speckmann, H.-D.  
"German Re-entry Experiments on EXPRESS"  
IAF-94-1.3.192, 45th Congress of the International Astronautical Federation"  
Israel, 1994
- [15] R. Müller Eigner, G. Koppenwallner  
Pressure and Heat Flux Measurement with RAFLEX 2 during MIRKA Re-Entry.  
3rd European Symposium on Aerothermodynamics of Space Vehicles  
ESA SP 426 1999, pp. 685-689
- [16] R. Müller-Eigner  
Instrumentierung der IRDT2 Kapsel mit RAFLEX III  
Abschlußbericht des Zuwendungsbescheids 50 JR 0082  
HTG – Report 04 – 01; HTG 2004

