

**Multi-dimensional modeling of electron field emission with and without laser excitation**

PI: Prof. ANG Lay-Kee  
Division of Microelectronics  
School of Electrical and Electronic  
Nanyang Technological University, Singapore 639798  
Email: [elkang@ntu.edu.sg](mailto:elkang@ntu.edu.sg)  
Telephone: 65- 6790-4228 (office) 6793-3318 (fax)  
Website: <http://www.ntu.edu.sg/home/elkang>

The production of electron beam of high brightness and low emittance is critical for a variety of scientific and technological applications such as high power vacuum coherent radiation source such as microwave sources, free electron lasers (FEL) and electron imaging system. The focus is to have a robust cathode using field emission mechanism based on the process of electron tunneling from a metal's surface, which is also known as Fowler Nordheim (FN) law. When a laser is used to excite the electron emission, the mechanism is known as the Fowler-Dubridge (FD) model. In this project, we aim to improve the basic of fundamental understandings of the electron emission process (related to FN and FD models) by developing multi-dimensional (2D or 3D) models.

In this short report, we will present the topics supported in this grant,

**1. Quantum Shot noise suppression of field emission – 2D dimensional model**

We have successfully created a two-dimensional (2D) nonuniform model to calculate the quantum shot noise suppression (or Fano factor) for electron field emission from a single field emitter of two different shapes: Lorentzian and prolate spheroidal. Between them, the Lorentzian field emitter has a larger shot noise suppression. For a given sharp emitter at a fixed work function, there is a minimum value of the Fano factor, which is independent of the geometrical sharpness of the emitter, and it increases with larger work function. Comparison with the one-dimensional uniform model has implied that prior results had overestimated the shot noise suppression. The results was published in the Journal of Applied Physics [JAP 107, 106103 (2010)]. In Fig. 1, we show the calculated Fano factor of (a) Lorentzian and (b) prolate spheroidal type for a single Ba field emitter with a work function 2.48 eV at different sharpness: (a)  $h/w$  and (b)  $d/a$ .

# Report Documentation Page

Form Approved  
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE <b>31 AUG 2010</b>		2. REPORT TYPE <b>FInal</b>		3. DATES COVERED <b>10-06-2009 to 09-06-2010</b>	
4. TITLE AND SUBTITLE <b>Multi-dimensional modeling of electron field emission with and without laser excitation</b>				5a. CONTRACT NUMBER <b>FA23860914122</b>	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) <b>Lay Kee Ang</b>				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Nanyang Technological University,Block S2.1 Nanyang Avenue,Singapore 639798,Singapore,SG,639798</b>				8. PERFORMING ORGANIZATION REPORT NUMBER <b>N/A</b>	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) <b>AOARD, UNIT 45002, APO, AP, 96337-5002</b>				10. SPONSOR/MONITOR'S ACRONYM(S) <b>AOARD</b>	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) <b>AOARD-094122</b>	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT <b>The production of electron beam of high brightness and low emittance is critical for a variety of scientific and technological applications such as high power vacuum coherent radiation source such as microwave sources, free electron lasers (FEL) and electron imaging system. The focus is to have a robust cathode using field emission mechanism based on the process of electron tunneling from a metal's surface, which is also known as Fowler Nordheim (FN) law. When a laser is used to excite the electron emission, the mechanism is known as the Fowler- Dubridge (FD) model. In this project, we aim to improve the basic of fundamental understandings of the electron emission process (related to FN and FD models) by developing multi-dimensional (2D or 3D) models.</b>					
15. SUBJECT TERMS <b>microwave sources, Electric Field emission</b>					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

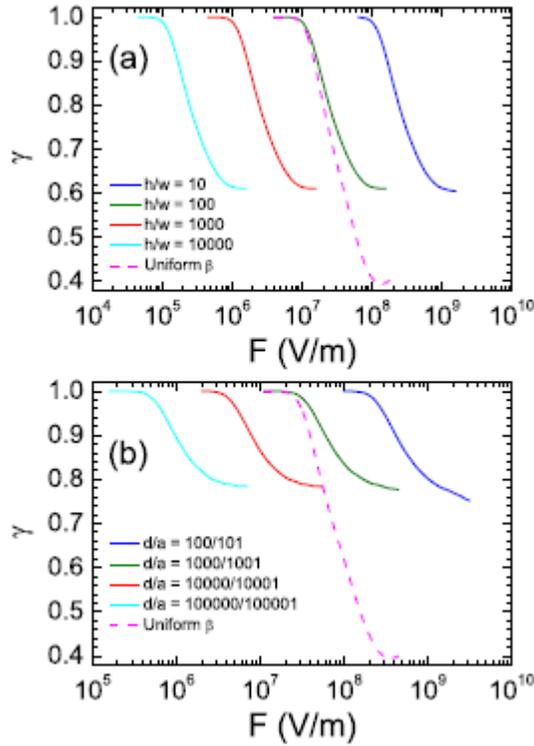


Fig. 1 Fano factor  $\gamma$  as a function of applied E field  $F$

## 2. Higher dimensional protrusive Child-Langmuir (CL) law

The current understanding of CL law is restricted to an uniform flat surface with a finite emission area. With finite emission area, the enhancement over the 1D limit is like  $1 + a / (W/D)$  where  $a$  is a numerical constant, and  $W/D$  ( is the ratio of width of the emission area over the gap spacing). In this topic, we have extended the 2D or 3D CL law to include the sharpness of the emitter (in terms of height) and nonuniform emission over the surface. Our preliminary results show that the enhancement factor will converge to a value for small emission area or very sharp emitters as in Fig. 2 below for an emitter with a work function of 4 eV for : Lorentzian (circle) and hyberboloid (triangle). The results have been submitted for journal publication.

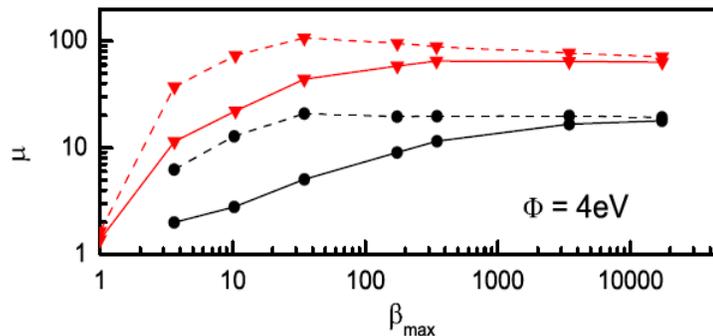


Fig.2 Enhancement of the 1D CL law as a function of field enhancement factor

### **3. Single electron limit of Child Langmuir law under laser excitation**

In this topic, we consider ultrafast laser is able to excite the emission of electron from a metal surface in discrete limit. In this limit, the electron will emit in the form of oscillation at low voltage. At high voltage, the oscillation will damp to become a steady state condition. The average current density is closed to the classical CL law. The results are now in preparation for journal submission.

### **4. Multi-dimensional models of CL law based on capacitance formulation.**

The traditional 1D CL law can be reformulated using capacitance model. In this topic, we are interested to use the same concept to reapprove the 2D CL law but using 2D capacitance model. The research on this topic is still on-going.

### **5. Electron field emission model of a single layer graphene.**

At the end of this project, we have learned of great research interests of field emission from a new material – single layer graphene. In this topic, we have started to develop new model to describe the emission process, and our preliminary results indicate that the classical FN law is not valid. The reseearch on this topic is still on-going, and it will continue under the support of a new grant by AOARD 10-4110.

## **SUMMARY**

Within the 12 months of this grant, we have successfully developed new 2D or 3D models of electron field emission in the limit of space charge limited current. This study has provided important insights in the nano-physics of electron emission and electron transport in a broad area of quantum vacuum nano-electronics. Some of the on-going research topics will be continued under a new AOARD grant 10-4110.