

\*\*Disclaimer: Reference herein to any specific commercial company, product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the Department of the Army (DoA). The opinions of the authors expressed herein do not necessarily state or reflect those of the United States Government or the DoA, and shall not be used for advertising or product endorsement purposes.\*\*



**TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.**

# Failure Mode and Effects Analysis (FMEA) Introductory Overview

TARDEC Systems Engineering Risk Management Team

POC: Kadry Rizk or Gregor Ratajczak

Unclassified: Distribution Statement A. Approved for public release.

## Report Documentation Page

*Form Approved*  
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE <b>14 JUN 2012</b>	2. REPORT TYPE <b>Briefing Charts</b>	3. DATES COVERED <b>01-05-2012 to 23-05-2012</b>			
4. TITLE AND SUBTITLE <b>Failure Mode and Effects Analysis (FMEA)</b>		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S) <b>Kadry Rizk</b>		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>U.S. Army TARDEC, 6501 East Eleven Mile Rd, Warren, Mi, 48397-5000</b>		8. PERFORMING ORGANIZATION REPORT NUMBER <b>#22937</b>			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) <b>U.S. Army TARDEC, 6501 East Eleven Mile Rd, Warren, Mi, 48397-5000</b>		10. SPONSOR/MONITOR'S ACRONYM(S) <b>TARDEC</b>			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) <b>#22937</b>			
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>For the TARDEC System Engineering (SE) Workshop 2012</b>					
14. ABSTRACT <b>Purpose of presentation is to make you aware of a tool which is often misused if used at all. As result too many expensive failures go undiscovered until its too late. Unbelievable sums of money are spent annually in every industry to react to failures that were never anticipated. In most case these failures could have been avoided if the time was taken to identify them early. Therefore costs associated with controlling them would have gone from dollars to pennies relatively speaking.</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Public Release</b>	18. NUMBER OF PAGES <b>31</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

Welcome to

# “An introductory overview of Failure Mode and Effects Analysis (FMEA)”

A brief concerning the use and benefits of FMEA

- **FMEA IPT Leader:** Kadry Rizk, 586.282.5403, [kadry.w.rizk.civ@mail.mil](mailto:kadry.w.rizk.civ@mail.mil)
- **Additional Contacts:** Lisa Graf, 586-306-2572, [lisa.j.graf2.civ@mail.mil](mailto:lisa.j.graf2.civ@mail.mil)

Becky Addis, 586-282-2626, [rebecca.l.addis.civ@mail.mil](mailto:rebecca.l.addis.civ@mail.mil)

The Cost of Poor Quality (COPQ) has been increasing at such a rate that there is almost nothing that “doesn’t matter” when it comes to doing a good job. Whether it’s the coffee we buy in the morning or the services we expect from government contractors, we’ll only feel comfortable parting with our money if we felt it was worth it.


Today’s goal is to show you the benefits of a powerful tool and how it **PROACTIVELY**.....

- Identifies risk
- Focuses resources
- Reduces failure
- Reduces cost
- Improves safety
- and can be done by EVERY organization in ANY role



## This tool is **Failure Mode and Effects Analysis**

## Failure Mode and Effects Analysis can have SIGNIFICANT impact on Life Cycle Costs!

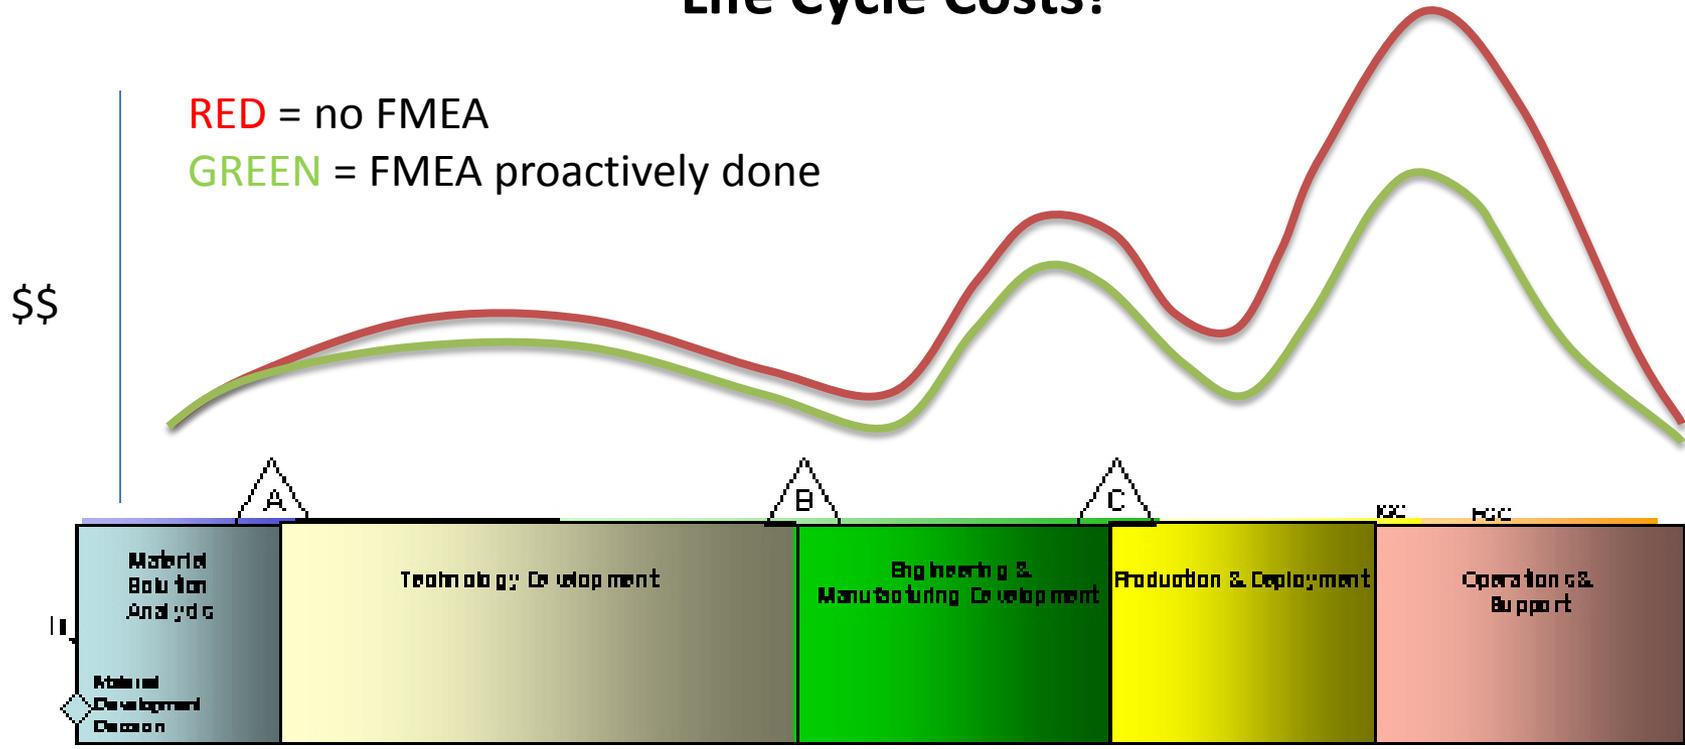

When correctly executed FMEA reduces costs by reducing the possibility of failure.

*Doing it right the first time is always less expensive than the alternative.*

**When correctly executed FMEA reduces costs by reducing the possibility of failure.**

**FMEA can and does have SIGNIFICANT impact on Life Cycle Costs!**

**The FMEA never goes away, it only matures as a living document. Therefore it is both a proactive prevention tool as well as a reactive problem solving tool.**

**Industry has been using FMEA for a long time and has collaborated together to continuously improve the process.**

**Companies that ignore proactive tools like FMEA often fail!!**

## Failure Mode and Effects Analysis (FMEA)



### A brief outline of the upcoming slides....

1. What is FMEA? Some definitions
2. How can FMEA help my program
3. When and Why use FMEA?
4. What can FMEA be used on?
5. How does FMEA work? – A simple example
6. Identifying and choosing the Top 5, 10, or 50 things to work on
7. Learning FMEA – sign up for our upcoming course
8. Wrap up

**Today's overview is not a comprehensive explanation on the mechanics of FMEA!**

This presentation is intended to make you aware of the power of being able to identify and deal with risk, but not to instruct you in detail. A live, instructional class has been constructed for that purpose and we hope you will take advantage of it.

FMEA stands for Failure Mode and Effects Analysis. Simply translated, it means that through some method we will identify how something can fail and what will happen if it does. When done correctly it can be an expedient and thorough approach to risk identification.

## Some definitions:

- 1. Failure:** *is the inability to produce the desired output. Failure may occur at any point within the function of a product or flow of a process.*
- 2. Failure Mode:** *the manner by which a failure is observed; it generally describes the way the failure occurs.*
- 3. Effects:** *the consequences of failure. The effect is the thing we are most interested in. The power of the effect will dictate our level of action. Not every failure will result in a severe effect and therefore not every failure needs to be addressed.*
- 4. Analysis:** *means the investigation of the process being used such that it can be determined how failure occurs. The analysis provides identification of the potential failures and then serves to rate their effects based on how severe they are, how often they might occur, and how easily we can find them.*

**By using FMEA we can eliminate problems BEFORE they happen and save time and money on prioritized work.**

- A DFMEA provides robustness of design.
- A PFMEA provides robustness of process.
- A FMEA reused from a previous program reduces the design time for the system.
- Potential failure modes are identified early in the program and can be dealt with up front, rather than detected later.
- FMEAs can be used to determine the root cause of system or part failures, once fielded!!!

## Manage RISK NOW!




PREVENT failure from occurring or minimize its effect by acting PROACTIVELY. Focus your efforts on the critical few items worth pursuing. Ensure SUCCESS by minimizing cost and reducing risk.

or....



Unclassified

## Deal with FAILURE later

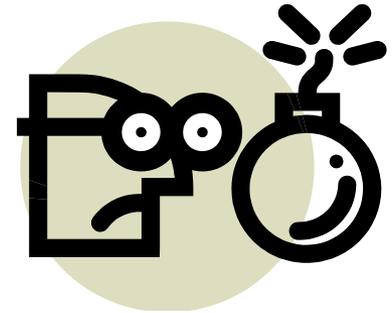

Lack of ANALYSIS leads to inefficient problem identification. Resources can be quickly expended addressing incorrect or insignificant concerns. The most severe failures may still happen and will always cost more to address reactively.

## Use it proactively to prevent failures

Explore the design and the processes of manufacturing and assembly to find the potential failures

Use the knowledge to put controls in place

Eliminate or diminish failures

Save time and money


## Use it reactively to solve problems

Interrogate the FMEA for similar or exact failures

Use the knowledge to put solutions in place

Eliminate or diminish failures

Save time and money

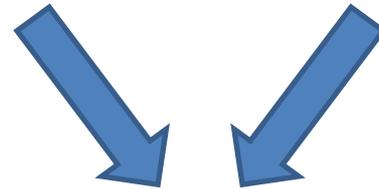

**Update existing FMEAs with lessons learned  
and provide the basis for FAILURE FREE next  
generation ideas**

Although FMEA is FMEA no matter its application, over the years many variations on the same theme were stood up under similar names. Here are some of the most popular categories:

**Design FMEA** – Helps to identify how something can fail to do what it was designed to do or why it does things it should not do

- Generates too much heat
- Takes too long to accelerate
- Cannot track target

**Process FMEA** – Helps to identify how something can be improperly or unsafely manufactured or assembled


- Parts missing after assembly
- Improper torque on fasteners
- Operator must put self at risk to achieve task

**Transactional FMEA** – Helps to identify the failures and inefficiencies of non-technical processes

- Lack of expedient travel approval results in premium fares
- A lumbering hiring process hinders the ability to quickly address customer needs, resulting in more contracting and less self expertise

Every product has a function it was designed to perform. In addition most products also need to be manufactured or assembled. The failures that are encountered in each of these environments are completely different. Typically things are first designed for functionality before the manufacturing or assembly process is considered.

The retractable pen pictured below could fail to dispense ink or may break under the pressure of your hand. This would be a DESIGN failure. On the other hand if the pen is missing parts or put together incorrectly this may have been the result of a manufacturing or assembly PROCESS failure.

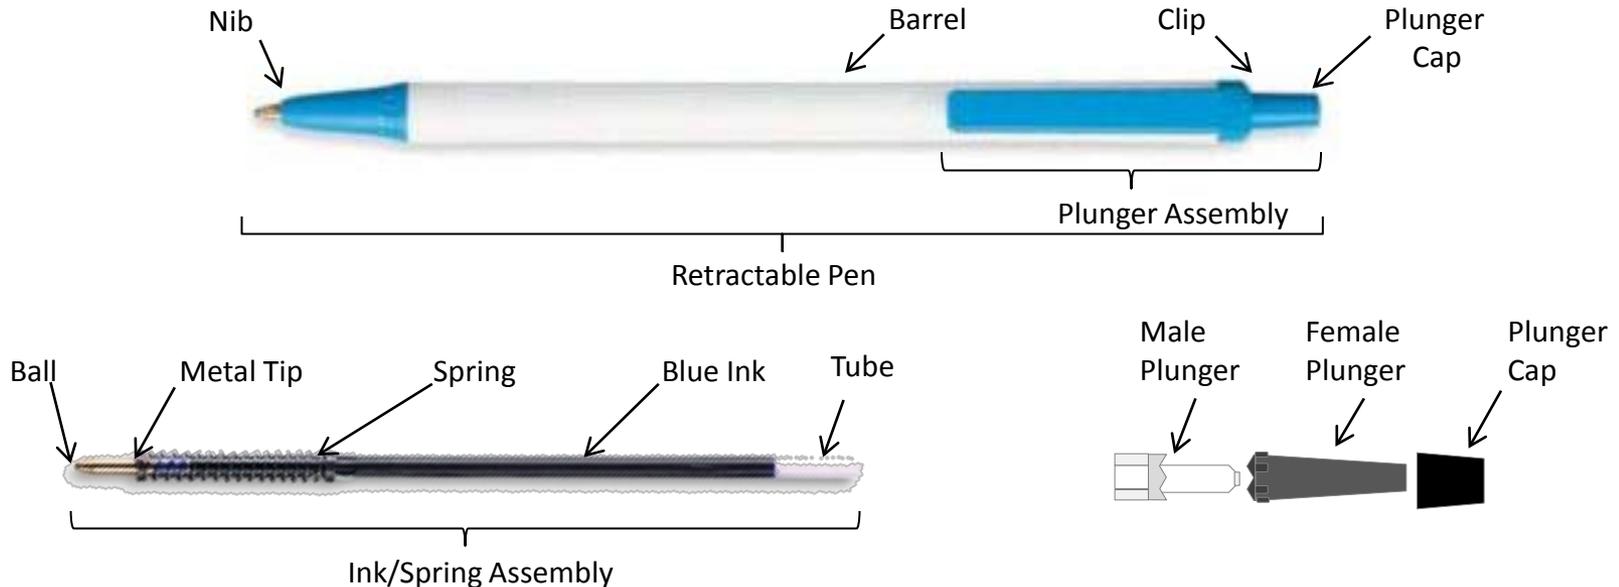

This simple Design FMEA investigates the function of the ball in a ball point pen

Item #	Item name / Function	Potential Failure Mode	Potential Effects of Failure	Severity	Classification	Potential Causes / Mechanisms of Failure	Current Design Controls Prevention	Occurrence	Current Design Controls Detection	Detect	R.P.N.	Recommended Actions	Responsibility & Target Completion Date	Action Results					
														Actions Taken	Severity	Occur	Detect	R.P.N.	
1.1.2.3	Ball / deliver ink to paper	Not enough ink delivered to paper	Intermittent line / skipping	7		Ball diameter variations	Tolerance specification	1	Supplier self certification and incoming inspection 10 of every lot	2	14								
				7		Paper surface finish variation; too rough or too smooth	Paper surface finish range specification	6	No control	10	420	Study coefficient of friction vs ink delivery amount	G. Ratajczak 11 Nov 2011	Study complete - must control ball surface finish	7	1	10	70	
				7		Ball surface finish variation	Tolerance specification	2	Supplier self certification and incoming inspection 10 of every lot	2	28								
				7		Ball diameter too big; blocking flow of ink	Tolerance specification	1	Supplier self certification and incoming inspection 10 of every lot	2	14								
				7		User does not exert sufficient pressure	Force study done on users	5	Test: pressure vs ink delivery; 6 parts per month 0-6 psi	4	140								
				7		User holds pen at extreme angle	Grip angle study done on users	5	Test: angle vs ink delivery; 6 parts per month 0 - 90 degrees	4	140								
		No ink delivered to paper	Ripped paper	5		Ball diameter too big; blocking flow of ink	Tolerance specification	1	Supplier self certification and incoming inspection 10 of every lot	2	10								
		Too much ink delivered to paper	Document ruined	9		Ball diameter too small	Tolerance specification	1	Supplier self certification and incoming inspection 10 of every lot	2	18								
				9		User exerts excessive pressure	Force study done on users	5	Test: pressure vs ink delivery; 6 parts per month 0-6 psi	4	180								
				9		Improper hardness of ball material	Tolerance specification	2	Supplier self certification and incoming inspection 10 of every lot	2	36								

Most products will require both DESIGN and PROCESS FMEA. And since processes can often be comprised of ASSEMBLY and MANUFACTURING, FMEA is appropriate in those areas as well.


***BE THOROUGH – UNDERSTAND THAT THE FAILURES SEEN IN THE DESIGN ARE COMPLETELY DIFFERENT THAN THOSE THAT MIGHT OCCUR DUE TO MANUFACTURING OR ASSEMBLY!!***

## How does FMEA Work?

### Step 1 - Understand how things work in order to find the ways it can fail.

Use proven, thorough approaches to describe all the elements of the process. Tools that describe how products function, or how processes work, turn complex things into elemental steps. Block Diagrams, Parameter (P) Diagrams, Work Breakdown Structures, and Process Maps are popular tools for this purpose.

**In the example process map below we can envision three steps of the retractable pen assembly process as follows:**

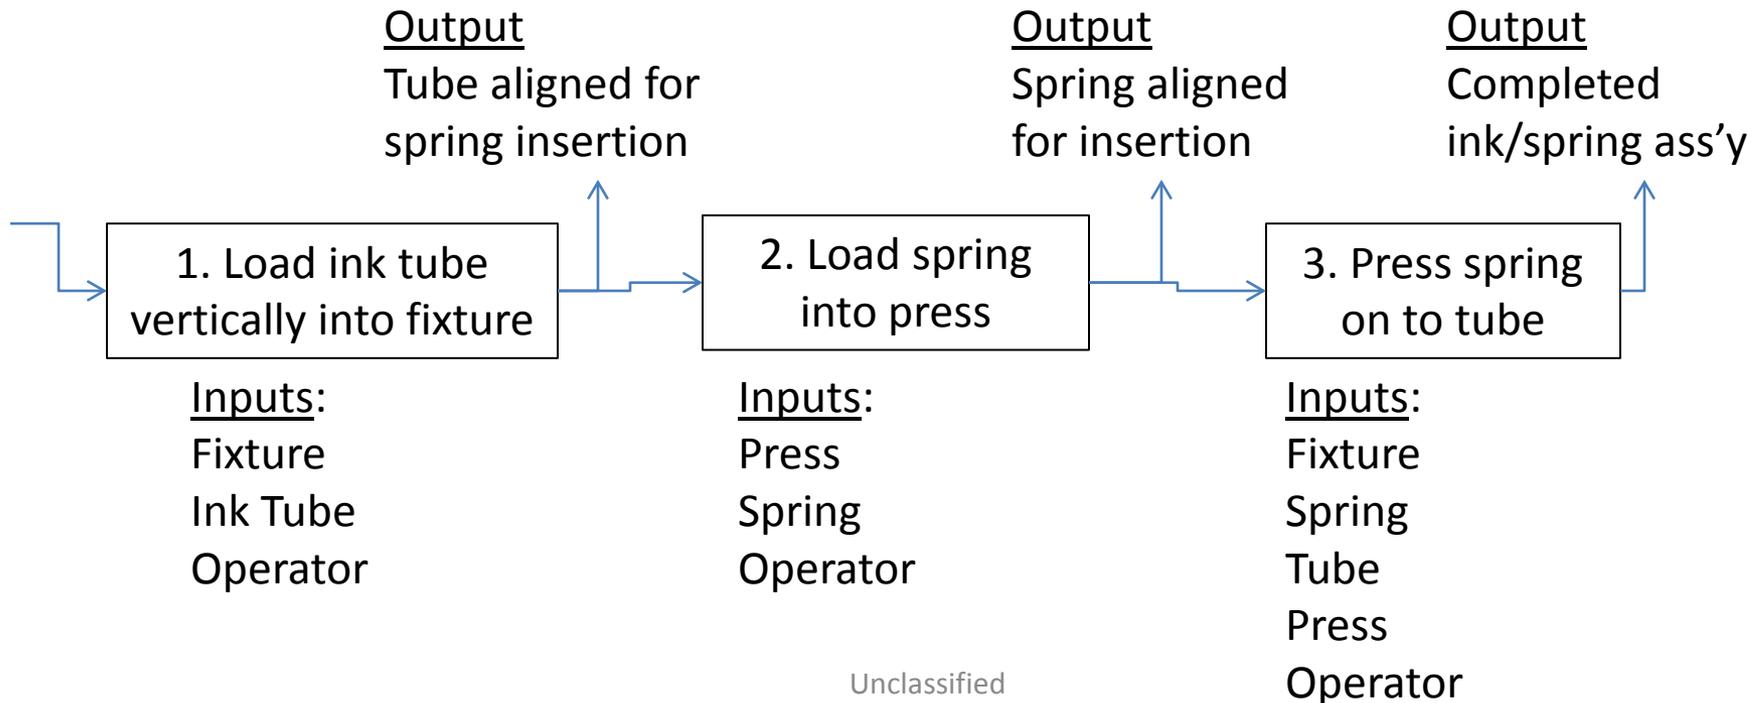

## Step 2 - Execute the analysis and discover the potential failures and effects, their causes, and ultimately what to do about it!

Process step #	Process step function / requirements	Potential Failure Mode	Potential Effects of Failure	Severity	Classification	Potential Causes / Mechanisms of Failure	Current Process Controls Prevention	Occurrence	Current Process Controls Detection	Detect	R.P.N.	Recommended Actions	Responsibility & Target Completion Date	Action Results					
														Actions Taken	Severity	Occur	Detection	R.P.N.	
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Fixture features/dimensions incorrect	Fixture drawings	3	Go/No Go Gauge	2	30								
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175								
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Fixture features/dimensions incorrect (tube fell out)	Fixture drawings	3	In line sensor	2	30								
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Operator forgot to load tube	Visual inspection	6	No detection control	10	300	Install sensor to detect tube	G. Ratajczak 07/MAR/2012	Sensor installed at ST001	5	6	2	22	
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Press features/dimensions incorrect	Fixture drawings	3	In line sensor	2	30								
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175								
2	Load spring into press	Spring missing	Spring cannot be inserted	5		Press features/dimensions incorrect (spring fell out)	Fixture drawings	3	In line sensor	2	30								
2	Load spring into press	Spring missing	Spring cannot be inserted	5		Operator forgot to load spring	Visual inspection	6	No detection control	10	300	Install sensor to detect spring	G. Ratajczak 07/MAR/2012	Sensor installed at ST002	5	6	2	22	
3	Press spring on to tube	Spring not fully pressed on to tube	Spring may fall off in a later step	7		Press does not move far enough down	Position sensors	1	Visual inspection	8	56								
3	Press spring on to tube	Spring not fully pressed on to tube	Spring may fall off in a later step	7		Operator did not activate press	Visual reminder (green light)	6	No detection control	10	420	Install position sensor at full travel	G. Ratajczak 07/MAR/2012	Sensor installed at ST003	7	6	2	84	
3	Press spring on to tube	Spring pressed on to tube too far	Ink/tube may not retract/extend	10	KPP	Press travel incorrect	Hard stop on press	1	Optical sensor	4	40								
3	Press spring on to tube	Spring not on tube at all	Rework needed	8		Spring fell off of press while moving downward	Part orientation	4	Visual inspection	8	256								
3	Press spring on to tube	Spring pressed on incorrectly	Ink/tube may not retract/extend	10	KPP	Fixture/press alignment issue	Verify alignment at each shift	2	Hourly audits	6	120								
3	Press spring on to tube	Spring pressed on incorrectly (crooked)	Ink/tube cannot be inserted into housing	5		Fixture/press alignment issue	Verify alignment at each shift	2	Hourly audits	6	60								

Both Design and Process FMEAs are created by using a step by step method. Let's go through the PFMEA pictured above one section at a time.....

Process step #	Process step function / requirements	Potential Failure Mode	Potential Effects of Failure	Severity	Classification	Potential Causes / Mechanisms of Failure	Current Process Controls Prevention	Occurrence	Current Process Controls Detection	Detect	R.P.N.	Recommended Actions	Responsibility & Target Completion Date	Action Results				
														Actions Taken	Severity	Occur	Detection	R.P.N.
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Fixture features/dimensions incorrect	Fixture drawings	3	Go/No Go Guage	2	30							
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175							
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Fixture features/dimensions incorrect (tube fell out)	Fixture drawings	3	In line sensor	2	30							
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Operator forgot to load tube	Visual inspection	6	No detection control	10	300	Install sensor to detect tube	G. Ratajczak 07/MAR/2012	Sensor installed at ST001	5	6	2	22
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Press features/dimensions incorrect	Fixture drawings	3	In line sensor	2	30							
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175							
2	Load spring into press	Spring missing	Spring cannot be inserted			Press features/dimensions					30							
2	Load spring into press	Spring missing	Spring cannot be inserted										G. Ratajczak 07/MAR/2012	Sensor installed at ST002	5	6	2	22
3	Press spring on to tube	Spring not fully pressed on to tube	Spring may fall of a later step															
3	Press spring on to tube	Spring not fully pressed on to tube	Spring may fall of a later step										G. Ratajczak 07/MAR/2012	Sensor installed at ST003	7	6	2	84
3	Press spring on to tube	Spring pressed on to tube too far	Ink/tube may not retract/extend															
3	Press spring on to tube	Spring not on tube at all	Rework needed															
3	Press spring on to tube	Spring pressed on incorrectly	Ink/tube may not retract/extend															
3	Press spring on to tube	Spring pressed on incorrectly (crooked)	Ink/tube cannot be inserted into housing															

<b>Process step #</b>	<b>Process step function / requirements</b>
<b>1</b>	<b>Load ink tube vertically into fixture</b>

Process step #	Process step function / requirements	Potential Failure Mode	Potential Effects of Failure	Severity	Classification	Potential Causes / Mechanisms of Failure	Current Process Controls Prevention	Occurrence	Current Process Controls Detection	Detect	R.P.N.	Recommended Actions	Responsibility & Target Completion Date	Action Results					
														Actions Taken	Severity	Occur	Detection	R.P.N.	
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Fixture features/dimensions incorrect	Fixture drawings	3	Go/No Go Guage	2	30								
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175								
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Fixture features/dimensions incorrect (tube fell out)	Fixture drawings	3	In line sensor	2	30								
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Operator forgot to load tube	Visual inspection	6	No detection control	10	300	Install sensor to detect tube	G. Ratajczak 07/MAR/2012	Sensor installed at ST001	5	6	2	22	
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Press features/dimensions incorrect	Fixture drawings	3	In line sensor	2	30								
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175								
2	Load spring into press	Spring missing	Spring cannot be inserted	5		Press features/dimensions incorrect					30								
2	Load spring into press	Spring missing	Spring cannot be inserted	5									tajczak R/2012	Sensor installed at ST002	5	6	2	22	
3	Press spring on to tube	Spring not fully pressed on to tube	Spring cannot be inserted	5															
3	Press spring on to tube	Spring not fully pressed on to tube	Spring cannot be inserted	5									tajczak R/2012	Sensor installed at ST003	7	6	2	84	
3	Press spring on to tube	Spring pressed on to tube too far	Spring cannot be inserted	5															
3	Press spring on to tube	Spring not on tube at all	Spring cannot be inserted	5															
3	Press spring on to tube	Spring pressed on incorrectly	Spring cannot be inserted	5															
3	Press spring on to tube	Spring pressed on incorrectly (crooked)	Spring cannot be inserted	5															

<b>Potential Failure Mode</b>	<b>Potential Effects of Failure</b>	<b>Severity</b>
<b>Tube mis-aligned</b>	<b>Spring cannot be inserted</b>	<b>5</b>

Process step #	Process step function / requirements	Potential Failure Mode	Potential Effects of Failure	Severity	Classification	Potential Causes / Mechanisms of Failure	Current Process Controls Prevention	Occurrence	Current Process Controls Detection	Detect	R.P.N.	Recommended Actions	Responsibility & Target Completion Date	Action Results							
														Actions Taken	Severity	Occur	Detection	R.P.N.			
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Fixture features/dimensions incorrect	Fixture drawings	3	Go/No Go Guage	2	30										
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175										
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Fixture features/dimensions incorrect (tube fell out)	Fixture drawings	3	In line sensor	2	30										
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Operator forgot to load tube	Visual inspection	6	No detection control	10	300	Install sensor to detect tube	G. Ratajczak 07/MAR/2012	Sensor installed at ST001	5	6	2	22			
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Press features/dimensions incorrect	Fixture drawings	3	In line sensor	2	30										
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175										
2	Load spring into press	Spring missing	Spring cannot be inserted	5		Press features/dimensions incorrect (spring fell out)	Fixture drawings	3	In line sensor	2	30										
2	Load spring into press	Spring missing	Spring cannot be inserted	5		Operator forgot to	Visual inspection	6	No detection control	10	300	Install sensor to	G. Ratajczak 07/MAR/2012	Sensor installed at ST002	5	6	2	22			
3	Press spring on to tube	Spring not fully pressed on to tube	Spring ma a late			<b>Potential Causes / Mechanisms of Failure</b>	<b>Current Process Controls Prevention</b>	<b>Occurrence</b>													
3	Press spring on to tube	Spring not fully pressed on to tube	Spring ma a late																		
3	Press spring on to tube	Spring pressed on to tube too far	Ink/tube retract																		
3	Press spring on to tube	Spring not on tube at all	Rework																		
3	Press spring on to tube	Spring pressed on incorrectly	Ink/tube retract																		
3	Press spring on to tube	Spring pressed on incorrectly (crooked)	Ink/tube c inserte hou																		
3	Press spring on to tube	Spring pressed on incorrectly (crooked)	Ink/tube c inserte hou																		

<b>Potential Causes / Mechanisms of Failure</b>	<b>Current Process Controls Prevention</b>	<b>Occurrence</b>
Fixture features/dimensions incorrect	Fixture drawings	3

Process step #	Process step function / requirements	Potential Failure Mode	Potential Effects of Failure	Severity	Classification	Potential Causes / Mechanisms of Failure	Current Process Controls Prevention	Occurrence	Current Process Controls Detection	Detect	R.P.N.	Recommended Actions	Responsibility & Target Completion Date	Action Results				
														Actions Taken	Severity	Occur	Detection	R.P.N.
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Fixture features/dimensions incorrect	Fixture drawings	3	Go/No Go Guage	2	30							
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175							
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Fixture features/dimensions incorrect (tube fell out)	Fixture drawings	3	In line sensor	2	30							
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Operator forgot to load tube	Visual inspection	6	No detection control	10	300	Install sensor to detect tube	G. Ratajczak 07/MAR/2012	Sensor installed at ST001	5	6	2	22
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Press features/dimensions incorrect	Fixture drawings	3	In line sensor	2	30							
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175							
2	Load spring into press	Spring missing	Spring cannot be inserted	5		Press features/dimensions incorrect (spring fell out)	Fixture drawings	3	In line sensor	2	30							
2	Load spring into press	Spring missing	Spring cannot be inserted	5		Operator forgot to load tube	Visual inspection	6	No detection control	10	300	Install sensor to detect spring	G. Ratajczak 07/MAR/2012	Sensor installed at ST002	5	6	2	22
3	Press spring on to tube	Spring not fully pressed on to tube	Spring may fall off in a later step	7		Operator not trained	Work instructions	5	Visual inspection	7	175	Install position sensor at full travel	G. Ratajczak 07/MAR/2012	Sensor installed at ST003	7	6	2	84
3	Press spring on to tube	Spring pressed on to tube too far	Ink/tube may not retract/extend	10	KF	Operator not trained	Work instructions	5	Visual inspection	7	175							
3	Press spring on to tube	Spring not on tube at all	Rework needed	8		Operator not trained	Work instructions	5	Visual inspection	7	175							
3	Press spring on to tube	Spring pressed on incorrectly	Ink/tube may not retract/extend	10	KF	Operator not trained	Work instructions	5	Visual inspection	7	175							
3	Press spring on to tube	Spring pressed on incorrectly (crooked)	Ink/tube cannot be inserted into housing	5		Operator not trained	Work instructions	5	Visual inspection	7	175							

<p><b>Current Process Controls Detection</b></p>	<p><b>Detect</b></p>
<p><b>Go/No Go Guage</b></p>	<p><b>2</b></p>

Process step #	Process step function / requirements	Potential Failure Mode	Potential Effects of Failure	Severity	Classification	Potential Causes / Mechanisms of Failure	Current Process Controls Prevention	Occurrence	Current Process Controls Detection	Detect	R.P.N.	Recommended Actions	Responsibility & Target Completion Date	Action Results				
														Actions Taken	Severity	Occur	Detection	R.P.N.
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Fixture features/dimensions incorrect	Fixture drawings	3	Go/No Go Guage	2	30							
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175							
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Fixture features/dimensions incorrect (tube fell out)	Fixture drawings	3	In line sensor	2	30							
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	5		Operator forgot to load tube	Visual inspection	6	No detection control	10	300	Install sensor to detect tube	G. Ratajczak 07/MAR/2012	Sensor installed at ST001	5	6	2	22
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Press features/dimensions incorrect	Fixture drawings	3	In line sensor	2	30							
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	5		Operator not trained	Work instructions	5	Visual inspection	7	175							
2	Load spring into press	Spring missing	Spring cannot be inserted	5		Press features/dimensions incorrect (spring fell out)	Fixture drawings	3	In line sensor	2								
2	Load spring into press	Spring missing	Spring cannot be inserted	5		Operator forgot to load spring	Visual inspection	6	No detection control	10			G. Ratajczak MAR/2012	Sensor installed at ST002	5	6	2	22
3	Press spring on to tube	Spring not fully pressed on to tube	Spring may fall off in a later step	7		Press does not move far enough down	Position sensors	1	Visual inspection	8								
3	Press spring on to tube	Spring not fully pressed on to tube	Spring may fall off in a later step	7		Operator did not activate press	Visual reminder (green light)	6	No detection control	10			G. Ratajczak MAR/2012	Sensor installed at ST003	7	6	2	84
3	Press spring on to tube	Spring pressed on to tube too far	Ink/tube may not retract/extend	10	KPP	Press travel incorrect	Hard stop on press	1	Optical sensor	4								
3	Press spring on to tube	Spring not on tube at all	Rework needed	8		Spring fell off of press while moving downward	Part orientation	4	Visual inspection	8								
3	Press spring on to tube	Spring pressed on incorrectly	Ink/tube may not retract/extend	10	KPP	Fixture/press alignment issue	Verify alignment at each shift	2	Hourly audits	6								
3	Press spring on to tube	Spring pressed on incorrectly (crooked)	Ink/tube cannot be inserted into housing	5		Fixture/press alignment issue	Verify alignment at each shift	2	Hourly audits	6								

R.P.N.

---

30

## Risk Priority Number (RPN)

$$RPN = 5 \times 3 \times 2 = 30$$

Out of a possible 10 x 10 x 10 = 1000  
this risk ranks relatively low.....






*I can't address every failure – only the most important ones. Where do I draw the line? How do I decide where to focus resources?*



Process step #	Process step function	Failure	Current Process Controls	Prevention	Occurrence	Current Process Controls Detection	Detect	R.P.N.
9	Press barrel on to plunger	Barrel not fully on to plunger	Operator did not activate press	Visual inspection	6	No detection control	10	600
9	Press nib on to housing ass'y	Nib not fully pressed on to housing	Operator did not activate press fully	Visual reminder (green light)	6	No detection control	10	420
6	Press barrel on to plunger	Barrel not on plunger at all	Operator did not activate press fully	Visual reminder (blue light)	6	No detection control	10	420
9	Press nib on to housing ass'y	Nib may fall off and ink/spring ass'y fall out later	Operator did not activate press fully	Visual reminder (blue light)	6	No detection control	10	420
6	Press barrel on to plunger	Barrel not on plunger at all	Rework needed	Barrel fell off of tube	Part orientation	No detection control	10	320
9	Press nib on to housing ass'y	Nib not on housing at all	Rework needed	Barrel fell off of tube	Part orientation	No detection control	10	320
1	Load ink tube vertically into fixture	Tube missing	Spring cannot be inserted	Operator forgot to load tube	Visual inspection	No detection control	10	300
2	Load spring into press	Spring missing	Spring cannot be inserted	Operator forgot to load spring	Visual inspection	No detection control	10	300
4	Load plunger ass'y to fixture	Plunger ass'y missing	Housing cannot be added	Operator forgot to load plunger ass'y	Visual inspection	No detection control	10	300
5	Load barrel on to press	Barrel mis-aligned	Housing cannot be added	Operator forgot to load barrel	Visual inspection	No detection control	10	300
3	Press spring on to tube	Spring not on tube at all	Rework needed	Spring fell off of press while moving downward	Part orientation	Visual inspection	8	256
4	Load plunger ass'y to fixture	Plunger ass'y mis-aligned	Housing cannot be added	Operator not trained	Work instructions	No detection control	10	250
5	Load barrel on to press	Barrel mis-aligned	Housing cannot be added	Operator not trained	Work instructions	No detection control	10	250
1	Load ink tube vertically into fixture	Tube mis-aligned	Spring cannot be inserted	Operator not trained	Work instructions	Visual inspection	7	175
2	Load spring into press	Spring mis-aligned	Spring cannot be inserted	Operator not trained	Work instructions	Visual inspection	7	175
3	Press spring on to tube	Spring pressed on incorrectly	Ink/tube may not retract/extend	10 KPP Fixture/press alignment issue	Verify alignment at each shift	Hourly audits	6	120
6	Press barrel on to plunger	Barrel pressed on incorrectly	Damaged parts/Scrap	8 Unclassified Fixture/press alignment issue	Verify alignment at each shift	Hourly audits	6	96

A chart can be made of RPN versus cause. Without a Pareto, the easiest way to decide what to work on is to simply sort by RPN and address the highest items. In a simple rank order chart the RPN falls (descends) by even, somewhat linear steps.


**Chart of RPN by individual causes**

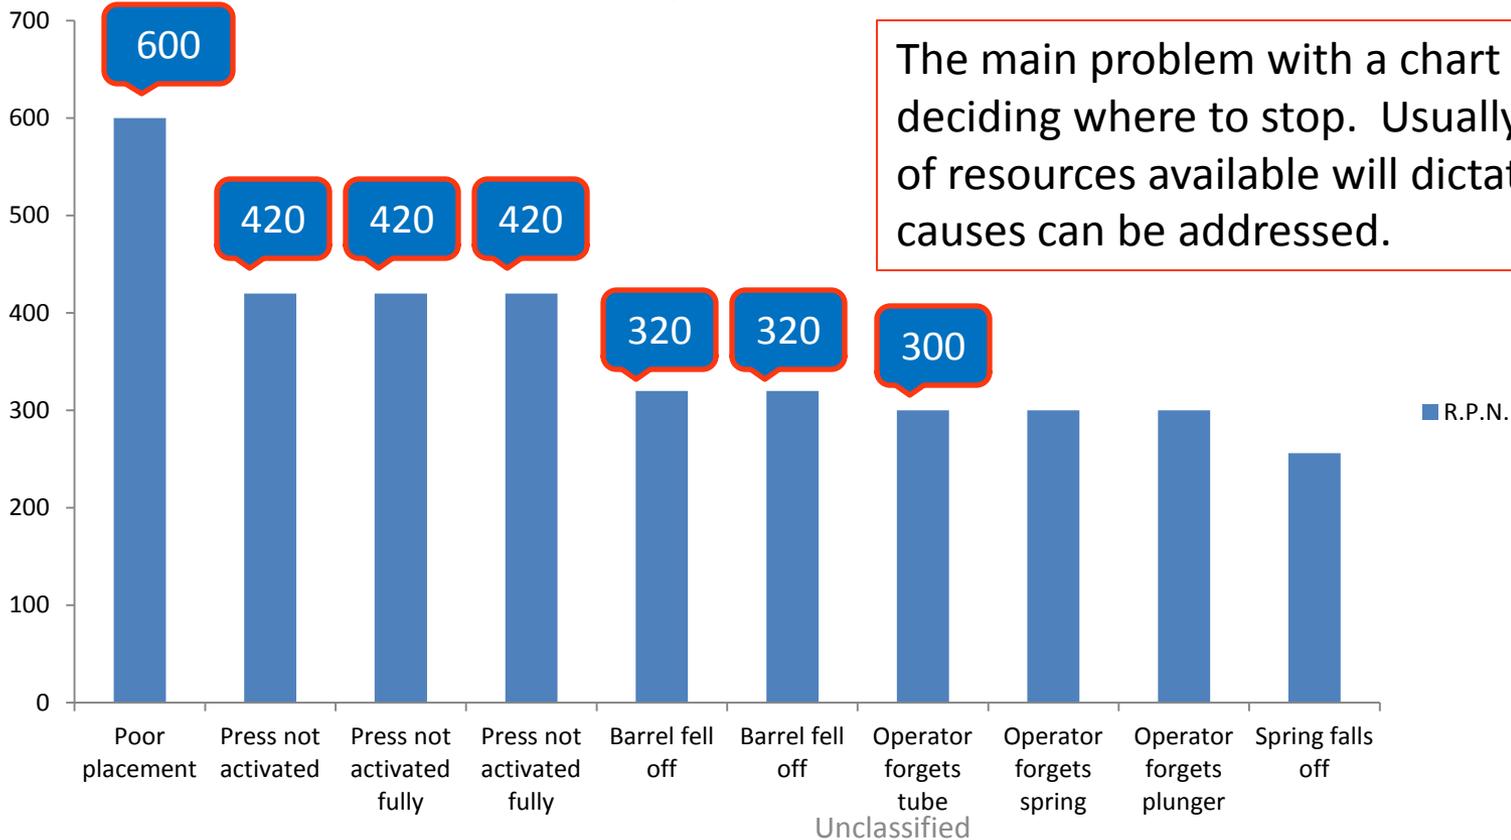

The main problem with a chart like this is deciding where to stop. Usually the amount of resources available will dictate how many causes can be addressed.


If a Pareto exists, then the 80/20 rule starts to apply, meaning that the majority of our concern can be eliminated by addressing the relatively few but very potent top items.

**Pareto chart of RPN by individual causes**

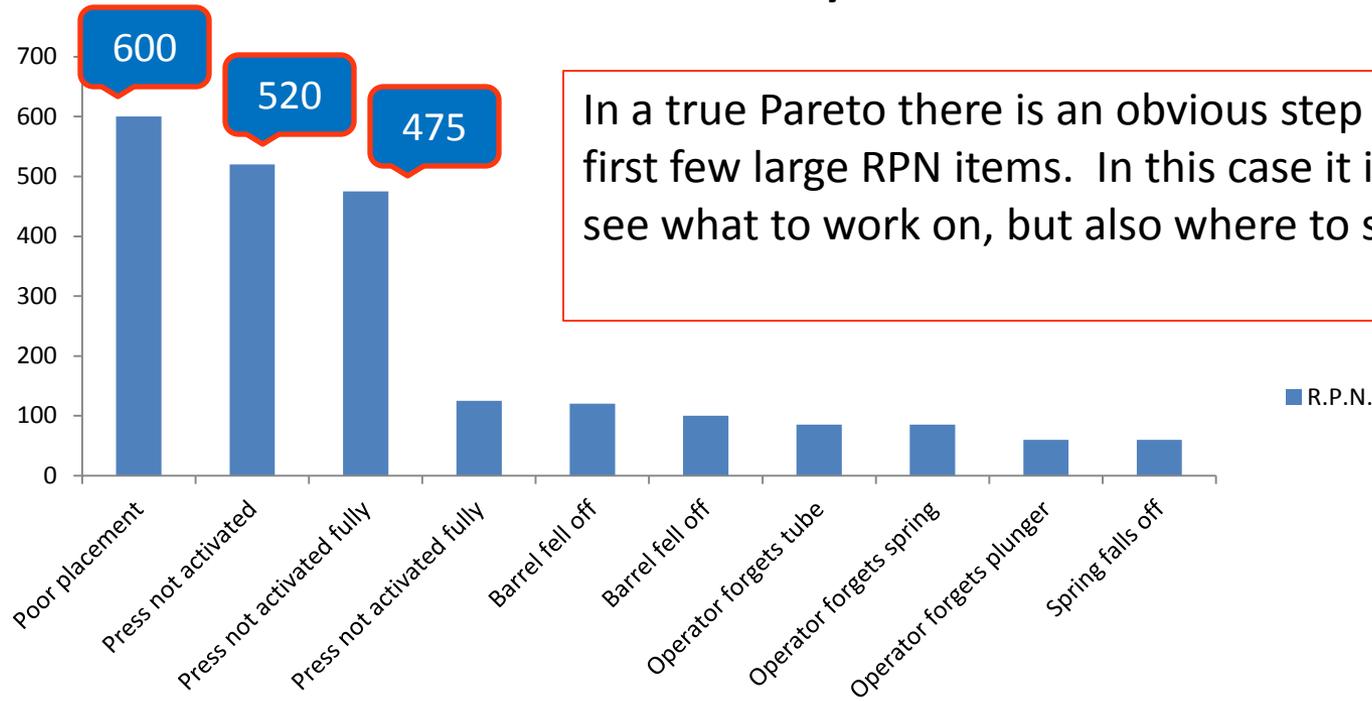

If another way is desired to identify a Pareto and get the most risk mitigation for the money, causes that are similar and that might receive the same controls can be grouped. This is a “kill many birds with the same stone” approach. Cause groups are comprised of many similar causes found throughout the entire FMEA. Individually their RPN rankings might be low, but when combined into a group they can add up substantially.

**Pareto chart of RPN by cause group**

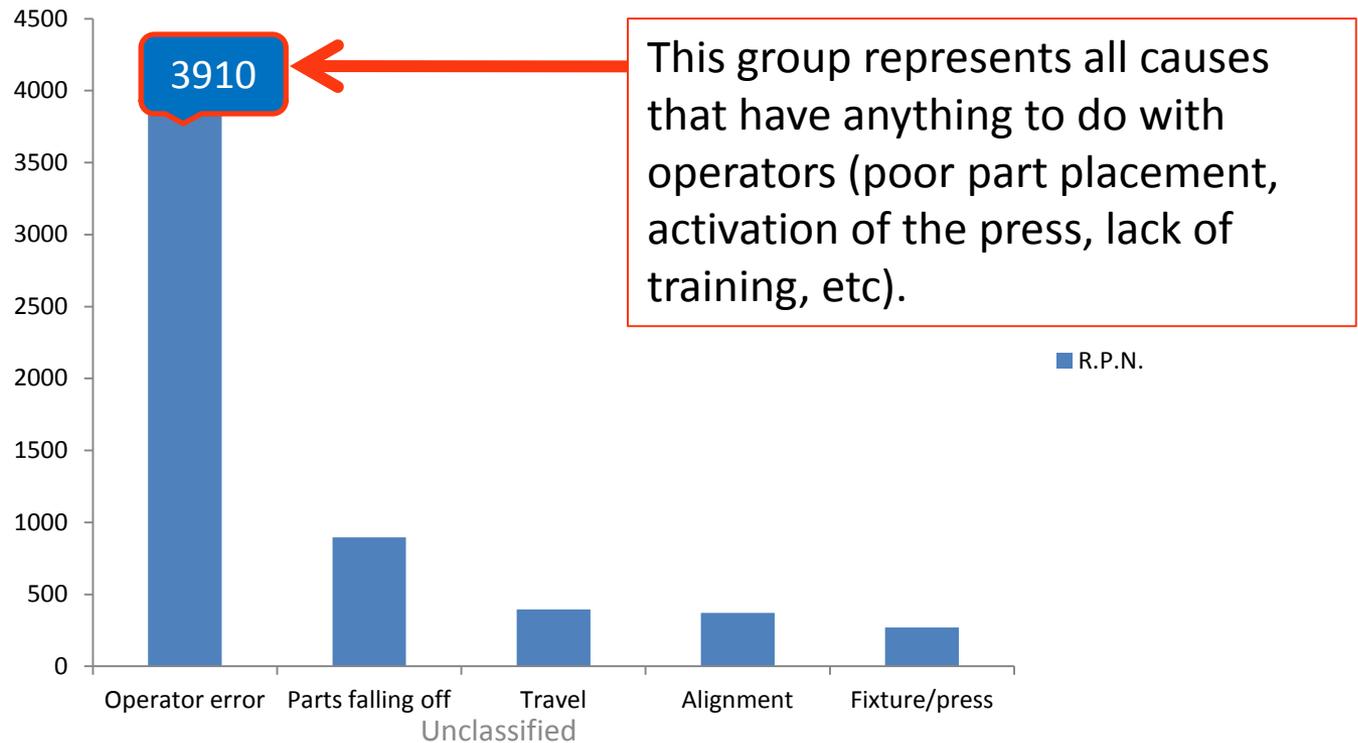

This group represents all causes that have anything to do with operators (poor part placement, activation of the press, lack of training, etc).

Addressing anything that has to do with “operator error” has a HUGE impact!

In the retractable pen example, it was easy to see how the assembly process could fail to produce a properly put together pen. The PROCESS FMEA showed:


- Each assembly process step has some output and therefore a way to fail
- By carefully mapping the process, the potential failures become visible and controllable

However, just because something is properly assembled does not mean that it will not fail! The way things are designed plays a large role in how robust they are to failure. A full DESIGN FMEA could have shown us the risk of failure due to poor design and engineering:

- Poor designs can make things work improperly, inefficiently, or not at all
- By understanding how things work and how they interface, failure modes become visible and controllable

Risk reduction by executing FMEA is not complete until ALL aspects of risk have been addressed. A DESIGN FMEA followed by a PROCESS FMEA insures that products will work as expected and be put together as expected. Together they identify the deviations to design and process expectations which result in failures.

In the event that a failure mode is encountered, the FMEA can be the first source for reactive problem solving.

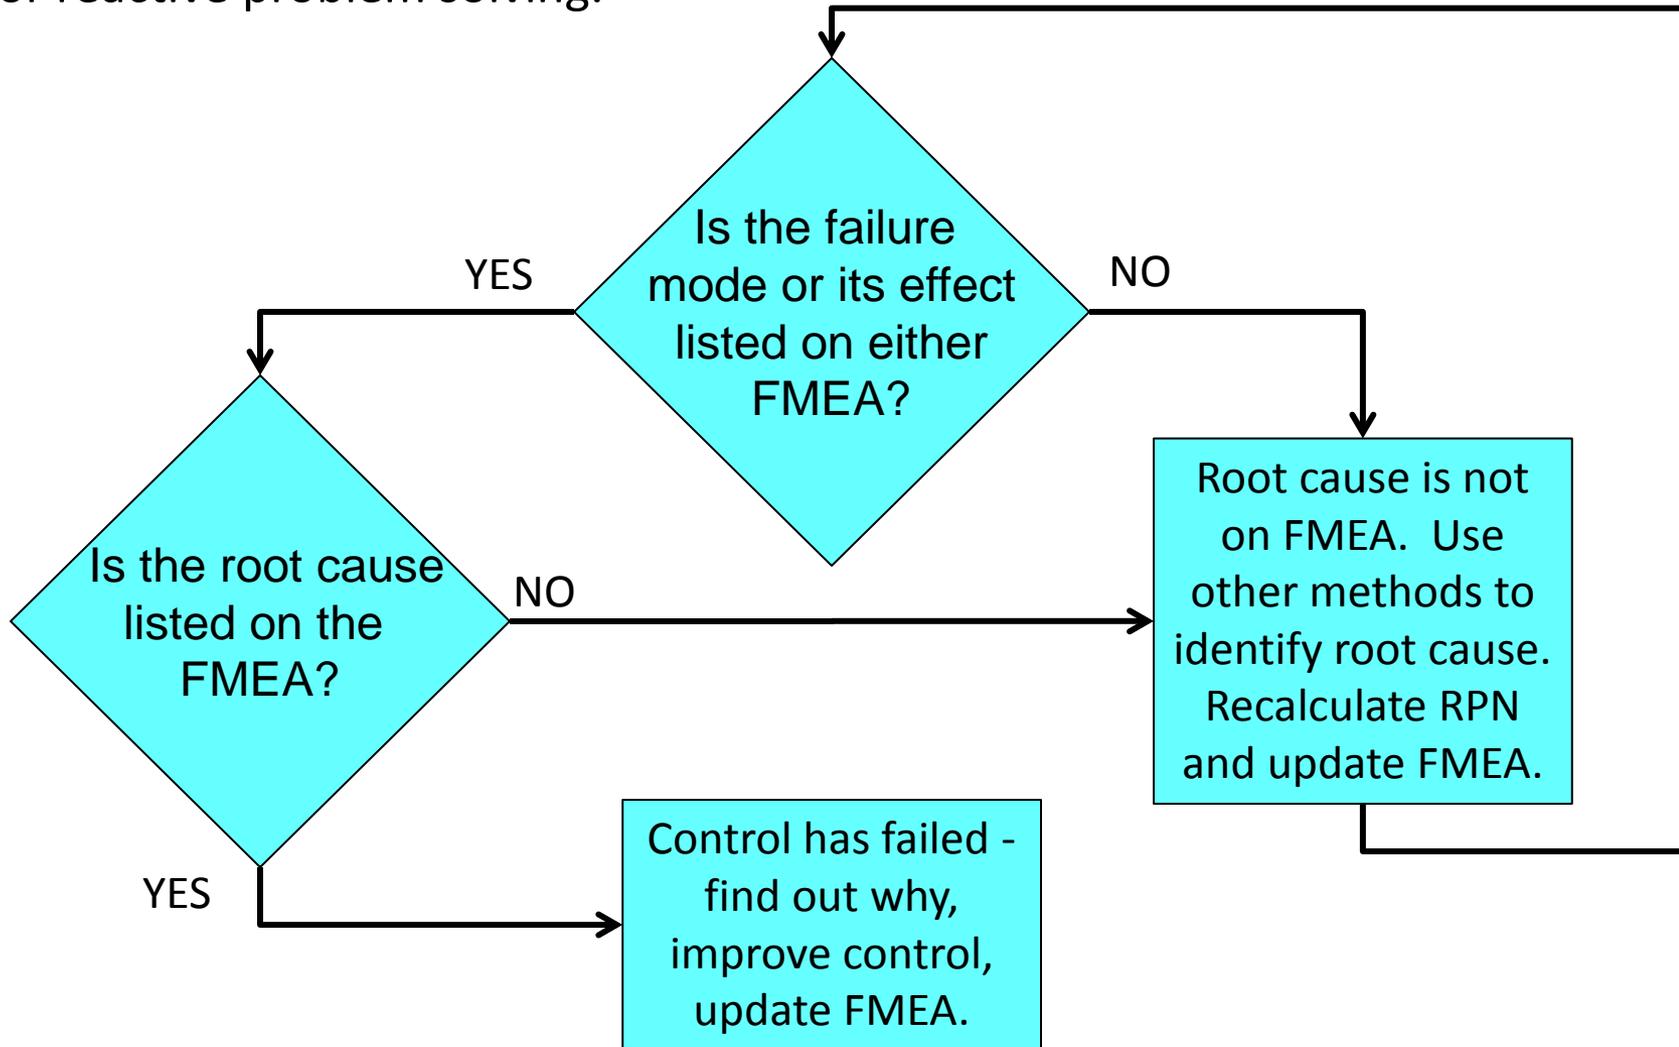

Unclassified

Many government products are designed, manufactured, and assembled by contractors through written contracts.


We have learned that without some structured approach to reducing risk, such as FMEA, failures with various levels of effect can and will result. This is unacceptable to the Warfighter.

Therefore the Government should expect contractors to complete any and all appropriate FMEAs needed to risk reduce a product.

Government contracts need to be written such that the FMEA and its supporting documents will be shared and audited by the Government. This will insure that failures are minimized, and costs stay within expectations.

Recommend using TARDEC FMEA Templates, Ranking Tables with two scales, and DFMEA & PFMEA Evaluation Check Lists customized to DoD systems.

Successful FMEA exercises result in very complete risk identifications. In turn, risk management is more successful in eventually reducing the failures which were identified as the most influential.

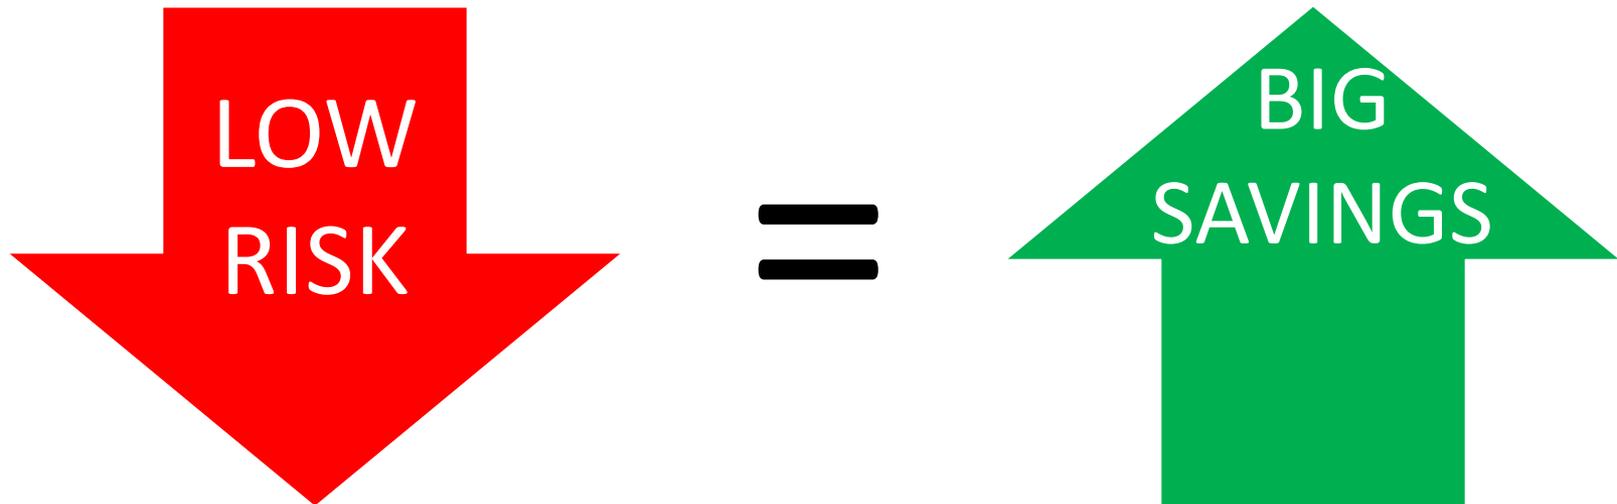

## SUMMARY:

1. FMEA is not hard to do or understand
2. FMEA works on EVERYTHING
3. FMEA is the BEST way to identify risk
4. Managing risk early SAVES MONEY!

**ARE YOU USING FMEA? CAN YOU AFFORD NOT TO?**



Learn FMEA – start using it!



UPCOMIN TARDEC FMEA TRAINING

# Understanding and Evaluating Failure Mode and Effects Analysis (FMEA)

Insert information concerning upcoming class, times, how to sign up.

## Class will cover:

How to prepare for FMEA using the proper tools, How to do FMEA, Design and Process FMEAs with examples and exercises, Prioritization of mitigation actions, Using FMEA to root cause failures, Transition to Project Recon, Evaluating and Managing Contractor FMEA, TARDEC FMEA Templates, Ranking Tables with two scales, and DFMEA & PFMEA Evaluation Check Lists customized to DoD systems

POC: [Kadry.W.Rizk.civ@mail.mil](mailto:Kadry.W.Rizk.civ@mail.mil)

[Rebecca.L.Addis.civ@mail.mil](mailto:Rebecca.L.Addis.civ@mail.mil)

[Lisa.J.Graf2.civ@mail.mil](mailto:Lisa.J.Graf2.civ@mail.mil)

Need minimum of 15 enrolled to hold a class