

The TACOM-USU Intelligent Mobility Program

Kevin L. Moore
Center for Self-Organizing and Intelligent Systems
Utah State University 4160 Old Main Hill
Logan, UT 84322-4160, USA
moorek@ece.usu.ed

Grant Gerhart
US Army Tank-Automotive and Armaments Command
AMSTA-TR-R/263
Warren, MI 48397
gerhartg@tacom.army.mil

ABSTRACT

Over a six year period the US Army Tank-Automotive and Armaments Command's Intelligent Mobility Program sponsored research to develop and demonstrate enhanced mobility concepts for unmanned ground vehicles. In this paper we describe the Intelligent Mobility Program's research accomplishments achieved at Utah State University's (USU) Center for Self-Organizing and Intelligent Systems (CSIOS). The CSIOS program was based on USU's "smart wheel" technology, which enables design of an omni-directional vehicle (ODV). Through the course of the program, USU researchers built thirty robots using eight distinct ODV robot designs. These robots were also demonstrated in a number of application scenarios. The program has culminated in the actual fielding of the final robot developed, the ODIS-T2, which was designed for undervehicle inspection at security checkpoints. The design and deployment of these robots required research advances in mechanical and vetronics design, sensor integration, control engineering and intelligent behavior generation algorithms, system integration, and human interface. An overview of the USU-developed robotics technology is presented that details the technology development and technical accomplishments achieved by the TACOM-USU Intelligent Mobility Program, with a focus on the actual hardware produced.

Keywords: Mobile robotics, omni-directional drive, undervehicle inspection, ODIS.

1. TACOM-USU INTELLIGENT MOBILITY PROGRAM OVERVIEW

Beginning in FY98 and continuing through FY04, the Center for Self-Organizing and Intelligent Systems (CSIOS) at Utah State University (USU) was funded by the Office of the Secretary of Defense through the US Army Tank-Automotive and Armaments Command's (TACOM) Intelligent Mobility (IM) Program (under agreement No. DAAE07-98-3-0023) to develop a new generation of intelligent and highly-mobile robots. The long-range goal of the program was "... to develop and demonstrate enabling technologies that allow lightweight robotic and semiautonomous ground vehicles to achieve on-road and off-road mobility and survivability similar to current manned, wheeled, and tracked military vehicles, with a focus on small-scale to mid-scale vehicles..." The CSIOS program was based on USU's "smart wheel" technology, a mechatronic system that provides independent computer control of steering and drive in a single wheel assembly. Putting multiple smart wheels on a chassis gives a vehicle that is capable of (nearly) uncoupled translational and rotational motion. USU researchers built thirty robots using eight distinct designs. These robots, the T1, T2 (and the enhanced T2, the T2E), T3, T4, ODIS-I, ODIS-T (3 copies built), ODIS-S (2 copies built), and ODIS-T2 (20 copies built), were all based on the smart wheel mobility concept and included both electric and hydraulic drive robots, as well as robots exhibiting both three and six degrees of freedom and robots deploying a variety of payloads. USU efforts also included demonstration in a number of application scenarios and in the actual fielding of the final robot developed, the ODIS-T2, which was designed for undervehicle inspection at security checkpoints. Figure 1 shows the T1, T2, T3, and ODIS robots. Figure 2 shows the complete line of ODIS robots along with the T2e and T4 robots. In this paper we give an overview of the IM program, beginning with a summary of USU's smart wheel technology, continuing with a discussion of each robot and their associated technical accomplishments, and ending with a summary of the scholarly and educational impact of the program.

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 01 APR 2004	2. REPORT TYPE Journal Article	3. DATES COVERED 04-02-2004 to 26-03-2004			
4. TITLE AND SUBTITLE The TACOM-USU Intelligent Mobility Program		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S) Kevin Moore; Grant Gerhart		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Center for Self-Organizing and Intelligent Systems, Utah State University, 4160 Old Main Hill, Logan, UT, 84322-4160		8. PERFORMING ORGANIZATION REPORT NUMBER ; #14192			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army TARDEC, 6501 East Eleven Mile Rd, Warren, Mi, 48397-5000		10. SPONSOR/MONITOR'S ACRONYM(S) TARDEC			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) #14192			
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Over a six year period the US Army Tank-Automotive and Armaments Command's Intelligent Mobility Program sponsored research to develop and demonstrate enhanced mobility concepts for unmanned ground vehicles. In this paper we describe the Intelligent Mobility Program's research accomplishments achieved at Utah State University's (USU) Center for Self-Organizing and Intelligent Systems (CSIOS). The CSIOS program was based on USU's 'smart wheel' technology, which enables design of an omni-directional vehicle (ODV). Through the course of the program, USU researchers built thirty robots using eight distinct ODV robot designs. These robots were also demonstrated in a number of application scenarios. The program has culminated in the actual fielding of the final robot developed, the ODIS-T2, which was designed for undervehicle inspection at security checkpoints. The design and deployment of these robots required research advances in mechanical and electronics design, sensor integration, control engineering and intelligent behavior generation algorithms, system integration, and human interface. An overview of the USU developed robotics technology is presented that details the technology development and technical accomplishments achieved by the TACOM-USU Intelligent Mobility Program, with a focus on the actual hardware produced. Keywords: Mobile robotics, omni-directional drive, undervehicle inspection, ODIS.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Public Release	18. NUMBER OF PAGES 13	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

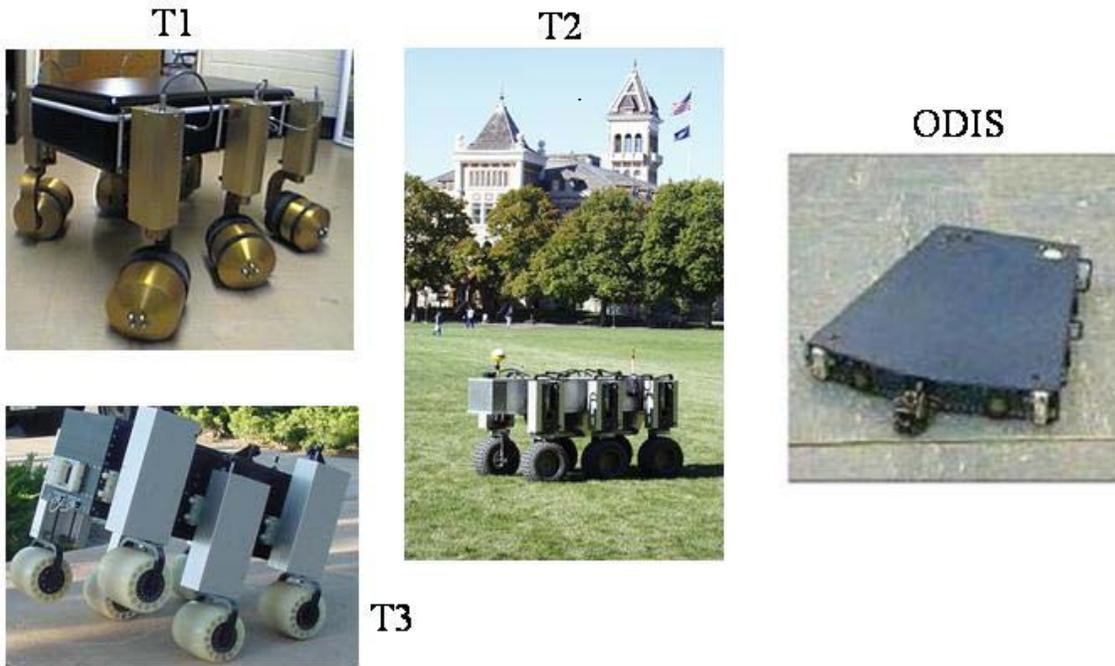


Figure 1: T1, T2, T3, and ODIS-I robots



Figure 2: T4, T2e, ODIS-I, ODIS-T, ODIS-S, and ODIS-T2 robots.

2. USU SMART WHEEL AND ODV PLATFORMS

We have previously noted that our perspective on developing effective robotic systems for UGV applications is that you must have a mobility capability to work with and you must have the proper mobility control to effectively utilize the mobility capability. For the robotic platforms developed at USU the core mobility capability is called the “smart wheel.” Figure 3 shows the smart wheel concepts used in the T-Series and ODIS robots. Using slip-rings, it is possible to achieve independent control over drive and steering motors and to obtain infinite rotation in the steering axis of the wheel. The actual implementation of the smart wheel concept has varied from vehicle-to-vehicle. For instance, in T1, each smart wheel has a drive motor, power, and a micro-controller, all in the wheel hub. This is combined with a separate steering motor to create a three degree-of-freedom mechanism. Infinite rotation in the steering degree-of-freedom is achieved through an innovative slip ring that allows data and, in the T2, T3, T4, and ODIS robots, power to pass from the chassis to the wheel without a wired connection. The T3 robot also includes actuation in the z-axis.

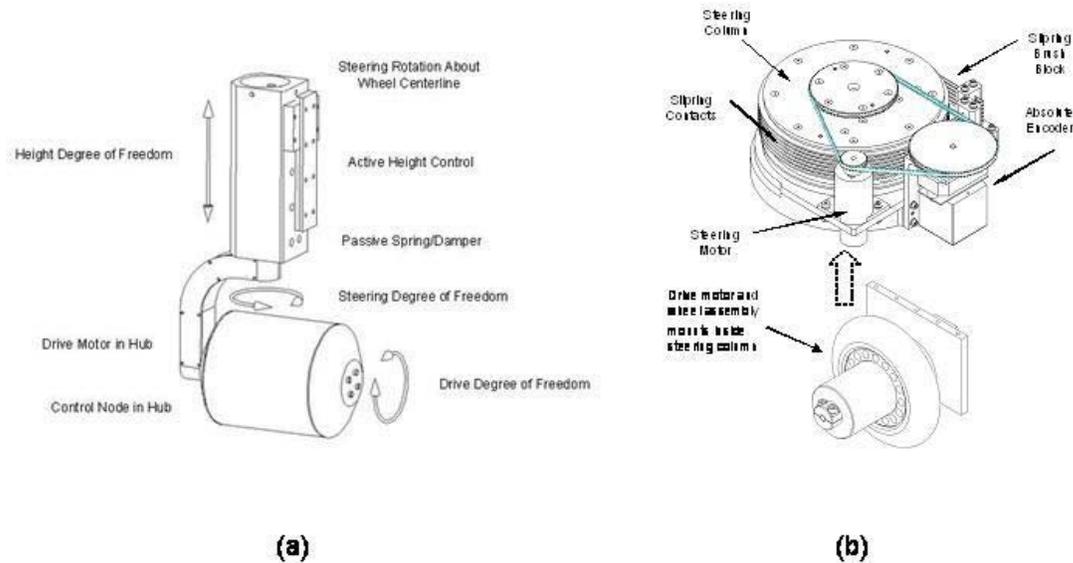


Figure 3: Smart wheel designs – (a) T3 wheel concept; (b) ODIS-I smart wheel.

The USU concept for building mobile robots features multiple smart wheels attached to a chassis. The robotic platforms resulting from attaching multiple smart wheels to a chassis are called omni-directional vehicles, or ODV, because the resulting vehicle can drive a path with independent orientation and motion in the X - Y plane. This is different from a traditional Ackerman-steered vehicle or a tracked vehicle that must use skid-steering. In such vehicles orientation is constrained by the direction of travel. However, an ODV vehicle using USU's "smart wheels" has a much higher degree of mobility. This mobility has previously been described as being like a “hovercraft on wheels.” For the T1, T2, T4, and ODIS robots and like a “helicopter on wheels” for the T3 robot.

3. T-SERIES ROBOTS

3.1. The T1 and T2 ODV Vehicles

Figure 1 showed the T1, a 95 lb. ODV vehicle with six smart wheels. Because this vehicle was developed as prototype for the T2, its performance was not benchmarked and has always been considered “as-built.” T1 was built during the first year of the IM program, along with T2, which was design to demonstrate the scalability of the ODV concept. Figure 4 shows another view of the T2 robot. Its geometry and performance characteristics include:

- Size: 97" long x 40" wide x 44" high
- Weight (no payload): 1480 lb.
- Speed (flat and level surface): up to 11.7 feet/sec (0-8 MPH)
- Uphill traction limited slope: 35° to 40° depending on soil traction assumptions
- Maximum slope stability limit: 57° aligned with the principle axis, 38° aligned with the minor axis
- Vehicle run time: 30 minutes based on 20 minutes of full speed hard level surface running plus 10 minutes of maximum torque running



Figure 4: The T2 ODV autonomous mobile robot.

3.2. The T3 ODV Vehicle

During the second year of the TACOM IM program CSOIS built the T3, an ODV robotic vehicle with six complete three degree-of-freedom smart wheels. The T3 is in the same weight and size class as the T1, with the following features:

- Top Speed: 10 mph
- Maximum Slope: 45°
- Maximum Weight: 100 lbs.
- Size: 20" wide x 26" long and 18" high
- Z-axis Travel: 7.5" stop to stop
- Z-axis Travel Rate: 2 inches/second
- Maximum Z-axis Force: 75 lb
- Maximum slope stability limit: 57° aligned with the principle axis, 38° aligned with the minor axis
- Vehicle run time: 30 minutes based on 20 minutes of full speed hard level surface running plus 10 minutes of maximum torque running

The key difference between the T3 and the earlier robots, T1 and T2, was the addition of z-axis capability, which provided an interesting new mobility capability, such as the ability to climb step-ups and curbs. Another new concept introduced in the T3 design was a modular "plug-and-play" approach to the wheel assembly and its connection to the vehicle chassis. This idea is shown in Figure 5. The basic concept is that wheels can be easily removed and replaced for repair as needed.

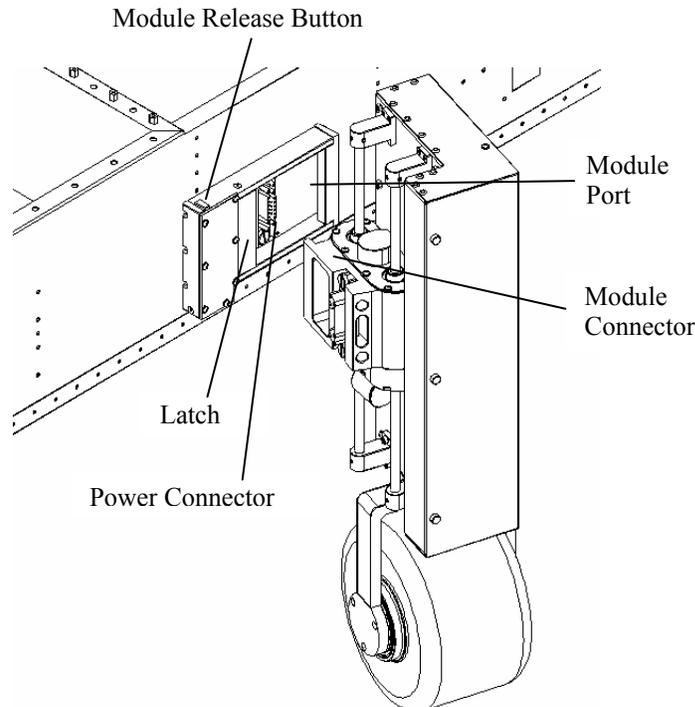


Figure 5: Modular wheel assembly attachment port.

4. ODIS SERIES ROBOTS

The T-series of robots were developed to demonstrate the feasibility and scalability of the ODV concept. The next step for CSOIS was to design a complete robotic system for a practical, real-world application. The resulting system, developed during the third year of the program, is called the Omnidirectional Inspection System (ODIS). ODIS is a man-portable physical security mobile robotic system that can be used for autonomous or semi-autonomous inspection under vehicles in a parking area. Customers for such a system include military police and other law enforcement entities interested in searching under vehicles for bombs or contraband.

ODIS-I, shown in Figure 7 carrying out an inspection task, is only 3.75 inches tall and has three wheels, each with the same ODV capability found in the T-series of robots. Using GPS, odometry, and on-board sensors, ODIS can navigate through a parking area either, a) going from stall to stall, inspecting any vehicles that it finds, or, b) going to a prescribed location and inspecting any vehicles it finds in that location. Once a vehicle is found to be in a parking stall some form of inspection may be carried out. After deciding to inspect a vehicle, ODIS characterizes the vehicle, finding bumper and tire locations, and then autonomously travels under the vehicle, sending streaming video back to the operator station for analysis.

A second version of ODIS is the tele-operated **ODIS-T**, shown in Figure 7. ODIS-T was developed in response to the terrorist attacks on the World Trade Center and the Pentagon on September 11, 2001. The robot is intended to be driven by an operator and was designed to be able to deploy a number of mission sensors, including visual cameras, infrared cameras, chemical sniffers, and radiation detectors. Limited objective experiments of three ODIS-T robots being used by military police were carried out at Fort Leonard Wood in August 2002. The robots were found to be very effective when compared to the traditional “mirror-on-a-stick” method of under-vehicle inspection at security checkpoints. In particular, it has been found that ODV mobility is a very useful feature for under-vehicle inspection as the operator can move the robot in a natural way while focusing the camera on desired inspection points.




Figure 6: ODIS-I robot performing an inspection task.



Figure 7: ODIS-T robot.

The third version of ODIS, called the **ODIS-S**, was developed in the fourth and fifth year of the project, for a customer who wished to have the autonomy of ODIS-I with the improved wheel assembly of ODIS-T. ODIS-S, shown above in the lower right-hand corner of Figure 2, is a semi-autonomous robot that can be tele-operated via a simple physical joystick or through a virtual joystick on a PC-based OCU. It is semi-autonomous in the sense that the vehicle can have the ability to do localized area path planning and obstacle avoidance. Its mission capabilities will include a “sentry mode” function that will allow the robot to automatically inspect a car after being tele-operating into the cars vicinity. Software provided with the vehicle enables following behaviors that can be commanded through the SPAWAR MHRA system, including: GPS-based waypoint navigation; automatic under-car raster scan searches; automatic entry and exit from under the car from GPS specified positions; non-dynamic collision avoidance of static obstacles (by coming to a stop).

Finally, in years five and six of the program a fourth version of ODIS was designed, called the **ODIS-T2**, shown in Figure 9. The ODIS-T2 robot was designed as an improved ODIS-T robot for the specific application of military police and law enforcement checkpoint inspection. A novel feature of this effort, which took place during year six of the program, was a teaming with a manufacturer who carried out a complete design for manufacture and assembly (DFMA) assessment of the design as well as assembly instructions. Twenty copies of the ODIS-T2 robot were produced in an assembly-line fashion, with ten of these robots deployed in the Iraq theatre.

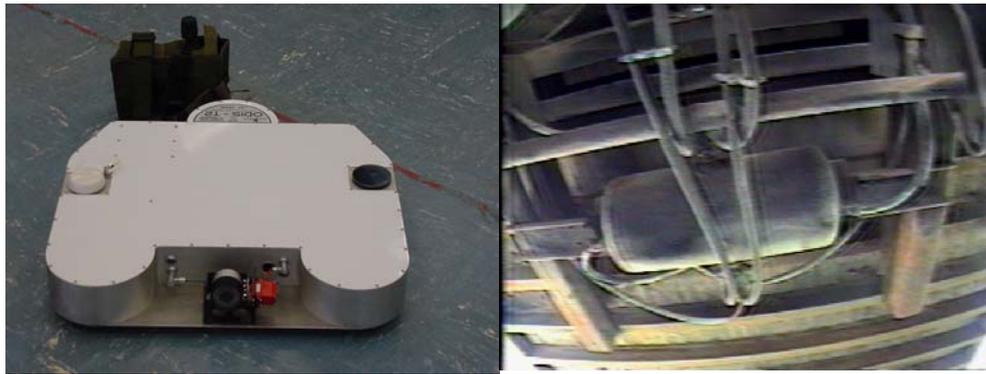


(a) ODIS-T2 robot.

(b) Image obtained from ODIS-T2.

Figure 8: The ODIS-T2 robot.

5. Integrated Parking Security System

During the fourth year of the Intelligent Mobility program, CSOIS began development of a complete integrated parking area surveillance system. The concept is shown in Figure 9. The system will use one or more ODIS robots for performing fine resolution inspection and clandestine surveillance. In addition, a mid-sized mobile robot, called the T4, will be used as a “marsupial mothership” for one of the ODIS vehicles and will also perform coarse resolution inspection (such as license plate recognition), parking area monitoring and security, and general surveillance. T4 enhances the mobility of ODIS. These robots will be deployed to work together, both autonomously and semi-autonomously, to provide a variety of security functions for parking areas.

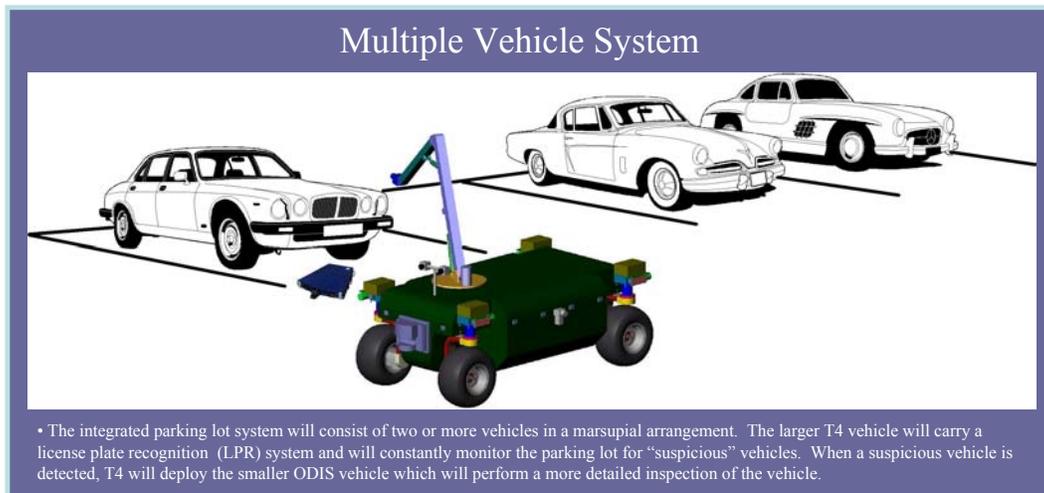

• The integrated parking lot system will consist of two or more vehicles in a marsupial arrangement. The larger T4 vehicle will carry a license plate recognition (LPR) system and will constantly monitor the parking lot for “suspicious” vehicles. When a suspicious vehicle is detected, T4 will deploy the smaller ODIS vehicle which will perform a more detailed inspection of the vehicle.

Figure 9: Integrated parking lot surveillance system.

A key feature of the system shown in Figure 9 is the T4 robot. T4 was designed to be a rugged ODV robot based on hydraulic-motor-based smart wheels and using a gasoline powered motor. The vehicle is similar in size to T2, with a weight of about 1500 lbs. Figure 10 shows T4 in its current stage of completion. This effort ended with a completely-designed and operational mechanical system and completely-design vetronics hardware. However, the pressing needs of national security re-directed CSOIS efforts toward continued ODIS development and the mechanical and vetronic subsystems of T4 were never integrated, though the long-term goal remains the same. We comment that the original development roles of the T4 project included extensive software and sensor efforts. While the hardware was under construction, the software team proceeded by outfitting the T2 robot with all the sensors planned for the T4 robot. This modified T2 was called the T2e robot (see Figure 11) and was used extensively for intelligent behavior experimentation.



Figure 10: T4 robot.



Figure 11: T2e robot.

6. Mobility Control and Intelligent Behavior Generation

In addition to the mobility capability provided by multiple smart wheels, CSOIS has developed the vehicle electronics and planning and control systems needed to utilize the ODV capability in autonomous and semi-autonomous applications. This includes: multiple computers systems for sensing, navigation, guidance, and control; algorithms for decision-making and path tracking; user interfaces for monitoring and tasking the vehicles, and multiple sensors. Figure 12 details some of these features as found on the T2 robot, for example. Figure 13 shows the sensors on ODIS and T4.

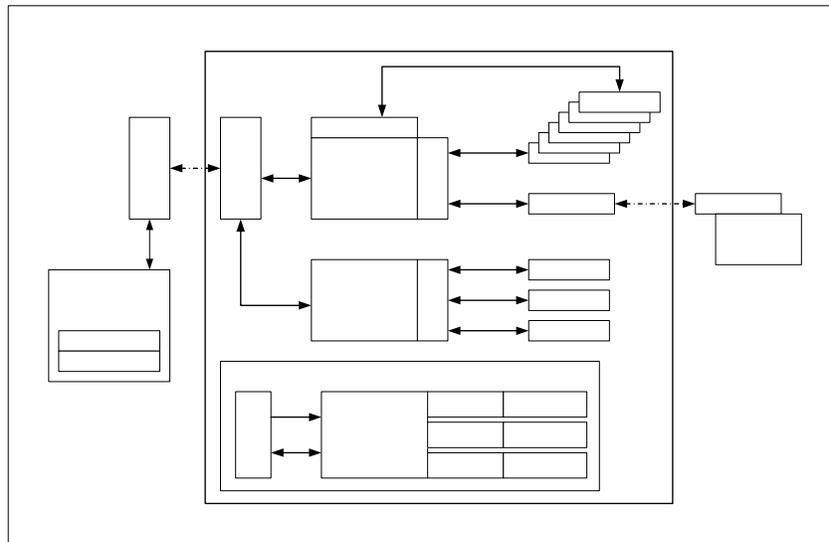


Figure 12: T2 vetronics design.

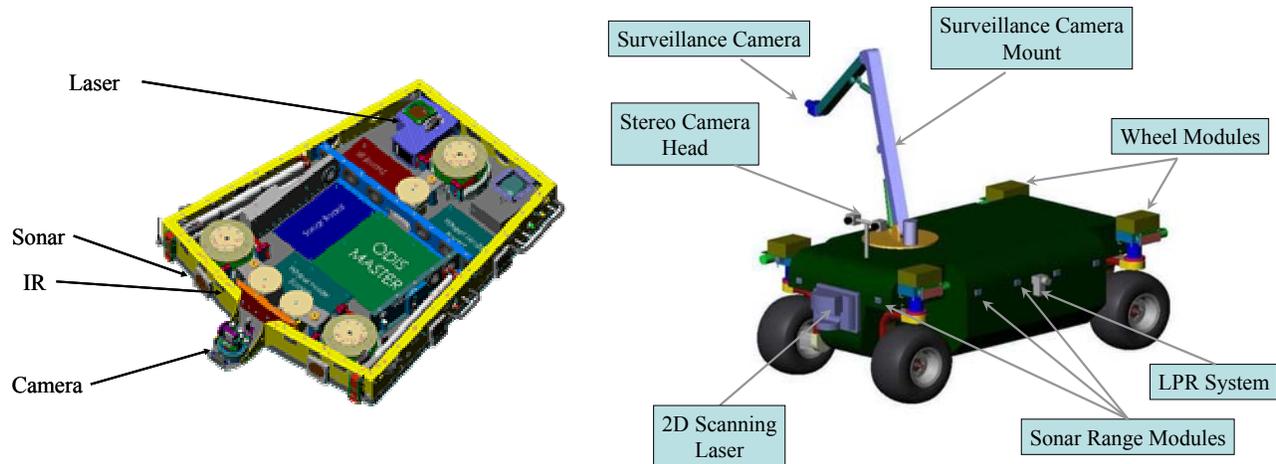


Figure 13: ODIS-I and T4/T2e sensor packs.

In addition to developing mechanical and vetronics hardware and sensors, CSOIS researchers have also done extensive work on the problem of intelligent behavior generations. For example, ODIS robots are intended to be operated in one of three different modes. In the original planned scenario, the robot should operated autonomously (ODIS-I robot). Thus, in addition to the use of smart wheels to develop the ODIS ODV mobility capability, USU designed a command environment for ODIS. Called MoRSE, an acronym for Mobile Robots in Structured Environments, the command environment provides a large number of small commands to explicitly control each system module. The command environment has been designed to implement what the USU researchers call a delayed commitment strategy. In this approach, a planner function takes as input a set of tasks and a partial map of the environment and produces from the grammar a flexible script, or sequence, of high-level action commands to be executed by the vehicle. The script is flexible in that precise paths are not specified; rather, paths are specified as functions of information to be acquired through sensing during system execution. This delayed commitment approach reduces the need to re-plan and enables vehicle behaviors to adapt to the environment. The approach includes active command of sensors and model-based interpretation of sensor data. Though currently only used on ODIS, the USU grammar-based approach to intelligent behavior generation for commanding autonomous robotic vehicles is applicable to a wide variety of autonomous systems. Note that the command environment is primarily aimed at robot-level command and control and efforts are planned to make it compatible with MHRA and JAUGS.

Due to space limitations, it is not possible to detail the various efforts carried out in the area of mobility control and intelligent behavior generation. Table I give an overall summary of these accomplishments. Interested readers are referred to the papers in the Bibliography for more details.

7. ADDITIONAL IMPACTS OF THE TACOM- USU INTELLIGENT MOBILITY PROGRAM

A common misconception about research institutions is that they are some type of “ivory tower,” where faculty spend their time studying esoteric topics and publishing obtuse articles in obscure journals. And, this point of view is nothing new. The debate about the relevance of academic research has raged well over one hundred years, even leading to such (somewhat!) tongue-in-cheek comments such as those of the thermodynamicist George Francis Fitzgerald, who wrote in an 1892 letter to the journal *Nature*, that “... if Universities do not study useless subjects, who will?” However, no one will accuse CSOIS researchers of carrying out useless research. Indeed, the TACOM project is a perfect example of the research cycle, where theoretical ideas are proposed, explored, refined, and finally commercialized. The goal of the research was to develop a new generation of intelligent and highly-mobile robots. CSOIS researchers began by designing, developing, and building three prototype robotic vehicles: T1, T2, and T3, each based upon the key enabling concept of the smart Wheel. The next step for CSOIS was to design a complete robotic system for a practical, real-world application. This led to the ODIS family, which led to one of the outcomes of the TACOM project: a licensing

agreement with a manufacturing firm that will do volume production of the ODIS-T2 robot and the application of these robots for military physical security/force protection and for homeland security applications in the fight against terrorism. However, beyond commercialization, other scholarly, educational, and economic benefits of the TACOM IM Program at USU in the past six years include:

Educational

- 2 PhD students graduated with 2 others expected this year
- 38 MS and ME students graduated
- Numerous ECE and MAE Senior Design Projects

Scholarly

- Five faculty collaborating between three different departments
- Two books
- Over 100 refereed journal and conference publications
- 18 visiting research scholars from 7 countries (3 month to 1 year visits)

Economic

- 14 full-time staff employed (average of 7 FTE per year)
- 8 PhD students employed
- 64 MS and ME students employed
- 31 Undergraduate students employed
- 12 Other staff employed

ACKNOWLEDGEMENTS

This research was conducted under the U.S. Army Tank-Automotive and Armaments Command Intelligent Mobility Program (agreement No. DAAE07-98-3-0023). The authors would like to thank the technical development team at USU's Center for Self-Organizing and Intelligent Systems for their efforts throughout the program as well as the program management team at TACOM.

BIBLIOGRAPHY

We have chosen to not refer specifically to individual reference in this paper, but to list a number of key publications related to the USU-TACOM IM program. A complete list of all publications produced under this program, including many downloadable links to these papers, can be found at <http://www.csois.usu.edu/publications>.

General

- "A small mobile robot for security and inspection applications," N.S. Flann, Kevin L. Moore, and Lili Ma, *Control Engineering*, Volume 10, No. 11, Nov. 2002, pp. 1265-1270.
- "A Six-Wheeled Omnidirectional Autonomous Mobile Robot," Kevin L. Moore and Nicholas S. Flann, invited paper, *IEEE Control Systems Magazine*, Special Issue on Mobile Robotics, vol. 20, no. 6, pp. 53-66, December 2000.
- "Balancing Autonomy and manual operation in a robotic system for under-vehicle inspections at security checkpoints," W. Smuda, P. Muench, G. Gerhart, and Kevin L Moore, in *Proceedings of SPIE Aerosense 2002, Conference on Unmanned Robotic Vehicles*, Orlando, FL, April 2002.
- "Motion in a Plane," Kevin L. Moore, *Unmanned Vehicles*, pg. 36, October 2001.
- "Intelligent Mobility for UGV," Grant Gerhart, David Gorsich, Gary Witus, and Kevin L. Moore, in *Proceedings of AUVSI 2001*, Baltimore, Maryland, August 2001.

- "Intelligent Mobility through Omni-Directional Vehicles: A Research Program," Nicholas S. Flann, Bob Gunderson, and Kevin L. Moore, in *Proceedings of SPIE Aerosense Symposium: Unmanned Ground Vehicles II*, Vol. 4024, pp. 228-240, April 2000.
- "Utah State University's T2 ODV Mobility Analysis, in *Proceedings of Unmanned Ground Vehicle Technology II*," Davidson M, Bahl V, Wood C, SPIE, Vol 4024, 2000, p 96-105.

Sensors

- "Flexible Camera Calibration Using a New Analytical Radial Undistortion Formula with Application to Mobile Robot Localization," Lili Ma, YangQuan Chen and Kevin L. Moore, in *Proceedings of the 18th IEEE International Symposium on Intelligent Control*, IEEE ISIC'03, Westin Galleria Houston, Texas, October 5-8, 2003.
- "Sonar and Laser-Based HMM Map Building for Collision Avoidance of Mobile Robots," Lili Ma and Kevin L. Moore, in *Proceedings of the 18th IEEE International Symposium on Intelligent Control*, IEEE ISIC'03, Westin Galleria Houston, Texas, October 5-8, 2003.
- "Two-Dimensional Laser Servoing for Precision Motion Control of an ODV Robotic License Plate Recognition System," Zhen Song, Kevin L. Moore, Vikas Bahl, and YangQuan Chen, in *Proceedings of SPIE Aerosense 2003, Conference on Unmanned Robotic Vehicles*, Orlando, FL, April 2003.
- "Some Sensing and Perception Techniques for an Omni-directional Ground Vehicles with a Laser Scanner," Zhen Song, YangQuan Chen, Lili Ma, and You Chung Chung, IEEE International Symposium on Intelligent Control (IEEE ISIC), Vancouver, British Columbia, October 27-30, 2002, pp. 690-695.
- "Visual Servoing of an Omni-Directional Mobile Robot for Alignment with Parking Lot Lines," Matthew Berkemeier, Morgan Davidson, Vikas Bahl, Yangquan Chen, and Lili Ma, IEEE International Conference on Robotics and Automation, Washington, DC, May 2002, pp. 4202-4210.
- "Wireless safety personnel radio device for collision avoidance system of autonomous vehicles," Chung, You Chung, Olsen, S.L.; Wojcik, L., Song, Z., He, C., Adamson, S., *IEEE Antennas and Propagation Society, AP-S International Symposium (Digest)*, v 3, 2001.

Intelligent Behavior Generation

- "Multi-Robot Autonomous Parking Security System," Vikas Bahl and Kevin L. Moore, in *Proceedings of the 18th IEEE International Symposium on Intelligent Control*, IEEE ISIC'03, Westin Galleria Houston, Texas, October 5-8, 2003.
- "Resource Allocation and Supervisory Control Architecture for Intelligent Behavior Generation," Hitesh Shah, Vikas Bahl, Kevin L. Moore, Nick S. Flann, and Jason Martin, in *Proceedings of SPIE Aerosense 2003, Conference on Unmanned Robotic Vehicles*, Orlando, FL, April 2003.
- "Intelligent behavior generator for autonomous mobile robots using planning-based AI decision making and supervisory control logic," Hitesh Shah, Vikas Bahl, Nick S. Flann, and Carl Wood, in *Proceedings of SPIE Aerosense 2002, Conference on Unmanned Robotic Vehicles*, Orlando, FL, April 2002.
- "Intelligent Behavior Generation Strategy for Autonomous Vehicles Using a Grammar-Based Approach," Nicholas S. Flann, Morgan Davidson, Jason Martin, and Kevin L. Moore, in *Proceedings of 3rd International Conference on Field and Service Robotics FSR2001*, Helsinki University of Technology, Otaniemi, Espoo, Finland June 11 -13, 2001.
- "Hierarchical Task Decomposition Approach to Path Planning and Control for an Omni-Directional Mobile Robot," Kevin L. Moore and Nicholas S. Flann, in *Proceedings of 1999 IEEE International Symposium on Control/Intelligent Systems and Semiotics*, pp. 302-307, Cambridge, MA, Sept. 1999.
- "Area Coverage Planning with Dynamic Obstacle Avoidance for Autonomous Vehicles," Saunders KS, Flann NS, *IASTED International Conference, Robotics and Applications*, Santa Barbara, California, October 28-30, 1999, P 140-146.
- "T2 Omni-Directional Vehicle Mechanical Design," Wood C, Davidson M, Rich S, Keller J, Maxfield R, *SPIE Conference on Mobile Robots*, Boston Massachusetts, Vol 3838, September, 1999, p 69-77.
- "A Global and Local Obstacle Avoidance Technique for an Autonomous Vehicle," Gray K, Saunders K, *Proceedings of SPIE Conference on Unmanned Ground Vehicle Technology*, April 1999, p 170-181.

- “Mobility Planning for Omni-Directional Vehicles in Natural Terrains,” Goodsell TG, Flann NS, Davidson ME, in *Proceedings of SPIE Conference on Unmanned Ground Vehicle Technology*, Orlando Florida , Vol 3693, April 1999, p 2-10.

Control

- “Wireless Visual Servoing for ODIS – An Under Car Inspection Mobile Robot,” Lili Ma, Matthew Berkemeier, Yangquan Chen, Morgan Davidson, Vikas Bahl, and Kevin L. Moore, in *Proceedings of the 2002 15th IFAC World Congress*, July 21-26, 2002, Barcelona, Spain.
- “Spatial Integration for a Nonlinear Path Tracking Control Law,” Morgan Davidson, Vikas Bahl, and Kevin L. Moore, in *Proceedings of the 2002 American Control Conference*, Anchorage, Alaska, May 8-10, 2002.
- “Improved Path Following of USU ODIS by Learning Feedforward Controller Using Dilated B-Spline Network,” Y.Q. Chen, Kevin L. Moore, and Vikas Bahl, in *Proceedings of 2001 IEEE International Symposium on Computational Intelligence in Robotics and Automation*, Bamff, Alberta, Canada, pp. 59-64, July 29-August 1, 2001.
- “Iterative Learning Control for Multivariable Systems with an Application to Mobile Robot Path Tracking Control,” Kevin L. Moore and Vikas Bahl., in *Proceedings of the 2000 International Conference on Automation, Robotics, and Control*, Singapore, December 2000.
- “Modelling and Control of a Six-Wheeled Autonomous Robot,” Kevin L. Moore, Morgan Davidson, Vikas Bahl, Shayne Rich, and Stephan Jirgal, in *Proceedings of 2000 American Control Conference*, pp. 1483-1490, Chicago, Illinois, June 2000.
- “The Scalar E-Controller: A Spatial Path Tracking Approach for ODV, Ackerman, and Differentially-Steered Autonomous Wheeled Mobile Robots,” Davidson M, Bahl V, *IEEE International Conference on Robotics and Automation*, Seoul, Korea, May, 2001.
- “Spatially-Robust Vehicle Path Tracking Using Normal Error Feedback,” Cripps DL, *Proceedings of SPIE Aerosense 2001 Conference on Unmanned Robotic Vehicles*, Orlando, Florida, April 2001.
- “Stair Climbing Capabilities of USU's T3 ODV Mobile Robot,” Robinson DR, Wood C, in *Proceedings of SPIE Aerosense 2001 Conference on Unmanned Robotic Vehicles*, Orlando, FL, April 2001.
- “Mechatronic Design and Integration for a Novel Omni-Directional Robotic Vehicle,” Wood C, Rich S, Frandsen M, Davidson M, Maxfield R, Keller J, Day B, Mecham M, Moore KL, in *Proceedings of Mechatronics 2000 Conference*, Sep 6-9, 2000.
- “ODV Mobility Enhancement Using Active Height Control,” *Proceedings of SPIE Conference on Unmanned Ground Vehicle Technology II*, Rich S, Keller J, Wood C, SPIE, Vol 4024, 2000, p 137-145.
- “Ultra-Maneuverable Steering Control Algorithms for Terrain Transitions,” Torrie MW, Koch R, Bahl V, Cripps D, in *Proceedings of SPIE Conference on Unmanned Ground Vehicle Technology*, Vol 3693, April 1999, p 66-78.

Vehicle Design

- “Mid-Sized Omni-Directional Robot with Hydraulic Drive and Steering,” Carl Wood, Trent Perry, Douglas Cook, Russell Maxfield, and Morgan Davidson, in *Proceedings of SPIE Aerosense 2003, Conference on Unmanned Robotic Vehicles*, April 2003.
- “Implementation of an Omnidirectional Robotic Inspection System (ODIS),” Kevin L Moore, Nick S. Flann, Shayne Rich, Monte Frandsen, You Chung Chung, Jason Martin, Morgan Davidson, Russell Maxfield, and Carl Wood, in *Proceedings of SPIE Aerosense 2001, Conference on Unmanned Robotic Vehicles*, Orlando, FL, April 2001.
- “Mechatronic Design and Implementation for a Novel Omni-Directional Robotic Vehicle”, Carl Wood, Shayne Rich, Monte Frandsen, Morgan Davidson, Russell Maxfield, Jared Keller, Braden Day, Matt Mecham, and Kevin L. Moore, in *Proceedings of 7th Mechatronics Forum and International Conference*, Atlanta, Georgia, September 2000.

