

# Reproduction Quality Notice

This document is part of the Air Technical Index [ATI] collection. The ATI collection is over 50 years old and was imaged from roll film. The collection has deteriorated over time and is in poor condition. DTIC has reproduced the best available copy utilizing the most current imaging technology. ATI documents that are partially legible have been included in the DTIC collection due to their historical value.

If you are dissatisfied with this document, please feel free to contact our Directorate of User Services at [703] 767-9066/9068 or DSN 427-9066/9068.

**Do Not Return This Document  
To DTIC**

Reproduced by  
**AIR DOCUMENTS DIVISION**



**HEADQUARTERS AIR MATERIEL COMMAND**

**WRIGHT FIELD, DAYTON, OHIO**

*The*  
**U.S. GOVERNMENT**

**IS ABSOLVED**

FROM ANY LITIGATION WHICH MAY

ENSUE FROM THE CONTRACTORS IN -

FRINGING ON THE FOREIGN PATENT

RIGHTS WHICH MAY BE INVOLVED.

REEL - C

151

A.T.I.

6414

DS2.1/9  
FLF-3

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

ATI No. 6414

# WARTIME REPORT

ORIGINALLY ISSUED

April 1945 as  
Advance Restricted Report L5C23

FLIGHT TESTS OF THE LATERAL CONTROL CHARACTERISTICS OF AN  
F6F-3 AIRPLANE EQUIPPED WITH SPRING-TAB AILERONS

By Walter C. Williams

Langley Memorial Aeronautical Laboratory  
Langley Field, Va.

FILE COPY

Air Documents Division, T-2  
Langley Field  
Microfilm  
RC-151 F 6414

RETURN TO

Special Documents Branch - TSNW-6  
Wright Field Reference Library Section  
Air Documents Division - Intelligence (T-2)  
Wright Field, Dayton, Ohio.

RECEIVED  
JUL 21 1947

# NACA

WASHINGTON

NACA WARTIME REPORTS are reprints of papers originally issued to provide rapid distribution of advance research results to an authorized group requiring them for the war effort. They were previously held under a security status but are now unclassified. Some of these reports were not technically edited. All have been reproduced without change in order to expedite general distribution.

NACA ARR No. L5023

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

ADVANCE RESTRICTED REPORT

FLIGHT TESTS OF THE LATERAL CONTROL CHARACTERISTICS OF AN  
F6F-3 AIRPLANE EQUIPPED WITH SPRING-TAB AILERONS

By Walter C. Williams

SUMMARY

Flight tests were made to determine the lateral control characteristics of an F6F-3 airplane equipped with spring-tab ailerons, which were developed by the Grumman Aircraft Engineering Corp. and have been made a production installation on F6F airplanes.

The flight tests showed that the spring-tab ailerons had desirably light stick forces and no tendency to over-balance. Although the tabs were not mass-balanced, no flutter tendencies were indicated at speeds up to 400 miles per hour, and any oscillations following abrupt control deflections were heavily damped. The spring-tab ailerons gave 80 percent higher values of effectiveness with a 30-pound stick force at 400 miles per hour than the original ailerons on the F6F-3 airplane. At speeds lower than 275 miles per hour, the spring-tab ailerons were less effective than the original ailerons because of restricted aileron travel as a result of the use of large stick deflection to deflect the spring tab. Recommendations are made for modifications that would increase the aileron effectiveness at low speeds without affecting the lateral control at high speeds. The modifications consist of increasing the available aileron deflection and modifying the spring-tab arrangement. Such an arrangement might, however, be more susceptible to flutter than the production installation.

INTRODUCTION

Flight tests were made to determine the lateral control characteristics of an F6F-3 airplane equipped with spring-tab ailerons, which were developed by the Grumman Aircraft Engineering Corp. and have been made a production

installation on F6F airplanes. Considerable interest has been shown in the use of spring tabs as a means of balancing control surfaces on high-speed airplanes, because spring tabs permit light control forces to be obtained at high speeds without making the balancing action critical to small changes in control-surface contour. These advantages are obtained because the balancing action provided by a spring tab is proportional to the applied control force, and very close aerodynamic balance of the control surface is not required.

#### AIRPLANE AND AILERONS

The F6F-3 airplane is a low-wing, single-place, single-engine, fighter-type monoplane. A three-view drawing of the airplane is shown as figure 1. The spring-tab ailerons have a Frise type nose balance and are identical to the original F6F-3 ailerons except that a spring tab has been installed on each aileron. These spring tabs are identical in size and location to the trim tab on the original F6F-3 ailerons; in the case of the spring-tab ailerons, however, the tab on the left aileron is a combination trim and spring tab. Details of the spring-tab aileron arrangement are shown in figures 2 and 3, which were furnished by the Grumman Aircraft Engineering Corp. Dimensions pertinent to the aileron characteristics are as follows:

Wing span, feet . . . . .	42.83
Aileron span (each), feet . . . . .	6.375
Distance from center line of airplane to inboard end of aileron, percent semispan . . . . .	64
Aileron chord, percent wing chord . . . . .	20
Aileron area behind hinge line (each), square feet . . . . .	7.64
Spring-tab area (each), square foot . . . . .	0.466
Spring-tab span (each), feet . . . . .	1.375
Stick force required to deflect spring tab 1°, pounds . . . . .	1.6

No preload was used in the spring of the arrangement tested and the tabs had no mass balance. The variation of stick position with right-aileron spring-tab angle with the aileron held neutral is shown in figure 4. The tab angles are measured in degrees from the aileron. The relation between stick position and right- and left-aileron angle, with no load on the control system, is shown in figure 5. The aileron angles are referenced to neutral.

## INSTRUMENTATION

Standard NACA photographic recording instruments, synchronized by an electrical timer, were used to measure airspeed, rolling velocity, aileron stick force, and the position of the spring tab, aileron, and stick. Correct service indicated airspeed  $V_{1s}$  used herein is defined as

$$V_{1s} = Kf_o\sqrt{q_c}$$

where

$$K = 45.06$$

$f_o$  compressibility correction at sea level

$q_c$  impact pressure, measured difference between static and total-head pressures corrected for position error, inches of water

## TEST RESULTS AND DISCUSSION

Tests were made to determine whether the spring-tab ailerons tended to oscillate or flutter in the speed range to 400 miles per hour. These tests consisted of maneuvers in which the pilot abruptly deflected and released the aileron control at various speeds. Typical time histories of the maneuvers are shown in figure 6, which indicates that any oscillation of the aileron or spring tab was heavily damped and disappeared completely within two cycles. The pilot reported no flutter in the speed range up to 400 miles per hour.

The lateral control characteristics were measured in abrupt aileron rolls with the rudder held fixed as described in reference 1. These rolls were made at increments of 50 miles per hour from approximately 100 to 400 miles per hour. The results are given as the variation of helix angle  $pb/2V$  and change in aileron stick force at various speeds with the change in total aileron angle in figure 7 and with stick position in figure 8. No force data are shown in these figures for

most of the end points on the  $\frac{pb}{2V}$ -curves because the control stick was against the stops and the forces recorded were a measure of how hard the pilot was pushing against the stops rather than a measure of the force required to deflect the ailerons. Limited stick deflections were used at 350 and 400 miles per hour in order that the structural design loads of the system would not be exceeded. Figures 7 and 8 show that the aileron stick forces are quite light and there is no tendency toward overbalance. It should be noted however that, although the end test points in figure 7 indicate partial aileron deflection, figure 8 shows that substantially full stick travel was used to obtain these aileron deflections. This condition occurs because considerable stick travel is used to deflect the spring tab.

In all flights for which data are presented herein, the transmitter of an NACA electrical control-position recorder was mounted externally on the right aileron to measure the spring-tab angles. A flight made without the transmitter, however, showed that this protuberance caused no change in the aileron characteristics. The results of the measurements of spring-tab angles during the abrupt aileron rolls are shown in figure 9 as the variation of spring-tab angle on the right aileron with deflection of that aileron. The similarity of these curves to curves of hinge-moment coefficients for a Frise type aileron, such as is used on the F6F-3 airplane, indicate that the tab angle is proportional to the stick force required to deflect the aileron. That is, for the down-aileron deflections, the large tab angles indicate little aerodynamic balance; while for the up-aileron deflections the negative tab angles tend to oppose the aileron travel, which indicates aerodynamic overbalance, until separation occurs about the nose. Separation decreases the aerodynamic balance and causes the spring tab to deflect in a direction to aid in deflecting the ailerons.

The over-all efficiency of the spring-tab ailerons is compared with that of the original F6F-3 ailerons in figures 10 and 11. These figures present, respectively, the  $pb/2V$  and the rolling velocity at an altitude of 10,000 feet obtained throughout the speed range with full stick deflection or 30-pound stick force, whichever occurred first. The data for the original ailerons were obtained from a flight investigation (unpublished) of the handling qualities of the F6F-3 airplane. These data show that

the spring-tab ailerons are less effective than the original ailerons at speeds lower than approximately 275 miles per hour. The loss in effectiveness of the spring-tab ailerons is caused by the limited aileron travel, which results from the use of large stick deflection to deflect the spring tab. At speeds greater than 275 miles per hour, the effect of the lighter stick forces of the spring-tab ailerons becomes predominant and, as a result, the aileron effectiveness obtained with a 30-pound stick force at 400 miles per hour is approximately 80 percent higher with the spring-tab ailerons than the aileron effectiveness obtained with the original ailerons.

The loss in effectiveness of the spring-tab ailerons can be decreased at low speeds without affecting the desirably light stick forces at high speeds if a stiffer spring is used and if, at the same time, the length of the tab actuating arm (fig. 2) is so increased that the ratio of stick force to tab deflection is kept the same as in the spring-tab aileron tested. In this suggested arrangement, the stick deflection required for full tab deflection would be decreased and this decrease would allow larger aileron deflection. Such an arrangement, however, might make the tab installation more susceptible to flutter (reference 2); that is, the tab would have a greater mechanical advantage over the control system than the spring-tab tested and, therefore, inertia effects of the tab would be more likely to cause flutter. Further increases in aileron effectiveness at the lower speeds could be accomplished by increasing the down-aileron deflection to the same value as the present up-aileron deflection. Increases in the up-aileron deflection are not recommended, however, since figure 9 indicates flow separation about the nose balance and any increase in up-aileron deflection might therefore result in aileron buffet at full deflection. Although the increase in down-aileron deflection might result in somewhat higher stick forces throughout the speed range, some reduction could be made in the spring stiffness to reduce the stick forces to the present values and, at the same time, retain increased aileron effectiveness at low speeds.

#### CONCLUSIONS

Flight tests to determine the lateral control characteristics of an F6F-3 airplane equipped with spring-tab ailerons indicated the following conclusions:

1. The spring-tab ailerons on the P6F-3 airplane showed no tendency to flutter in the speed range up to 400 miles per hour, and any oscillations following abrupt control deflection were heavily damped.

2. The spring-tab ailerons had desirably light stick forces without any tendency to overbalance.

3. The spring-tab ailerons gave 80 percent higher values of effectiveness with a 30-pound stick force at 400 miles per hour than the original P6F-3 ailerons. At speeds lower than 275 miles per hour, the spring-tab ailerons had less effectiveness than the original ailerons because of restricted aileron travel as a result of the use of large stick deflection to deflect the spring tab.

4. The available aileron effectiveness with the spring-tab ailerons at the lower speeds could be increased without affecting high-speed lateral control by an increase in the available aileron deflection and a modification of the spring-tab arrangement. Such an arrangement might, however, be more susceptible to flutter than the production installation.

Langley Memorial Aeronautical Laboratory  
National Advisory Committee for Aeronautics  
Langley Field, Va.

#### REFERENCES

1. Johnson, Harold I.: NACA Procedure for Flight Tests of Aileron Characteristics of Airplanes. NACA RR No. 3024, 1943.
2. Collar, A. R.: The Prevention of Flutter of Spring Tabs. Rep. No. S.M.E. 3249, British F.A.E., May 1943.

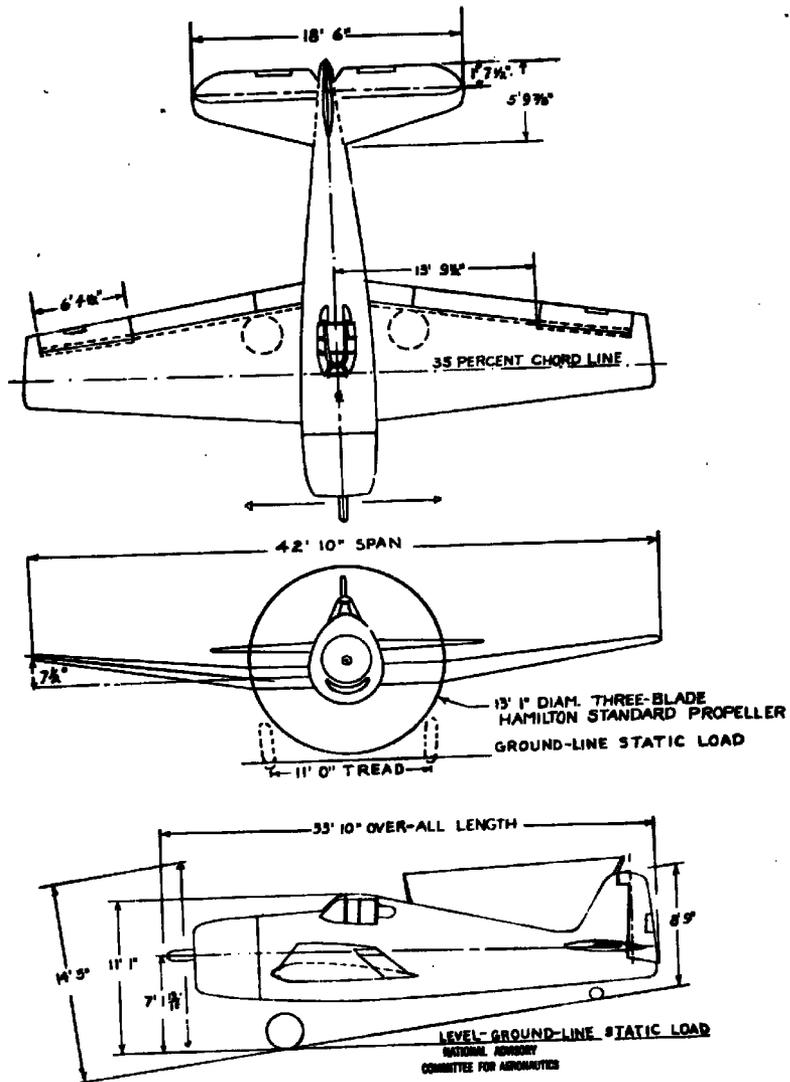


Figure 1.- Three-view drawing of 96P-3 airplane.

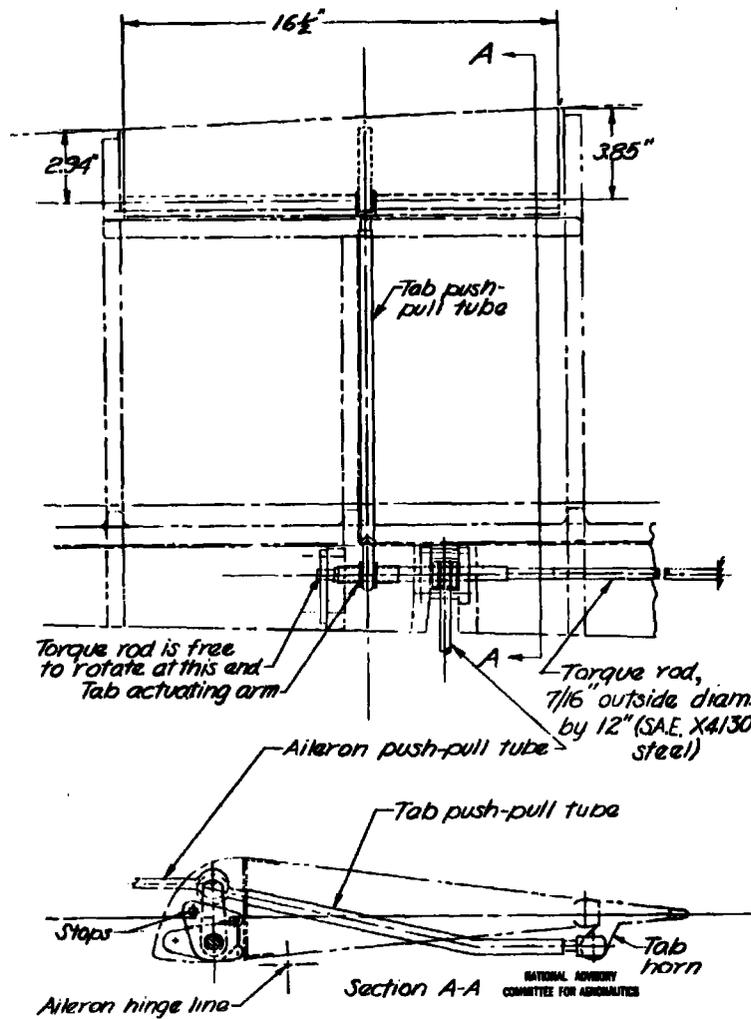


Figure 2.- Spring-tab-aileron arrangement of P4F-3 airplane.  
(Data furnished by Grumman Aircraft Engineering Corp.)


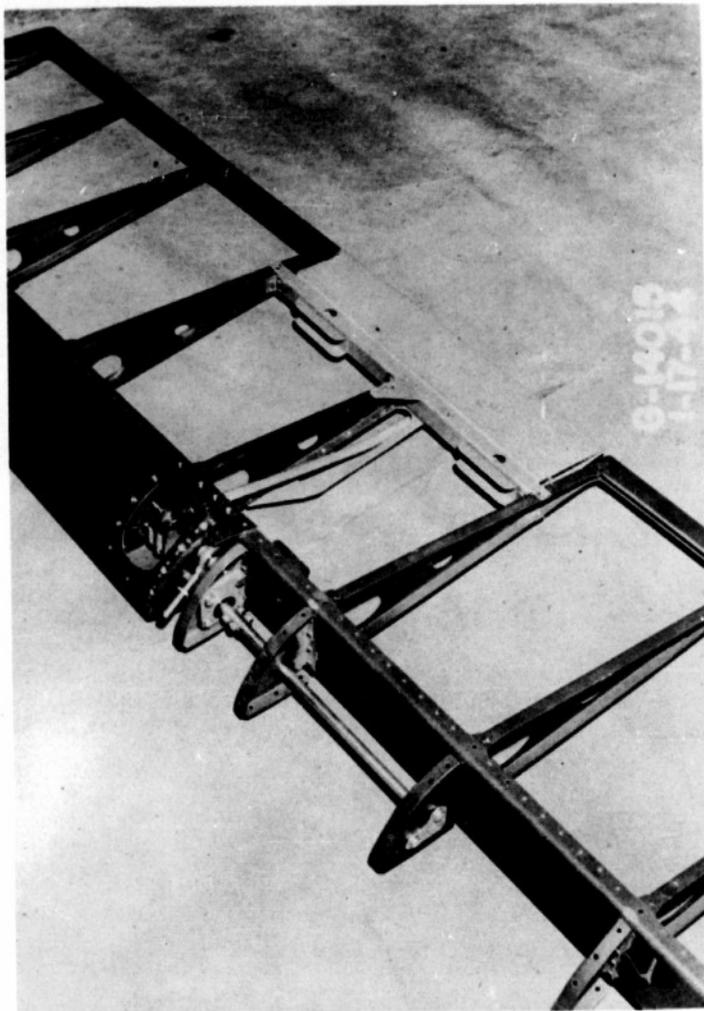


Figure 3.- Detail view of right spring-tab aileron. F6F-3 airplane.  
(Photograph furnished by Grumman Aircraft Engineering Corp.)

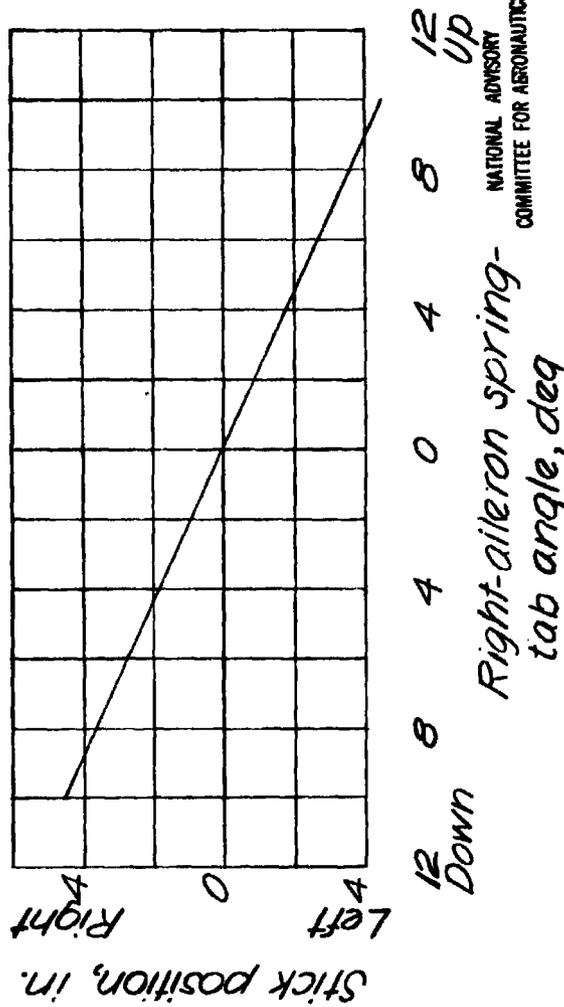

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

Figure 4.- Variation of stick position with right-aileron spring-tab angle. F6F-3 airplane; ailerons held neutral.

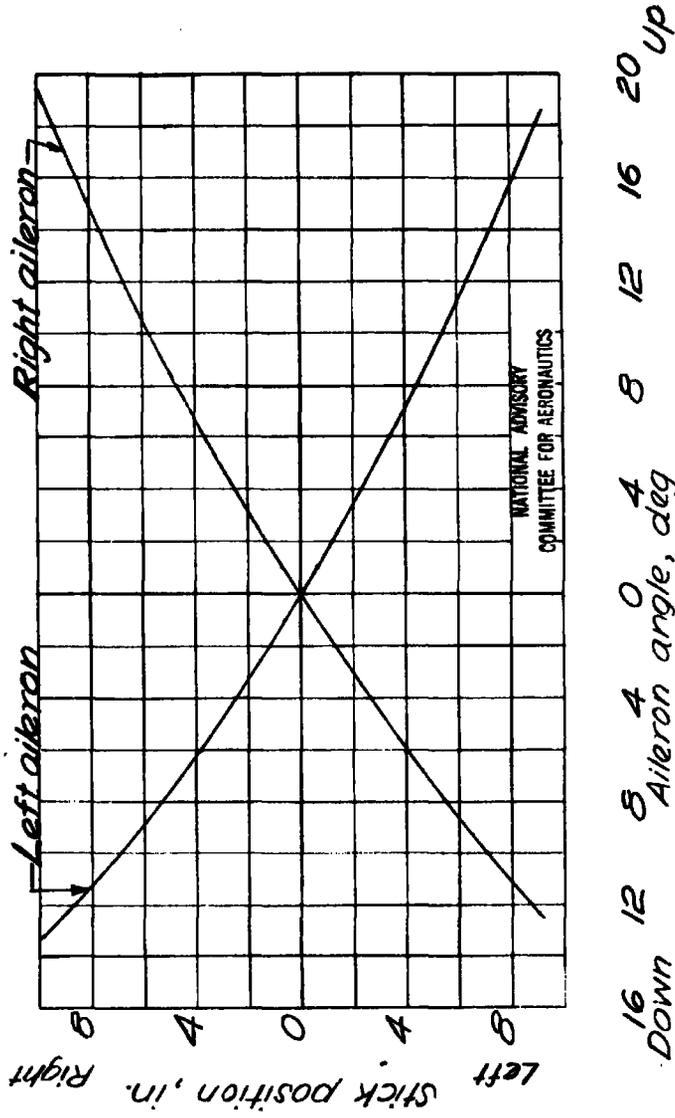


Figure 5.- Variation of stick position with left- and right-aileron angles. F6F-3 airplane with spring-tab ailerons; no load on control system.

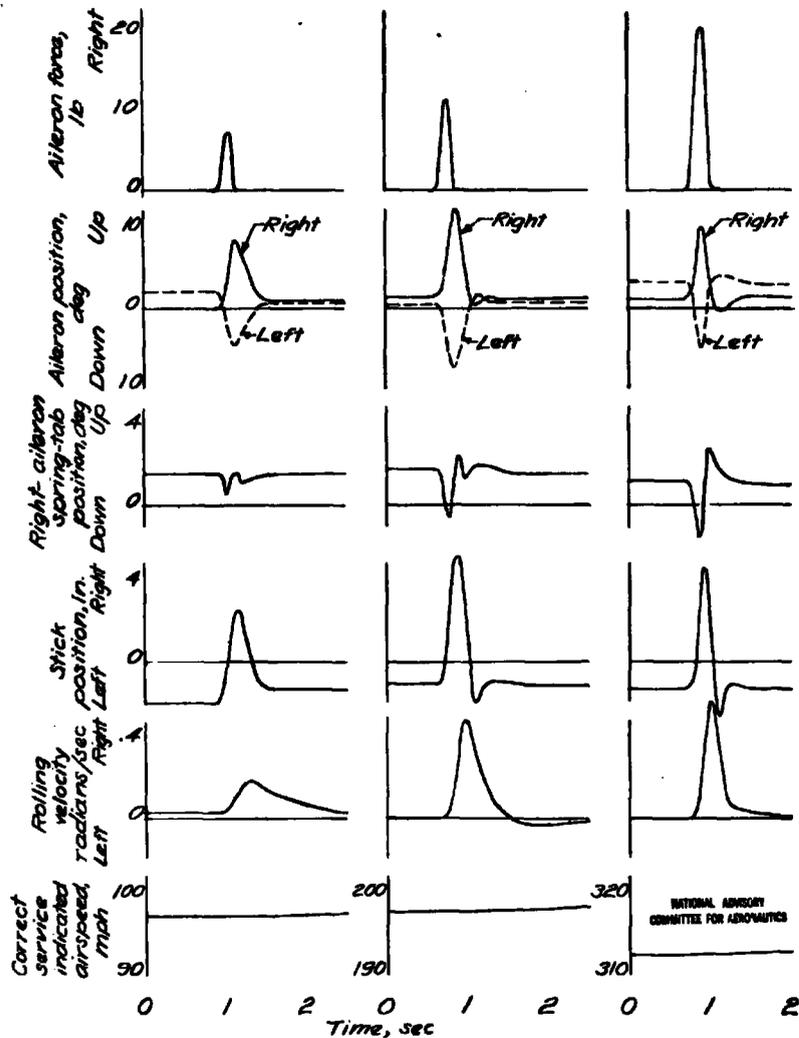


Figure 6.- Time histories of typical attempted aileron oscillations following abrupt deflection of control. P-3 airplane with spring-tab ailerons.

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

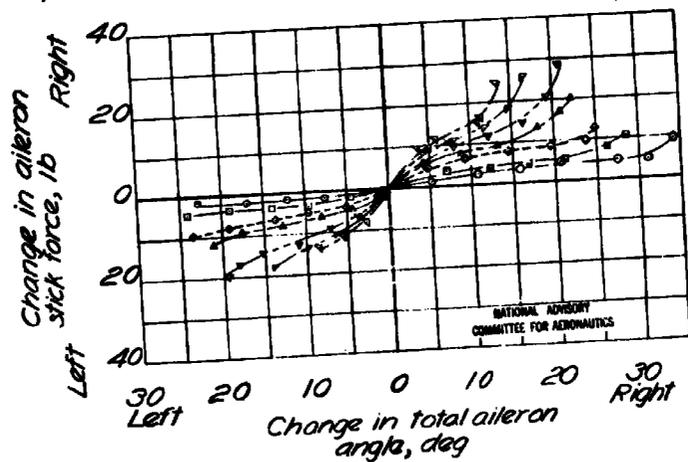
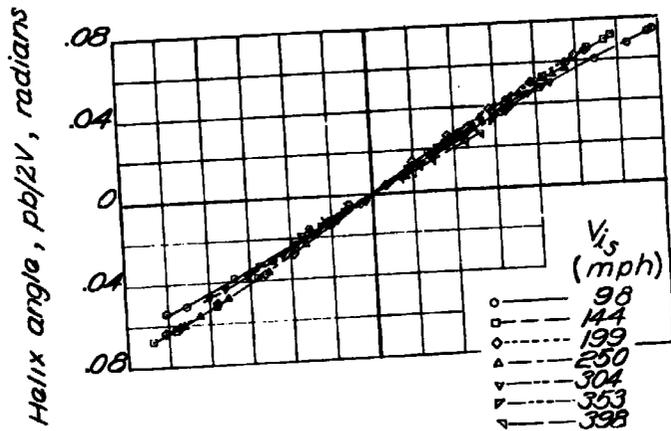


Figure 7.- Variation of  $pb/2V$  and change in aileron stick force with change in total aileron angle. F6F-3 airplane with apror-tab ailerons.

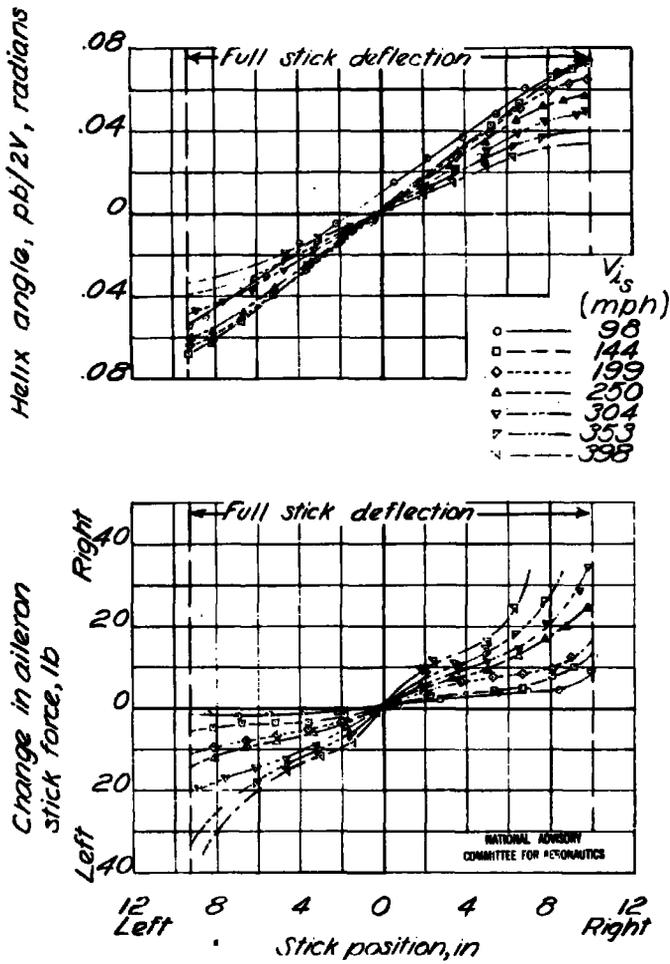


Figure 8.- Variation of pb/2V and change in aileron stick forces with stick position. F5F-3 airplanes with spring-tab ailerons.

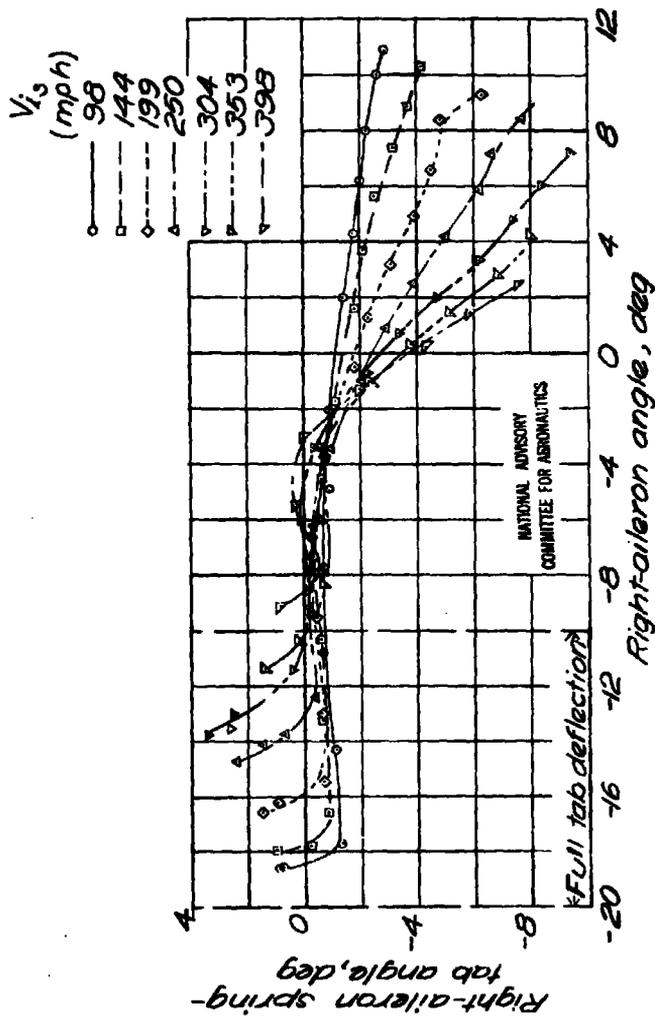


Figure 9.- Variation of right-aileron spring-tab angle with right-aileron angle in abrupt aileron rolls. P6F-3 airplane.

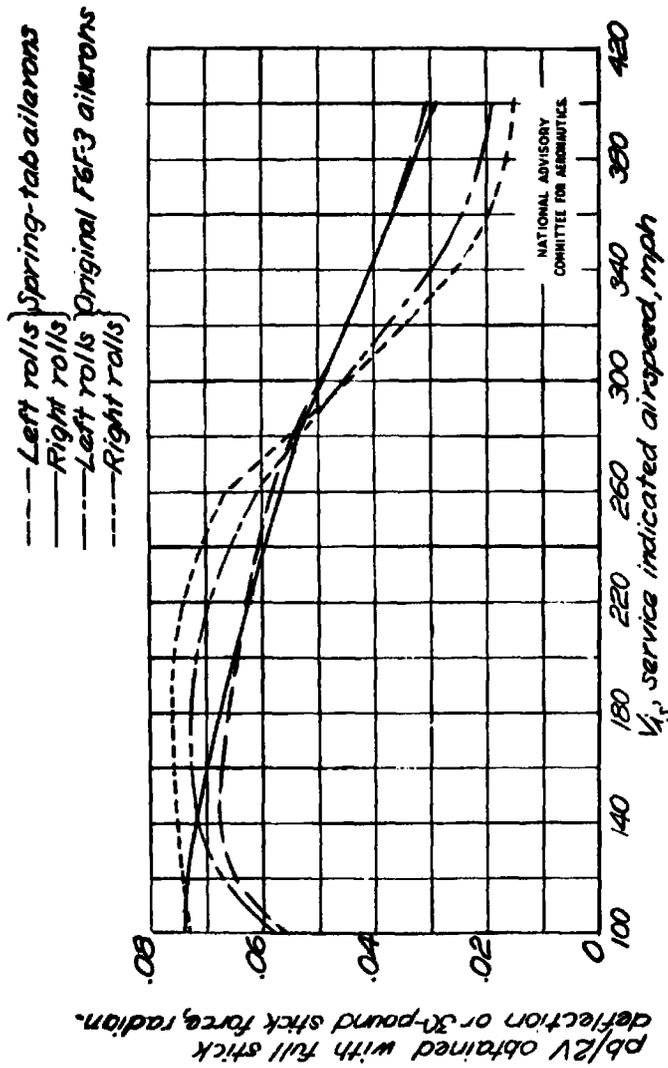


Figure 10.- Variation with correct service indicated airspeed of  $p/2V$  obtained with full stick deflection or 30-pound stick force, whichever occurs first. F6F-3 airplane with spring-tab ailerons and with original F6F-3 ailerons.

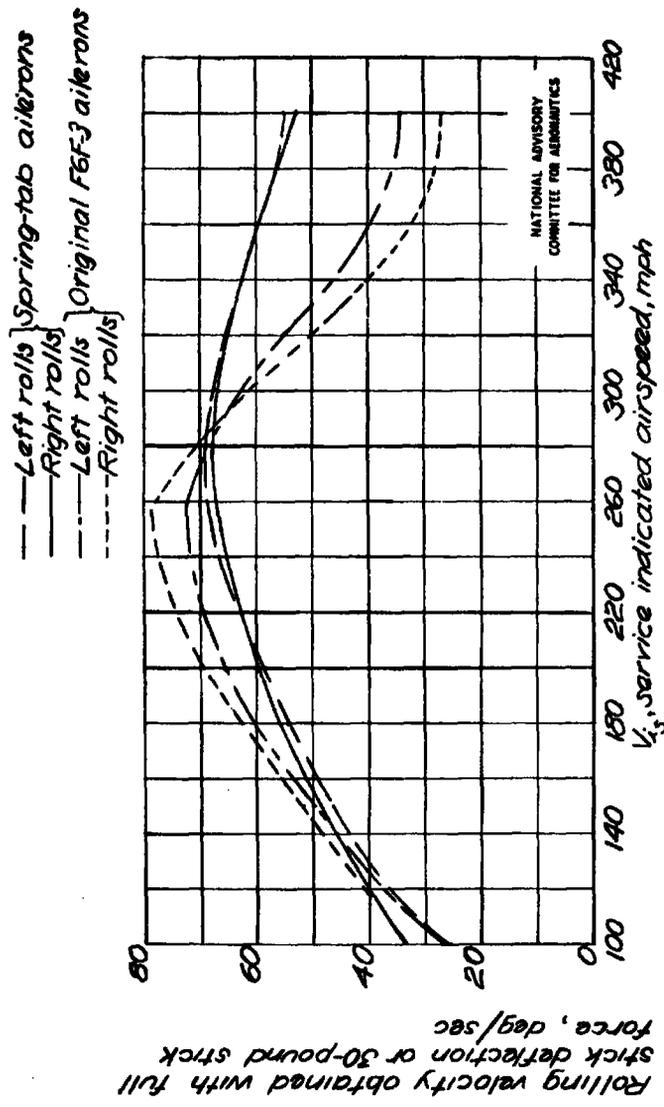


Figure 11.- Variation with correct service indicated airspeed of rolling velocity obtained at an altitude of 10,000 feet with full stick deflection or 30-pound stick force, whichever occurs first. F6F-3 airplane with spring-tab ailerons and with original F6F-3 ailerons.

REEL - C

151

A.T.I.

6414

NDW FORM 88 (13 MAR 47)

Williams, W. C.

DIVISION: Aerodynamics (2) (1) (9)  
 SECTION: Stability and Control (1) (2) (6-7)  
 CROSS REFERENCES: Airplanes - Lateral control (08470.5);  
 Ailerons - Effectiveness (03205); Ailerons - Oscilla-  
 tion (03215); Control surfaces - Flutter (25680)

ATI- 6414

ORIG. AGENCY NUMBER

ARR-L5C23

REVISION

AUTHOR(S)

AMER. TITLE: Flight tests of the lateral control characteristics of an F6F-3 airplane equipped with spring tab ailerons

FORG'N. TITLE:

Trim Tabs P111 OVER

ORIGINATING AGENCY: National Advisory Committee for Aeronautics, Washington, D. C.

TRANSLATION:

COUNTRY	LANGUAGE	FORG'N. CLASS.	U. S. CLASS.	DATE	PAGES	ILLUS.	FEATURES
U.S.	Eng.		Unclass.	Apr '45	17	11	photos, diagrs, graphs

## ABSTRACT

Tests were made to determine whether spring-tab ailerons tended to oscillate or flutter in speed ranges up to 400 mph. Flight tests showed spring-tab ailerons had desirable light stick forces and no tendency to overbalance. No flutter tendencies were indicated up to 400 mph, and any oscillations following abrupt control deflections were heavily damped. Recommendations were made for modifications to increase aileron effectiveness at low speeds without affecting lateral control at high speeds by increasing available deflection and modifying spring-tab arrangement.

NOTE: Requests for copies of this report must be addressed to: N.A.C.A.,  
 Washington, D. C.

T-2, HQ., AIR MATERIEL COMMAND

AIR TECHNICAL INDEX

WRIGHT FIELD, OHIO, USAAF

WF-0-21 MAR 47 2001

UNCLASSIFIED PER AUTHORITY: INDEX  
OF NACA TECHNICAL PUBLICATIONS  
DATED 31 DECEMBER 1947.

FORM 10 (10 FEB 57)

Williams, H. C.

DIVISION: Aerodynamics (2)  
 SECTION: Stability and Control (1)  
 CROSS REFERENCES: Airplanes - Lateral control (08470.5);  
 Ailerons - Effectiveness (03205); Ailerons - Oscillation (03215); Control surfaces - Flutter (25680)

ATI- 6414

ORIG. AGENCY NUMBER:

ARR-15C23

REVISION

AUTHOR(S)

AMER. TITLE: Flight tests of the lateral control characteristics of an F67-3 airplane equipped with spring tab ailerons

FORGN. TITLE:

ORIGINATING AGENCY: National Advisory Committee for Aeronautics, Washington, D. C.

TRANSLATION:

COUNTRY	LANGUAGE	FORGN. CLASS.	U. S. CLASS.	DATE	PAGES	ILLUS.	FEATURES
U.S.	Eng.		Unclass.	Apr '45	17	11	photos, diagrs, graphs

ABSTRACT

Tests were made to determine whether spring-tab ailerons tended to oscillate or flutter in speed ranges up to 400 mph. Flight tests showed spring-tab ailerons had desirable light stick forces and no tendency to overbalance. No flutter tendencies were indicated up to 400 mph, and any oscillations following abrupt control deflections were heavily damped. Recommendations were made for modifications to increase aileron effectiveness at low speeds without affecting lateral control at high speeds by increasing available deflection and modifying spring-tab arrangement.

NOTE: Requests for copies of this report must be addressed to: H.A.C.A., Washington, D. C.

T-2, HQ, AIR MATERIEL COMMAND

AIR TECHNICAL INDEX

WRIGHT FIELD, OHIO, USAAF

17-0-11 MAR 57