ADA952015

EXTINGUISHMENT OF SOLID PROPELLANT FLAMES: A THEORY BASED ON A NEW FEEDBACK LAW

(Presentation Version)

Aerospace and Mechanical Sciences
Report No. AMS-838

by

C. L. Merkle and M. Summerfield

June, 1968

This research was sponsored by the Power Branch, Office of Naval Research, under Contract Nonr 1858(32)

DTIC
ELECTE
SEP 8 1983
S
B

Transmitted by

Martin Summerfield
Principal Investigator

This report is composed of reproductions of the slides presented at the Third ICRPG/AIAA Solid Propulsion Conference, Atlantic City, New Jersey, June 4-6, 1968. Additional copies of this presentation version are available from Princeton University.

Guggenheim Laboratories for the Aerospace Propulsion Sciences
Department of Aerospace & Mechanical Sciences
PRINCETON UNIVERSITY
Princeton, New Jersey

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

EXPLANATORY NOTE

Presentation Version

This report consists of reproductions of the slides comprising the presentation given at the Third ICRPG/AIAA Solid Propulsion Conference in Atlantic City, New Jersey on June 4-6, 1968. As such it does not include the verbal explanations that accompanied the slides. No manuscript was prepared for the Conference, but it is hoped that, despite its terseness, this document will serve as a useful summary of the material presented at the Conference. Work on this topic is still continuing and a later report will include revisions of these results along with new results.

Accession For
NTIS GRA&I ☑
DTIC TAB ☐
Unannounced ☐
Justification PER LETTER
By 1968
Distribution/
Availability Codes
Dist | Avail and/or Special
A

DTIC COPY INSPECTED 2

UNANNOUNCED

TABLE OF CONTENTS

	Page
Title Page	i
Explanatory Note	ii
Table of Contents	iii
Presentation Title Page	1
Introduction	2
Experimental Results on Extinguishment	3
A. Typical Experimental Data	3
B. Composite of Experimental Data	4
Review of Previous Theoretical Works	5
Pressure-Frequency Regime of Interest	6
Theoretical Formulation	7
A. Coordinate System	7
B. Gas Phase Flame Equations	8
C. KTSS Integration of Gas Phase Flame Equations	9
D. Solid Phase Equation and Boundary Conditions	10
Theoretical Predictions	11
A. Pressure Decay Used in Theoretical Analysis	11
B. Predicted Flame Temperature During Depressurization	12
C. Experimental Curve of Luminosity During Depressurization (from Ciepluch)	13
D. Surface Temperature and Burning Rate During Depressurization	14
E. Extinction Map	15
Comparison of Theory With Experiment	16
A. Comparison of Several Theories With Ciepluch Data	16
B. Effect of O/F Ratio on Extinction	17
Effect of Aluminum Addition	18
A. Effect of Aluminum on Transient Flame Temperature	18
B. Effect of Aluminum on Transient Burning Rate and Surface Temperature	19
C. Comparison of Theory and Experiment	20
Conclusions	21

EXTINGUISHMENT OF SOLID PROPELLANT FLAMES: A THEORY BASED ON A NEW FEEDBACK LAW

by

C. L. Merkle and M. Summerfield

Guggenheim Laboratories, Princeton University

Sponsored by ONR Contract Nonr 1858(32)

Supervised by the Power Branch

of the Office of Naval Research

This paper includes:

1. A critical examination of previous theories of extinguishment and reasons for a new approach.

2. A new theory of non-steady burning based on the KTSS flame model for an AP composite propellant.

3. Predictions of the time variation of burning rate, surface temperature, and flame temperature during rapid depressurization:

   a) Extinguishment case.

   b) Non-extinguishment case.

4. Predictions of the effects of oxidizer loading and aluminum content on the difficulty of extinguishment.

5. Comparison of the predictions with experimental results of Ciepluch and others.

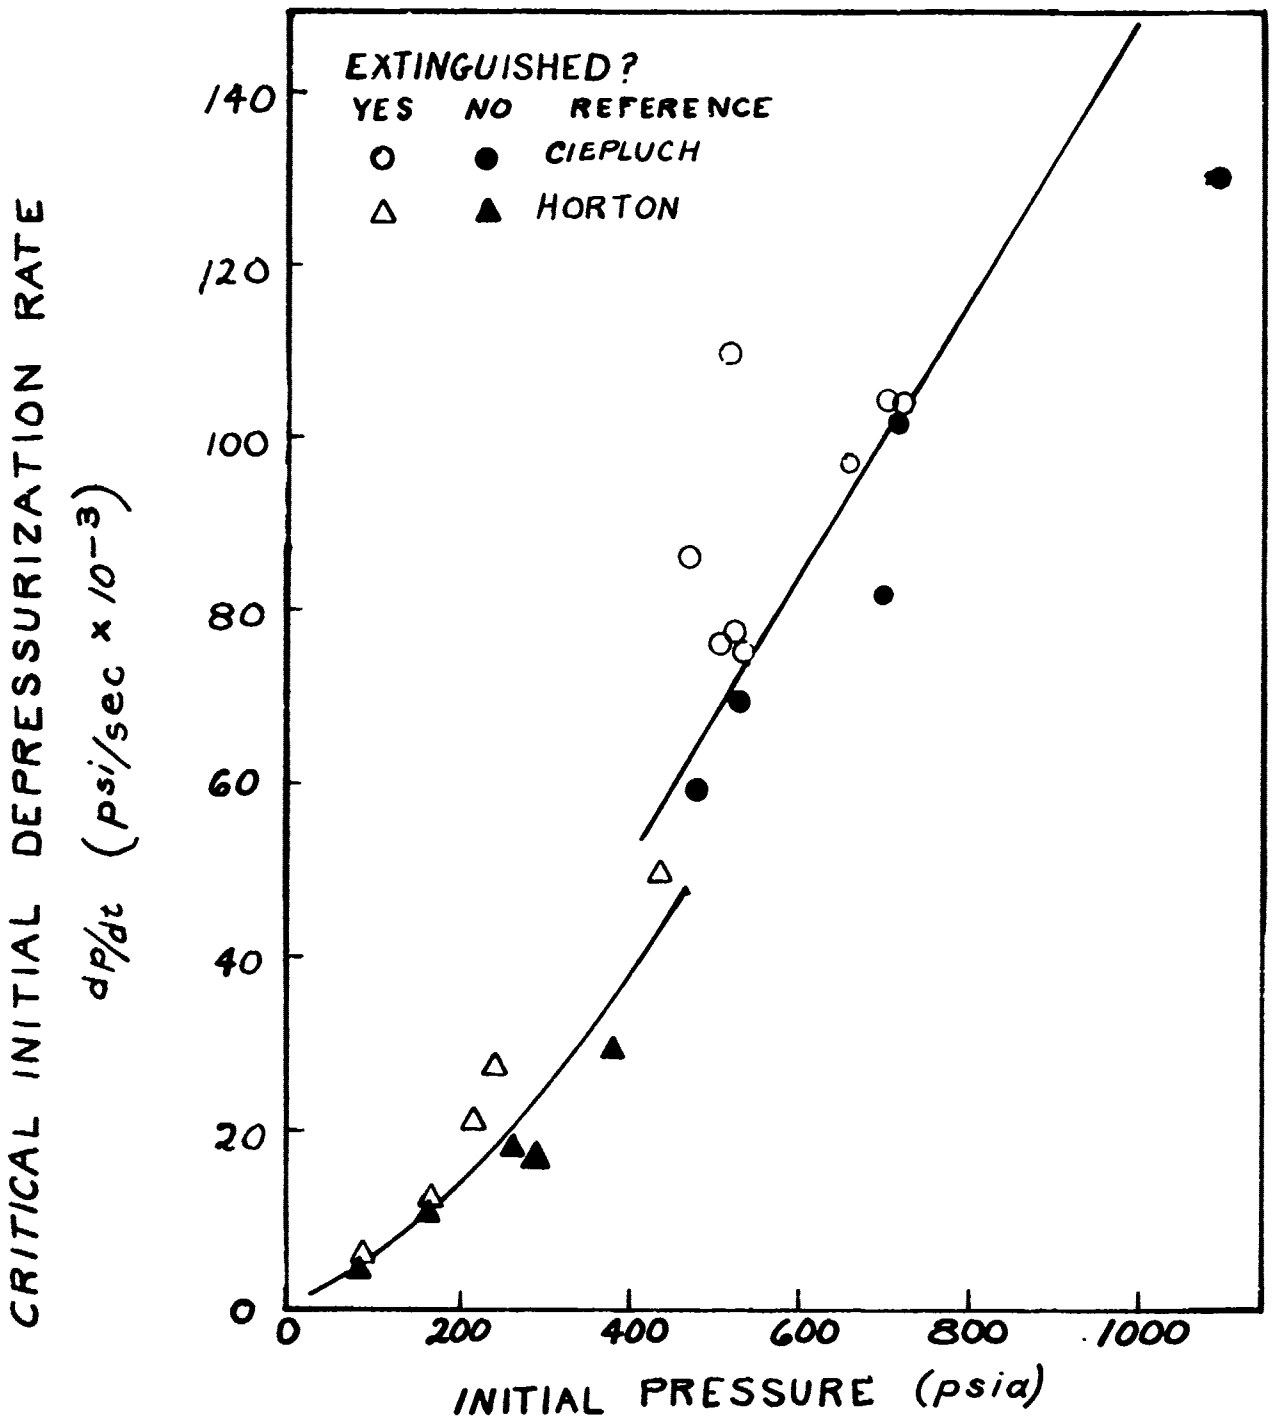

DIFFICULTY OF EXTINCTION BY DEPRESSURIZATION: EXPERIMENTAL DATA

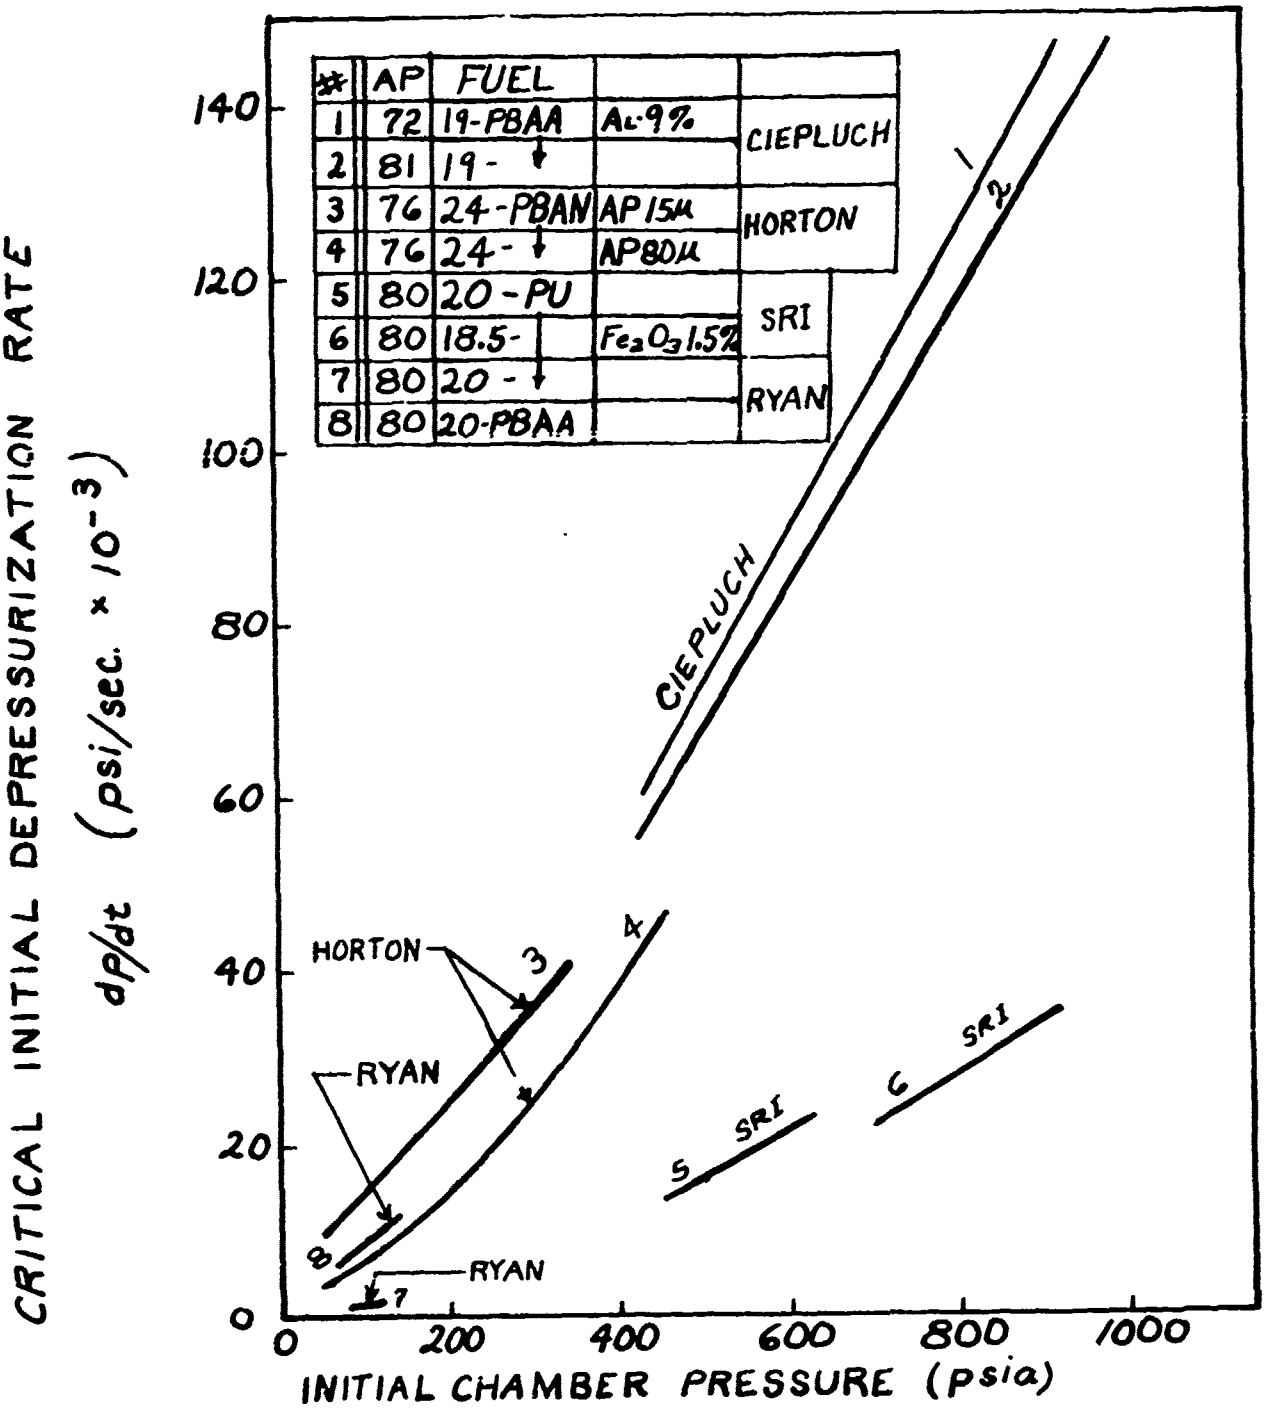

#	AP	FUEL		
1	72	19-PBAA	Al-9%	CIEPLUCH
2	81	19- ↓		
3	76	24-PBAN	AP 15μ	HORTON
4	76	24- ↓	AP 80μ	
5	80	20-PU		SRI
6	80	18.5-	Fe_2O_3 1.5%	
7	80	20- ↓		RYAN
8	80	20-PBAA		

DIFFICULTY OF EXTINCTION BY DEPRESSURIZATION
COMPOSITE OF EXPERIMENTAL DATA

Previous theories of extinguishment:

Von Elbe	ARC	1963, 1966
Paul	Aerojet	1964
N. Ryan, Donaldson, Baer, P. Ryan and Mantyla	Utah	1966, 1967
Horton, Bruno and Graesser	BYU	1967, 1968
Marxman, Wooldridge, Dickinson and Capener	SRI	1966, 1967, 1968

PRESSURE-FREQUENCY REGIMES OF ACOUSTIC INTERACTION WITH COMBUSTION ZONE

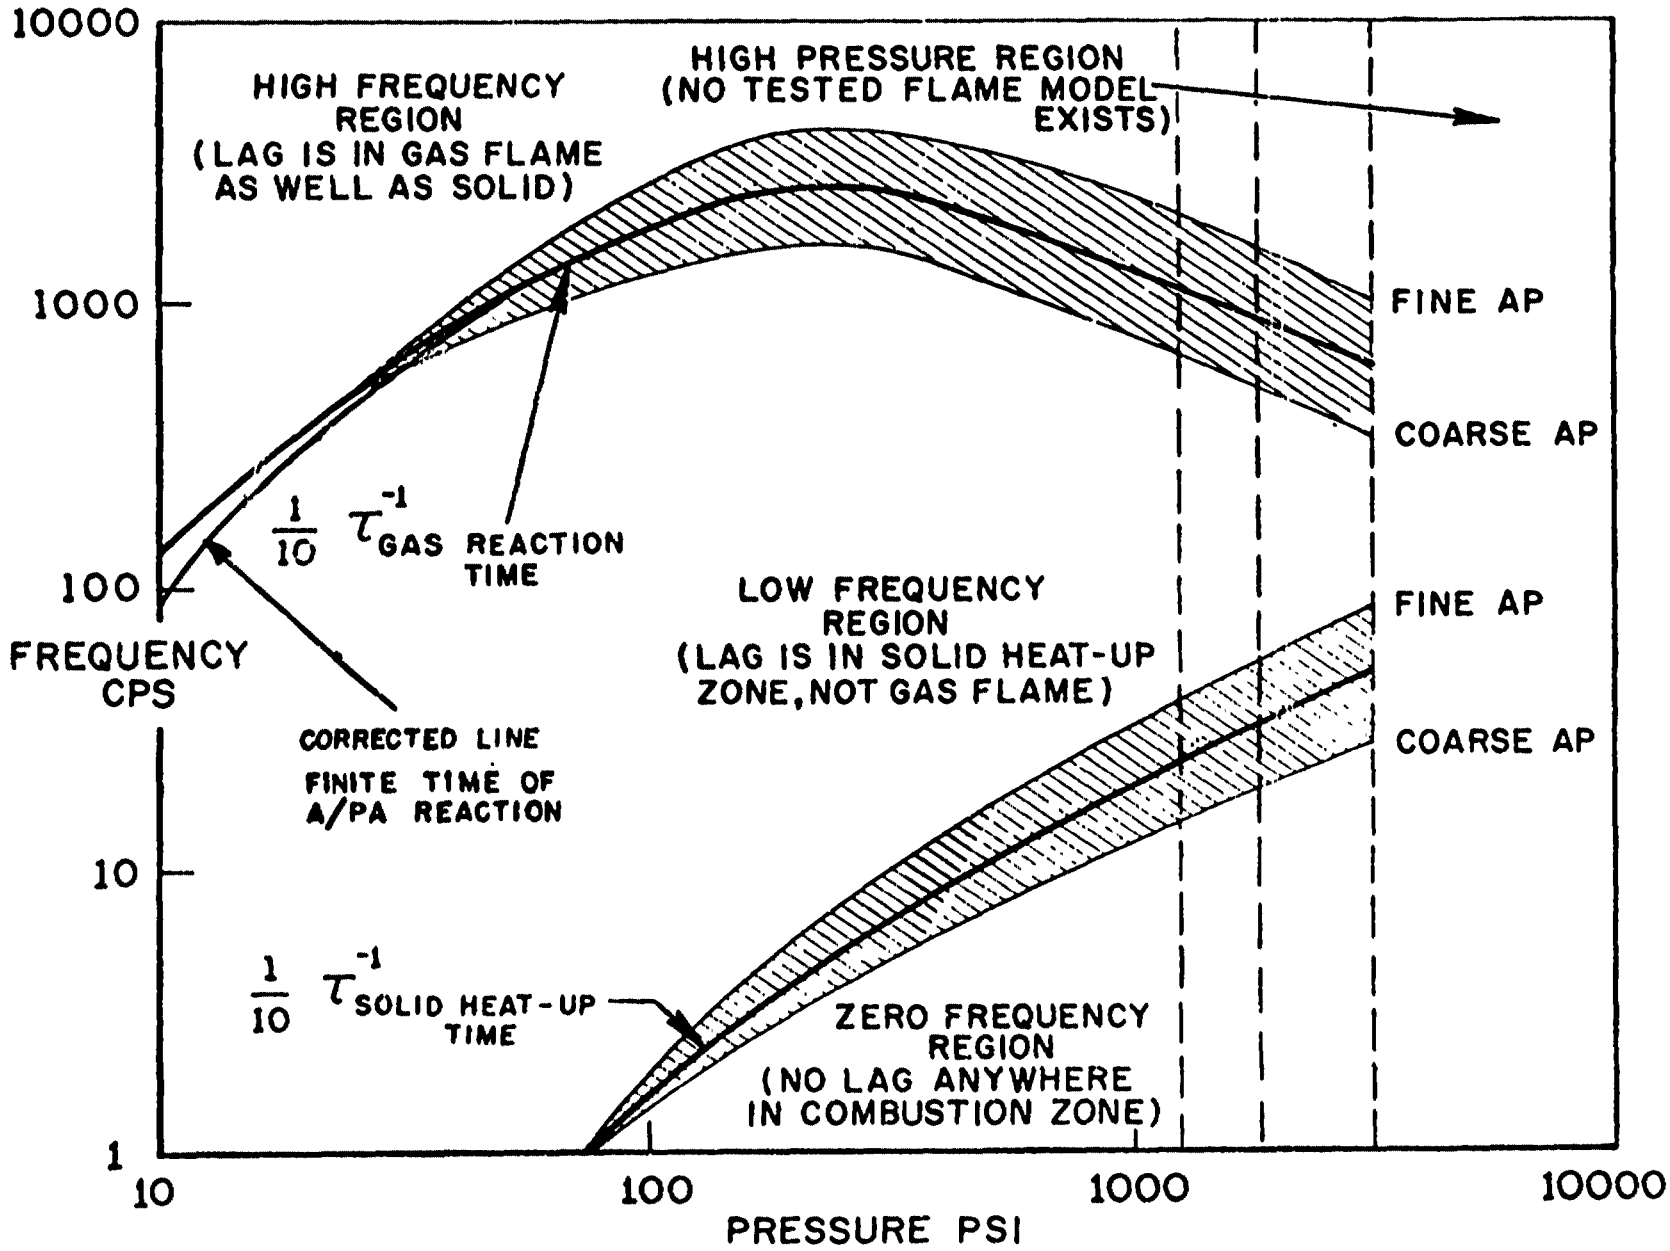

KTSS MODEL FOR NONSTEADY SOLID PROPELLANT BURNING

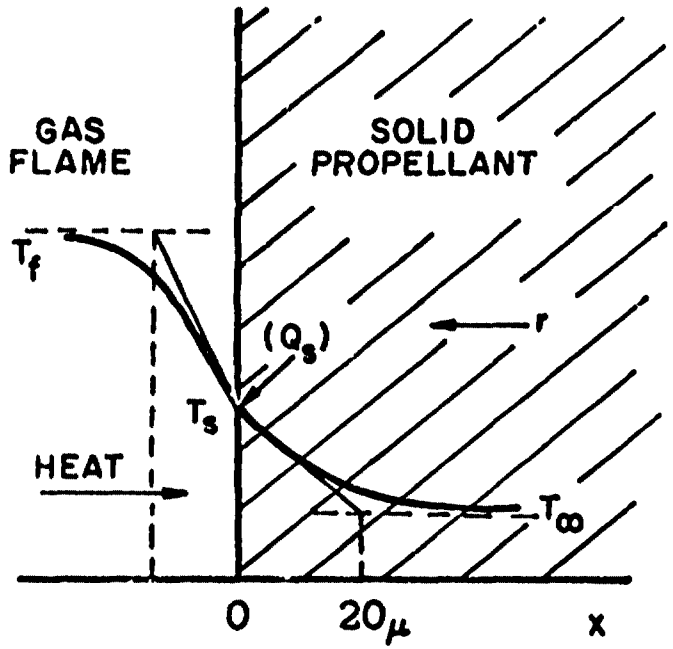

HEAT RELEASE PARAMETER

$$H = \frac{Q_s}{c_s(T_{so} - T_\infty)}$$

ENERGY EQUATION FOR GAS PHASE

$$\lambda_g \frac{d^2T}{dx^2} + r\rho_p c \frac{dT}{dx} + \rho_g Q_f \dot{\varepsilon} = 0$$

$$-\lambda_g \left(\frac{\partial T}{\partial x}\right)_s = \frac{\phi(p)}{r}[1 - \exp\{-\rho_p r^2 Q_f/\phi(p)\}]$$

$$\phi(p) = \frac{\lambda_g Q_f \rho_g}{\rho_p c \tau_c}$$

EVALUATION OF $\phi(p)$ AT STEADY STATE

$$q_g = \frac{\phi(p)}{r}[1 - \exp - \rho_p(\bar{r})^2 Q_f/\phi(p)]$$

$$q_g = \rho_p \bar{r}[c(T_s - T_\infty) - Q_s]$$

$$\bar{r} = ap^n$$

$$\phi(p) = \frac{\rho_p(ap^n)^2[c(T_s - T_\infty) - Q_s]}{[1 - \exp\{-\rho_p(ap^n)^2 Q_f/\phi(p)\}]}$$

ENERGY EQUATION FOR SOLID PHASE

$$\frac{\partial T}{\partial t} = r(t)\frac{\partial T}{\partial x} + \alpha\frac{\partial^2 T}{\partial x^2}$$

where $r(t) = A\exp(-E_s/RT_s)$

<u>B. C.</u>

$$-\lambda_p\left(\frac{\partial T}{\partial x}\right)_s = q_g + r\rho_p Q_s$$

$$T(\infty) = T_\infty$$

$$T(x,0) = (T_{s,o} - T_\infty)\exp(-xr_o/\alpha)$$

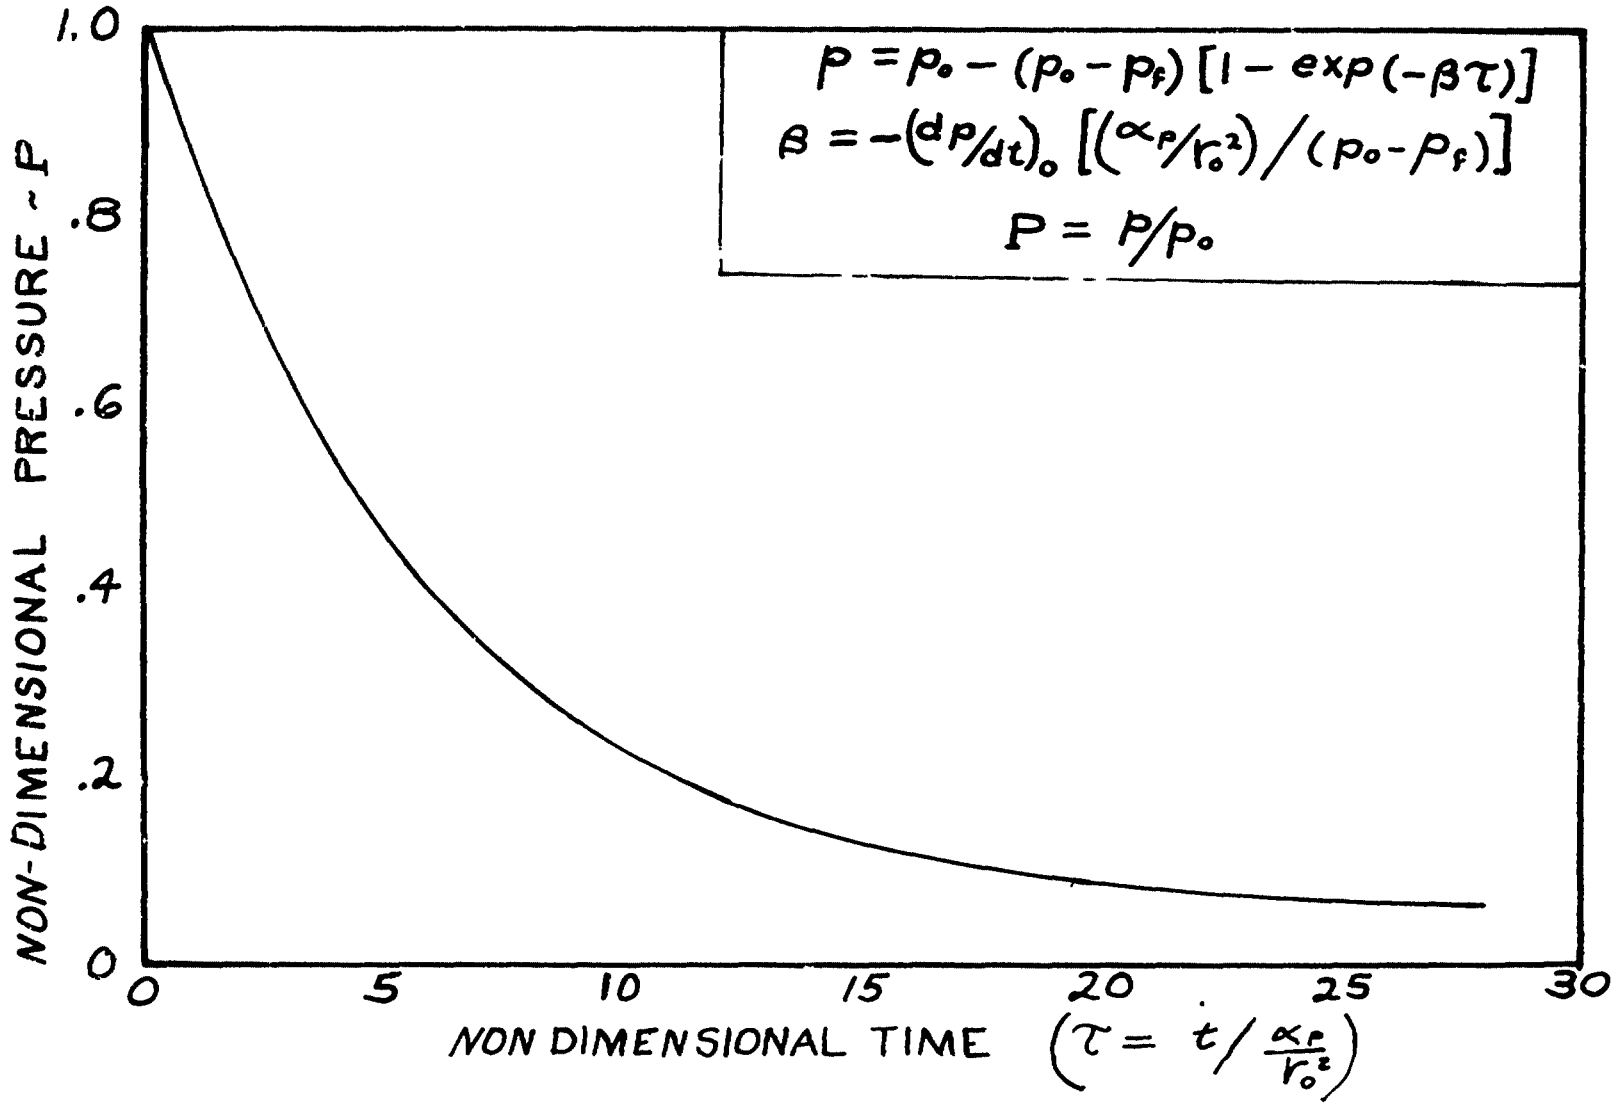

EXPONENTIAL PRESSURE DECAY
USED IN DEPRESSURIZATION ANALYSIS

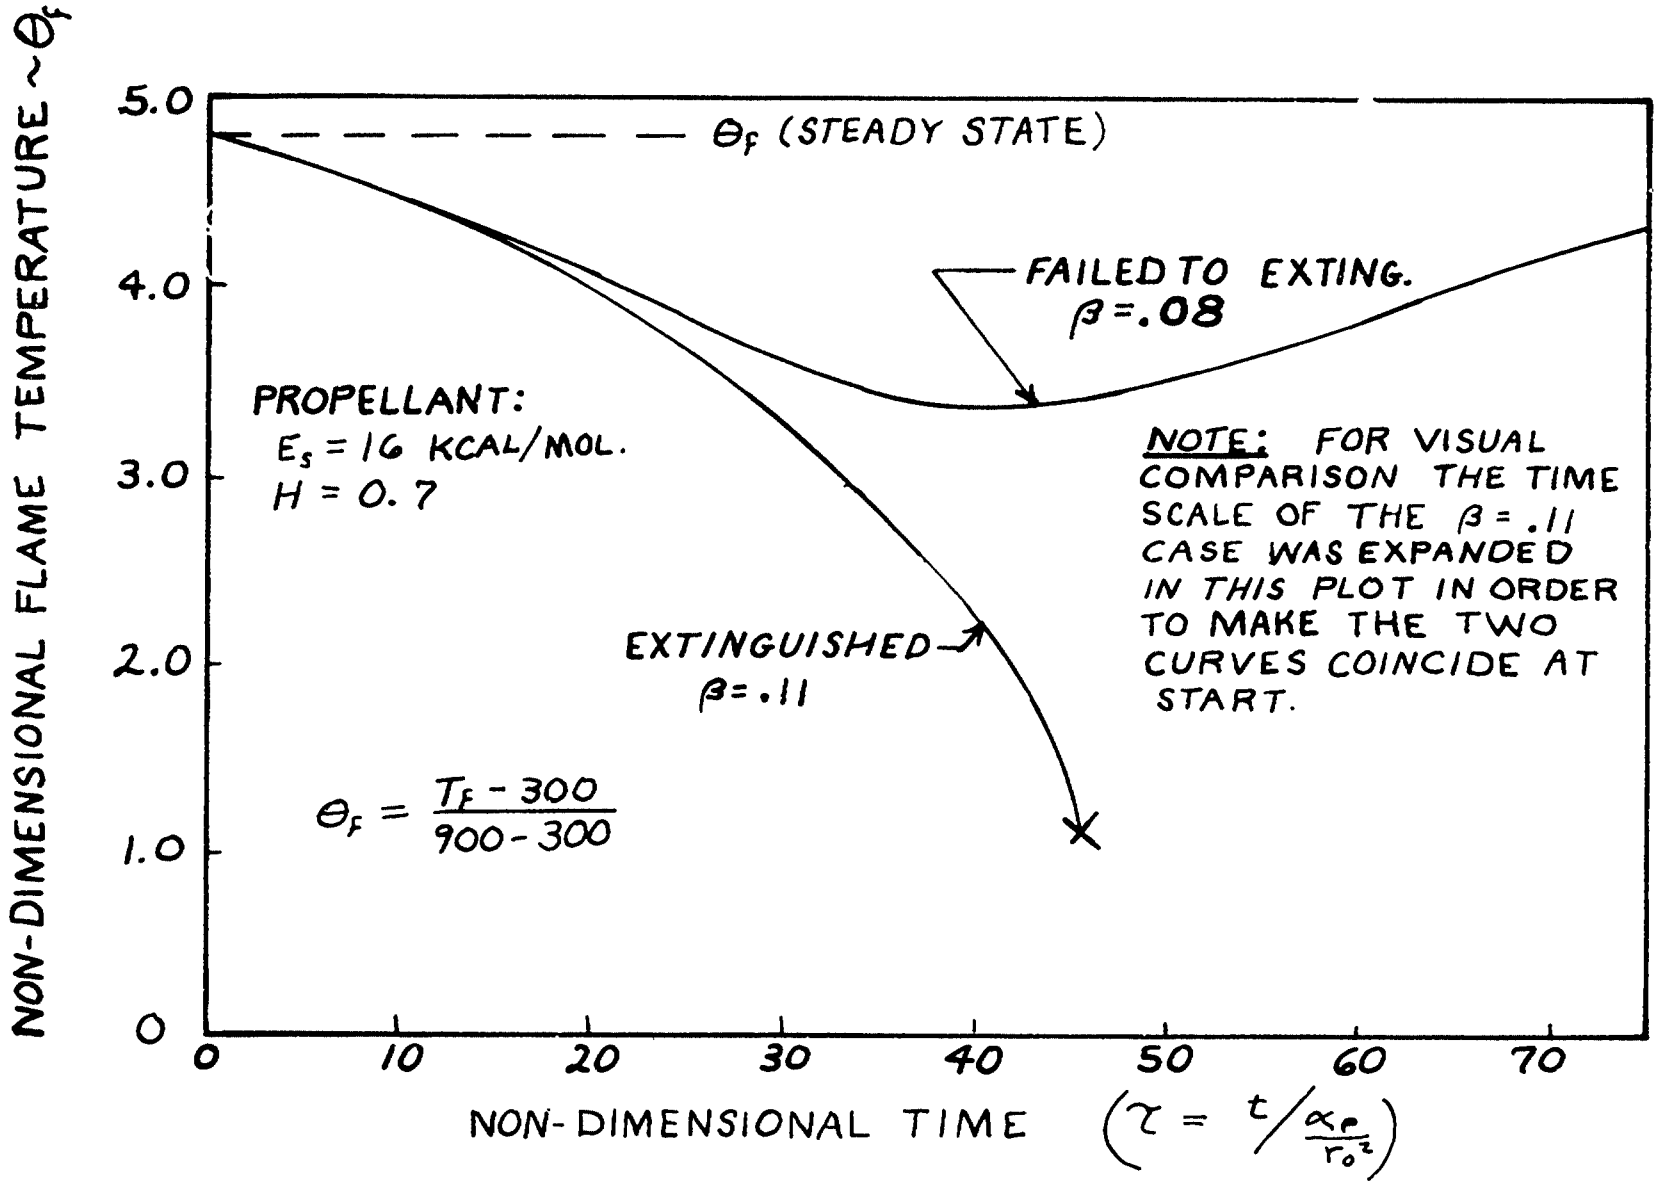

PREDICTED HISTORY OF FLAME TEMPERATURE DURING RAPID DEPRESSURIZATION

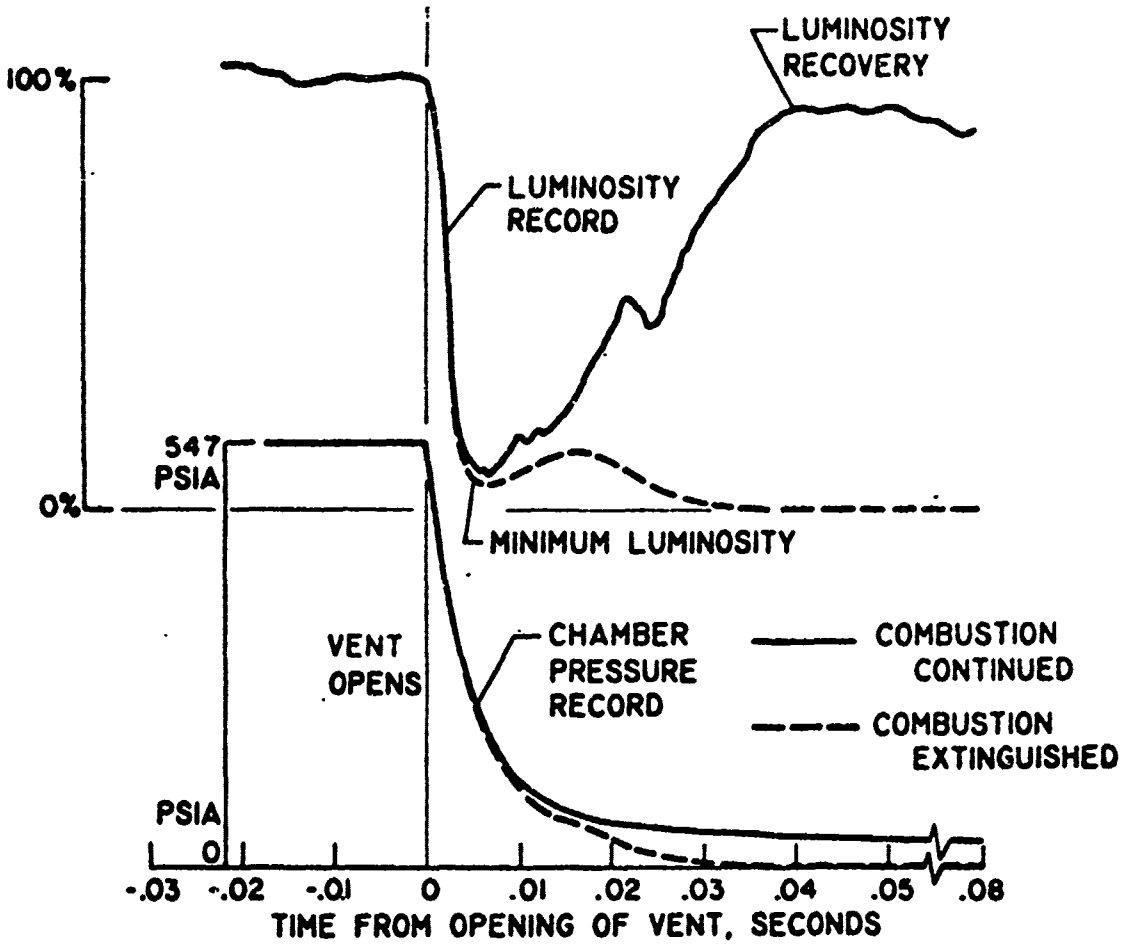

Typical luminosity and chamber pressure transient records during rapid pressure decay

Taken from Ciepluch, ARS J., Nov. 1961 (His Figure 2)

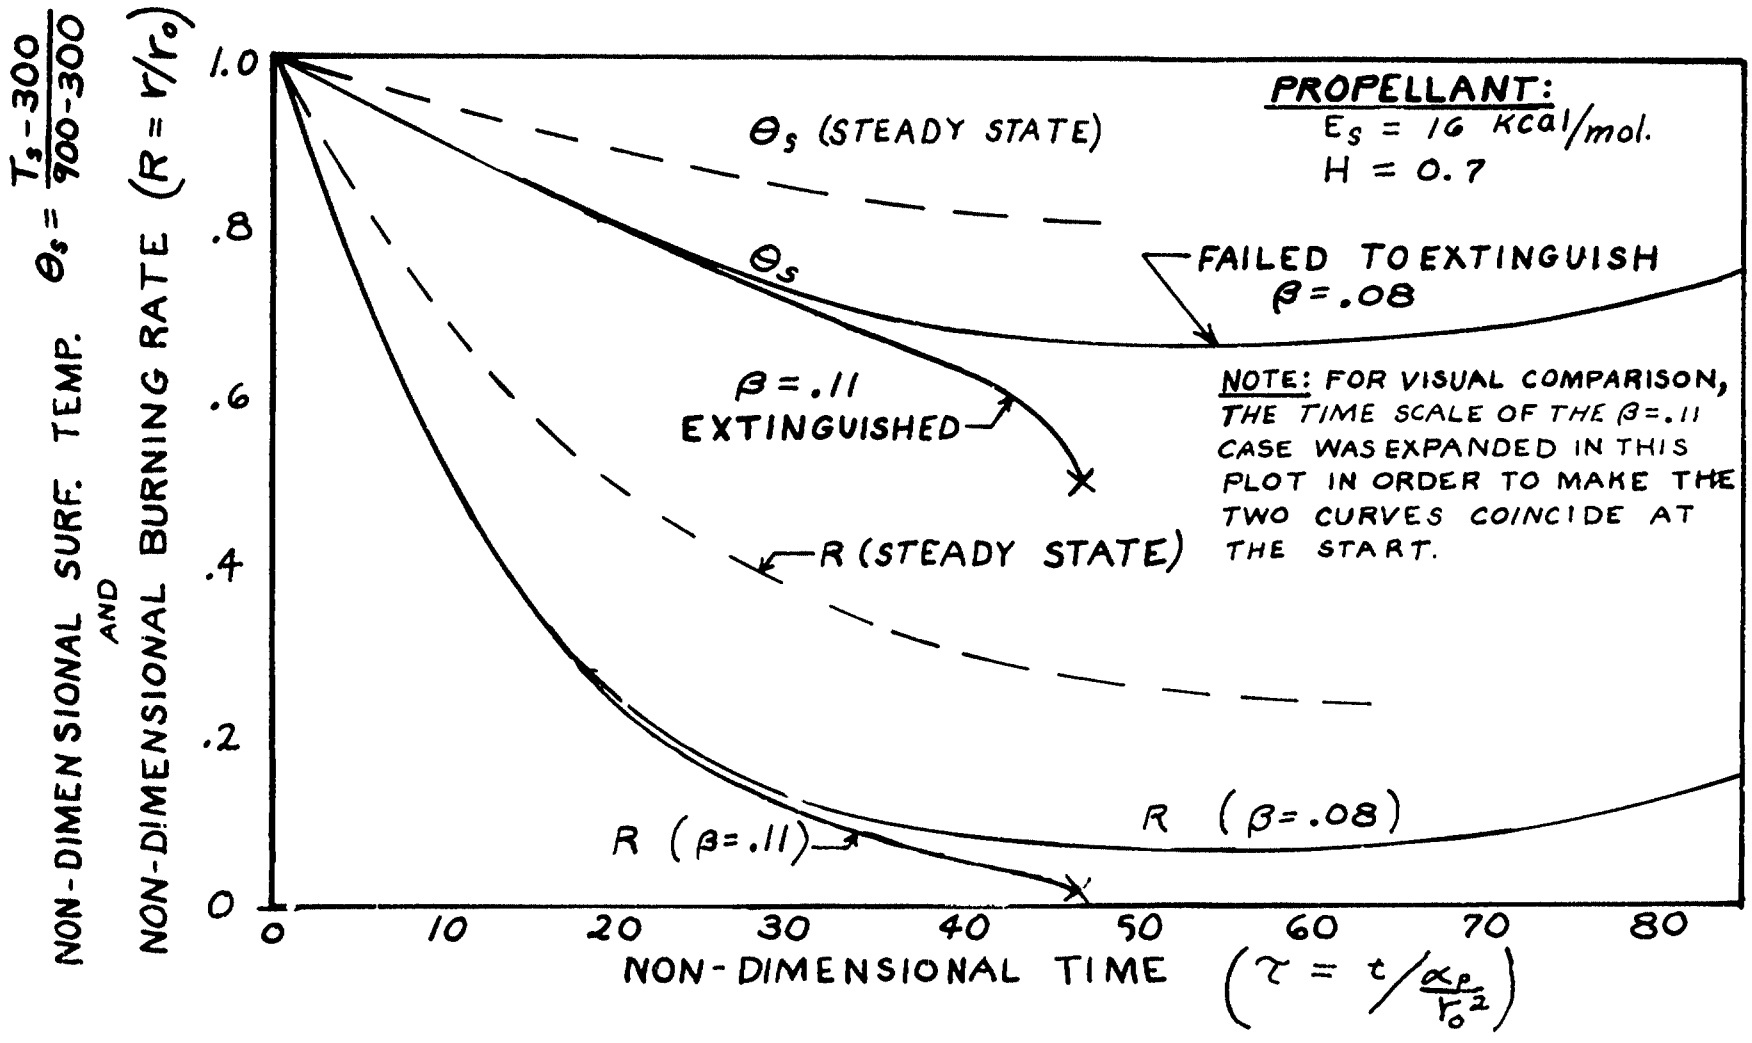

PREDICTED HISTORY OF SURFACE TEMPERATURE AND BURNING RATE DURING RAPID DEPRESSURIZATION

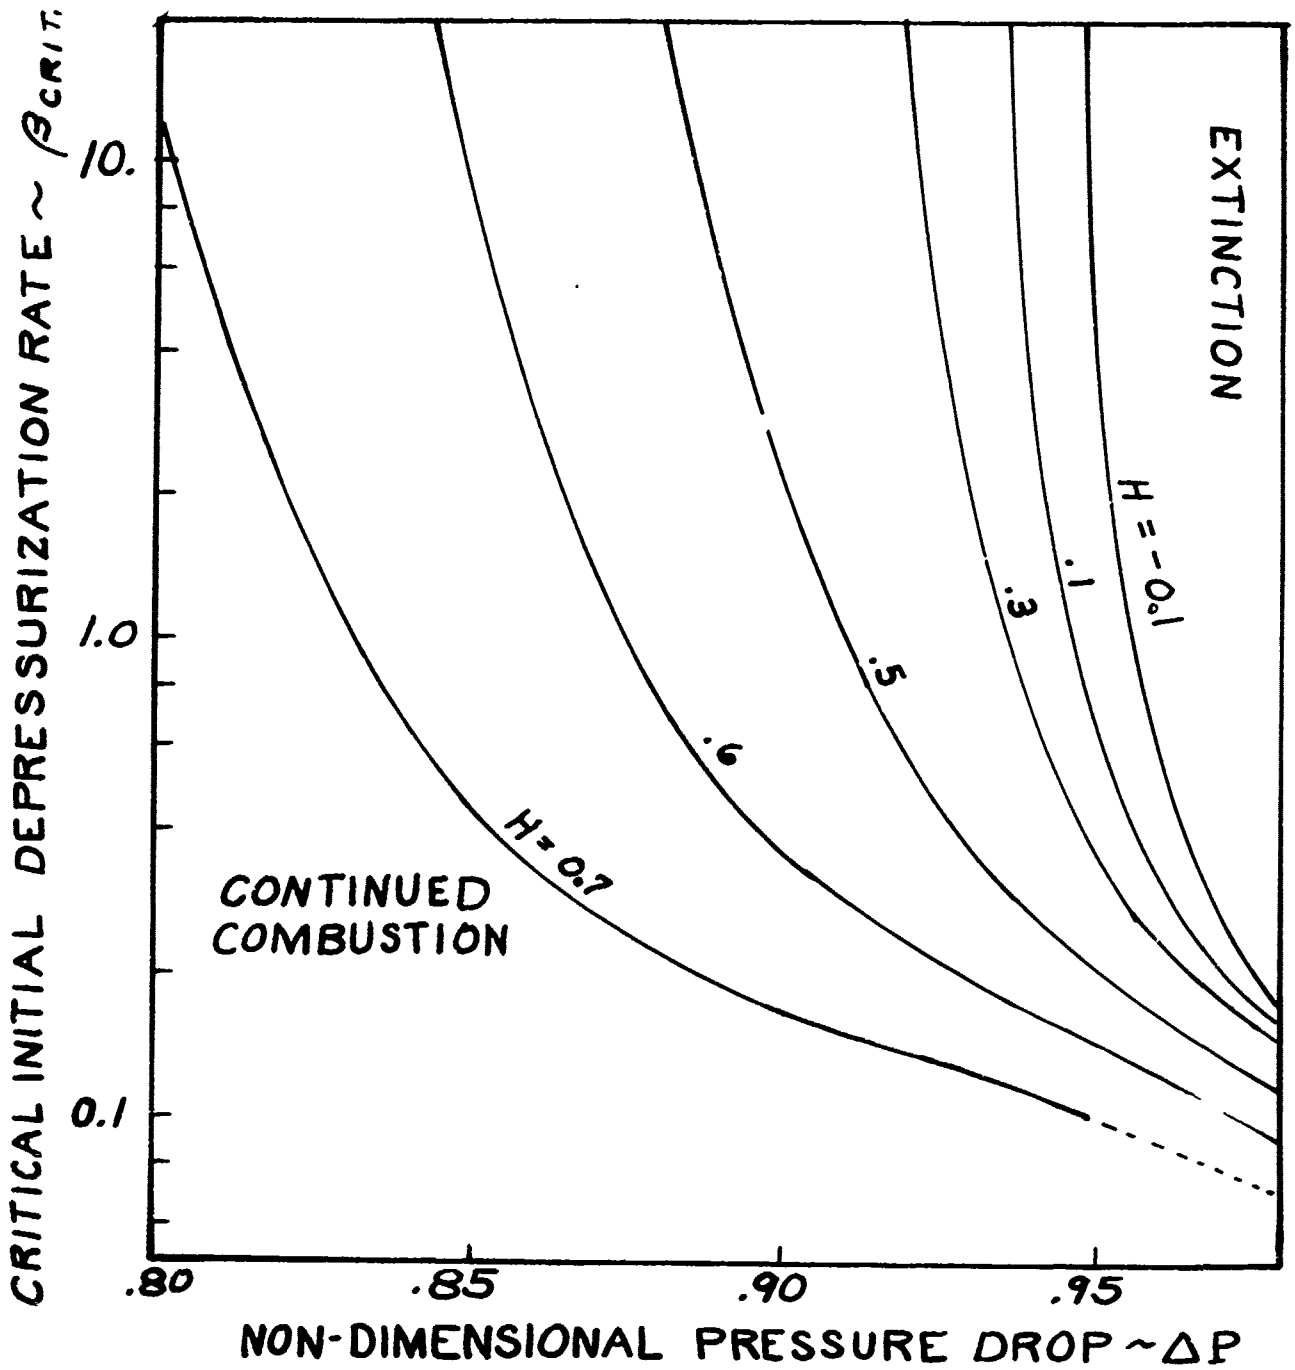

DIFFICULTY OF EXTINCTION BY DEPRESSURIZATION: EFFECT OF PRESSURE DROP

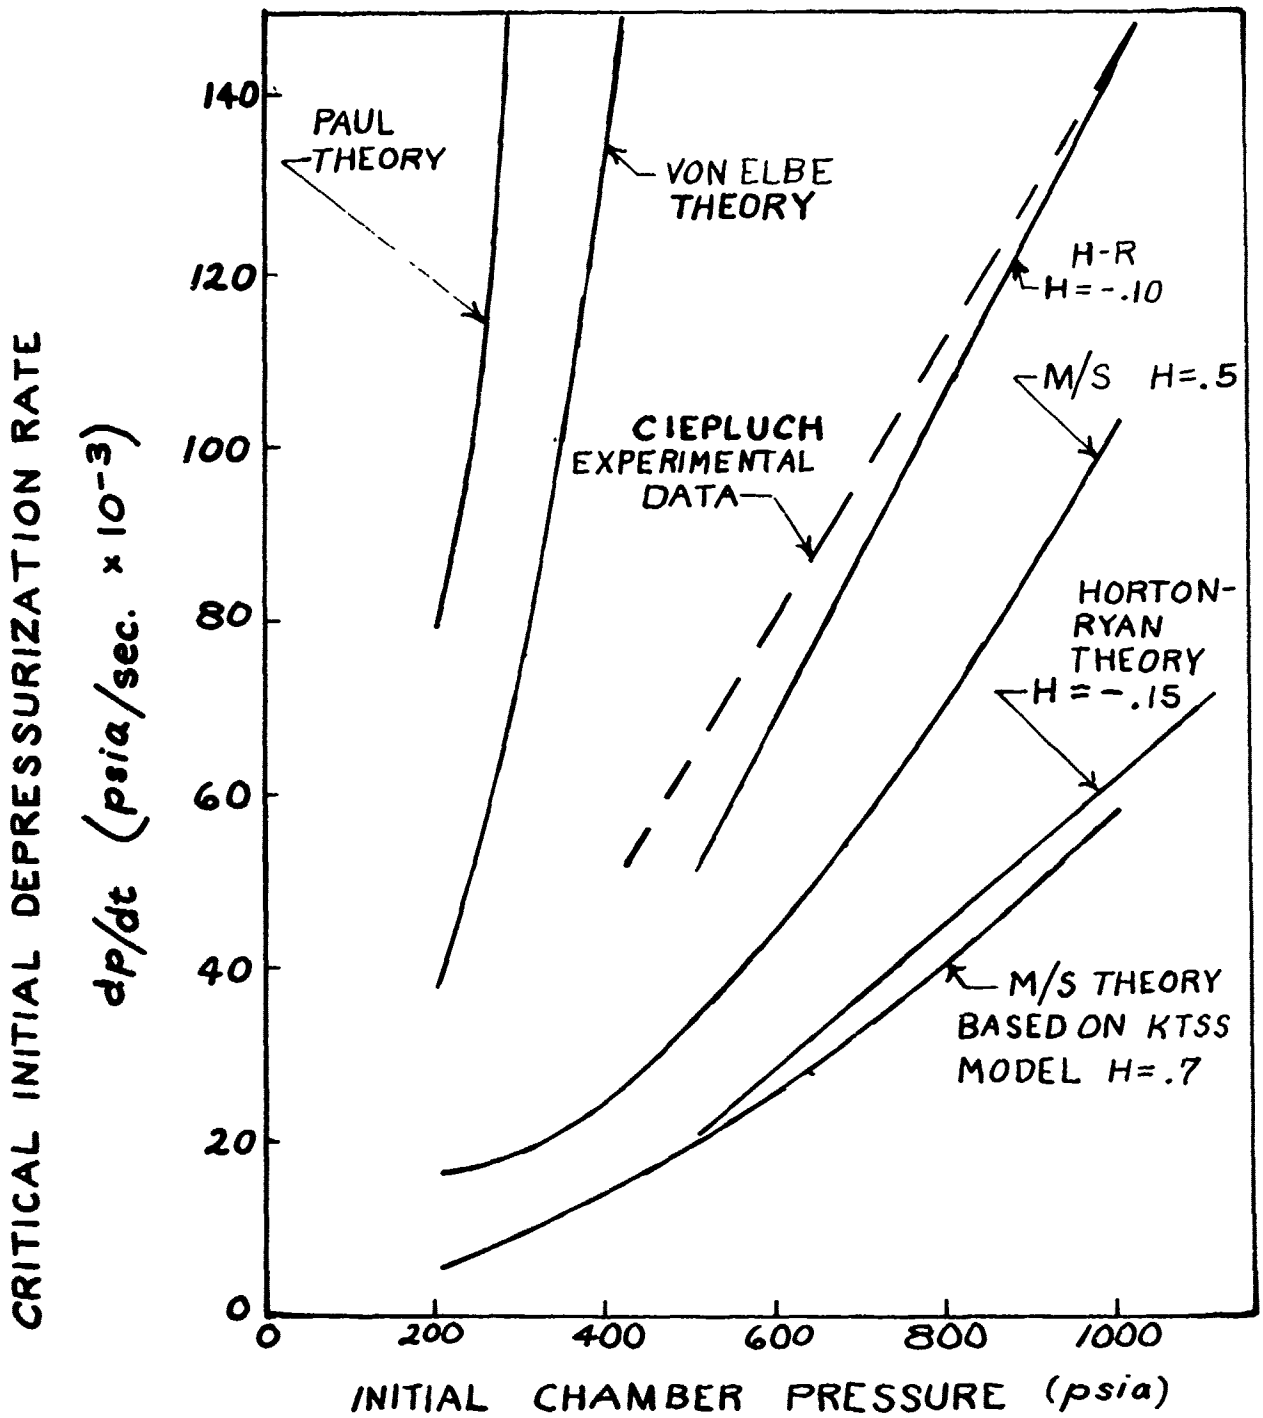

DIFFICULTY OF EXTINCTION BY DEPRESSURIZATION: COMPARISON OF THEORY AND EXPERIMENT

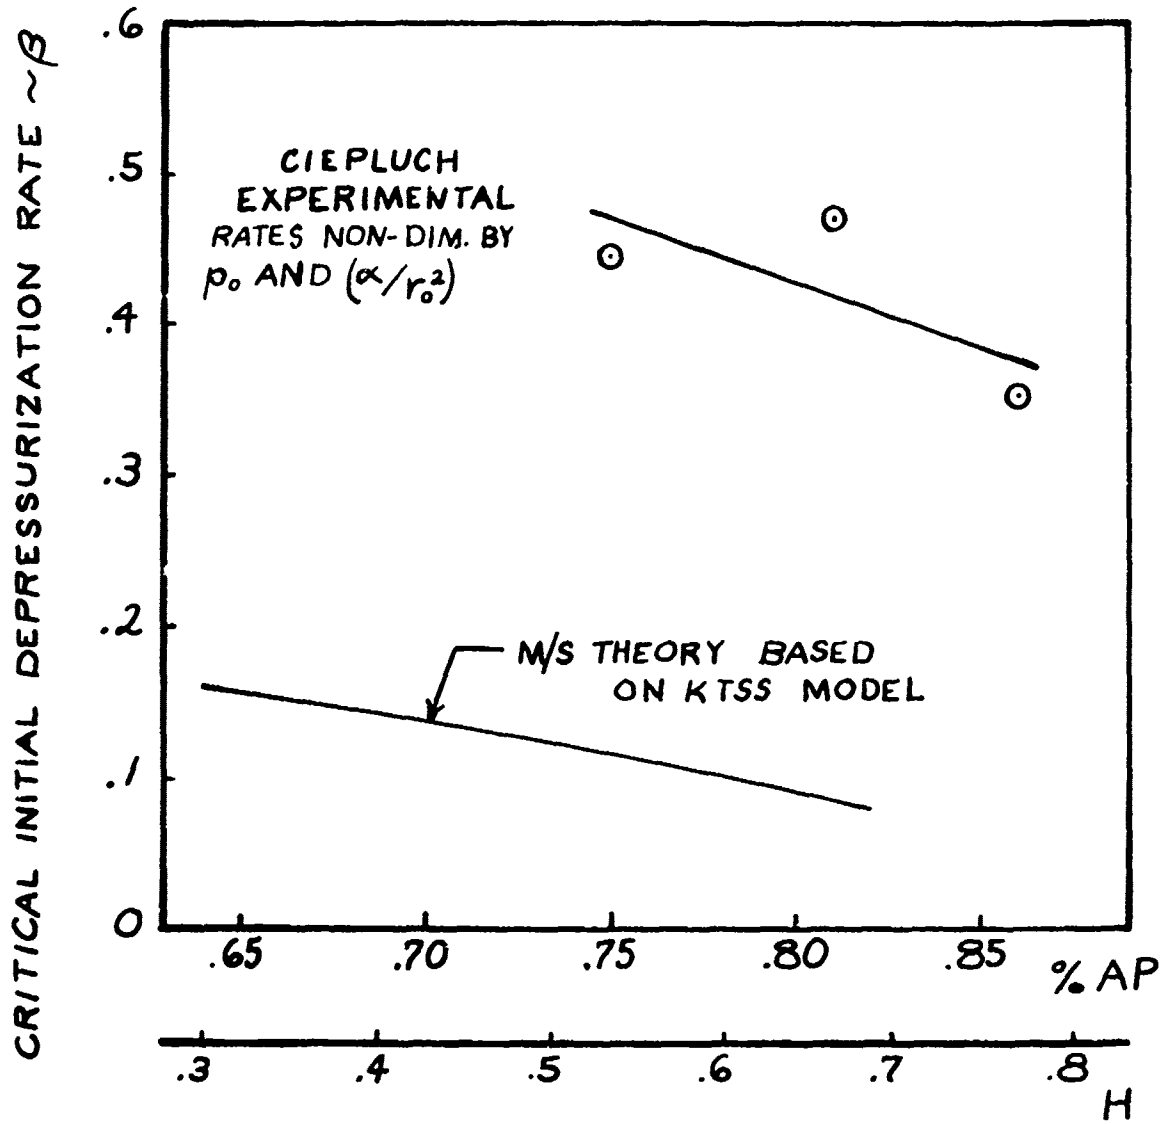

DIFFICULTY OF EXTINCTION BY DEPRESSURIZATION

EFFECT OF AP LOADING (O/F) RATIO

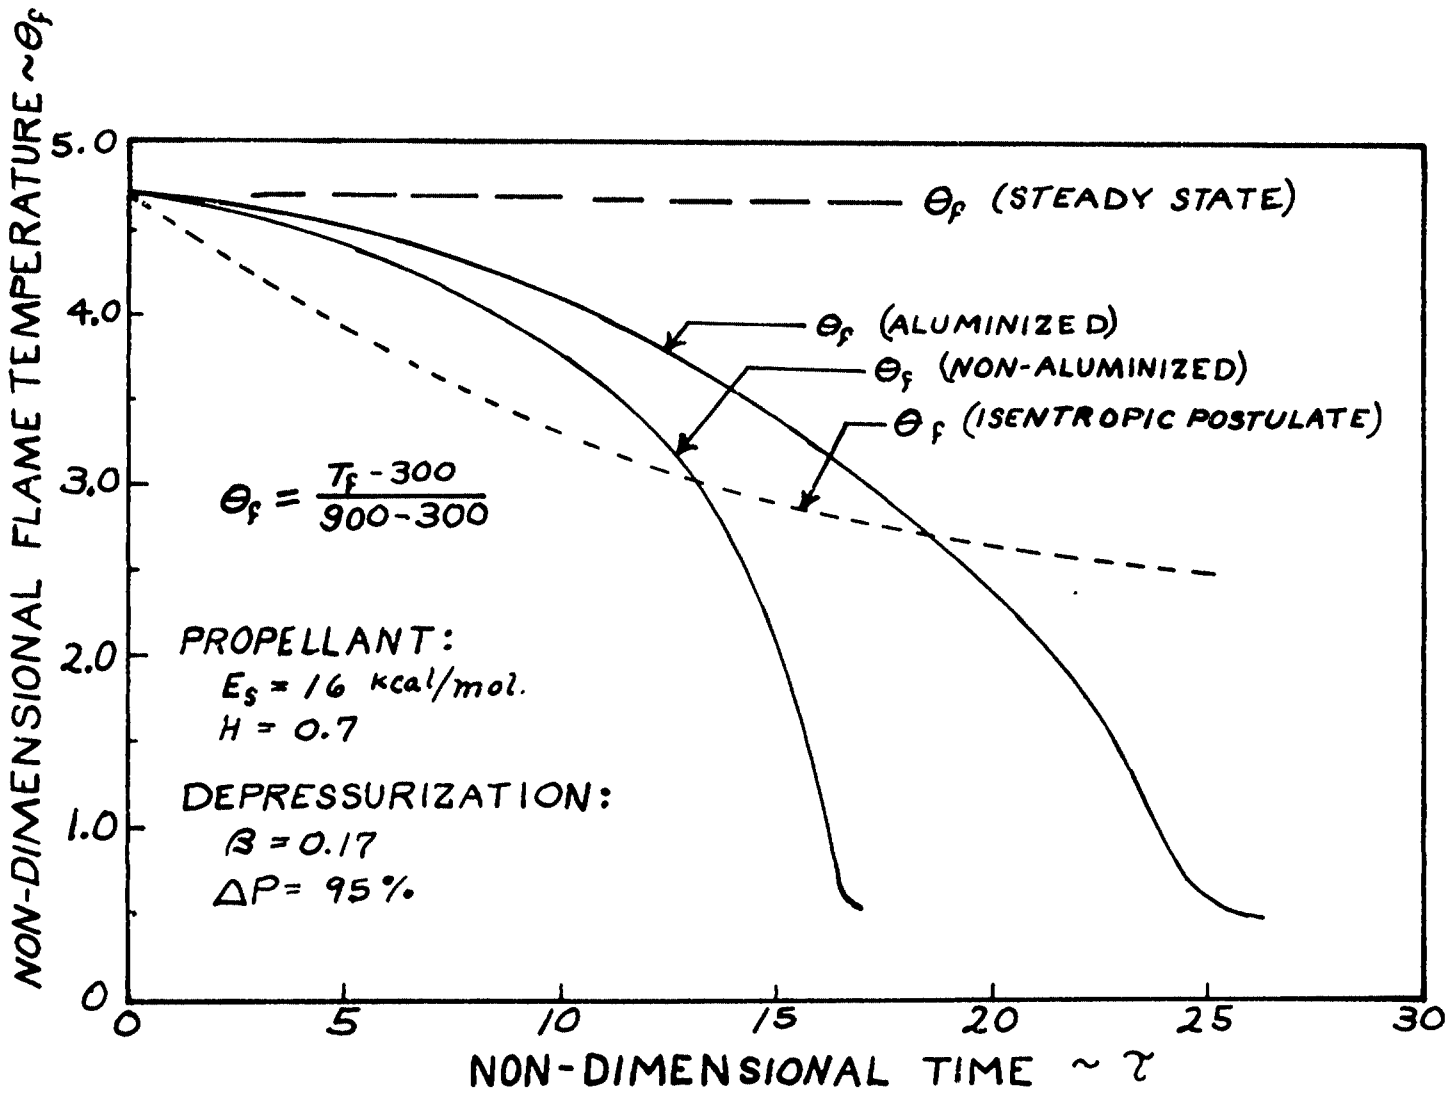

PREDICTED HISTORY OF FLAME TEMPERATURE
DURING RAPID DEPRESSURIZATION TO EXTINGUISHMENT

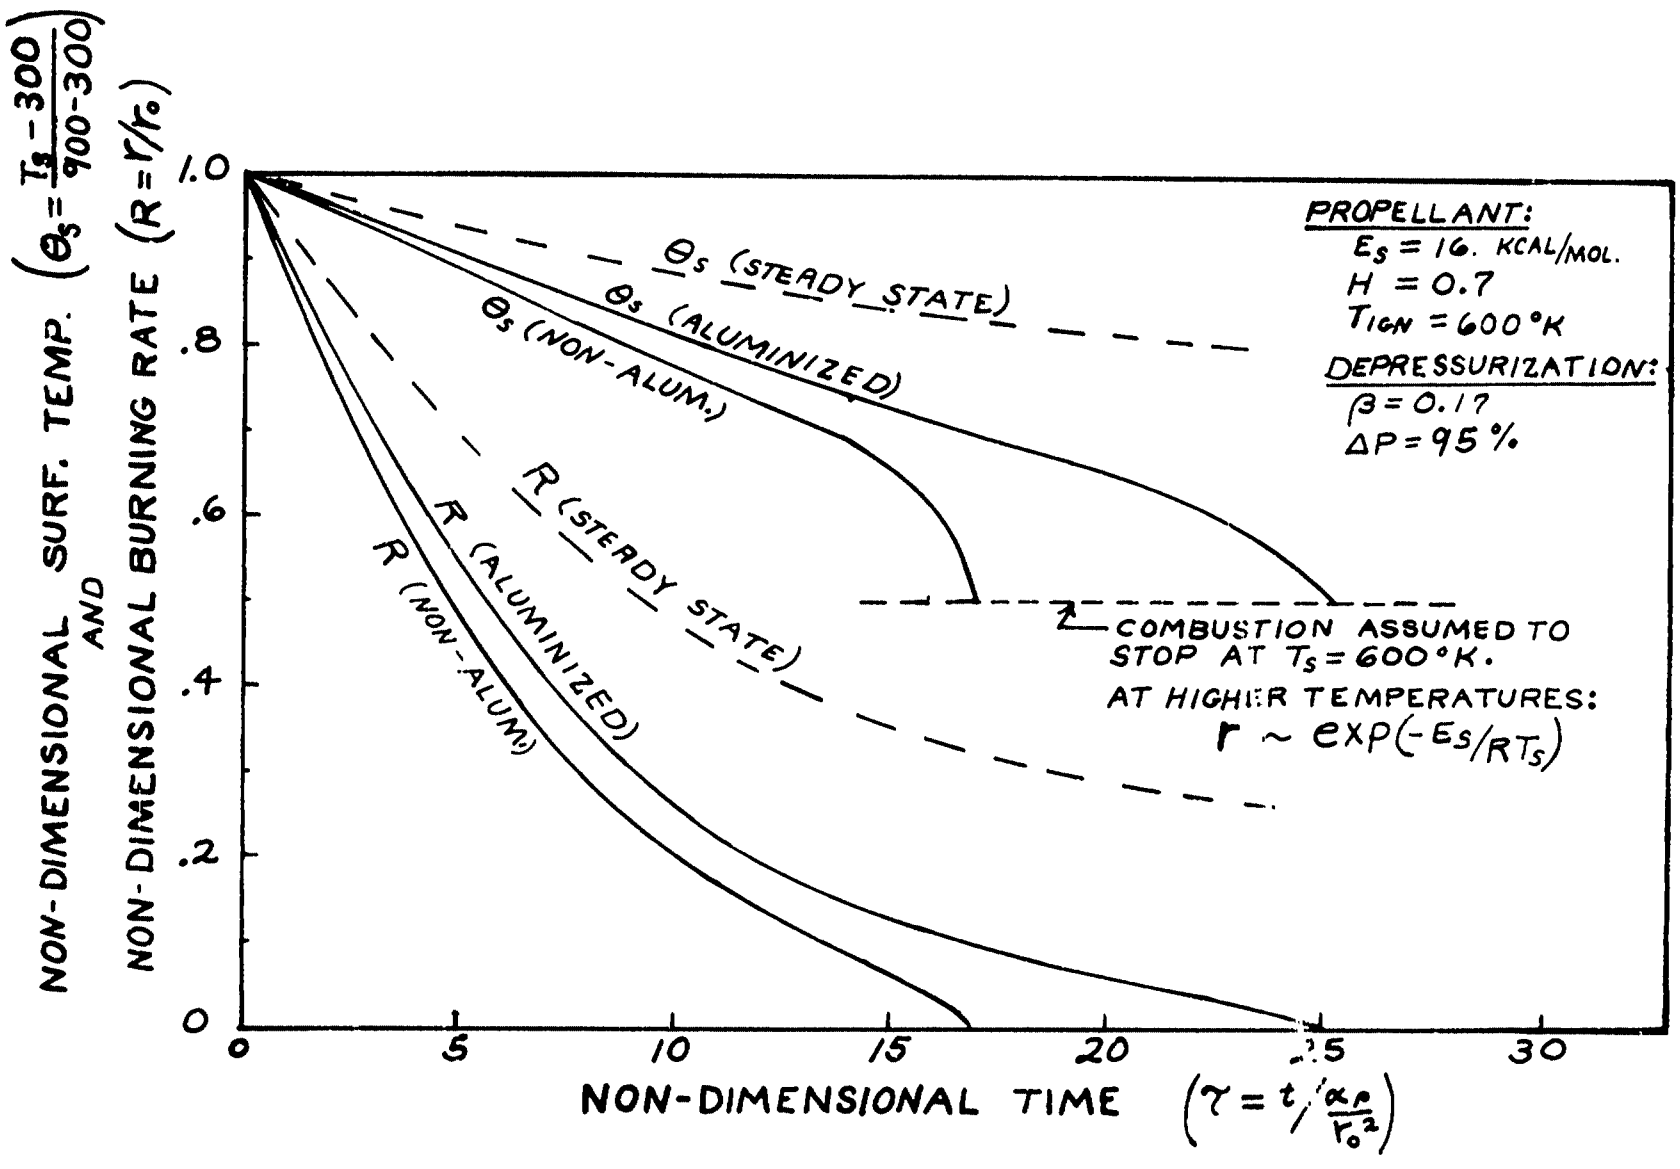

PREDICTED HISTORY OF SURFACE TEMPERATURE AND BURNING RATE DURING RAPID DEPRESSURIZATION TO EXTINGUISHMENT

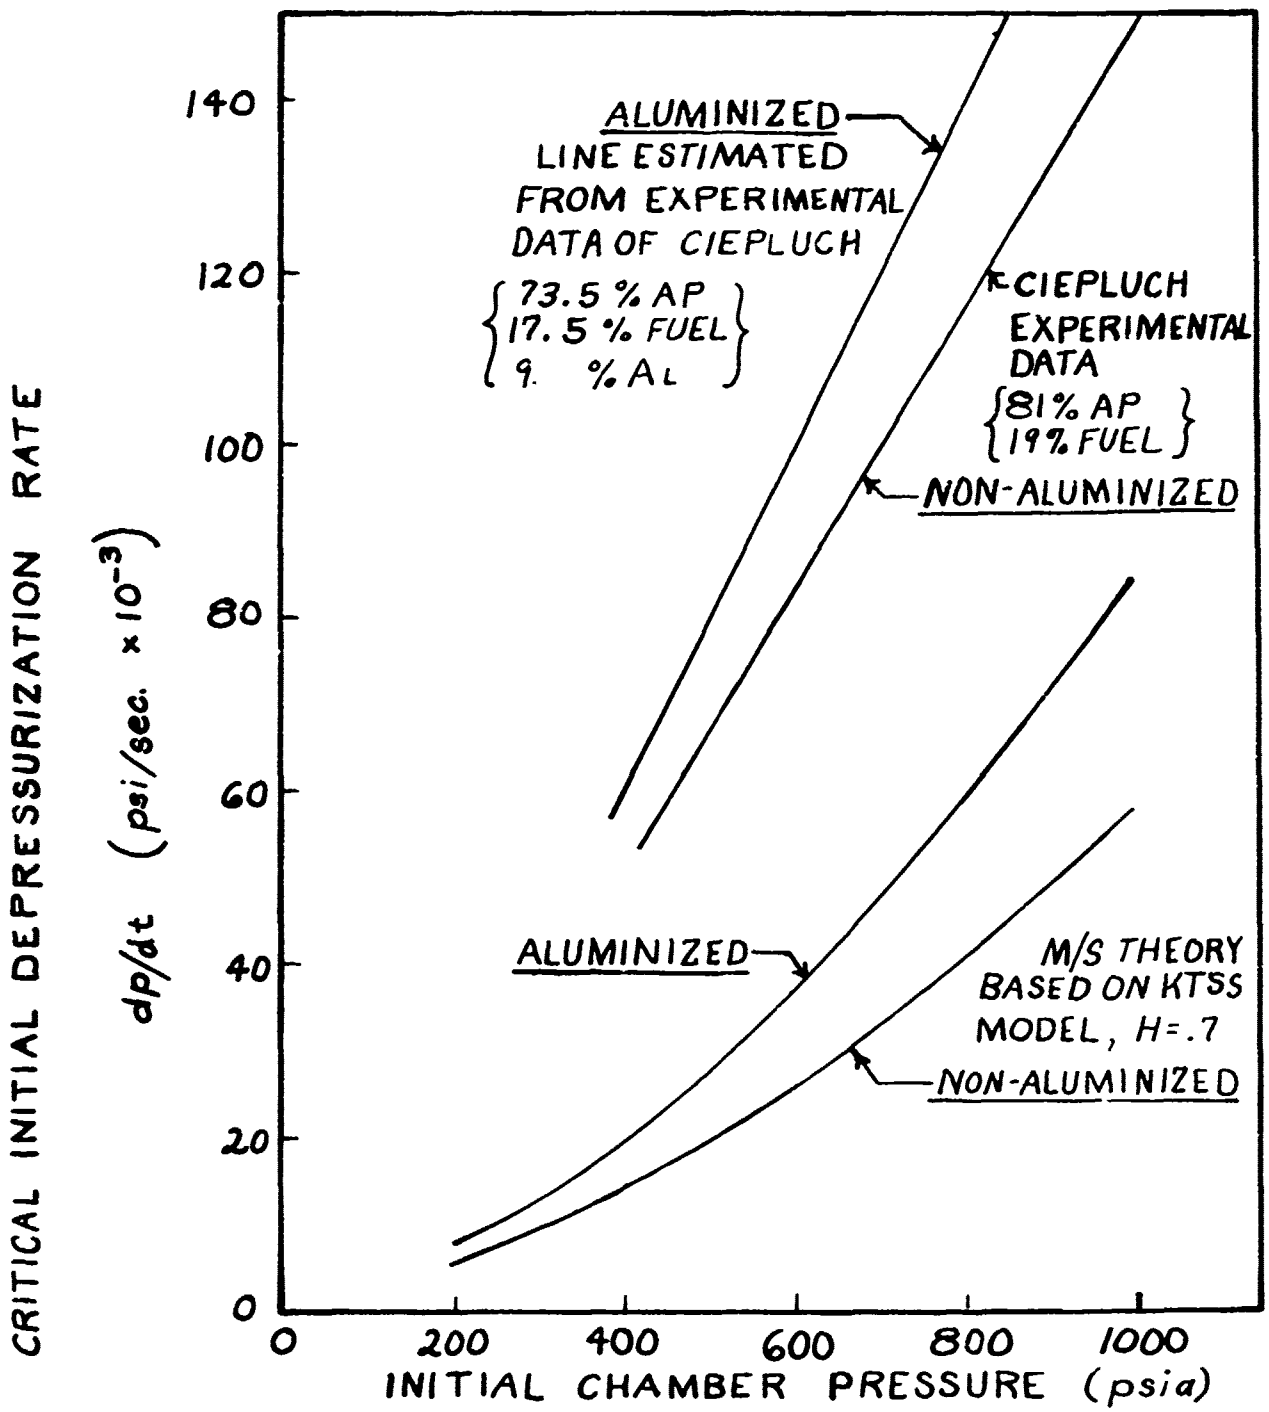

DIFFICULTY OF EXTINCTION BY DEPRESSURIZATION: EFFECT OF ADDITION OF ALUMINUM

In conclusion we have shown that:

1. A theory based on the KTSS dynamic flame model (surface heat release plus granular diffusion flame) predicts qualitatively the observed extinguishment behavior.

2. An aluminized propellant is more difficult to extinguish than a non-aluminized one having the same AP binder ratio.

3. The low pressure part of the depressurization transient is the most critical in determining whether extinction will occur.

4. To improve the predictions, the theory will have to incorporate a more exact description of the entire burning rate curve.