

①

A452011

DEPARTMENT OF THE NAVY  
OFFICE OF NAVAL RESEARCH  
(ADVANCED RESEARCH PROJECTS AGENCY)

Contract Nonr 1858(32) - NR 098-201  
(ARPA Order No. 23-59; 23-60 Amend. 5)

BURNING RATE CONTROL FACTORS  
IN SOLID PROPELLANTS

Tenth Quarterly Technical Summary Report  
For the Period 1 April 1961 to 30 June 1961

Aeronautical Engineering Report No. 446-j

*Superseded*  
*AD-262770*

Reproduction, translation, publication, use and disposal in whole or in part by or for the United States Government is permitted.

Prepared by: *Kimball P. Hall*  
Kimball P. Hall  
Research Associate

and *E. Karl Bastress*  
E. Karl Bastress *by LPH*  
Research Associate

Approved by: *Martin Summerfield*  
Martin Summerfield  
Principal Investigator

DTIC  
ELECTE  
SEP 1 1963  
S

1 August 1961

Department of Aeronautical Engineering  
PRINCETON UNIVERSITY  
Princeton, New Jersey

This document has been approved  
for public release and wide  
distribution is unlimited.

## CONTENTS

	<u>Page</u>
TITLE	1
CONTENTS	2
I. INTRODUCTION	3
II. PARTICLE SIZE EFFECTS IN BIMODAL DISTRIBUTIONS	4
III. PARTICLE SIZE EFFECTS IN POLYBUTADIENE ACRYLIC ACID PROPELLANTS	4
IV. PARTICLE SIZE EFFECTS IN ALUMINIZED PROPELLANTS	5
ILLUSTRATIONS	6

Accession For	
NTIS GRA&I	X
DTIC TAB	
Unannounced	
Justification:	
By _____	
Distribution/	
Availability	
Availability for	
Dist	Special
A	



UNANNOUNCED

## I. INTRODUCTION

During the past quarter, four experimental programs have been underway. The following statements describe briefly the nature and present status of each of these programs:

(1) Effects of oxidizer particle size have been studied in polysulfide propellants containing 75 percent ammonium perchlorate in a bimodal particle size distribution. Results of this study are presented in Section II. The relative effects of the fine and coarse particle sizes are clearly shown in these results.

(2) A series of polybutadiene-acrylic acid propellants have been prepared containing 72.5 percent ammonium perchlorate in unimodal particle size distributions and varying mean diameters. Strand burning rates of these propellants are presented in Section III. This program was intended as an extension of earlier work carried out with other fuels. It has been concluded that variations in oxidizer particle size produce similar effects in all two-component (fuel and oxidizer) propellants. The variations in fuel type which have been conducted thus far have produced only minor effects. However, a more comprehensive program designed to study the relation between fuel type and burning characteristics is contemplated. No further studies of oxidizer particle size effects are planned, except at high pressures.

(3) As mentioned in earlier reports, a joint program is underway between Picatinny Arsenal and Princeton University to study propellant burning rates at high pressures (1000 to 20,000 psi). Through the courtesy of Dr. Picard, Head, Propellant Research Section, high pressure burning rates are being measured at Picatinny on propellant strands prepared at Princeton. Preliminary trials have demonstrated that the Picatinny equipment performs well on Princeton propellant provided the strand diameter is reduced to 1/8 inch. Burning rates obtained during the trial runs suggest that pressure exponents in excess of unity may be characteristic of ammonium perchlorate propellants at pressures above 5000 psi.

(4) A series of polybutadiene-acrylic acid-ammonium perchlorate propellants containing ten percent aluminum have been prepared in order to determine the relative effects of aluminum and oxidizer particle size. Burning rates of these propellants are discussed in Section IV. As an initial effort in studies of aluminized propellants, these results indicate a number of interesting effects. A more carefully controlled program of burning rate studies with these propellants is contemplated in order to establish the role of aluminum particles in the combustion process. It is possible that such studies might also elucidate the mechanism by which aluminum affects unstable burning.

A polysulfide binder was used at first for studies of aluminized propellants, but was found to be unsuitable. Water produced in the curing reactions in conjunction with the aluminum produces hydrogen gas resulting in a porous propellant. No problem of this nature has been observed with the polybutadiene-acrylic acid binder.

## II. PARTICLE SIZE EFFECTS IN BIMODAL DISTRIBUTIONS

Earlier work with propellants containing oxidizer in bimodal particle size distributions (Report No. 446-f) indicated that the combustion process of such propellants is more complex than in those containing a narrow particle size distribution. However, the results did not indicate clearly the relative importance of the fine and coarse particles in determining the propellant burning rate. Therefore, further studies were planned in hopes that a clearer picture might be obtained of the burning of these propellants.

Another series of propellants were prepared with varying coarse and fine particle sizes. The overall composition was fixed at 25 percent polysulfide binder (Thiokol LP-3) and 75 percent ammonium perchlorate, of which 70 percent was coarse and 30 percent fine. The increased oxidizer represents a substantial change from the 65 percent used in the previous unimodal particle size study. However, the resulting propellants are more typical of practical propellants containing bimodal oxidizer, in terms of mixing consistency and physical and ballistic properties.

The burning rates of these compositions are shown in Figure 1. The most striking characteristic of the data is the complete lack of variation of burning rate with varying fine particle size. Burning rate is seen to vary moderately with coarse particle size, the variation being greatest at low and intermediate pressures. These results are in agreement with results reported by the Thiokol Chemical Company, Elkton Division\*, from work with another propellant composition. It would appear, therefore, that one is justified in concluding that the size of the fine oxidizer particles in a bimodal distribution does not significantly influence the burning rate. This conclusion is important from the standpoint of propellant quality control.

## III. PARTICLE SIZE EFFECTS IN POLYBUTADIENE ACRYLIC ACID PROPELLANTS

Earlier work in this program dealt with the effects of oxidizer particle size on burning rates of propellants containing polysulfide and polyester-styrene binders. A number of interesting behavior patterns were observed in this work and these were reported in detail (Reports 446-f and 536). In order to further verify the results, similar studies have been made with a polybutadiene acrylic acid binder. A series of propellants were prepared containing 27.5 percent binder and 72.5 percent ammonium perchlorate in narrow unimodal particle size distributions. Six propellants were prepared with median particle diameters varying from 9 to 210 microns. Particle size distributions were measured by liquid sedimentation (Report 446-d). Burning rates of these propellants are shown as a function of pressure in Figure 2, and as a function of particle size in Figure 3.

---

\*Brenner, C. S., "Oxidizer Particle Size Effects on Propellant Ballistic Properties," Paper presented at ARS Solid Propellant Rocket Conference, Salt Lake City, February, 1961, ARS Preprint No. 1598-61.

These figures indicate that the overall behavior pattern of the PBAA propellants is similar to those of the polysulfide and polyester-styrene propellants. Burning rates are found to vary inversely with particle size, but more strongly at low than high pressures. Propellants containing fine particles (9 and 16 microns) are found to extinguish at pressures above 400 psi, and propellants with somewhat larger particles (27 and 44 microns) show a tendency toward plateau burning between 400 and 1000 psi. These characteristics have been found to be common to all propellant formulations tested.

A characteristic peculiar to the PBAA propellants is the tendency toward increased particle size sensitivity at pressures above 1000 psi. This appears to be a result of low burning rates and pressure indices in this region with coarse particle propellants.

The general conclusion to be drawn is that propellants containing ammonium perchlorate as oxidizer burn with comparable rates and their burning rates vary similarly with pressure and particle size. There are, however, minor variations in behavior which are brought about by changes in the nature of the binder.

With the presentation of the data of this and the previous section the study of the influence of ammonium perchlorate particle size upon burning rates at pressures below 2000 psi is essentially complete. The most perplexing feature of the data so far obtained --- the question of what happens above 1000 psi --- will, hopefully be clarified as data emerge from the high pressure burning rate studies now in progress at Picatinny. At present it is anticipated that most future low pressure burning rate studies will be concerned with metal-(or possibly catalyst-)containing propellants, and propellants containing other oxidizers. A limited study of the influence of the molecular structure of the binder on burning rate of ammonium perchlorate compositions is also planned, however.

#### IV. PARTICLE SIZE EFFECTS IN ALUMINIZED PROPELLANTS

Because of the widespread use of aluminum powder in propellant formulations for control of instability and for increased specific impulse, it was decided to devote a portion of this program to a study of the effects of aluminum addition on propellant burning rate. Previous work on burning rate studies at Princeton has been devoted exclusively to simple fuel-oxidizer systems wherein the independent variables were limited to oxidizer concentration, oxidizer particle size distribution, and fuel type. In a three-component system (that is fuel, oxidizer, and aluminum) the independent variables are increased to five if the oxidizer type is limited to ammonium perchlorate. The added variables are aluminum concentration and particle size distribution. As a result, any study of a three-component system must be rather extensive, or must be limited in the variables studied.

As an initial investigation of this subject, a series of propellants were prepared with variations in aluminum and ammonium perchlorate particle size. The composition of these propellants

was fixed at 25 percent PBAA binder, 10 percent aluminum and 65 percent ammonium perchlorate. This is the composition resulting when aluminum is added to the composition described in Section III, - 27.5 percent PBAA, 72.5 percent A.P. - keeping the PBAA/A.P. ratio fixed. This composition was selected initially so as to determine qualitatively the effect of aluminum on the combustion process. If the aluminum were to have no effect on the burning propellant, burning rates would be expected comparable to those reported in Section III. If the aluminum did not react chemically, but acted as a heat sink, reduced burning rates might be expected.\* If the aluminum were to react in the flame zone, or were to add significantly to the heat feedback by radiation, a higher burning rate would be expected.

The burning rates of these propellants are shown in Figure 4. Burning rates of propellants with similar oxidizer particle size and equal binder-oxidizer ratio are shown in dashed lines. A number of interesting effects can be seen in this figure. It is apparent that the addition of aluminum does not change the propellant burning rate to a significant extent, except perhaps at low pressures. In this region, fine aluminum increases the burning rate by as much as 50 percent, indicating a participation in the combustion process. Coarse aluminum, on the other hand, does not appear to alter the burning rate.

At higher pressures (above 100 psia) there is little effect on burning rate by either fine or coarse aluminum. If any effect were to be noted, it would be a slight depression of burning rate.

Other secondary effects are of interest in these data. It is apparent that aluminum has no effect on the extinguishment of propellants containing fine oxidizer. Limits of combustion have been observed in several propellants at approximately 500 psi when finely ground oxidizer is used.\*\*

Finally, it is interesting to note the reduced burning rates at higher pressure for the propellant containing coarse aluminum and coarse oxidizer. The authors are not prepared to comment in this behavior without further study.

The investigation of aluminized propellants will continue.

---

\*In either of these cases the aluminum might (and, to some extent at least, probably would) eventually become oxidized, but at so great a distance from the propellant surface that its heat feedback contribution would be negligible compared to that from the oxidizer-organic binder combustion flame.

\*\*In some propellants a low pressure index or even a plateau occurs in this range of pressure (See Reports 446-f and 536).

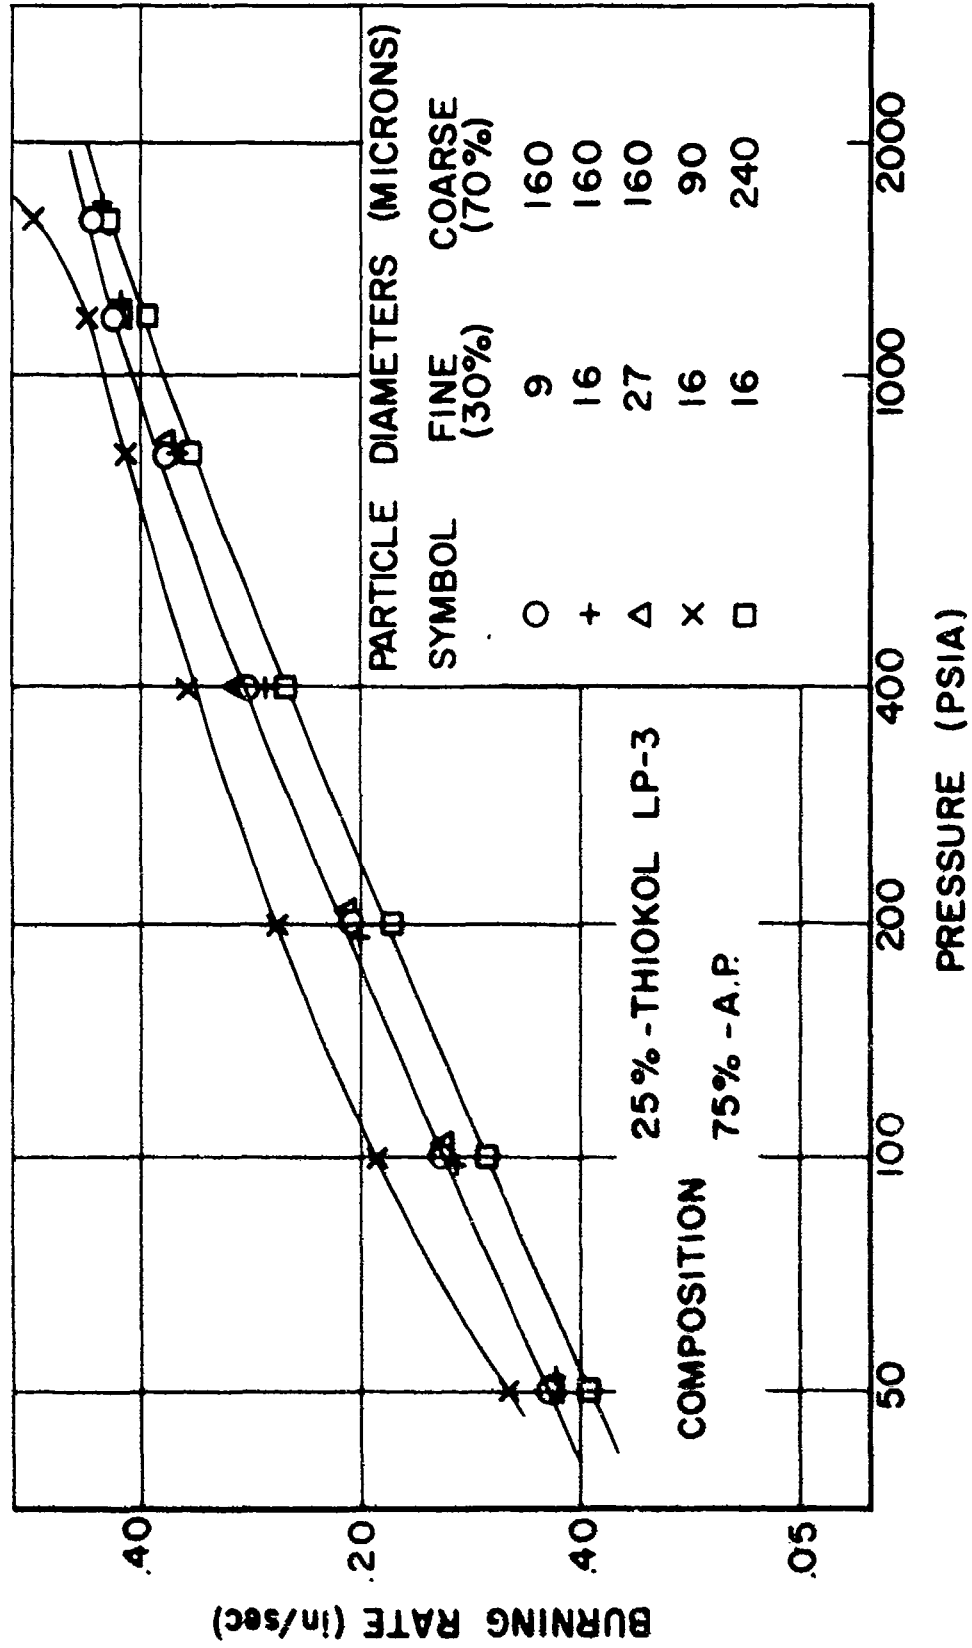


FIGURE 1

BURNING RATE VS PRESSURE, POLYSULFIDE-AMMONIUM PERCHLORATE PROPELLANTS WITH BIMODAL PARTICLE SIZE DISTRIBUTIONS

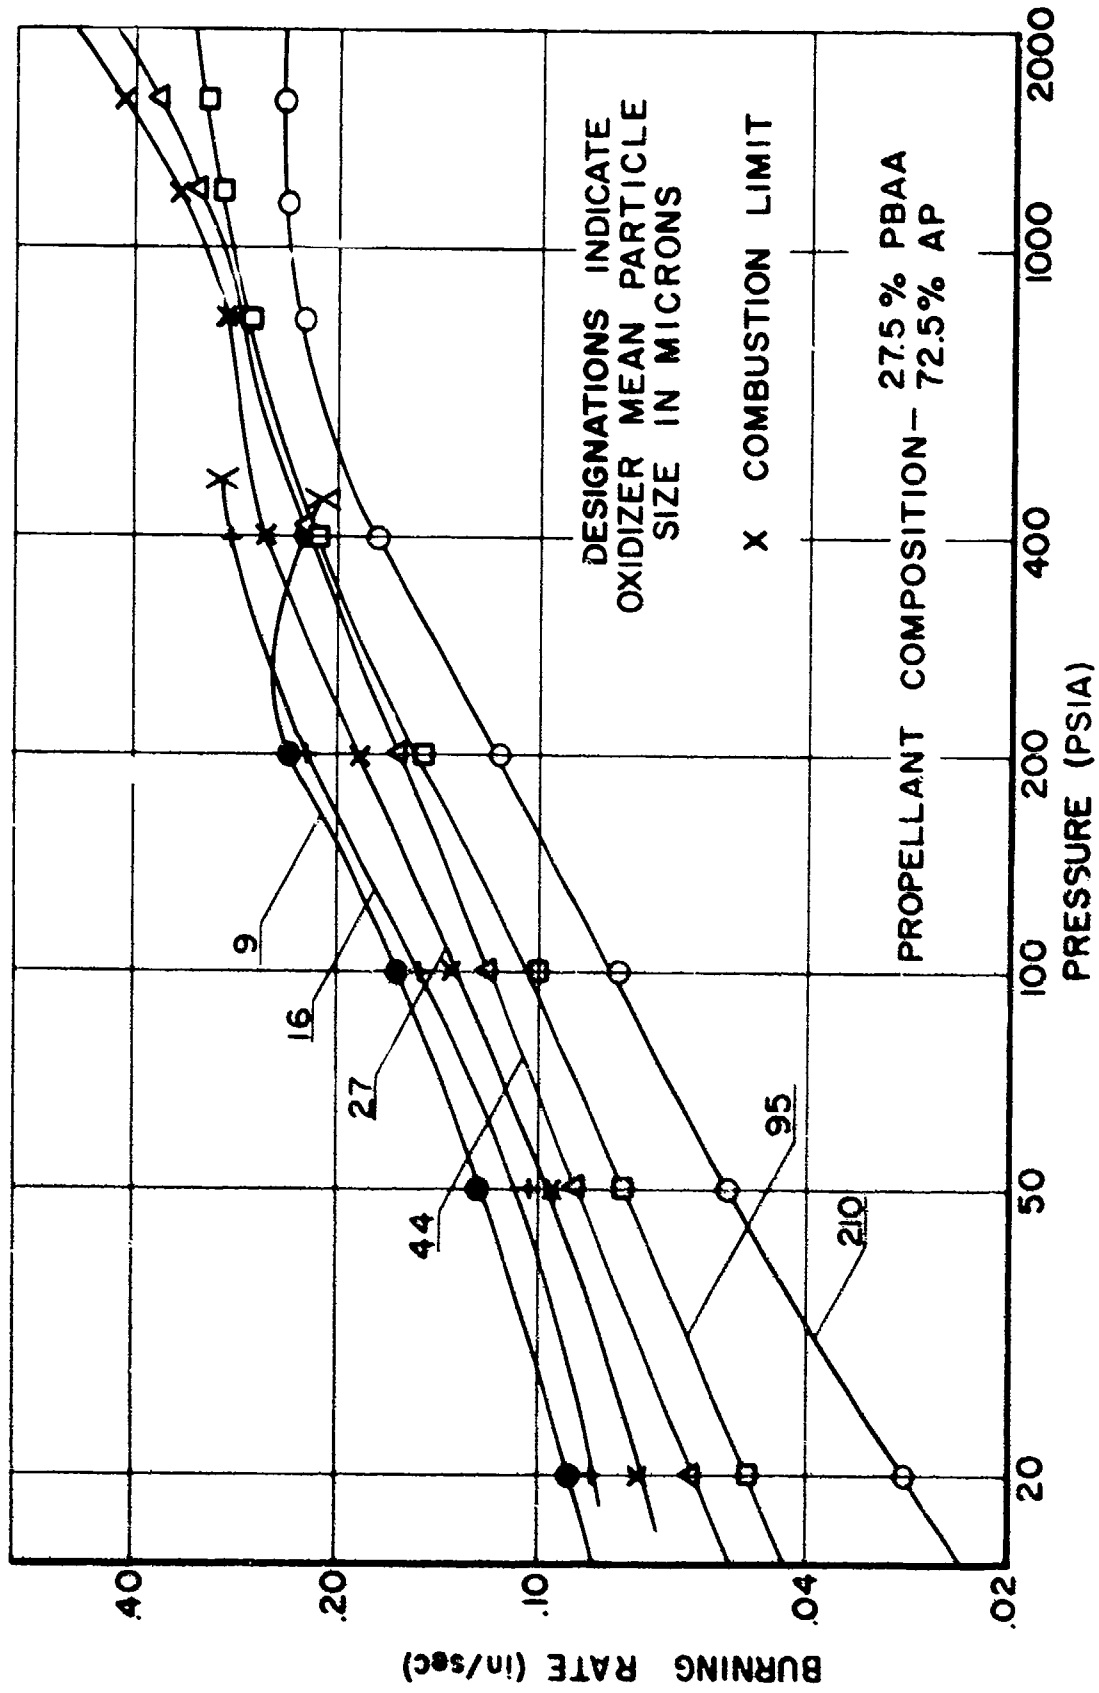


FIGURE 2

BURNING RATE VS PRESSURE, POLYBUTADIENE ACRYLIC ACID-AMMONIUM  
PERCHLORATE PROPELLANT WITH VARYING PARTICLE SIZE



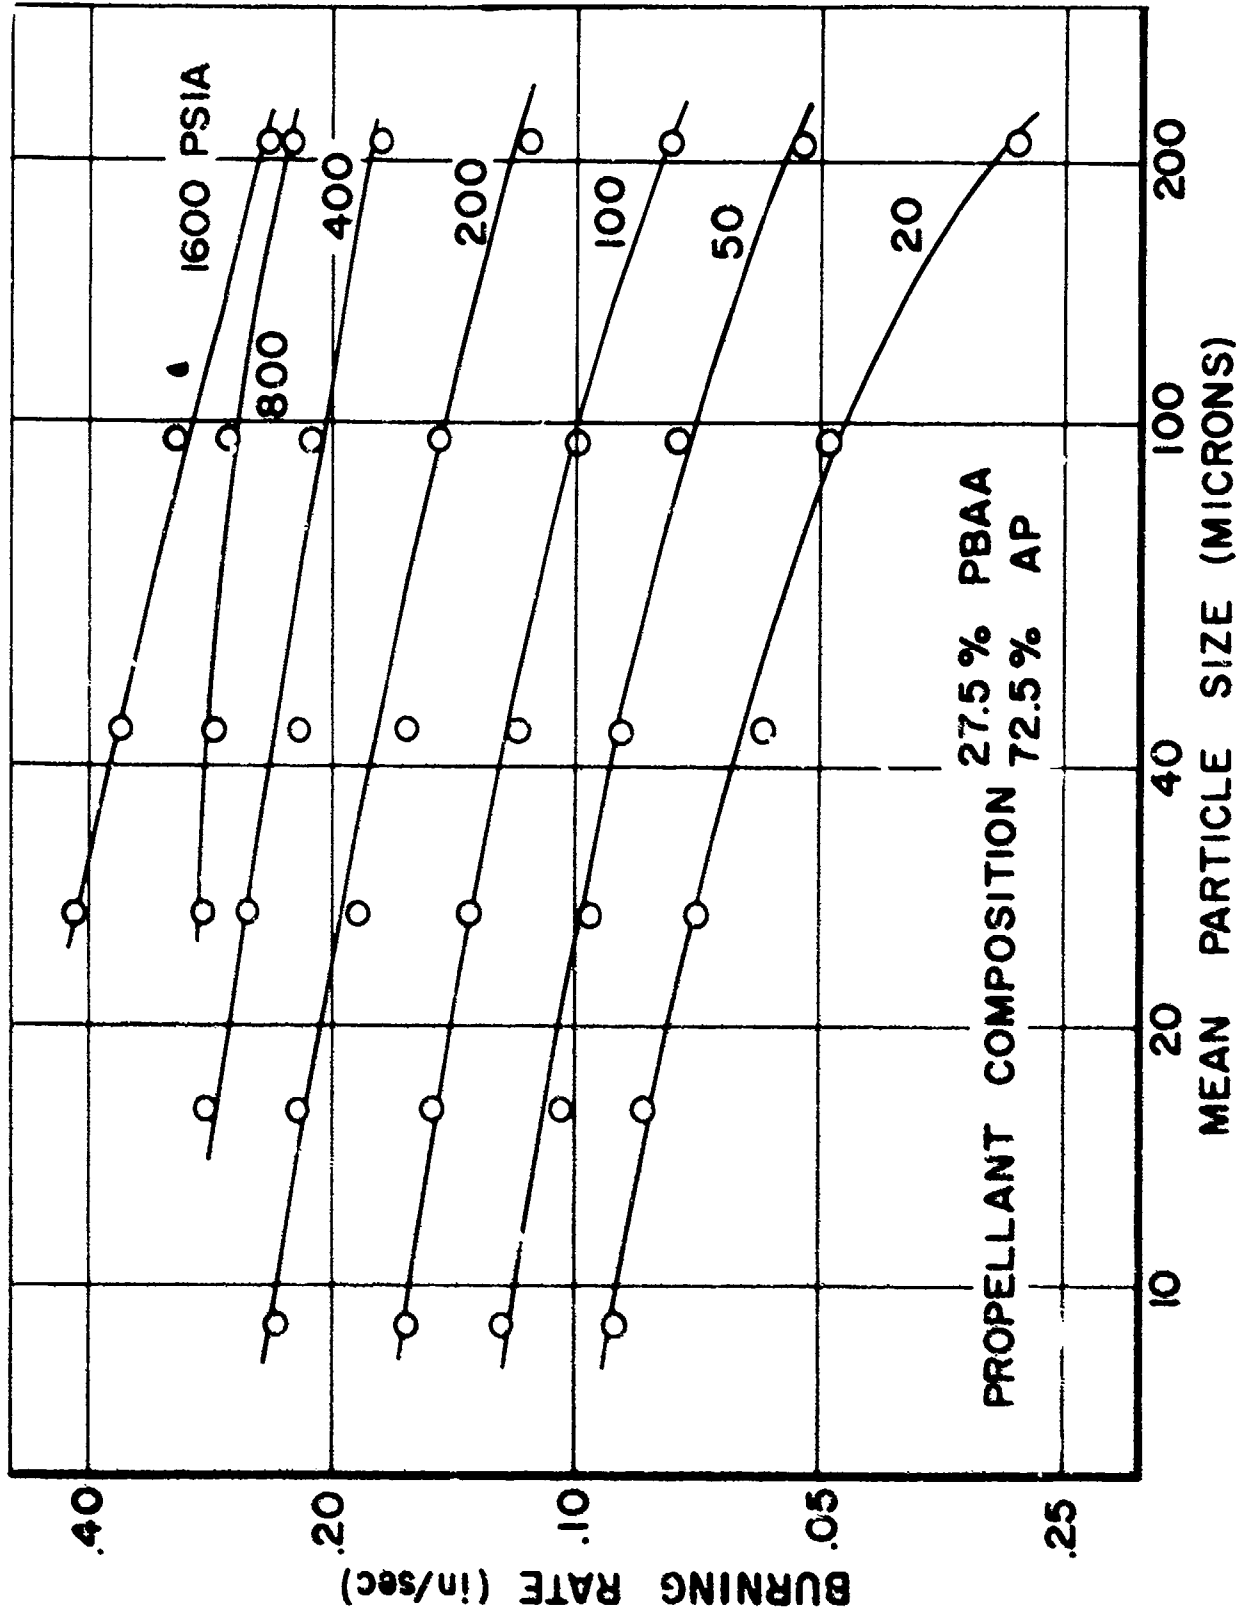


FIGURE 3

BURNING RATE VS PARTICLE SIZE, POLYBUTADIENE ACRYLIC  
ACID—AMMONIUM PERCHLORATE PROPELLANT

**PROPELLANT COMPOSITIONS**  
**CONTROL** 72.5 % AP; 27.5 % PBAA  
**ALUMINUM ADDED** 65.0 % AP; 25.0 % PBAA, 10.0 % ALUM.

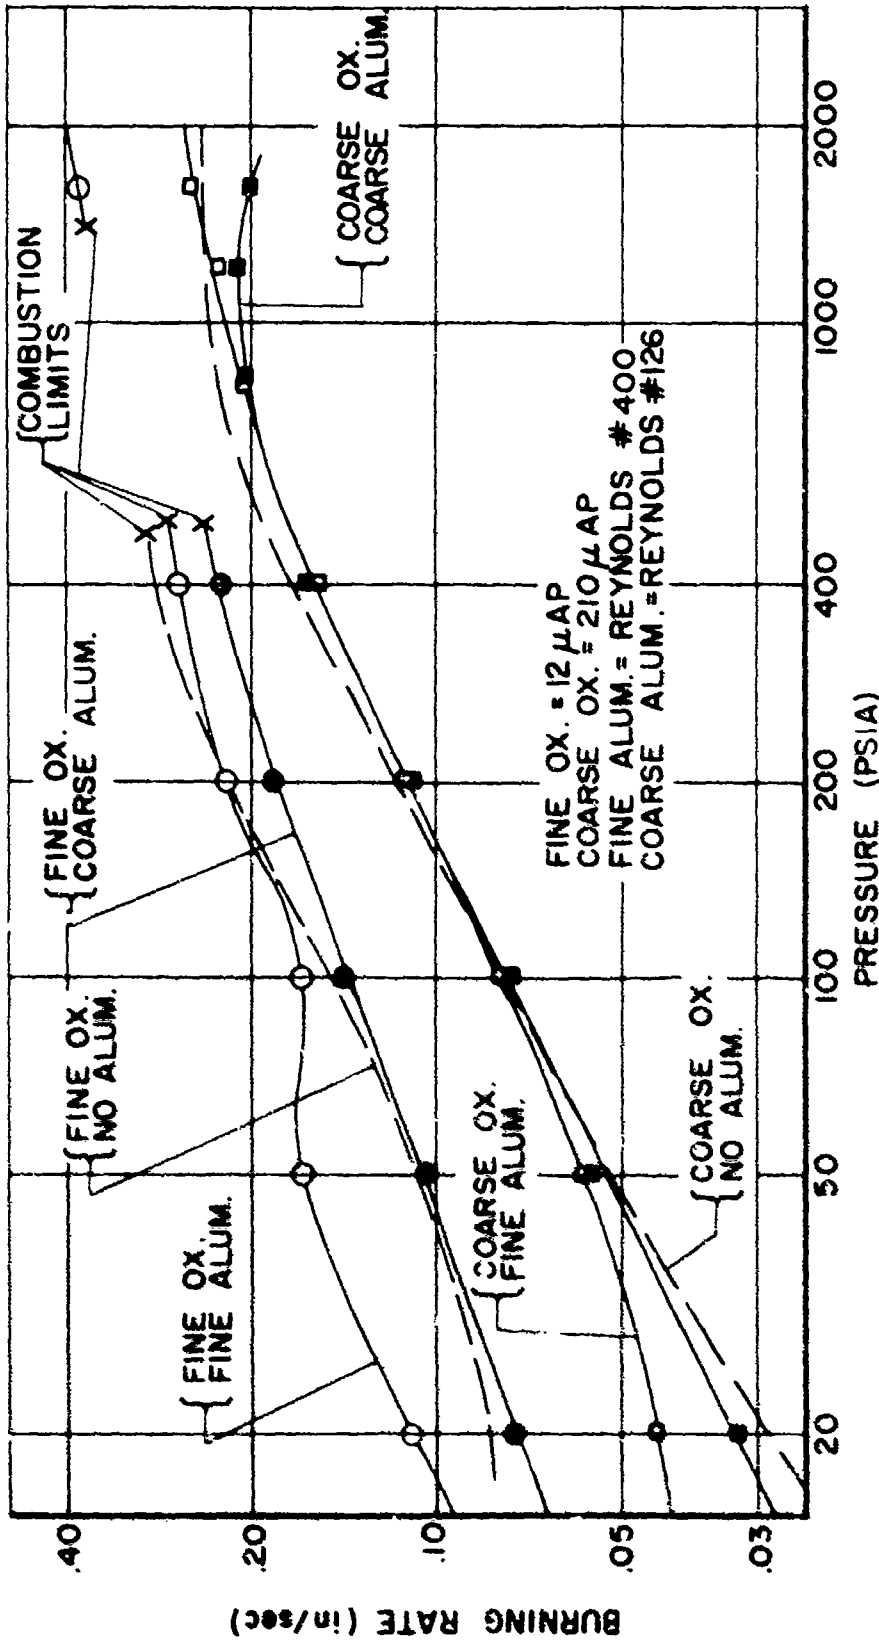


FIGURE 4

BURNING RATE VS PRESSURE, POLYBUTADIENE ACRYLIC ACID - ALUMINUM-AMMONIUM  
 PERCHLORATE PROPELLANT, PARTICLE SIZES OF BOTH OXIDIZER AND  
 POWDERED METAL VARYING.

DISTRIBUTION LIST  
QUARTERLY TECHNICAL SUMMARY REPORT

Contract Nonr 1858(32)  
NR 098-201

Director  
Advanced Research Projects Agency  
The Pentagon  
Washington 25, D. C. (4)

U. S. Department of the Interior  
Bureau of Mines  
4800 Forbes Street  
Pittsburgh 13, Pennsylvania  
Attn: Marjorie P. Benoy (1)

NASA  
1512 H Street, N. W.  
Washington 25, D. C.  
Attn: Chief, Div. of Res. Info. (5)

Department of the Air Force  
Hq. USAF, DCS/D  
Washington 25, D. C.  
Attn: AFDRD-AN (1)

Commander  
Air Force Ballistic Missile Division  
Hq. ARDC, P. O. Box 262  
Inglewood, California  
Attn: WDSOT (1)

Commander  
ASTIA  
Arlington Hall Station  
Arlington 12, Virginia  
Attn: TIPOR (10)

Commander  
Army Ballistic Missile Agency  
Redstone Arsenal  
Alabama  
Attn: ORDAB-HSI (1)

Commander  
Wright Air Development Center  
Wright-Patterson Air Force Base  
Ohio  
Attn: WCLPPER (1)

Department of the Army  
Office, Chief of Ordnance  
Washington 25, D. C.  
Attn: ORDTB (1)

Commanding Officer  
Office of Ordnance Research  
Box CM, Duke Station  
Durham, North Carolina (1)

Commanding Officer  
Picatinny Arsenal  
Dover, New Jersey  
Attn: Library (1)

Commander  
Army Rocket & Guided Missile Agency  
Redstone Arsenal  
Alabama  
Attn: Tech. Library, ORDXR-OTL (1)

Commanding Officer  
Diamond Ordnance Fuze Labs  
Washington 25, D. C.  
Attn: ORDTL (012) (1)

Commander  
AFOSR  
Air Research & Development Command  
19th and E Capital  
Washington 25, D. C.  
Attn: FROC (1)

Chief, Bureau of Naval Weapons  
Department of the Navy  
Washington 25, D. C.  
Attn: RMMP-4 (1)  
DLI-3 (1)  
RMMP-2 (1)  
RMMP-331 (1)  
SP-27 (1)  
RVAW-2 (1)  
RRRE (1)

Commanding Officer  
U. S. Naval Propellant Plant  
Indian Head, Maryland  
Attn: Res. & Dev. Dept. (1)

Commander  
U. S. Naval Ordnance Laboratory  
White Oak  
Silver Spring, Maryland  
Attn: Library

Commander  
U. S. Naval Ordnance Test Station  
China Lake, California  
Attn: Tech. Library Branch (1)

Director  
U. S. Naval Research Laboratory  
Washington 20, D. C.  
Attn: Chemistry Div. Code 6130  
R. R. Miller (1)

Commanding Officer  
Office of Naval Research  
1030 E Green Street  
Pasadena 1, California (1)

Department of the Navy  
Office of Naval Research  
Washington 25, D. C.  
Attn: Code 429 (2)  
Code 426 (1)

Commanding Officer  
Office of Naval Res. Branch Office  
86 Randolph Street  
Chicago 1, Illinois (1)

Shell Development Company  
4560 Horton Street  
Emeryville 8, California (1)

Commanding Officer  
Office of Naval Res. Branch Office  
346 Broadway  
New York 13, New York (1)

Aerojet-General Corporation  
P.O. Box 296  
Azusa, California  
Attn: Librarian (1)

Hercules Powder Company  
Allegheny Ballistics Laboratory  
P. O. Box 210  
Cumberland, Maryland  
Attn: Librarian (1)

Atlantic Research Corporation  
812 North Fairfax Street  
Alexandria, Virginia (2)

Experiment, Incorporated  
P. O. Box 1-T  
Richmond 2, Virginia  
Attn: Librarian (1)

Jet Propulsion Laboratory  
4800 Oak Grove Drive  
Pasadena 3, California  
Attn: I. E. Newlan  
Chief, Reports Group (1)

Arthur D. Little, Inc.  
15 Acorn Park  
Cambridge 40, Massachusetts  
Attn: W. A. Sawyer  
Miss V. R. Valeri (1)

Phillips Petroleum Company  
Rm. 145, Chemical Lab. Bldg.  
Phillips Research Center  
Bartlesville, Oklahoma  
Attn: Logan E. Taylor (1)

Olin Mathieson Chemical Corporation  
Niagara Falls, New York  
Attn: Miss Eleanor E. Seminare  
P. O. Box 438 (1)

Rohm & Haas Company  
Redstone Arsenal Res. Div.  
Huntsville, Alabama  
Attn: Librarian (1)

Solid Propellant Information Agency  
Applied Physics Laboratory  
The John Hopkins University  
Silver Springs, Maryland  
Attn: K. C. Britton (3)

Thiokol Chemical Corporation  
Redstone Division  
Huntsville, Alabama  
Attn: Tech. Dir. (1)

Reaction Motors, Incorporated  
Denville, New Jersey  
Attn: Librarian (1)

Astrodyne, Incorporated  
P. O. Box 548  
McGregor, Texas  
Attn: A. P. Anderson (1)

B. F. Goodrich Aviation Products  
P. O. Box 395  
Rialto, California  
Attn: A. B. Japs, Mgr.  
Rocket Motor Dev. (1)

Grand Central Rocket Company  
P. O. Box 111  
Redlands, California  
Attn: Helan Ashman, Librarian (1)

Aerojet-General Corporation  
Box 1168  
Sacramento, California  
Attn: Miriam S. Mylin, Librarian (1)

Thiokol Chemical Corporation  
Utah Division  
Brigham City, Utah  
Attn: Tech. Dir. (1)

Aeronutronic  
A Division of Ford Motor Company  
P. O. Box 697  
Newport Beach, California

Director  
U. S. Naval Research Laboratory  
Washington 20, D. C.  
Attn: Code 2027 (6)

Hughes Tool Company  
Aircraft Division  
Culver City, California (1)

Ethyl Corp. Res. Labs  
Box 341  
Baton Rouge 1, Louisiana (1)

Ethyl Corp. Res. Labs  
1600 West Eight Mile Road  
Ferndale, Michigan  
Attn: E. B. Rifkin, Asst. Dir.  
Chemical Research (1)

The Dow Chemical Company  
Midland, Michigan  
Attn: M. A. Auro  
Tech. Services and Dev.  
Abbott Road Bldg. (1)

Stanford Research Institute  
Menlo Park, California  
Attn: E. M. McGill, Librarian (1)

Minnesota Mining & Mfg. Company  
900 Bush Avenue  
St. Paul 6, Minnesota  
Attn: J. W. Millin  
Via: R. W. McElroy, Sec. Adm. (1)

Esso Research & Engineering Co.  
Chemical Research Division  
P. O. Box 51  
Linden, New Jersey  
Attn: Dr. Charles E. Morrell  
Via: Chief, N. Y. Ord. Dist. (1)

American Cyanamid Company  
1937 W. Main Street  
Stamford, Connecticut  
Attn: Dr. A. L. Pelker (1)

Office of Technical Services  
Department of Commerce  
Washington 25, D. C.

Commander  
Wright Air Development Center  
Wright-Patterson Air Force Base  
Ohio  
Attn: WCLPRX (1)

Commanding Officer  
Office of Naval Research Br. Office  
Keysign House  
429 Oxford Street  
London W1, England (2)

Princeton University  
Forrestal Research Center  
Princeton, New Jersey (20)

Commanding General  
Aberdeen Proving Ground  
Maryland  
Attn: Ballistic Res. Lab  
ORDBG-BLI (1)