

UNCLASSIFIED

AD NUMBER
ADB004383
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; MAY 1975. Other requests shall be referred to Defense Advanced Research Projects Agency, Attn: TIO, Arlington, VA 22209.
AUTHORITY
DARPA ltr, 5 Aug 1985

THIS PAGE IS UNCLASSIFIED


AD B 004383

THE EVALUATION OF SMALL ARMS EFFECTIVENESS CRITERIA

VOLUME II: APPENDIXES

May 1975

Sponsored by:  
Defense Advanced Research Projects Agency  
ARPA Order No. 2760



**INTREC, INC.**  
Santa Monica, California 90401

DDC  
RECEIVED  
JUN 9 1975  
RESERVED  
D

THE EVALUATION OF SMALL ARMS EFFECTIVENESS CRITERIA

VOLUME II: APPENDIXES


May 1975

Distribution limited to U.S. Gov't. agencies only;  
Test and Evaluation; JUN 1975. Other requests  
for this document must be referred to


ARPA - TIO, ARL, VA 22209

The views and conclusions contained in this document are those of the authors and should not be interpreted as necessarily representing the official policies, either expressed or implied, of the Defense Advanced Research Projects Agency or the US Government.

This research was supported by the Defense Advanced Research Projects Agency of the Department of Defense and was monitored by the US Army Missile Command under Contract Number DAAH01-74-C-0649, effective 5 April 1974.



**INTREC, INC.**  
Santa Monica, California 90401

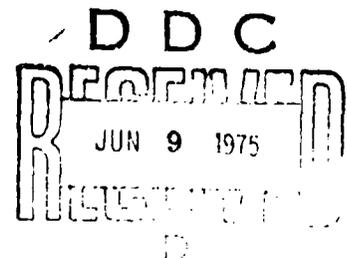

CONTENTS: VOLUME II

List of Tables iii

List of Figures iv

Appendix

- A. BIBLIOGRAPHY A-1
- B. REVIEW OF SMALL ARMS LETHALITY TESTING B-1
- C. ENGINEERING TEST FORMAT C-1
- D. RANGES AT WHICH SMALL ARMS TARGETS ARE ENGAGED D-1
- E. HOW SOLDIERS FIRE SMALL ARMS IN COMBAT--ANALYSIS OF  
COMBAT FILMS E-1
- F. FURTHER DATA ON CDEC AND IB TESTING RANGES AND NEW RANGE  
EQUIPMENT AVAILABLE F-1
- G. SAMPLE DECISION MEMORANDA FROM THE CDEC-SAWS PROJECT G-1

TABLES: VOLUME II

- D-1 Range Intervals for Detecting Infantry Targets Reported from the Korean War D-5
- D-2 Estimated Maximum Useful Small Arms Ranges in the Korean War D-14
- E-1 Incidence of Body Positions in Filmed Small Arms Firing Sequences E-4
- E-2 Incidence of the Use of Support for Rifles, Carbines, and BARs from the Shoulder E-6
- E-3 Incidence of Firers' Body Exposure Level with Sighting Method and Selected Body Positions E-7
- E-4 Incidence of the Use of Cover and Concealment by Small Arms Firers E-9
- E-5 Incidence of Clearly Pointed Fire by Weapon Type in Various Terrains E-11
- F-1 Small Arms Tests Recently Conducted on IB Ranges F-2
- F-2 Number and Types of Targets on IB Test Ranges F-3
- F-3 Estimated Cost of Procuring IB Defense Ranges F-11
- F-4 Small Arms Experiments Recently Conducted at CDEC F-13
- F-5 Personnel Directly Assigned to CDEC Ranges When in Operation F-25
- F-6 Procurement Costs of CDEC Range Components F-27
- F-7 Comparison of Current IB and CDEC Ranges in Target Instrumentation and Capacity to Handle Test Firers F-28
- F-8 Companies Producing Equipment for Small Arms Testing and Training F-39

FIGURES: VOLUME II

- D-1 Frequency distribution of maximum lines of sight ranges from 153 defense positions in the Ardennes Campaign, World War II D-3
- D-2 Frequency distribution of ranges to rifle squad targets in the CDEC-SAWS experiment D-5
- D-3 Frequency distribution of ranges to machine gun squad targets in the CDEC-SAWS experiment D-6
- D-4 Percent of rifle ammunition expended versus range in World War II and the Korean War D-10
- D-5 Frequency distribution of ranges in small arms firings estimated from World War II, Korean War, and Vietnam War combat films D-11
- D-6 Frequency distribution of ranges in small arms firings estimated from Vietnam War combat films D-12
- D-7 Frequency distribution of ranges in small arms firings in World War II in Europe D-13
- D-8 Frequency distribution of ranges in small arms firings estimated by the British Army for combat in Korea D-15
- D-9 Frequency distribution of ranges at which small arms casualties were incurred in New Georgia and Burma in World War II D-17
- D-10 Frequency distribution of ranges at which U.S. rifle casualties were incurred in the Vietnam War D-19
- E-1 Incidence of pointed and aimed fire at different exposure levels E-8
- E-2 Frequency distribution of first-round fire times E-13
- E-3 Frequency distribution of first-round firing times for aimed and pointed fire E-14
- E-4 Frequency distribution of sizes of M16 and BAR bursts of automatic fire E-16
- E-5 Percent of times each range bracket was chosen E-19
- E-6 Percent of estimated target range per 50-meter intervals E-20
- E-7 Percent of estimated target range per 50-meter intervals for aimed and pointed fire E-21

- E-8 Standing positions showing typical high elbow position (M1 and M16) and low elbow position (M14) E-24
- E-9 Typical kneeling positions (M1 and M16) and typical prone position (M16) E-25
- E-10 Men firing weapons from other than shoulder position E-27
- E-11 Man firing M16 from other than shoulder position E-28
- F-1 Layout of IB attack range F-8
- F-2 Layout of IB quick-fire range F-9
- F-3 Layout of IB day and night defense range F-10
- F-4 Weapon-signature simulator F-15
- F-5 Target components in armored target box F-17
- F-6 Portable round counter for the M16 rifle F-19
- F-7 Layout of Alpha Range, HLMR F-23
- F-8 Layout of Bravo Range, HLMR F-24

Appendix A

BIBLIOGRAPHY

DOD DIRECTIVES, ARMY REGULATIONS, ARMY FIELD MANUALS

- U.S. Army. Basic Policies for Systems Acquisition by the Department of the Army; Effective 1 January 1975. AR 1000-1. Washington, 5 November 1974.
- \_\_\_\_\_. M14 and M14A1 Rifles and Rifle Marksmanship. Field Manual 23-8. Washington, April 1974.
- \_\_\_\_\_. M16A1 Rifle and Rifle Marksmanship. Field Manual 23-9. Washington, June 1974.
- \_\_\_\_\_. Organization and Functions: United States Army Materiel Command. AR 10-11. Washington, 27 June 1968.
- \_\_\_\_\_. Research and Development and Force Development User Testing. AR 71-3. Washington, 17 March 1975.
- \_\_\_\_\_. Research and Development: Test and Evaluation During Development and Acquisition of Materiel, Effective 15 September 1971. AR 70-10. Washington, 21 July 1971.
- \_\_\_\_\_. Rifle Marksmanship. Field Manual 23-71. Washington, December 1966.
- \_\_\_\_\_. U.S. Rifle Caliber .30, M1. Field Manual 23-5. Washington, May 1965.
- U.S. Army and U.S. Air Force. Carbine Caliber .30 M1, M1A1, M2, and M3. Field Manual 23-7. Washington, January 1952.
- U.S. Department of Defense. Test and Evaluation. Directive 5000.3. Including change 1. Washington, January 19, 1973.

TEST AND EVALUATION REPORTS

- Ballistic Research Laboratories. Ballistic Limits of Tissue and Clothing, by J. Sperrazza and W. Kokinakis. BRL TN 1645. AD 813-139. Aberdeen Proving Ground, January 1967.

- Comparative Effectiveness Evaluation of the M14 and Other Rifle Concepts (U), by Robert E. Carn, Joseph Sperrazza, and Ronald L. Simmons. Technical Note 1482. AD 359-241. Aberdeen Proving Ground, December 1962. Confidential.
- Development and Proof Services. A Test of Rifle, Caliber .223, AR-15, by L. F. Moore. DPS-96. AD 245-705L. Aberdeen Proving Ground, November 1960.
- Edgewood Arsenal, Chemical Research and Development Laboratories. Wound-Ballistics Assessment of M-14, AR-15, and Soviet AK Rifles (U), by Arthur J. Dziemian and Alfred G. Oliver. CRDLR 3204. AD 366-278. Edgewood Arsenal, MD, March 1964. Confidential/NOFORN.
- Great Britain, Jungle Warfare School, Trial and Development Wing. Trial of Section 5.56mm Light Machine Guns, by M. W. Ward. JWS/TD/STO/2. N.p., 8 July 1970.
- Human Resources Research Organization. Target Detection and Range Estimation, by James A. Caviness, Jeffery L. Maxey, and James H. McPherson. Technical Report 72-34. AD 753-600. Alexandria, VA, November 1972.
- Johns Hopkins University, Operations Research Office. Rifle, Carbine, and Pistol Aiming Error as a Function of Target Exposure Time, by Theodore E. Sterne and Kenneth L. Yudowitch. Technical Memorandum ORO-T-324. AD 094-065. Chevy Chase, MD, December 1955.
- Johns Hopkins University, Operations Research Office, Tactics Division. SALVO I: Rifle Field Experiment, by Leon Feldman et al. Technical Memorandum ORO-T-378. AD 304-321. Bethesda, MD, June 1959.
- SALVO II: Rifle Field Experiment, by Leon Feldman et al. Technical Memorandum ORO-T-397. AD 325-385. Bethesda, MD, May 1961.
- Litton Systems, Inc., Mellonics Systems Development Division. Infantry Weapons Test Methodology Study Quick-Fire Experiment I; Final Report, by Ronald D. Klein. Contract DAEA 18-68-C-0004. Prepared for U.S. Army Infantry Board. USAIB Project 3091. AD 914-686. Ft. Benning, GA, 27 June 1969.
- Springfield Armory. Synopsis of the Results of Tests of the U.S. Rifle, Caliber .30, Lightweight, T47, for the Period Covering 1 Jul 51-30 Jan 52, by S. D. Caloccia. SA-MR11-2500. Springfield, MA, April 7, 1952.
- U.S. Army, Chemical Corps Research and Development Command, Chemical Research and Development Laboratories. Wound-Ballistic Studies of Projectiles for Hand-Held Antipersonnel Weapons: A Caliber .45 Pistol Round and the Caliber .30 XM76 Rifle Round (U), by Max Krauss et al. CRDLR 3121. AD 328-697L. Army Chemical Center, MD, February 1962. Confidential/NOFORN.

- U.S. Army, Materiel Systems Analysis Agency. Comparison of Predicted and Observed Wound Ballistics Estimates for Rifle Bullets (U), by Robert E. Carn et al. Technical Report 28. Aberdeen Proving Ground, November 1970. Confidential.
- U.S. Army Combat Developments Command. Infantry Rifle Unit Study 1970-1975 (IRUS-75), Phase I. AD 870-281L. Ft. Ord, CA, August 1967.
- U.S. Army Combat Developments Command, Experimentation Command. Small Arms Weapon Systems (SAWS), Part 1: Main Text. CDCEC 65-4. Ft. Ord, CA, 10 May 1966.
- \_\_\_\_\_. Small Arms Weapon Systems (SAWS), Part 2: Annexes. CDCEC 65-4. Ft. Ord, CA, 10 May 1966.
- \_\_\_\_\_. XM19 Serial Flechette Rifle Experiment (21.9) (Short Title: USACDEC Experiment 21.9), Final Report, Vol. 1: Executive Summary (U). ACN 13105. AD 521-235L. Ft. Ord, CA, 26 June 1972. Confidential/NOFORN.
- \_\_\_\_\_. XM19 Serial Flechette Rifle Experiment (21.9) (Short Title: USACDEC Experiment 21.9), Final Report, Vol. 2 (U). ACN 13105. AD 521-236L. Ft. Ord, CA, 26 June 1972. Confidential/NOFORN.
- \_\_\_\_\_. XM19 Serial Flechette Rifle Experiment (21.9) (Short Title: USACDEC Experiment 21.9), Final Report, Vol. 3: Reduced Data Report (U). ACN 13105. AD 521-237L. Ft. Ord, CA, 26 June 1972. Confidential/NOFORN.
- \_\_\_\_\_. XM19 Serial Flechette Rifle Experiment (21.9) (Short Title: USACDEC Experiment 21.9), Final Report, Vol. 4: Data Supplement (U). ACN 13105. AD 521-659L. Ft. Ord, CA, July 1972. Confidential/NOFORN.
- U.S. Army Human Engineering Laboratory. Effects of Rifle Configuration on Quick Fire Accuracy, by R. R. Kramer and J. P. Torre, Jr. Technical Memorandum 6-64. Aberdeen Proving Ground, March 1964.
- \_\_\_\_\_. Human Factors Evaluation of the Stoner 63 Assault Rifle, by J. P. Torre, Jr. et al. Technical Memorandum 7-64. AD 349-898. Aberdeen Proving Ground, April 1964.
- U.S. War Department, Fig Board. Report of the Board of Officers Appointed by Paragraph 31, Special Orders 154, War Department 2 July 1928. Washington, September 21, 1928.

HISTORICAL STUDIES

- Edgewood Arsenal, Research Laboratories, Wound Data and Munitions Effectiveness Team. Missile Wounds of the Abdomen: Analysis of 135 U.S. Army Casualties in Vietnam, by Ian Sunshine. EATR 4374. AD 867-809. Edgewood Arsenal, MD, March 1970.
- Johns Hopkins University, Operations Research Office. Commentary on Infantry Operations and Weapons Usage in Korea; Winter of 1950-51, by S. L. A. Marshall. ORO-R-13. AD 000-342. Chevy Chase, MD, October 1952.
- \_\_\_\_\_. Operational Requirements for an Infantry Hand Weapon, by Norman A. Hitchman, Statistical Analysis by Scott Forbush and George Blakemore, Jr. Technical Memorandum ORO-T-160. AD 000-346. Chevy Chase, MD, 19 June 1952.
- \_\_\_\_\_. Use of Infantry Weapons and Equipment in Korea, by G. N. Donovan. Technical Memorandum ORO-T-18(FEC). ATI 169-243. Chevy Chase, MD, 13 May 1952.
- RMC Research Corporation. Research Study on Predictive War Game Factors; Final Report, by James K. Cockrell and Donn Carter. Prepared for SHAPE Technical Centre. Contract C.72.03. Bethesda, MD, March 1974.
- Stanford Research Institute. Considerations Affecting the Doctrine of Small Arms Employment Rifle and Automatic Rifle Usage as a Function of Range (U), by George M. Gividen. Prepared for U.S. Army Combat Developments Command Experimentation Center. Ft. Ord, CA, February 1965. Confidential.
- U.S. Army, Office of the Surgeon General. Wound Ballistics, edited by James C. Beyer. Washington, 1962.

INSTRUMENTATION REPORTS

- Janes, Mean and Dakon. USAIB Compiler User's Guide. Ft. Benning, GA, February 1971.
- Naval Training Devices Center. NAVSO Pamphlet 3108. Orlando, FL, December 1967.
- Naval Training Equipment Center, Commanding Officer. "List of Equipment Required for Commander General, Marine Corps Recruit Depot, Parris Island." (Cost included). Letter N3203: GDG. 22 May 1973.

Stanford Research Institute. U.S. Army Infantry Project Analysis--Small Arms Test Facilities and Methods. Ft. Benning, GA, May 1965.

U.S. Army, Combat Developments Command. Memorandum for Record: Live Fire Test of California Avionics Laboratories, Inc., Portable Round Court System. Ft. Ord, CA, 20 June 1973.

U.S. Army Infantry Board. Defense Experiment I. TECOM Project 8-5-0070-01. Ft. Benning, GA, 25 November 1971.

\_\_\_\_\_. A Pilot Experiment, Attack Experiment I: Small Arms Service Test Design for a Study of Small Arms Service Test Facilities and Methods, Final Report of Experiment. USAIB Project 3091. Ft. Benning, GA, June 1966.

\_\_\_\_\_. Project Analysis--Small Arms Test Facilities and Methods. Prepared by Stanford Research Institute. Ft. Benning, GA, May 1965.

\_\_\_\_\_. Technical Memorandum: Scoring Resolution of a Time Difference Miss Distance Scoring System. Ft. Benning, GA, December 1967.

U.S. Marine Corps, Deputy Chief of Staff, Installation and Logistics, to Naval Training Equipment Center, Commanding Officer, Orlando, Florida. "Marine Corps Procurement Request." 27 June 1974.

#### OTHER REFERENCES

Blue Ribbon Defense Panel. Report to the President and the Secretary of Defense on the Department of Defense. Washington, 1 July 1970.

Hatcher, Julian S. Hatcher's Notebook, 3rd ed. Harrisburg, PA: Stackpole, 1962.

U.S. Army. Small Arms Weapon Systems Analysis--A Review and Evaluation. Washington, June 1967.

## Appendix B

### REVIEW OF SMALL ARMS LETHALITY TESTING

#### INTRODUCTION

This appendix includes the following:

- o Review of existing wound ballistics combat results and test data.
- o Analysis of certain combat and test data.
- o Comparison of data with currently used lethality models.
- o Conclusions concerning testing and lethality differences among standard bullets.

A basic understanding of the mechanisms of wounding by bullets has been pursued by surgeons and medical researchers for over a century. The "explosive" wound damage effects of bullets were first noted by Huzier in 1848 in Paris. The hydrodynamic nature of the extensive internal damage or "explosive" cavity caused by high-velocity bullets was first recognized by a Swiss researcher, Kocher, in 1874. By the turn of the century, bullet flattening and shock wave transmission had been eliminated as mechanisms; in 1898, Stevenson had, from surgical observation, correctly defined the major damage mechanism as the cavity in the wake of the bullet caused by the outward momentum imparted to tissue fluids.

The 1928 "Pig Board" firings and wound autopsies established what had already been suspected: that bullet velocity, tumbling, and energy loss were closely related to wound damage and that bullet caliber was not. World War II research by Harvey and others at Princeton treated the quantitative physics of wounding as a branch of underwater ballistics, having established by ultra-high-speed photography and X-rays that bullet cavities in water show behavior analogous to that of bullet temporary or "explosive" cavities in tissues.\*

---

\*For a more detailed history of wound ballistics, see U.S. Army, Office of the Surgeon General, Wound Ballistics, edited by James C. Beyer (Washington, 1962). For the physics of wounding, see Chapter III.

Despite the advances in understanding the fundamental physics of wounding that were achieved in World War II, little or no research was undertaken to directly compare the wounding effectiveness of bullets of various shapes, velocities, and sizes (though some work was done on fragment sizes). The Pig Board tests remain the last scientifically credible experimental comparison of bullets of varying caliber.

Little progress has been made since World War II in the basic understanding of the mechanisms of wounding. Most attention in the area has focused on "optimizing" fragmentation, improving body armor, and devising and applying computer models for predicting incapacitation by various fragments and bullets. These models have, in fact, considerably less scientific validity than the World War II work; as a result, they have introduced much confusion and erroneous quantification into the evaluation of small arms wounding effectiveness--as will be seen.

#### THE TREND TOWARD SMALLER CALIBERS

Since the Civil War, whenever the question of introducing a smaller caliber cartridge has arisen, military developers and users have expressed concern that the smaller caliber may have insufficient "stopping power" and may be unlikely to "do the job." These objections were raised when the large (circa .40 to .60 caliber) and subsonic balls of the Civil War era were being replaced by 7.9- to 6.5-mm cartridges (about 2000 to 2800 fps) toward the end of the 19th century. Similar objections were raised again in the 1920s, when the .276 caliber was proposed (and defeated). The insufficient "stopping power" issue was heard again in the 1960s, when the 3200 fps 5.56 mm was proposed as a replacement for the 2800 fps 7.62 mm. In each case after adoption, surgical observation of combat casualties indicated that, if anything, the smaller-caliber, higher-velocity bullet created greater wound damage than its predecessor.

#### WOUND DAMAGE MECHANISMS

Based on the World War II wound ballistics research, it appears that most of the damage caused by a bullet owes to the violent expansion and

construction of the large temporary cavity formed in the wake of high-velocity projectiles of any shape. This temporary cavity can fracture bones and rupture organs at significant distances from the bullet path. The diameter of the damage zone is apparently directly related to the diameter of the temporary cavity. The diameter of the temporary cavity at any point is proportional to the square root of the space rate of projectile energy loss at that point, or, equivalently, to the energy of the projectile times the retardation coefficient at that point. Thus, the diameter of the temporary cavity can vary widely--even for spherical projectiles--as tissues of varying resistance are encountered.\*

Bullets, which are stabilized by the slight excess of gyroscopic spin forces over drag forces in air, become suddenly unstable upon entering the medium of tissue, which is 800 times denser than air. How fast they tumble in homogeneous tissue depends almost entirely on their transverse rotational moment of inertia and their yaw angle at impact. Thus, small bullets striking at moderate yaw angles of a few degrees will tumble much faster than highly stable, massive, point-on bullets of the type designed for minimum long-range dispersion. Yaws as fast as  $90^\circ$  in 3 inches have been observed. However, all high-velocity spitzer bullets will experience some tumbling due to tipping by external clothing or equipment and by internal inhomogeneities.

The significance of tumbling is that bullet retardation increases roughly as the square of yaw. Thus, a bullet at right angles to its path experiences approximately 50 times the retardation--and therefore produces a wound cavity diameter 50 times as large--as the same bullet point-on.\*\* Thus, rapid tumbling before bullet exit is the most significant determinant of wound cavity size for bullets of comparable velocity, and it dominates such factors as bullet mass. Rapid tumbling, high-damage bullets are achieved by obtaining some yaw at impact, low rotational moment of inertia around the transverse axis, and high velocities. In other words, the most

---

\* For a more detailed discussion, see U.S. Army, Office of the Surgeon General, Wound Ballistics, Chapter III.

\*\* Ibid., Chapter II.

lethal bullets will be fast and small\* and should have the least possible stability consistent with acceptable dispersion.\*\*

It is important to note that the above physical insights, although sufficient to guide bullet design and comparisons of qualitative wounding effectiveness, are not in any sense sufficient to provide quantitative predictions of serious casualty production or incapacitation. That is because the location of the temporary wound cavity relative to vital organs exerts an even more powerful (and unquantified) effect than the size of the cavity.

As a result of the most recent controversy, the 5.56-mm versus the 7.62-mm bullet, a number of research efforts were mounted, but they produced fragments of data that shed little new light and, in fact, often contradict each other. Reports and studies citing these data have, over the last ten or twelve years, created the general impression that significant differences in lethality exist between the 5.56-mm and 7.62-mm bullets. The validity of such a conclusion is an important matter and should therefore survive any fair and objective challenge. The remainder of this appendix examines the evidence for and against the existence of significant lethality differences in current standard rifle bullets.

#### TYPES OF EMPIRICAL BULLET LETHALITY DATA

There is little direct combat evidence of important variations in lethality among the standard rifle bullets in use since World War I. Comparable samples of casualties caused by several different kinds of bullets under similar exposure and range frequency conditions are rarely present in one country's force. Furthermore, little effort has been devoted to collecting detailed bullet wound data in any country. The data that are available are discussed below.

---

\*Bullets that are too fast and too small will not penetrate grass, brush, outer clothing, and equipment adequately because they will explode into tiny fragments upon contact. The limits of how small and how fast bullets can be made and still remain useful are not known.

\*\*In light of this, the AMC decision to increase the twist of the M16 from 1 in 14 inches to 1 in 12 inches to increase the stability of the bullet under extreme arctic conditions (thereby achieving a just-noticeable decrease in dispersion at -60°F) has decreased the weapon's overall effectiveness. Fortunately, the bullet is still more than adequately lethal.

Because direct casualty evidence is in short supply, weapon developers have turned to substitute evidence. This usually involves estimating or inferring human incapacitation from bullet performance in some substitute material. (Cadavers cannot be used for valid lethality tests because they present far different mechanical properties to bullets than do live bodies.) Two types of substitutes have been used: animals and blocks of firm gelatin (which has penetrability properties similar though not identical to human muscle tissue). It is obvious that these substitutes are not the same as human bodies. Thus, lethality predictions made from tests using them must be applied with caution. It is therefore useful to consider how much direct evidence of bullet lethality in humans is available before discussing the use of substitutes.

#### COMBAT EVIDENCE OF BULLET LETHALITY

Usable data on the severity of wounds produced by rifle and machine gun bullets are not available for all casualties recorded by the U.S. Army, in part because the wounding agent (bullet, fragment, etc.) identified by surgeons or recorded in grave registrations is often in question, and in part because the circumstances of each casualty incident are not recorded. However, several samples of detailed small arms casualty data were deliberately collected during World War II, and they provide insights into bullet lethality. The most detailed data come from two samples, one of 213 bullet casualties in the New Georgia and Burma campaigns and the other of 59 bullet casualties in the Bougainville campaign.\*

In these two samples the portion of rifle casualties who were killed or hospitalized (at any level above an aid station) was about 82 percent; for machine gun casualties it was about 92 percent. Even first-echelon hospitalization for bullet wounds required an average of 15 to 17 days. Of the total of men hit by rifle bullets, about 26 percent died and 41 percent had wounds so serious that they were evacuated to rear echelons or

---

\*U.S. Army, Office of the Surgeon General, Wound Ballistics, pp. 264-266 and p. 433, respectively.

the United States; for machine gun casualties, about 45 percent died and 40 percent required evacuation to rear echelons or the United States. The vast majority of small arms casualties were hit by the 6.5-mm Japanese rifle bullet, a moderate-velocity (2400 fps) bullet observed by military surgeons to cause especially grave wounds.\* The relatively large wound damage effects of the 6.5-mm bullet apparently owed to its thin rear jacket design, which caused (intentionally or unintentionally) both high yaw (e.g., low stability) and separation of bullet from jacket on impact.

No detailed casualty surveys of adequate sample size covering both wounded and killed casualties resulting from specific, known engagements are available for other small arms and other theaters. Surgical observations exist on the relative severity of wounds from other types of bullets; of some interest is the observation that, as expected, wounds from pistol bullets (800 to 1200 fps) are significantly less severe than high-velocity rifle bullet wounds, and .30 caliber carbine wounds (1975 fps) are more like pistol wounds than rifle wounds.\*\*

None of the available casualty surveys give any direct data concerning incapacitation, and time to incapacitation, of the casualty cases. Despite this, current computer lethality models attempt to predict incapacitation effectiveness (according to allegedly precise criteria of time and function--attack or defense) rather than to predict casualty production, say, the level of hospitalization required. Thus, these models are predicting quantities that have never been measured and probably never will be.

#### CONTROLLED TESTS USING SUBSTITUTE TARGETS

Of the two types of substitute targets, live animals are recognized to better simulate the human body, but gelatin blocks are far easier and less expensive to use.

---

\*Ibid., pp. 19, 96.

\*\*Ibid., p. 94.

The object of experiments with substitute materials is to predict the seriousness (or the incapacitating effects) of wounds produced in men, so it is important to know how well these experiments help to predict wound severity. Certainly, if one is to have confidence in such predictions the tests must produce data that allow calculating the effect of:

- o Expected distributions of hit locations on the body and of directions of bullet travel within the body (and thus of the bullet's opportunity to cause damage to internal organs most likely to incapacitate).
- o Bullet penetration of clothing and equipment covering the body at the hit location, both in terms of the energy loss outside the body and the induced tumbling.
- o Bullet penetration of various internal tissues and bones that affects the tumbling and energy transfer of the bullet as it traverses the body.
- o Bullet striking velocity and yaw at impact, which depend on the range from the weapon to the target.

If bullet lethality are to be compared on the basis of the "typical" hits on a soldier in combat, then it is essential that "typical" hits represent the expected distribution of locations and directions. The location of hits has been extensively studied in combat casualty surveys during the Civil War, World War I, World War II, in Korea and, to some extent, Vietnam. Direction of bullet travel through the body is rarely recorded; there exist essentially no usable distributions of directions of bullet paths relative to the body. The plausible assumption, used in most computer lethality models, that hits are random and proportional to the size of the body component's presented area has been demonstrated to be false. Almost all casualty surveys show a significantly higher than predicted percent of hits on the head and significantly lower than expected hits on the abdomen

and legs.\* In the absence of a combat-verified distribution of hit locations and directions for bullets, it seems unlikely that models for predicting lethality can have much validity.

A soldier engaged in front-line combat is always covered with layers of clothing and items of equipment (cartridge belt, suspenders, ammunition pouches, canteen, first aid kit, etc.); he is likely to be wearing a steel helmet and perhaps an armored vest. These items must be penetrated by a bullet before it penetrates his body. They add protection insofar as they decrease the bullet's energy and sometimes deflect it. However, they can significantly increase bullet damage by increasing its yaw angle and accelerating the tumbling process. (These effects of clothing and equipment have never been tested or included in current lethality modeling.) Similarly, after bullets begin to penetrate the body they may encounter bone and tough membrane, which can either protect vital organs or can accelerate tumbling.

Comparing animal targets and gelatin targets, it appears that most of the important internal and external effects on bullet lethality could be tested using animals, though such tests cannot lead to accurate quantitative prediction of human incapacitation. Test animals can be oriented toward the weapon and shielded by armor plate so as to achieve reproducible hit locations and bullet path angles relative to the body. They can be covered by clothing and equipment to provide data on the effects of these elements on bullet performance. Their bone structures and internal organs are not similar enough to man's to provide lethality quantification, but they can approximate the principal internal effects on bullet behavior. Bullet yaw before impact can be measured in order to control the effect of this critical variable. However, few of these aspects have been adequately represented in animal tests since World War II, as discussed below.

---

\*The presented areas used for prediction are almost always those of the full standing figure. As the casualty data show, this is hardly the average posture or exposure in combat; men are more likely to be crouching or prone and half exposed or in foxholes. The uniformly random hit distribution for bullets is further distorted by the effects of aiming, which are probably significant at close ranges.

Gelatin blocks, on the other hand, have little in common with the human body. They represent homogeneous muscle tissue only approximately (e.g., with about 22 percent lower drag coefficient and considerably different temporary cavity volumes and pulsations), but they do not represent any other component of the body. At most, gelatin block tests can be used to determine relative distance to tumble as an indicator of relative wound damage.\* The blocks can be covered with appropriate clothing and equipment, and their surfaces can be oriented at angles to the bullet's path to determine the effects of covering materials and obliquity on distance to tumble. Except for one laboratory test under unrepresentative ballistic conditions,\*\* gelatin tests have included only normal impact angles on "nude" gelatin.

#### RESULTS OF ANIMAL TESTS

The animal test data that this study has identified include one test using pigs and several tests using rabbits, cats, and goats. Only one of the latter involved the use of bullets and collected adequate data. The outstanding result of these tests was the seriousness of the wounds produced by all the bullets used, ranging from 5.56 mm to .30 caliber.

The pig tests were conducted by the U.S. Army in 1928 in support of a board appointed to recommend a cartridge for a new semiautomatic rifle.\*\*\* (The board has since become known as the "Pig Board.") Bullets of similar shape ranging from .256 to .30 caliber were fired, at muzzle velocities of 2700 fps, at anesthetized pigs located 300, 600, and 1000 yards away. Hit

---

\* Since distance to tumble is extremely sensitive to bullet yaw at impact, to be valid such tests must use large sample sizes of completely representative weapons and ammunition fired at many increments of range (since yaw is somewhat random from round to round and can vary rapidly with range). Few, if any, gelatin block tests meet these criteria of validity; a common failing is to simulate long-range impacts by using down-loaded cartridges at short range, which gives invalid yaw results.

\*\* Ballistic Research Laboratories, Ballistic Limits of Tissue and Clothing, by J. Sperrazza and W. Kokinakis, BRL TN 1645, AD 813-139 (Aberdeen Proving Ground, MD, January 1967).

\*\*\* U.S. War Department, Pig Board, Report of the Board of Officers Appointed by Paragraph 31, Special Orders 154, War Department, 2 July 1928 (Washington, September 21, 1928).

locations and directions were controlled; armor plate with a small aperture at the desired impact location was placed in front of each pig. The residual velocities and yaw of exiting bullets (almost all rounds completely penetrated the pigs) were measured in many cases. Wounds were examined and measured through autopsy.

#### Reanalysis of Pig Board Results

Examination of the wound-by-wound data in the pig test report reveals some clear lethality results that do not appear to be generally understood today; no newer or more valid data exist to refute them. Of a total of 106 wounds, 86 percent were described (based on the autopsy results) as producing severe damage. The remaining 14 percent were from shots that penetrated only skin, fat, and muscle; 80 percent of these hit the thighs, back, and shoulders. Most of these shots hit near the edges of the pig's silhouette.

The reanalysis confirmed the original report's findings of some differences among wounds from the different caliber bullets, with the smallest bullets producing the greatest damage at ranges of 300 and 600 yards. However, the larger bullets also produced severe damage at these ranges. The only detectable reduction in severity of damage at 1000 yards relative to damage at the shorter ranges was in wounds in the hams (thighs), some of which were probably not immediately incapacitating.

The amounts of bullet energy transferred to the pigs were measured in some of the shots, primarily those fired at 600 and 1000 yards. Foot-pounds of energy transferred ranged from 12 to over 1100, but over 60 percent of the bullets deposited less than 300 foot-pounds of energy (each) in the pigs' bodies. Contrary to the assumptions of most predictive models, total energy\* deposited in the non-serious wounds had about the

---

\*The physics of wound damage (i.e., the diameter of the temporary cavity) is concerned with the instantaneous space rate of energy loss, not the total energy loss. As mentioned above, the diameter of the temporary cavity is proportional to the projectile energy times the retardation coefficient at the point in the body where the cavity diameter is measured. The diameter of the cavity varies radically along the wound track, depending mostly on instantaneous bullet yaw angle and tissue resistance at each point.

same distribution as in the serious wounds. The only apparent difference in the amounts of energy deposited by the .256, .276, and .30 caliber rounds was that only the .30 caliber bullet deposited more than 700 foot-pounds. Energy transfer was somewhat a function of the hit location, with hits in the head, chest, and abdomen accounting for the great preponderance of energy deposits larger than 200 foot-pounds. Average total energy transfer was greater at 600 than at 1000 yards, reflecting the greater kinetic energy remaining in the bullets at the shorter range. However, as stated above, this did not appear to affect the percent of serious wounds produced.

It appears that most of the tested combinations of bullet size, range (and thus bullet velocity), and hit location and direction are above any minimum threshold for serious wounds. Of these factors only hit location and direction significantly influenced the seriousness of the wounds inflicted by these bullets.

#### Reanalysis of Goat Tests

Wound ballistic tests were conducted on goats in 1964;\* they were less precisely controlled than the pig tests. The weapons used were the 5.56-mm M16 rifle (1 in 12 twist); the 7.62-mm M14 rifle; and the Soviet 7.62-mm AK 47 rifle (representing considerably lower bullet mass and velocity than the M14). The locations of hits and directions of bullet paths relative to the goats were not controlled, but most bullets hit the goats' torsos rather than their extremities, and apparently from the side. The wounds were examined by autopsy. Of a total of 182 hits, 45 percent put the goat on the ground--dead or unable to stand--within five minutes (usually in a few seconds). In another 43 percent of the hits the goats were either sacrificed before five minutes elapsed or the time to their collapse was not recorded; however, the descriptions of the wounds (including diagrams of the wound tracks) indicate that they were serious.

---

\*Edgewood Arsenal, Chemical Research and Development Laboratories, Wound-Ballistics Assessment of M-14, AR-15 and Soviet AK Rifles (U), by Arthur J. Dziemian and Alfred G. Oliver, CRDLR 3204, AD 366-278 (Edgewood Arsenal, MD, March 1964), Confidential/NOFORN.

Many of this latter group of wounds produced large cavities in the goats' gastrointestinal systems. Thus, 85 percent of all wounds were apparently serious ones. The remaining 15 percent of the hits caused skin, fat, and muscle damage that would not necessarily be severe. Given the high variability induced by uncontrolled hit locations, all of the bullet types tested produced similar proportions of serious wounds at all ranges; differences in their lethalties cannot be inferred from the data.

#### GELATIN TESTS AND PREDICTIVE MODELS BASED ON THEM

Gelatin blocks are the most widely used target substitutes for human bodies in lethality testing because the tests are inexpensive and a detailed photographic record can be obtained of the projectile's track through the gelatin. The results of these tests are not, however, reliable indicators of lethality.\* In addition to the unrepresentative homogeneity of the gelatin target, the permanent cavity in gelatin is only a record of tumbling; it does not represent the size of the temporary cavity in tissue, which is the basic damage mechanism in human bodies.

Attempts have been made to compensate for the artificiality of gelatin block results. In current computer models for predicting incapacitation, the projectile's total energy loss in 15 cm of gelatin is calculated from equations fitted to the previously described gelatin block firings and then translated into estimated wounding effects of such incapacitation "scores"\*\* as a function of gelatin energy loss in each area of the body hit. The overall result is averaged, using the assumption of uniformly random horizontal hits or a standing nude man (with helmet) to arrive at

---

\* A detailed discussion of the technical aspects of the use of gelatin data to predict lethality is contained in U.S. Army, Small Arms Weapon Systems Analysis--a Review and Evaluation (Washington, June 1967).

\*\* These "scores" are intended to be percent reductions in soldier "capability" for each area of the body, arrived at by a panel of medical doctors using subjective judgments. Separate "scores" versus energy loss, by area of the body, were established for the various incapacitation criteria such as the "5-minute defense" criterion and the "30-second attack" criterion. Defenders and attackers are both assumed to be full standing figures.

an average incapacitation "score" (often incorrectly used as an incapacitation probability). It is claimed that the basic incapacitation "score" judgments were based on the kinds of wounds that were observed in goats hit with spheres or cubes at various total energy loss levels. Even if goat wounds could be validly translated into human wounds, the shape of the wound track and temporary cavity made by spheres and cubes is quite different from that made by bullets, since bullet tumbling carries great variations in cavity diameter. Further, the goat tests provided too small a sample size to determine the chances that hits on given areas of the goat's body would fracture bones, rupture intestines, or damage vital organs and veins.

The results of these incapacitation models have been calculated a number of times over the past fourteen years for the current standard small arms projectiles--the M80, 7.62 mm NATO; the Soviet AK47, 7.62 mm (39-mm cartridge); and the M193, 5.56 mm. The numbers always decrease substantially as range increases from 100 to 500 meters. The more recent calculations\* show the 5.56-mm and 7.62-mm bullets as achieving essentially equal average incapacitation "scores" at 100 meters (i.e., about .85 to .90 incapacitation), but as range increases to 500 meters the 7.62 mm decreases slowly to .77 incapacitation, while the 5.56 mm bullet drops to a .50-.55 "score."

These prediction differences are the direct results of calculated, not tested, differences in bullet energy loss to gelatin blocks during the first 15 cm of penetration. These calculated energy losses decrease smoothly\*\* from 1400 foot-pounds at 10 meters' range to 150 foot-pounds at 500 meters' range for the M80, 7.62-mm bullet, and from 700 to 57 foot-pounds over the same ranges for the M193, 5.56-mm bullet. If there were a valid basis for relating the energy loss in 15 centimeters of gelatin to wound severity and incapacitation, the above energy losses should approximate

---

\*Edgewood Arsenal, Chemical Research and Development Laboratories, Wound-Ballistics Assessment of M-14, AR-15 and Soviet AK Rifles (U), by Arthur J. Dziemian and Alfred G. Oliver, CRDLR 3204, AD 366-278 (Edgewood Arsenal, MD, March 1964), Confidential/NOFORN.

\*\*Valid test values of energy loss would show some increases with range at certain range intervals, due to increasing bullet yaw over these intervals.

those of the Pig Board tests. In fact, at 600 yards the measured losses in .30 caliber bullet energy due to travel through the pigs' bodies were more than four times larger than the calculated gelatin energy loss for the 7.62 mm (which has about the same size bullet and 100 fps more muzzle velocity than the Pig Board .30 caliber). The mean energy transfer in pigs at 600 yards for the .256 caliber bullet (2700 fps muzzle velocity) was 413 foot-pounds, and for the .276 and .30 caliber bullets (same velocity) it was 611 foot-pounds; median energy transfer values were 452 and 534 foot-pounds, respectively.

Clearly, gelatin block data and computer translations thereof cannot provide valid estimates of relative or absolute bullet lethality. The pig tests may imply lower wound severity than might be expected in actual combat. No clothing or equipment covered the pigs, so there were none of the added tipping effects on the bullets--increasing the wounding effect--that such materials could impart.\*

#### CONCLUSIONS

There is evidence from both combat data for the 6.5-mm Japanese bullet and animal tests for high-velocity (i.e., above 2400 fps) bullets ranging from 5.56 mm to 7.62 mm that approximately 85 percent of the wounds resulting from hits by such bullets will be serious, that is, will require hospitalization rather than care at battalion aid stations. What percent of these serious casualties will be effectively incapacitated under any time criterion is unknown and unprovable. The performances of these bullets are more than adequately lethal and appear to be well above some as yet unidentified threshold of lethality. Differences in the size

---

\*Tests conducted with thin metal tipping plates showed that causing 7.62-mm bullets to tip before striking a body produced what were described as "gross wounds." Ballistic Research Laboratories, Comparative Effectiveness Evaluation of the M14 and Other Rifle Concepts (U), by Robert E. Carn, Joseph Sperrazza, and Ronald L. Simmons, Technical Note 1482, AD 359-241 (Aberdeen Proving Ground, MD, December 1962), Confidential.

of the temporary cavity and the wound track caused by these bullets may exist, though the variability of the available data and the dominant importance of wound track location make it impossible to produce reliable evidence of significant differences.

On the basis of the surgical observations above, it appears that lower-velocity bullets (300 to 1200 fps), such as are used in pistols and submachine guns, produce considerably less severe wound damage.

Gelatin block tests, if sufficiently carefully conducted, can provide reliable measurements of relative distance to tumble, a useful qualitative indicator of relative lethality. Currently available gelatin block tests do not generally meet the criteria for reliable measurements.

It is apparent that predictions of bullet energy loss in gelatin, and current computer models that predict average incapacitation "scores" from these energy losses, are based upon tenuous assumptions and do not agree, in absolute or relative magnitude, with animal test results or combat experience data. Few animal tests of bullet lethality exist; none since the 1928 Pig Board have reached the same level of scientific validity.

These conclusions imply that if small arms projectiles are to be used that differ markedly in velocity or shape from current standard rifle and machine gun bullets, new animal testing will probably be necessary. Such tests should use the Pig Board procedures as a pattern, together with the other considerations mentioned in this appendix.

## Appendix C

### ENGINEERING TEST FORMAT

This appendix provides a typical example of the content of a small arms engineering test. The test cited is a standard engineering test for lightweight automatic rifles, and its procedures have remained approximately the same for the last twenty years.\* Because of their stability of content, such tests provide a source of data for engineering comparisons of weapons developed at different times.

The instrumentation needed to conduct engineering tests is not extensive. If diagnostic tests are done to investigate or amplify basic engineering tests results, as sometimes occurs, instrumentation is needed for making detailed measurements of component pressures, loads, and motions (e.g., chamber pressures, buffer forces, and bolt accelerations). This instrumentation is the same as that used in small arms engineering design testing; it is not as extensive as the test equipment needed for other types of weapons in development.

The sample engineering test format presented in the annex to this appendix is taken directly from a 1960 Development and Proof Services test of the AR-15 rifle.\*\* Since then, the engineering and testing of the lightweight automatic rifle have changed very little if at all.

It should be noted that absolute thresholds of acceptable performance are rarely specified for each of the 11 test procedures. In particular, no thresholds are usually set for assembly/disassembly, accuracy, flash, or

---

\*The test cited is not significantly different from tests that the Springfield Armory and Development and Proof Services, Aberdeen Proving Ground, were administering in the early 1950s. Springfield Armory, Synopsis of the Results of Tests of the U.S. Rifle, Caliber .30 Lightweight, T47, for the Period Covering 1 Jul 51 - 30 Jan 52, by S. D. Calocchia, SA-MR11-2500 (Springfield, MA, April 7, 1952).

\*\*Development and Proof Services, A Test of Rifle, Caliber .223, AR-15, by L. F. Moore, DPS-96, AD 245-705L (Aberdeen Proving Ground, November 1960).

cook-off. At most, performance in these tests is subjectively (but rarely explicitly) compared with that of previous rifles. Furthermore, few if any rifles--including those later standardized--pass all the extreme condition endurance tests.

ANNEX TO APPENDIX C

ENGINEERING TEST FORMAT FOR A  
STANDARD LIGHT AUTOMATIC RIFLE TEST

TEST I: EXAMINATION

- a. The rifle will be disassembled and an examination made of all parts.
- b. The number and names of all parts and the types of springs will be recorded.
- c. The weight of the complete rifle, component parts and accessories will be recorded.
- d. The length of the rifle and other pertinent dimensions will be recorded. Dimensions recorded will include barrel length, sight radius, line of sight above bore, and stock dimensions.
- e. The average trigger pull will be determined.
- f. The rifle will be photographed in various conditions of disassembly.

TEST II: DISASSEMBLY AND ASSEMBLY

The time, and the number and type of tools required for each of the following operations will be recorded:

- a. To disassemble the rifle completely.
- b. To assemble the rifle after complete disassembly.
- c. To dismount the operating parts and magazine mechanism (field strip).
- d. To assemble the operating parts and magazine mechanism.

TEST III: ACCURACY

- a. Four ten-round targets will be fired at a range of 100 yards from a machine rest or from a bench rest by an expert rifleman.
- b. A test will be conducted to investigate the accuracy that can be obtained when the rifle is fired under various conditions similar to those encountered in combat. Three riflemen will each fire the following course at 100 yards with the test rifle:

- (1) With sights properly adjusted and with a fouled bore,\* one 10-round target will be fired from a bench rest.
  - (2) The rifle will be disassembled (field stripped), cleaned, oiled, and reassembled.
  - (3) Starting with a cold and oiled bore, one 10-round target will be fired from a bench rest.
  - (4) One 10-round target will be fired from the prone position using a sling.
  - (5) One hundred rounds will be fired as rapidly as possible.
  - (6) Immediately after firing the 100 rounds, one 10-round target will be fired from a bench rest.
  - (7) Another 10-round target will be fired immediately from the prone position using a sling.
- c. Three riflemen will each fire 10 three-round bursts at a range of 25 yards from the standing position. The course will be repeated from the prone position. A suitable control rifle may be used.
- d. Three individuals will fire as many aimed shots as possible in a one-minute period with each semiautomatic and automatic fire. The course will be fired three times per individual and the hits recorded on the E\*\* target at 100 yards.
- e. Six individuals will fire a standard qualification course with the rifle.

#### TEST IV: ENDURANCE

The rifle will be fired 6000 rounds for endurance, firing alternately 100 rounds semiautomatically and 100 rounds automatically. The rifle will be cooled after each 100 rounds. The entire mechanism may be disassembled, cleaned, and oiled after each 600 rounds. All malfunctions, breakages, and replacement of parts will be recorded. The instrumental velocity will be measured on 20 rounds, before and after the endurance test. Accuracy will be checked before and after the test. In the endurance test, 100 rounds will be fired semiautomatically and 100 rounds will be fired automatically under each of the following conditions:

---

\*How the bore is fouled is not specified.

\*\*The "E" target is a silhouette target corresponding to a kneeling man. U.S. Army, U.S. Rifle Caliber .30, M1, FM 23-5, (Washington, May 1965).

- a. With the rifle held loosely in the hands.
- b. With the rifle held right side up.
- c. With the rifle held left side up.
- d. With the rifle held loosely in the hands at an elevation of 80 degrees.
- e. With the rifle held in a normal manner at an elevation of 80 degrees.
- f. With the rifle held loosely in the hands at a depression of 80 degrees.
- g. With the rifle held in a normal manner at a depression of 80 degrees.

TEST V: FLASH

The cumulative flash from 20 rounds fired semiautomatically in a completely dark range will be recorded photographically by means of a 4- by 5-inch camera using a lens opening of  $f/2.5$  and a film having a Weston rating of 100. The camera will be placed at a right angle to the muzzle at a distance of 4.5 feet.

TEST VI: UNLUBRICATED

The rifle will be cleaned in solvent and left in an unlubricated condition. One hundred rounds will then be fired alternating between semiautomatic and automatic fire.

TEST VII: EXTREME COLD

The rifle will be cleaned, lightly oiled, and placed with a loaded magazine in a cold room maintained at  $-65^{\circ}\text{F}$ , for a 12-hour period prior to firing. After this period an attempt will be made to fire 20 rounds (or the capacity of the magazine) semiautomatically. If satisfactory functioning is obtained, a similar number of rounds will be fired automatically after an additional two hours.

TEST VIII: DUST

The rifle will be cleaned, lightly oiled. It will be fully loaded and the safety will be placed in the "ON" position. The rifle will then

be placed in the dust box and exposed to the dust for one minute top side up and for one minute upside down. The dust mixture, which is made by mixing nine pounds of Grace 0 Albany sand with one pound of clean silica core sand which passed 100 percent through a 30-mesh sieve, 80 percent through a 50-mesh, and 3.4 percent through a 100-mesh, will be poured at a rate of five pounds per minute through the pourhole while the blower is turned at a handle speed of 60 revolutions per minute. The shooter will attempt to clean the rifle by wiping with his bare hands and by blowing sharply on the congested areas of the action. An attempt will be made to fire 20 rounds (or the capacity of the magazine).

#### TEST IX: MUD

The rifle will be cleaned, lightly oiled, and the muzzle taped to exclude the mud from the bore. The rifle will be immersed completely in the mud for a period of 15 seconds. The mud mixture is made in the proportion of ten pounds of red clay and two pounds of clean river sand to eight quarts of water. The sand is approximately the same grading as that used in the dust test. The shooter will remove the tape from the muzzle and attempt to clean the rifle by wiping with his bare hands and by blowing on the congested areas of the action. An attempt will be made to fire 20 rounds (or the capacity of the magazine).

#### TEST X: RAIN

The rifle will be cleaned, lubricated, and subjected to spray directed over the entire rifle by means of a 1/2-inch pipe having 0.059-inch holes spaced 1/2 inch apart. The pipe will be positioned three feet above the rifle. The following procedure will be used:

- a. The rifle, in a horizontal position, will be exposed to the spray for five minutes with the bolt retracted and for five minutes with the bolt closed. The rifle will be loaded when the bolt is closed. After this time the gun will be fired 100 rounds semiautomatically.
- b. The procedure in "a" will be repeated, except that the gun will be fired automatically.
- c. The procedure in "a" will be repeated, except that the rifle will be exposed to the spray with muzzle up. The rifle will be fired 100 rounds semiautomatically in a horizontal position. Before firing, the muzzle of the rifle will be depressed to permit water accumulating in the bore to run out.
- d. The procedure in "c" will be repeated except that the gun will be fired automatically.
- e. The procedure in "c" will be repeated except that the rifle will be exposed to the spray with muzzle down.
- f. The procedure in "e" will be repeated.

TEST XI: COOK-OFF

The rifle will be subjected to a test to determine the minimum number of rounds which may be fired before sufficient heating of the chamber occurs to result in a premature explosion of the cartridge. The firing will be conducted as rapidly as possible employing preloaded magazines. An attempt will be made to bracket the cook-off point in number of rounds fired.

## Appendix D

### RANGES AT WHICH SMALL ARMS TARGETS ARE ENGAGED

#### INTRODUCTION

This appendix briefly reviews the available information on the ranges at which small arms are used in combat. Target range frequency--the frequency of use versus range--is important for both the design and testing of small arms.

For testing purposes, the effectiveness of weapons cannot be usefully compared or evaluated without a realistic estimate of the ranges at which they are likely to be fired. For design purposes, requirements emphasize ranges that are too long. The design will be forced toward a heavier weapon and heavier ammunition of higher recoil, which can result in lower lethality, lower sustainability, and lower target effects against personnel targets at the ranges actually encountered in combat.

The question addressed here is what ranges are "normal" in small arms combat and what ranges occur too infrequently to be of interest.

The available quantitative data on small arms targets consist of fragmentary estimates of ranges and exposure times. These data do not define the frequency of target existence, detection, engagement, and exposure time as a function of range, tactical situation, terrain, and light; they merely reduce the degree of uncertainty about these matters. Some data on combat target range frequency are available for the following four types of targets:

- o Targets in line of sight to a firer, though concealed or partially concealed.
- o Targets in line of sight that are detected and recognized as targets (whether accurately located or not).
- o Recognized or acquired targets that are fired upon, i.e., engaged.
- o Engaged targets that are hit.

The available data for each of these types are discussed below.

MAXIMUM RANGES AT WHICH TARGETS ARE IN LINE OF SIGHT

Two sets of data are available that provide estimates of line of sight ranges to small arms targets. Both indicate upper-bound or maximum ranges at which lines of sight to targets may exist, but neither indicates how often targets will actually be in line of sight at any range within these maximum ranges (or how often the targets will be detected).

The first set is drawn from a study of World War II combat actions in the Ardennes campaign, December 1944. It gives the maximum ranges that could be seen along approaches to 153 company-level U.S. and German defensive positions (determined by personal reconnaissance of each defensive position).<sup>\*</sup> Thus, these data present the approximate ranges beyond which line of sight could not have existed--the actual lines of sight from firers to targets in these battles would necessarily have been shorter. Figure D-1 shows a frequency distribution of these ranges. When a position was attacked at night, the line-of-sight range was assumed to be reduced to less than 100 meters. That assumption partially accounts for the high incidence of short ranges in a terrain with much open area (the sample covered all terrain in the Ardennes campaign, only a small portion of which was heavily forested).

The other data set is the results of an analysis of combat and terrain data by combat-experienced analysts.<sup>\*\*</sup> The analysis was

---

<sup>\*</sup> RMC Research Corporation, Research Study on Predictive War Game Factors; Final Report, by James K. Cockrell and Donn Carter, prepared for SHAPE Technical Centre, Contract C.72-03 (Bethesda, MD, March 1974).

<sup>\*\*</sup> Stanford Research Institute, Considerations Affecting the Doctrine of Small Arms Employment Rifle and Automatic Rifle Usage as a Function of Range (U), by George M. Gividen, prepared for U.S. Army Combat Developments Command Experimentation Center (Ft. Ord, CA, February 1965), Confidential.

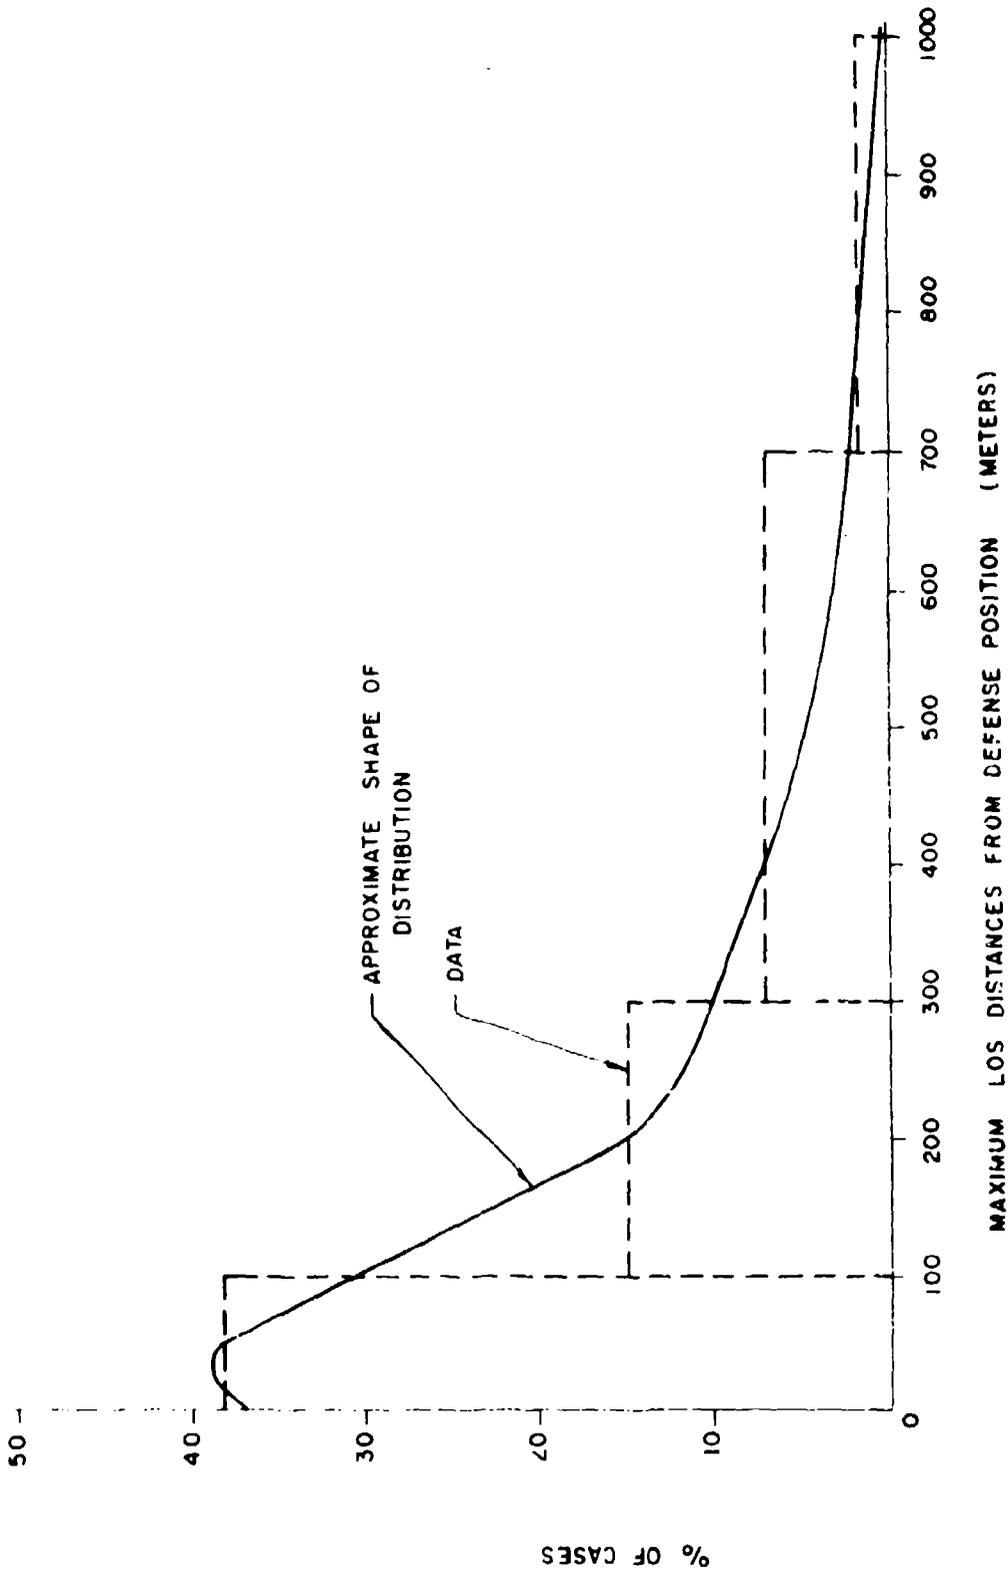


Figure D-1. Frequency distribution of maximum lines of sight ranges from 153 defense positions in the Ardennes Campaign, World War II.

conducted by the experimentation team at the U.S. Army Combat Developments Command Experimentation Center, which planned and conducted the Small Arms Weapon Systems experiment in 1965-1966.\* The team reviewed and compared available sources on small infantry unit combat experience and doctrine, and then translated their findings into sets of target arrays, on actual terrain, that were thought to represent typical firer-target dispositions in each of four typical kinds of infantry engagements (assault, advance and encounter, fire support of assault, and prepared defense). The frequency distribution of line-of-sight ranges to these targets for each type of engagement are illustrative, though they do not constitute definitive combat target range frequencies. They can be considered high or upper-bound estimates because the terrain was selected to bias the supporting fire positions toward ranges somewhat longer than typical combat ranges. That was done to test fully the range-accuracy capabilities of each of the candidate small arms tested in the experiment. The frequency distributions of range to targets are shown in Figures D-2 (rifle squad targets) and D-3 (machine gun squad targets).

#### RANGES AT WHICH PERSONNEL TARGETS ARE DETECTED AND RECOGNIZED

##### Absence of Measurement

Very little even quasi-quantitative data are available on the ranges at which personnel targets are detected and recognized, probably because the interacting factors affecting detection vary so widely; they include level and angle of light, vegetation, camouflage, and target exposure time and movement. It is obvious that a man walking erect in an open, grassy meadow in the daytime will be seen by almost all observers at considerable range and that a stationary man who is partially concealed in foliage at night may not be seen at even a few meters. Regrettably, the effects of the variations between such extremes have rarely been measured.

---

\* U.S. Army Combat Developments Command, Experimentation Command, Small Arms Weapon Systems (SAWS), Part 1: Main Text, CDCEC 65-4 (Ft. Ord, CA, 10 May 1966); U.S. Army Combat Developments Command, Experimentation Command, Small Arms Weapon Systems (SAWS), Part 2: Annexes, CDCEC 65-4 (Ft. Ord, CA, 10 May 1966).

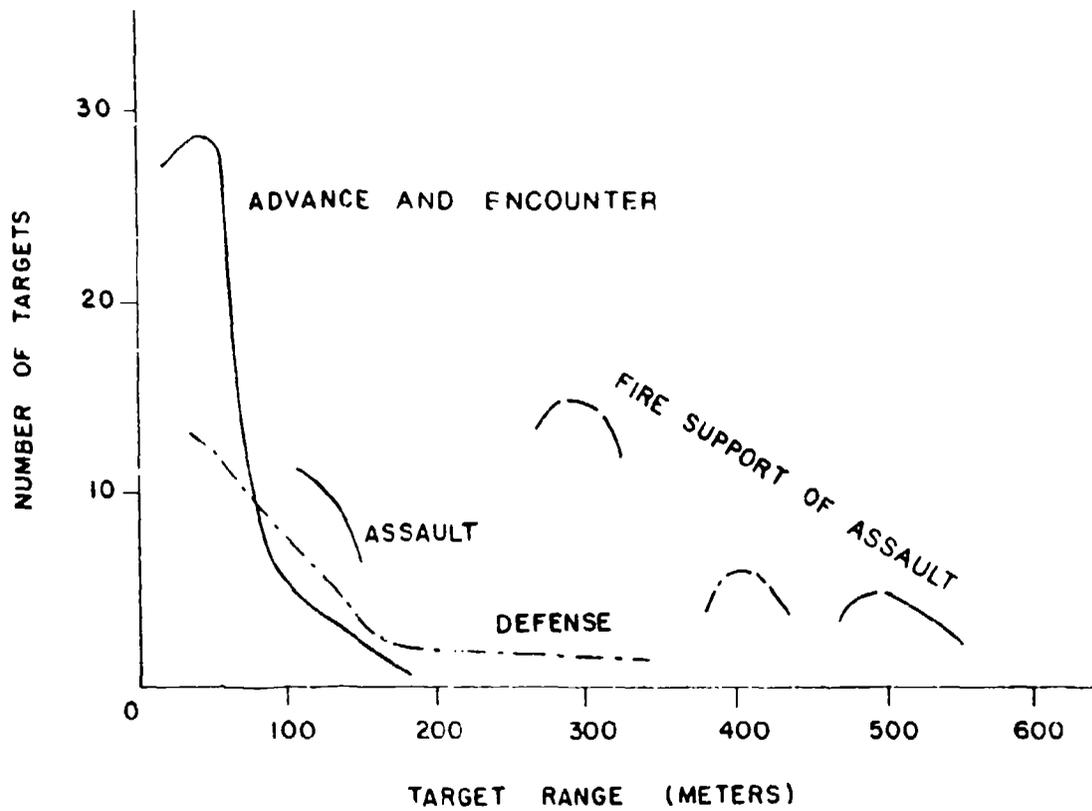


Figure D-2. Frequency distribution of ranges to rifle squad targets in the CDEC-SAWS experiment.

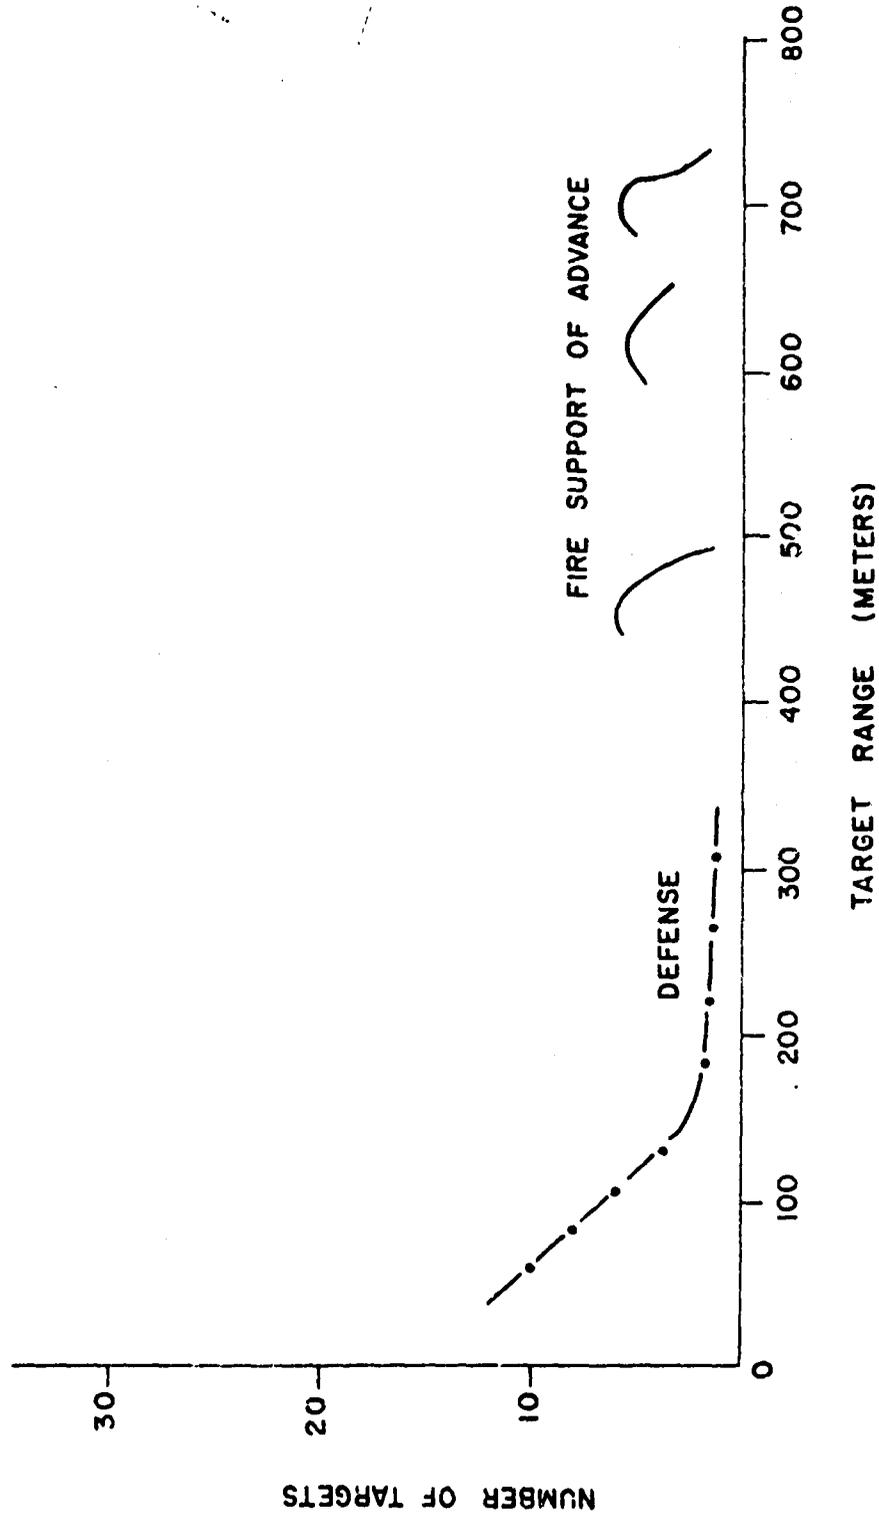


Figure D-3. Frequency distribution of ranges to machine gun squad targets in the CDEC-SAWS experiment.

One of the few experiments on this subject only confirmed the obvious conclusion that moving, standing personnel are readily detectable up to 300 meters (the longest range tested) unless concealed by vegetation; the experiment found no consistent effects of motion.\*

#### CDEC-SAWS Target Detection Evidence

Detection of stationary personnel in defensive positions is certainly much more difficult, and the CDEC-SAWS experiment provided some useful insights into this question. Targets that were silhouettes of soldiers' heads and shoulders were quickly raised at various ranges (to represent a man rising up in a foxhole), and colocated devices simulated the flash, smoke, and sound of small arms and the dust kicked up by muzzle gases.

Most of the CDEC-SAWS targets were partially concealed in a realistic manner. It was found that neither the targets nor the general locations of arrays containing them could be detected at ranges of about 500 meters or more, even when the weapon simulations were made more perceptible than was considered representative of combat conditions. The areas in which these target arrays were located had to be pointed out to test subjects to enable them to place fire on the arrays. Even when the targets were placed at 250-350 meters, the low percentages that were hit by the nearly 1000 test subjects provided evidence that their exact locations were difficult to detect.

#### Night Target Detections

The ranges at which targets can be detected for small arms fire in night combat vary greatly, exceeding daytime ranges at one extreme (e.g., machine gun muzzle flash on a clear night) and approaching point-blank range at the other (e.g., stealthy approach in woods on an overcast night). Observations and interviews with soldiers recently exposed to combat in the Korean War produced estimates of approximate infantry target-detection

---

\* Human Resources Research Organization, Target Detection and Range Estimation, by James A. Caviness, Jeffery L. Maxey, and James H. McPherson, Technical Report 72-34, AD 753-600 (Alexandria, VA, November 1972).

ranges comparing day and night conditions.\* The combat infantrymen's judgments of the range intervals within which most targets were detected are listed in Table D-1.

Table D-1

RANGE INTERVALS FOR DETECTING INFANTRY  
TARGETS REPORTED FROM THE KOREAN WAR

<u>Range (meters)</u>	<u>Condition</u>
15-200 .....	All cases
15-150 .....	Attacking targets
50-200 .....	Day only
15-50 .....	Night only
15-30 .....	Night or cut-up terrain

RANGES AT WHICH PERSONNEL TARGETS ARE FIRED UPON

The ranges at which small arms fire is directed at personnel may be somewhat shorter than those at which targets are detected and recognized. Fire will sometimes be withheld to permit targets to close to shorter ranges, to increase the chance that they will be hit before they take cover, or for other reasons. Two kinds of quantitative data are available about the distributions of firing ranges in combat: questionnaires and combat films.

Range Estimates from Questionnaires

One type of firing range data is the result of surveys of combat-experienced personnel made some time after the experiences occurred. Two such surveys made by the Johns Hopkins University Operations Research

---

\* Johns Hopkins University, Operations Research Office, Commentary on Infantry Operations and Weapons Usage in Korea; Winter of 1950-51, by S. L. A. Marshall, ORO-R-13, AD 000-342 (Chevy Chase, MD, October 1952).

Office contain responses about percentages of rifle fire expended at various ranges. (The basis of ammunition expenditure is likely to skew the underlying distribution of range, though the direction of bias is unknown.) One survey dealt only with daytime firing in the Korean War; the other dealt with firing under all visibility conditions in World War II (Europe and the Pacific) and the Korean War.\*

Figure D-4 shows the results of the surveys. As might be expected, firing during daytime in the Korean War showed a rather high incidence of targets at 150-300 meters.

#### Range Estimates from Combat Films

The second type of combat data consists of estimates of firing ranges derived from films of rifle, carbine, automatic rifle, and light machine gun firings in World War II and the Korean and Vietnam wars. Estimates could be made of firer-to-target range in 780 of a total of 1429 samples of combat movie film sequences of small arms firings (see Appendix E for detailed description). It appears from the overall film content that many short-range conditions typical of intense combat--such as final assaults or defenses against them--are rare. Figure D-5 shows the frequency distribution of firing ranges in the total sample, which contains 138 film sequences of firings in World War II in Europe, 211 sequences in World War II in the Pacific, 65 sequences in the Korean War, and 364 sequences in the Vietnam War. Figure D-6 shows the frequency distribution of filmed firings of rifles and M60 machine guns in Vietnam combat, and Figure D-7 shows the frequency distribution of firings of rifles, BARs, and carbines in World War II in Europe.

From observations and postbattle interviews of Korean War infantrymen have come general statements about firing ranges that support the data

---

\*Respectively, Johns Hopkins University, Operations Research Office, Use of Infantry Weapons and Equipment in Korea, by G. N. Donovan, Technical Memorandum ORO-T-18(FEC), ATI 169-243 (Chevy Chase, MD, 13 May 1952), and Johns Hopkins University, Operations Research Office, Tactics Division, SALVO I: Rifle Field Experiment, by Leon Feldman et al., Technical Memorandum ORO-T-378, AD 304-321 (Bethesda, MD, June 1959).

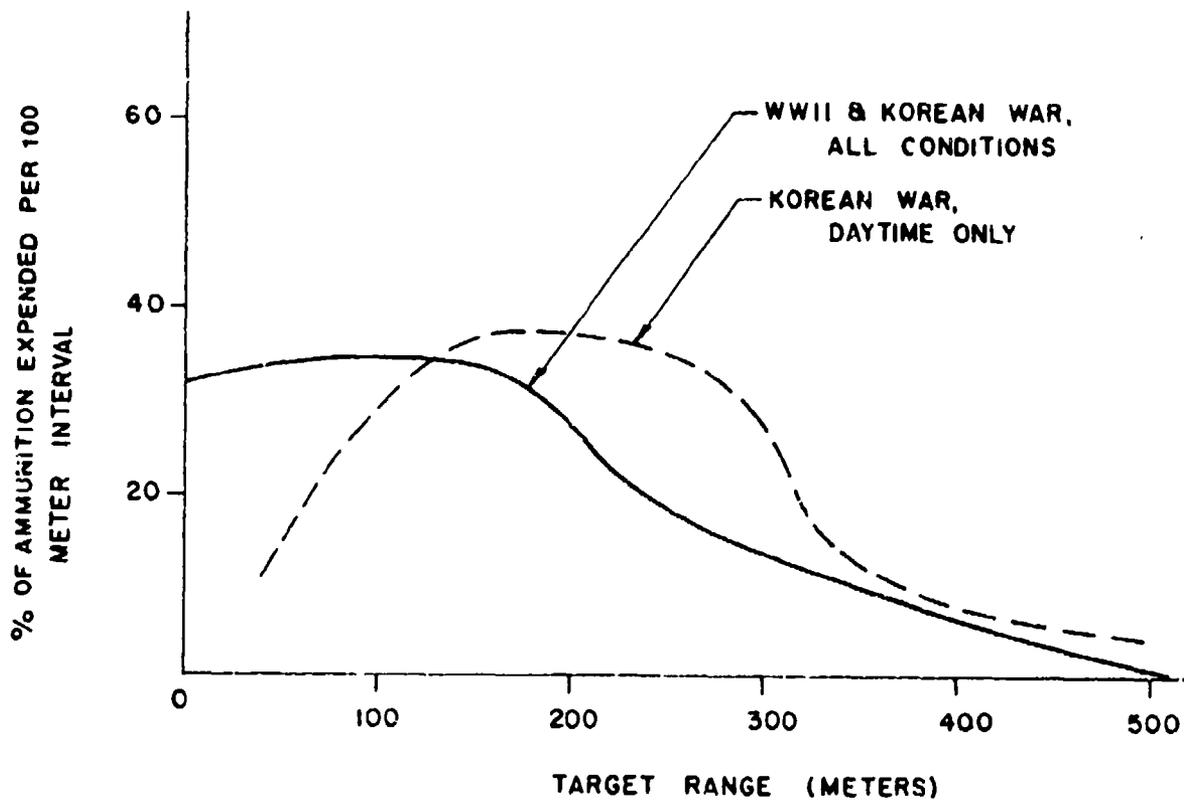


Figure D-4. Percent of rifle ammunition expended versus range in World War II and the Korean War.

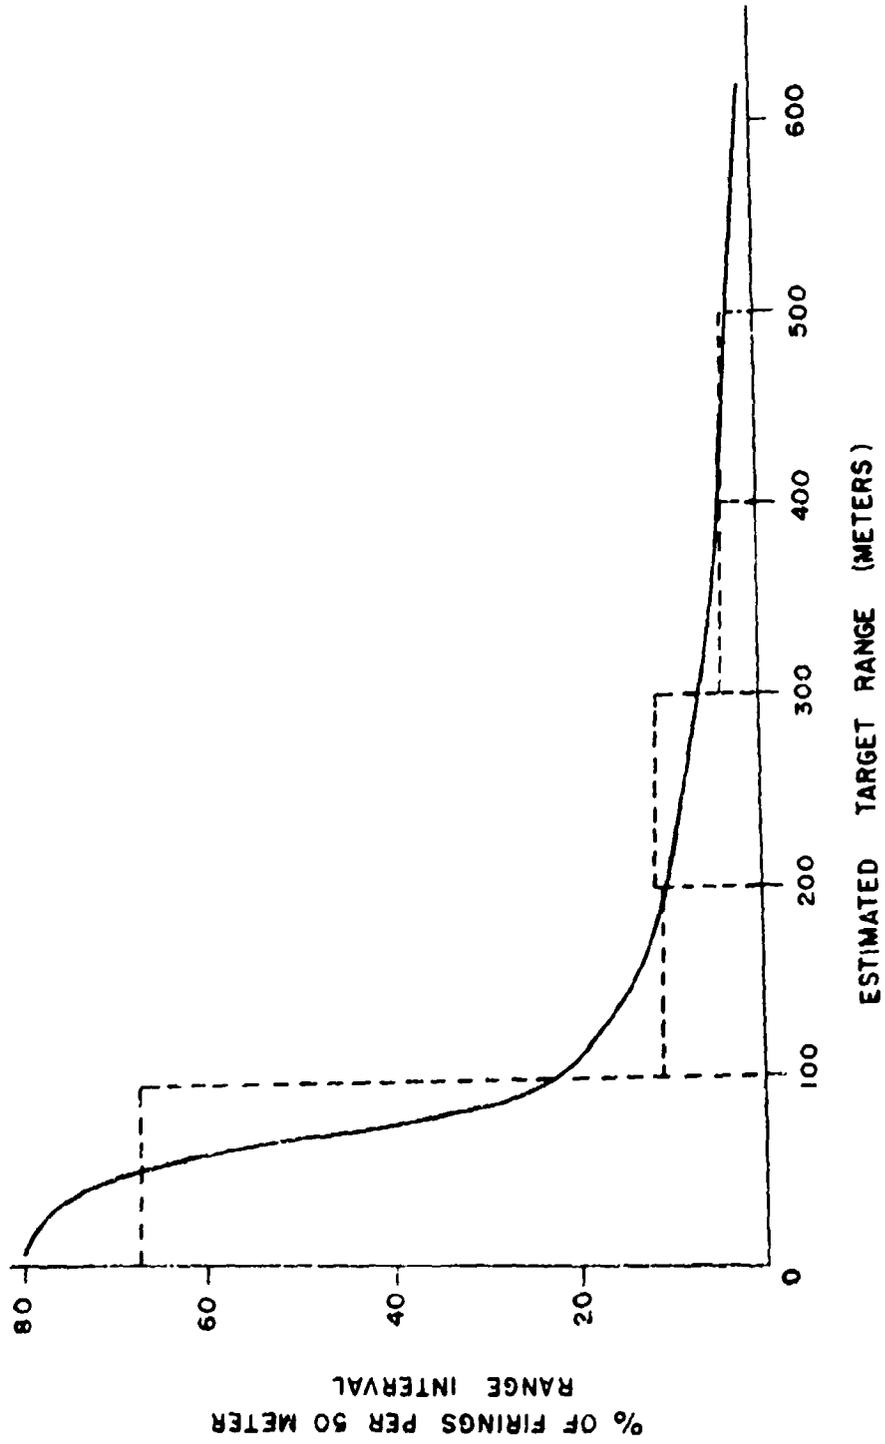


Figure D-5. Frequency distribution of ranges in small arms firings estimated from World War II, Korean War, and Vietnam War combat film.

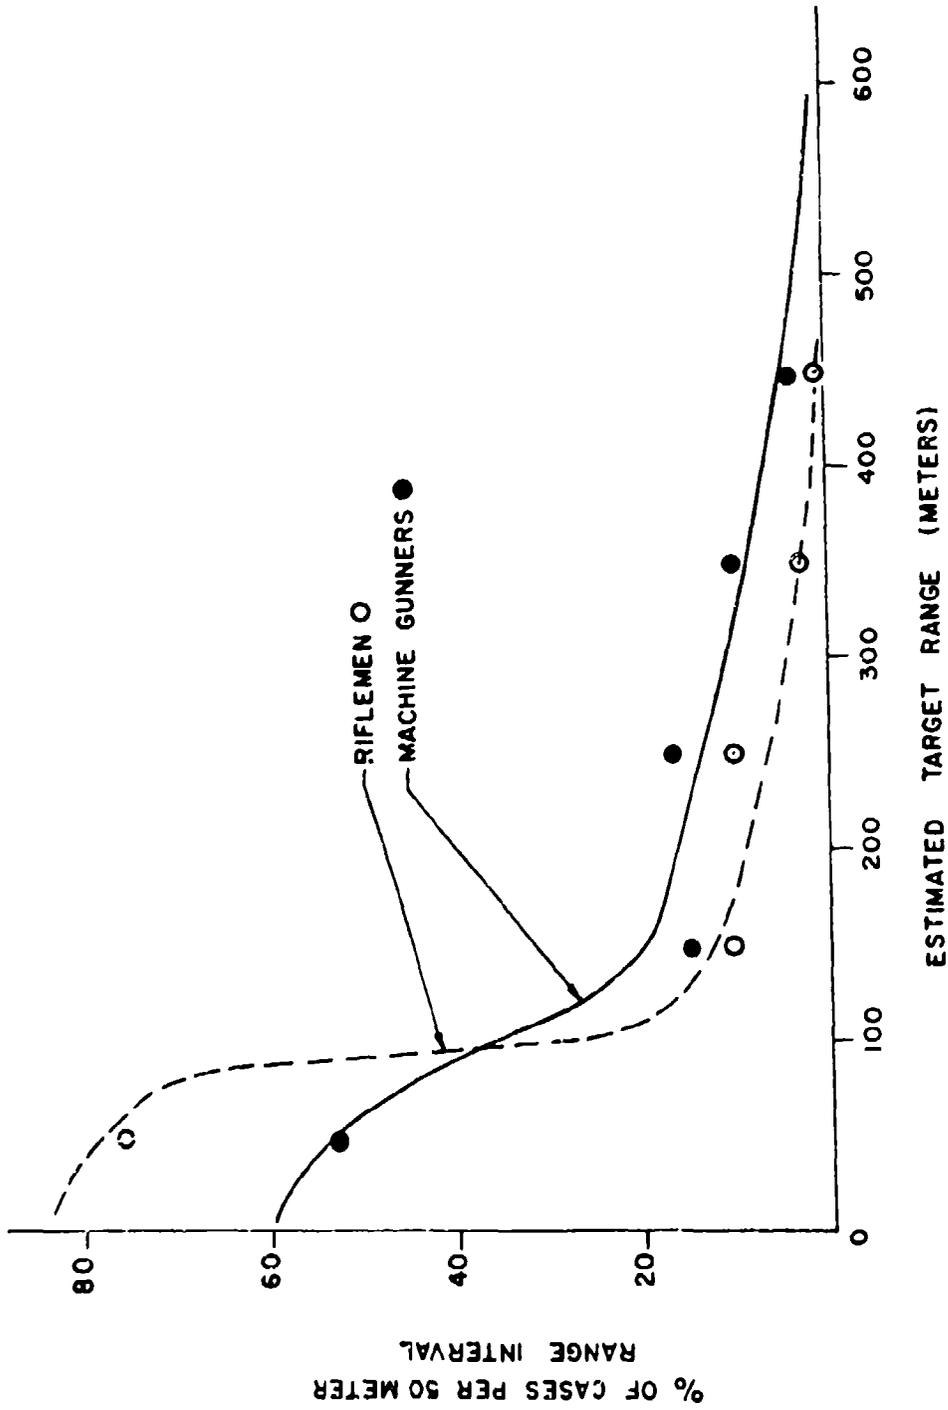


Figure D-6. Frequency distribution of ranges in small arms firings estimated from Vietnam War combat film.

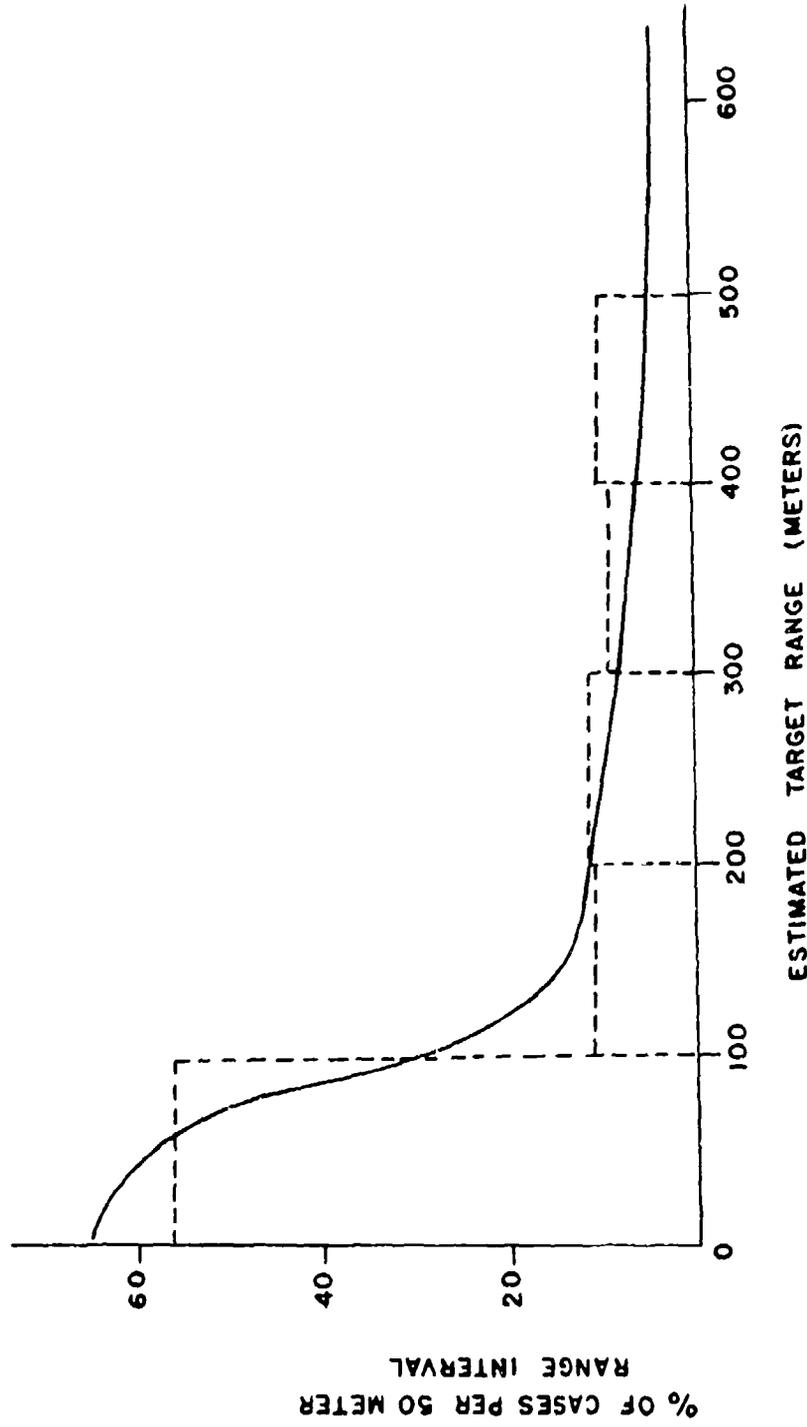


Figure D-7. Frequency distribution of ranges in small arms firings in World War II in Europe.

described above.\* They indicate the ranges shown in Table D-2.

Table D-2

ESTIMATED MAXIMUM USEFUL SMALL ARMS RANGES  
IN THE KOREAN WAR

<u>Range (meters)</u>	<u>Condition</u>
Up to 400 .....	All rifle squad fire
About 300 .....	"Normal" maximum for BAR fire
About 200 .....	"Effective" range for small arms fire
About 150 .....	Maximum for decisive small arms fire repulsion of attack
Up to 50 .....	Usual range for engaging Chinese Communist attacking forces

A British Army study has concluded that the ranges at which British units fired in the Korean War and the ranges at which targets become available to small arms firers in tactical training exercises are consistent with each other.\*\* The former is represented by the curve in Figure D-8. Although the trench warfare of World War I was certainly different from combat in World War II and later wars, a study of infantry actions in World War I determined that riflemen rarely fire at ranges greater than 400 yards.

RANGES AT WHICH SOLDIERS ARE WOUNDED  
OR KILLED BY BULLETS

Another type of combat data helpful in estimating ranges at which rifles and machine guns are used in combat is the frequency distribution

---

\* Johns Hopkins University, Operations Research Office, Commentary on Infantry Operations and Weapons Usage.

\*\* Great Britain, Jungle Warfare School, Trial and Development Wing, Trial of Section 5.56mm Light Machine Guns, by M. W. Ward, JWS/TD/STO/2 (N.p., 8 July 1970).

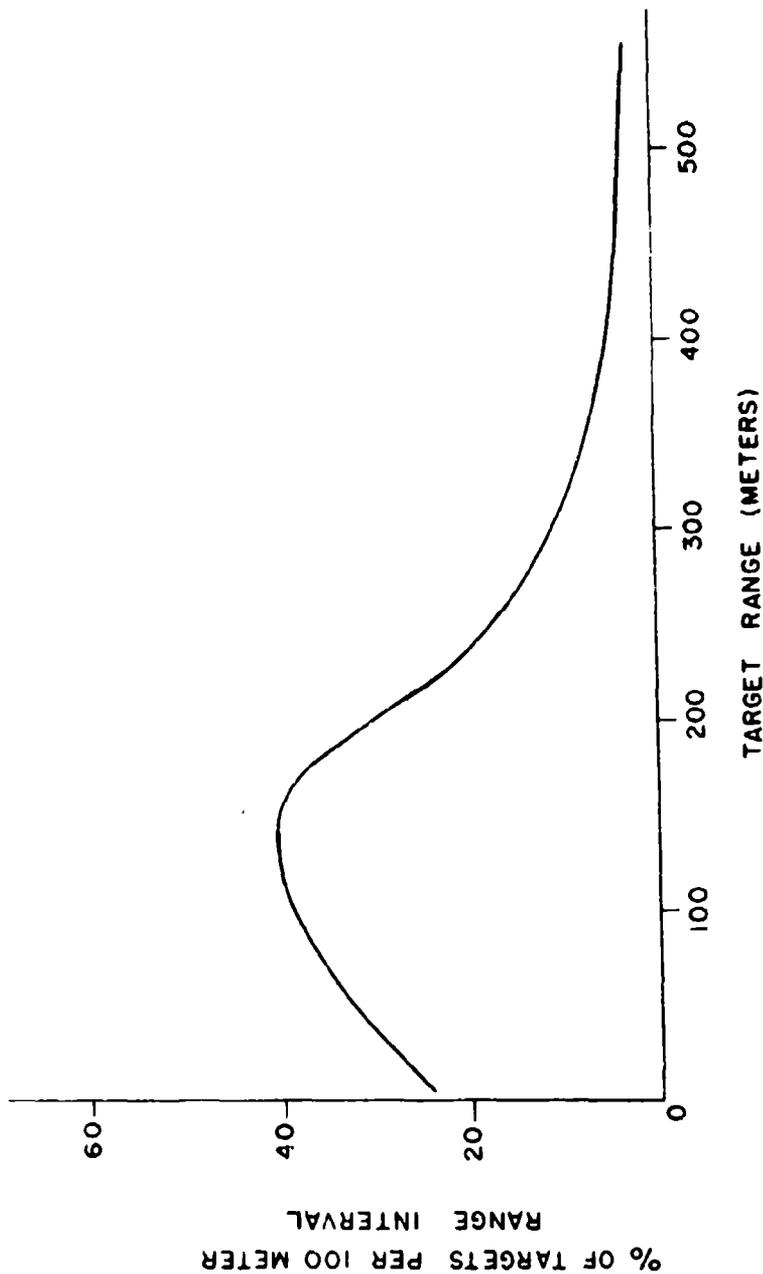


Figure D-8. Frequency distribution of ranges in small arms firings estimated by the British Army for combat in Korea.

of ranges at which bullet wounds are received. These ranges are necessarily shorter--probably significantly shorter--than a distribution of firing ranges. Data on this subject are not normally collected during combat, but a few samples exist.

Firing ranges at which casualties were hit were estimated on 208 of 219 casualties of small arms fire who were handled by one battalion medical aid station during campaigns in New Georgia Island and Burma in World War II. Of the 208 casualties (WIA and KIA), 93 were reportedly hit by rifle bullets and 115 by machine gun bullets; 68 percent of the rifle bullets and 65 percent of the machine gun bullets were estimated to have been fired from ranges of less than 75 yards (the range distribution of longer-range firings was not given). Figure D-9 shows the distribution of casualty ranges for these data, as calculated directly from the compiled incident descriptions.\*

A similar sample was collected in the Bougainville campaign, in which there were 549 bullet casualties; range estimates could be made on 460 of these (339 from rifle fire and 121 from machine gun fire).\*\* The range-limiting effect of jungle terrain appears to be more pronounced in this campaign, because 80 percent of the rifle bullet casualties and 86 percent of the machine gun casualties occurred at ranges of less than 75 yards.

Firing range data on one sample of surviving casualties from the Turkish Brigade in the Korean War suggest a type of terrain very different from that of the preceding samples.\*\*\* Of the 257 bullet wounds sustained, 149 were reportedly from rifles, 59 from machine guns, 28 from pistols or submachine guns, and 21 from unidentified weapons. No distribution of ranges is available, but the soldiers themselves estimated an average wounding range of 112 meters for rifle bullet wounds and 71 meters for machine gun bullets. As in the data from the Pacific theater

---

\*U.S. Army, Office of the Surgeon General, Wound Ballistics, edited by James C. Beyer (Washington, 1962), p. 272.

\*\*Ibid., p. 421.

\*\*\*Ibid., p. 716.

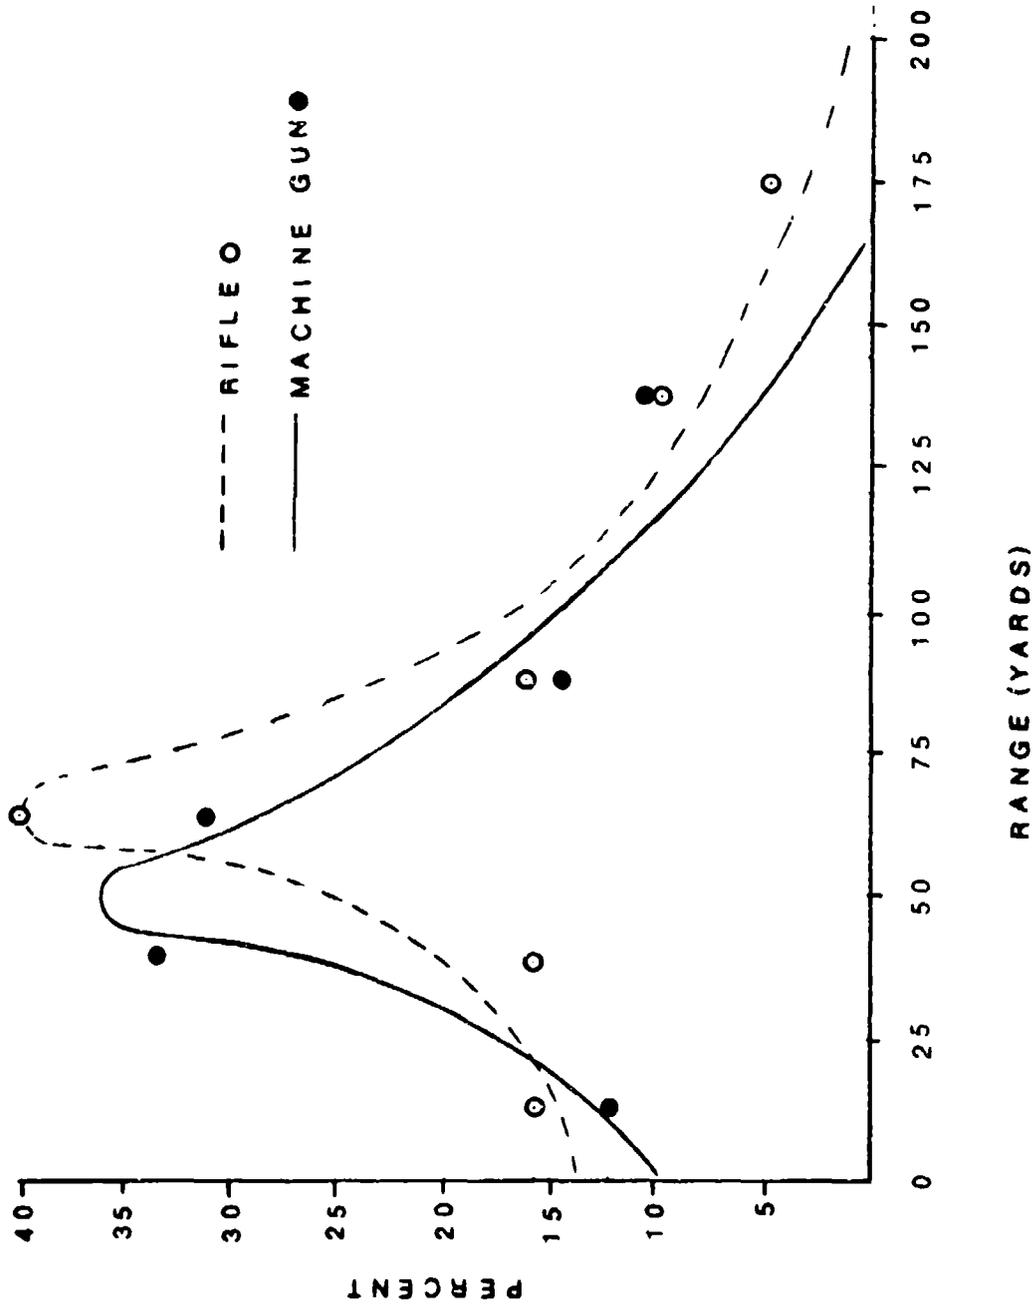


Figure D-9. Frequency distribution of ranges at which small arms casualties were incurred in New Georgia and Burma in World War II.

in World War II, machine guns had casualty-producing ranges consistently shorter than those of rifles.

A much larger sample of bullet casualty ranges is available from the Vietnam War, from surveys made by the U.S. Army Wound Data and Munitions Effectiveness Team in 1967.\* Of 4980 casualty cases considered, range data are available on 991 rifle fire wounds. The distribution of these ranges is shown in Figure D-10; note that the average range is 73 meters, compared with the Turkish Brigade average of 71 meters for machine guns and 112 meters for rifle bullets.

The apparently longer average casualty ranges in Korea may owe partially to the longer lines of sight on the Korean terrain, but they may also reflect a bias in the Turkish soldiers' estimations. Their range figures were apparently not checked by other estimates, as were most of the data in the other samples.

#### ASSESSMENT

The data presented above do not permit precise identification of the target range frequencies for small arms. Considering the variety of sources, however, the data are quite consistent in showing that the bulk of small arms combat takes place at under 100 meters, and a negligible percent of firings or casualties takes place beyond 300 meters.

There is little evidence that machine guns fire at significantly greater ranges than do rifles; machine gun-inflicted casualties consistently occur at ranges shorter than rifle-inflicted casualties. This probably reflects (1) a high percentage of machine-gun use in defensive or unplanned attacks, and (2) the frequent difficulty of finding positions from which long-range fire support can be delivered, coupled with uncertainty about the defender's location and the difficulty of coordinating such fire with the attacker's movement.

---

\*U.S. Army, Materiel Systems Analysis Agency, Comparison of Predicted and Observed Wound Ballistics Estimates for Rifle Bullets (U), by Robert E. Carn et al., Technical Report 28 (Aberdeen Proving Ground, MD, November 1970), Confidential.

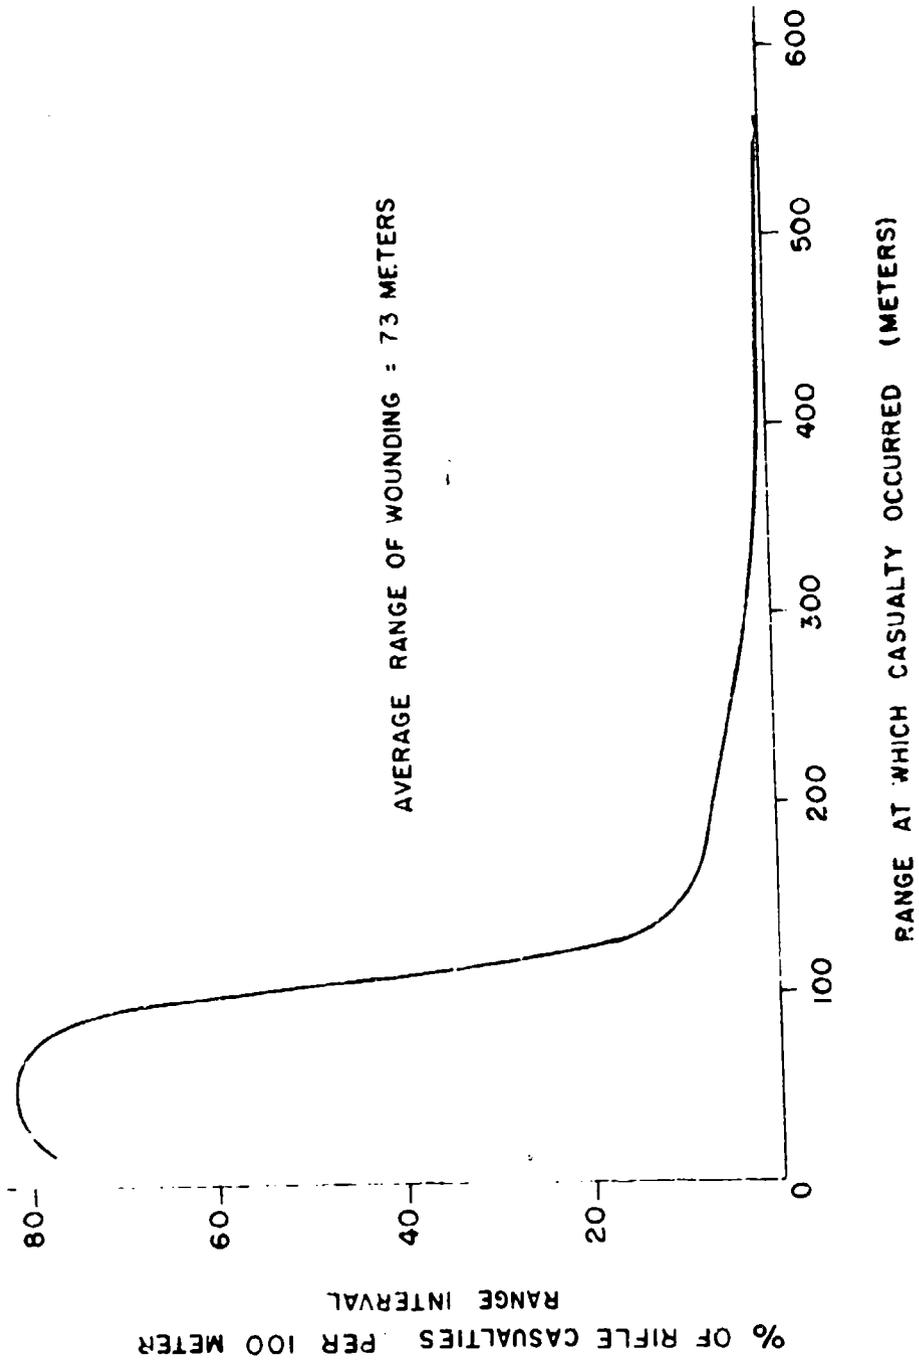


Figure D-10. Frequency distribution of ranges at which U.S. rifle casualties were incurred in the Vietnam War.

## Appendix E

### HOW SOLDIERS FIRE SMALL ARMS IN COMBAT-- ANALYSIS OF COMBAT FILMS

This appendix presents the results of an examination of combat films of small arms firing in World War II, Korea, and Vietnam. The examination was undertaken to derive insights regarding combat firings that might be of use in testing small arms. The appendix has eight sections: the reasons for using combat photography, the usefulness of the data collected from it, body positions, body exposure, aiming techniques, firing speed, target range, and a comparison of the body positions actually taken by the firers with those they had been taught in training. The data collected are presented in an annex to this appendix.

#### WHY COMBAT PHOTOGRAPHY WAS USED

Chapter III noted the importance of simulating the combat context in small arms operational tests. Actual combat is two-sided, so the firers on each side are also targets for the other side. The danger from return fire cannot be simulated in testing, although other aspects of two-sided firing situations can be simulated. Realistic testing will attempt to ensure that firer conduct in small arms tests will be like that in combat, but little data for comparing the two has been available.

A type of data that may be potentially useful in judging the impact of actual combat on firers--and the extent to which combat firing differs from test firing--is combat photography. An extensive amount of infantry combat film is available in Army and Marine Corps archives. On the other hand, film data have severe limitations that must be recognized.

#### USEFULNESS OF DATA FROM COMBAT FILMS

The utility of combat photography as a data source for improving the realism of small arms effectiveness testing hinges on three negative aspects

of the combat photography mission. First, the combat photographer is not permitted to impede or compromise the combat action being filmed, so his pictures are real, not staged.\* Second, combat photographers are not expected to take unreasonable risks in becoming casualties. It is likely, therefore, that they get a considerably smaller than representative sample of film footage in combat situations that place them in great danger, such as final assaults on well-defended enemy positions or defenses against very strong attacks. However, from examination of the films they took and the fact that many of them became casualties, it is clear that combat photographers operated in many sharply contested infantry actions. Third, the inherent limitations of the film medium (limited field of view, light dependence, lack of depth perception) and the frequent failure of cameramen to photograph target areas restrict the type and amount of information that combat films contain.

Another set of limitations is not specific to combat photography; it is the inherent weakness of any sample of descriptions of individual actions in combat. They lack extensive details about the individual and the engagement--details such as his skills, the level and content of his training, the combat circumstances of enemy and friendly tactics, and so forth. It becomes almost impossible to assess whether a certain individual action reflects good or poor training, effective or ineffective technique, fatigue or alertness.

However, even though combat film is a limited source of information on combat behavior, it may contain some useful information on firing positions, firing time factors, aiming techniques, and possibly target ranges. As regards the combat films examined for this study, little information was available on the circumstances of each photographed firing; and the representativeness of the sample of firings recorded on the film cannot be established in any quantitative way. With the foregoing limitations in mind, the following sections discuss observations derived from combat films that bear on small arms effectiveness testing.

---

\*Careful scrutiny of each "combat" film identified a few reenactments or staged events. No data were collected from these films.

CONTENT OF THE FILM DATA

To collect information about small arms firings from combat film for this study, all the film footage contained in the U.S. Army Motion Picture Depository at Tobyhanna, Pennsylvania, and in the U.S. Marine Corps Motion Picture Archives at Quantico, Virginia, was viewed. Over 800 reels of film were found to contain potentially useful small arms firing sequences, and the 61,000 feet of film in these reels were searched. In them, 1429 usable firing sequences were discovered. Each was screened by trained and combat-experienced observers, who reduced the desired data from each sequence into a format suitable for computer processing.

The readily derived information from combat films that is of potential relevance to small arms testing is firer posture, body exposure during firing, sighting techniques (aiming or pointing), rate of fire and burst size, and target ranges. The films were searched for a number of other data items of potential interest, but it was discovered that they could not be collected from the films or were insignificant.

Detailed descriptions of each element of information that was collected appear in the annex to this appendix. It also describes the procedures used to classify or measure each element and gives a complete listing of the data collected for each firing sequence.

OBSERVATIONS ON BODY POSITIONS

The body positions from which soldiers fire small arms may be influenced by a number of factors. They include the combat mission, whether or not the soldiers are moving or stationary, what cover and concealment are available, how the terrain and vegetation affect their opportunity to see and point at the target area, the apparent danger presented by enemy fire of all types, what weapon they are using, and their firing doctrine.

It was not possible to collect information on all these factors from the films, so the proportions of times that soldiers fired from standing, kneeling, prone, foxhole, or other positions cannot be related to all the factors that presumably influenced the selection of those positions.

Table E-1 shows the frequency of occurrence of each position. In the possibly biased film sample, a strong preference is shown for standing (weapon at shoulder or underarm) and kneeling positions. The standing or kneeling position was used about 65 to 80 percent of the time with every weapon, including the heavy BAR and M60 automatic weapons. The M60, however, was fired almost twice as often from the prone position as the other weapons--about 30 percent of the M60 firings were prone. The prone, sitting, and squatting positions combined comprised 26 to 28 percent of the positions taken with the heavier rifles and the BAR, but only 18 to 20 percent of those taken with the lighter and shorter carbine and M16 rifle.

Table E-1

INCIDENCE OF BODY POSITIONS IN FILMED SMALL ARMS  
FIRING SEQUENCES (%)

Position	Incidence of Position						
	All Weapons	M1	M14	M16	Carbine	BAR	M60 Machine Gun
Weapon at shoulder:							
Prone	16	17	12	10	8	16	29
Sitting	10	11	14	8	9	9	6
Squatting	1	1	2	2	1	1	0
Kneeling	28	28	40	31	24	25	24
Standing <sup>a</sup>	32	36	19	32	46	37	14
Weapon not at shoulder:							
Standing or crouching	13	7	13	17	12	12	27
Total (%)	100	100	100	100	100	100	100
Total number of cases	1429	531	133	319	89	180	177

<sup>a</sup>Includes less than 1 percent crouching.

Although the low incidence of prone firing (about 15 percent or less for rifles) may be due partly to a possible bias of the sample against the most intense combat situations, the films themselves show why the prone

position is so little used. In many film sequences, the firers would drop to the prone position upon receiving fire, and then would have to rise to a kneeling or sitting position to return fire, simply in order to see over the vegetation or cover directly in front of them. The films show clearly that there are few places where a firer can see much from a prone position.

Examination of the incidence of body positions in each of the various wars and theaters in which the weapons were used showed that they differed little from the overall incidence. However, when the body positions used by Army soldiers and Marines were compared, it is apparent that Marines fired the M1 and M14 rifles more often from the kneeling than from the standing position. The M14 sample shown in Table E-1 is primarily from Marine firings, which explains the higher percentage of the kneeling position in the M14 firings.

#### Sighting Methods versus Body Position

Sighting methods\* were affected by the type of body positions used. When the weapon was placed at the shoulder in a standing position, the sights were clearly not used over twice as much (7 percent of all standing position firings) as when the other shoulder-fired positions were used (3 percent of all prone, kneeling, etc., firings).

#### Type of Support Used

Another aspect of body position is the use of support for the weapon. Prone-position firing is always supported by the elbows resting on the ground, so it is not discussed further. The kneeling, sitting, and squatting positions usually involve resting one or both elbows on legs or knees. That was not considered in the data reduction as firm support; only when films showed firers resting their elbows or the weapon itself on a solid surface was it termed "support." Table E-2 shows that the incidence of use of support by firers of rifles, carbines, and the BAR in the shoulder-fired positions was about 20 to 28 percent, with 2/3 of the supported

---

\*Sighting methods were not clearly distinguishable as aiming or pointing. The film allowed only a small proportion of the firing to be definitely identified as not using the sights; the aiming category probably includes a sizable proportion of pointing fire.

firings resting the weapon directly on the supporting surface. Only six of these firings were clearly pointed rather than aimed. There were only four cases of firing from a weapon's bipod for support (although they were available for many of the M16's and BARs), so they did not constitute 1 percent of any position and do not show up in the table.

Table E-2

INCIDENCE OF THE USE OF SUPPORT FOR RIFLES,  
CARBINES, AND BARs FIRED FROM THE SHOULDER

Body Position	Size of Sample	Type of Support on Solid Surface (%)			
		Elbow	Weapon Itself	No Firm Support	Total
Standing	428	9	19	72	100
Kneeling	365	5	15	80	100
Sitting or Squatting	144	13	13	74	100
All Positions	937	8	17	75	100

OBSERVATIONS ON FIRER BODY EXPOSURE

Data were collected from each filmed firing sequence on the amount of each firer's body that was exposed in the direction toward which he was firing. These exposures were categorized as "full," "half," or "minimum." These terms mean that for each firing position (standing, prone, etc.), the full amount of a firer's body that could be exposed in that firing position was exposed, or that about half that amount was exposed, or that only a small fraction was exposed (generally little more than the head). Thus, a man in the prone position would be called "fully exposed" if no part of his body was obscured from enemy vision, even though his silhouette would be quite small. If he were lying in grass his exposure could be reduced to "half" or even "minimum" if he were partly behind a wall or foliage, etc.

The data show how often the firers attempted to remain partially or almost entirely concealed from the direction of the target areas. Table E-3 and Figure E-1 show the incidence of each exposure level (all firing positions combined) and the proportion of each that were clearly pointed or not. Clearly pointed fire was very strongly related to the degree of exposure: its use increased by half as exposure changed from minimum to full.

Table E-3

INCIDENCE OF FIRERS' BODY EXPOSURE LEVEL WITH  
SIGHTING METHOD AND SELECTED BODY POSITIONS

Item	Body Exposure Level			
	Full	Half	Minimum	Total
	No. (%)	No. (%)	No. (%)	No. (%)
<b>Sighting method:</b>				
Clearly pointed fire	146 (25)	56 (21)	38 (7)	242 (17)
Aimed or pointed fire	439 (75)	214 (79)	536 (93)	1187 (83)
<b>Total</b>	<b>585 (41)</b>	<b>270 (20)</b>	<b>574 (39)</b>	<b>1429 (100)</b>
<b>Body position:</b>				
Prone	66 (29)	22 (10)	136 (61)	224
Standing	221 (50)	63 (14)	158 (36)	442
Not to shoulder	126 (66)	42 (22)	23 (12)	191

The incidence of each exposure level does not vary greatly across the different types of terrain or among the different weapon types, except that the firers of M60 machine guns (all in Vietnam) were fully exposed about 1/3 less often (27 percent of the time) and minimally exposed about 1/3 more often (51 percent) than were the firers of other weapons. The possible underrepresentation of intense combat in the film sample may cause these estimates of fully exposed firing frequency to be somewhat high.

Data were also collected on the proportion of partially exposed firers who were behind physical cover and who were behind nonprotective concealment only (grass, brush, etc.). Overall, about 40 percent of the firings

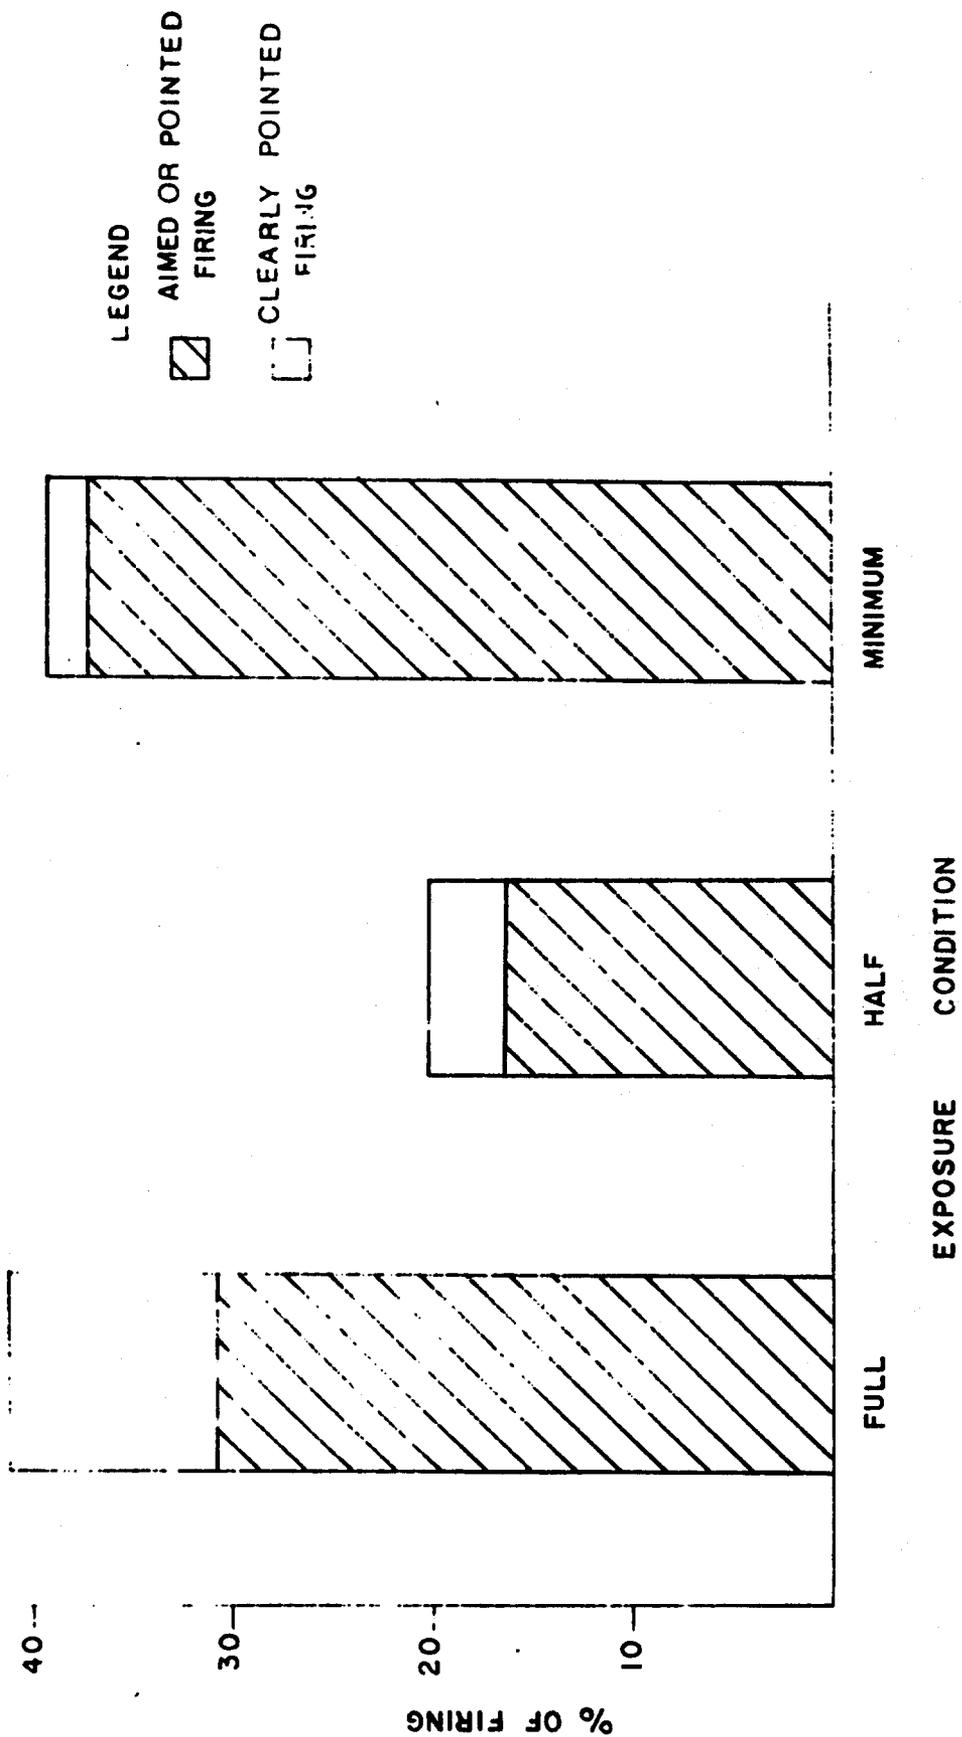


Figure E-1. Incidence of pointed and aimed fire at different exposure levels.

were fully exposed, and 40 percent were behind cover. Table E-4 shows the relative use of cover and concealment in different combat areas. The somewhat decreased frequency of fully exposed firings in Korea and Vietnam is noticeable; it may be due to changes in training rather than terrain since it happens in two theaters of rather different terrain. The only clear differences in the proportions among the different weapon types are those deriving from these theater differences (M14's, M16's, and M60's appeared only in Vietnam and the other weapons only in the other theaters).

Table E-4

INCIDENCE OF THE USE OF COVER AND CONCEALMENT  
BY SMALL ARMS FIRERS

Item	Use of Cover and Concealment in Various Theaters (%)					Size of Sample
	Europe (WWII)	South Pacific (WWII)	Korea	Vietnam	All	
Cover	45	42	42	38	41	580
Concealment	8	13	20	24	18	264
Neither	47	45	38	38	41	585
Total	100	100	100	100	100	1429

OBSERVATIONS ON AIMING TECHNIQUES

All the weapons included in this data sample had conventional peep sights. In aimed fire, soldiers are taught to align the top of the front sight post or blade both on the target and in the center of the ring formed by the rear ring or "peep" sight. That takes time, so soldiers use pointed fire when they need to fire very quickly; it involves looking over, not through, the sights and "pointing" along the barrel. Examination of the film did not show the degree to which a soldier whose position apparently allowed him to look through his sights actually aligned them. It did,

however, permit identification of cases in which the firer could not have used his sights. There were 242 such cases; in 191 of them the weapon was fired from a hip or underarm position, and in 51 of them the weapon was at the shoulder but the firer's head was clearly above the axis of the sights. These cases were called "clearly pointed" fire; all others were called "aimed or pointed" fire.

If different weapon types are not "clearly pointed" and "aimed or pointed" with the same frequencies, it is possible that the difference is due to a difference in weapon characteristics. Characteristics that might produce such differences are the size or weight of the weapon, which affects its "feel" or handiness, and whether muzzle impulse is low enough to produce usable bursts of automatic fire that could offset the decreased accuracy of pointed fire.

When data on the incidence of aiming and pointing were examined, it was clear (from the M1, carbine, and BAR results in Europe and the Pacific) that the type of terrain in which the weapon was being used strongly influenced the soldier's selection of sighting method. Table E-5 illustrates the effect of terrain and of weapon types. It shows that shorter weapons and automatic-firing weapons were more often clearly pointed than were longer and semiautomatic weapons. This was especially true in terrain providing shorter firing ranges. The M60 machine gun's very high incidence of clearly pointed fire may be explained by the fact that in films of Vietnam fighting it appeared most often in advancing offensive operations and was often carried slung from the shoulder in a waist-high firing position. It should not be concluded from the table that the M16 is actually pointed less often than the M60--it is clearly pointed less often only because most M60 pointed firings are likely to be clearly pointed firings from the waist.

To the extent that the film sample is biased away from intense combat, the actual frequencies of pointed fire are probably higher than those shown here.

Table E-5

INCIDENCE OF CLEARLY POINTED FIRE BY WEAPON TYPE  
IN VARIOUS TERRAINS

Weapon Type	Size of Sample (Total Number of Firings)	Clearly Pointed Firings (%)		
		Shorter-Range Terrain		Longer-Range Terrain
		South Pacific (WWII)	Vietnam	Europe (WWII) + Korea
Long, semiauto- matic rifle:				
M1	531	12	--	7
M14	133	--	14	--
Short, semiauto- matic (carbine)	89	22	--	10
Long, automatic:				
BAR	180	22	--	4
M60 machine gun	177	--	36	--
Short, automatic:				
M16 rifle	319	--	22	--
All weapons	1429	15	24	7

OBSERVATIONS ON FIRING SPEED

The amount of time firers take to aim or point their weapons at the target and to fire the first round (or burst) is of interest because it reflects the resolution of the conflicting pressures of need for accuracy (which motivates deliberate aiming) and need for speed (to beat the enemy's fire or reduce one's exposure). These times were measured from the moment that the weapon was placed in firing position (usually at the shoulder) to the moment of first trigger pull. The raw data are accurate to less

than 0.1 seconds but have been aggregated in 0.5-second intervals in Figure E-2. A smoothed curve has been added to show more clearly the approximate shape of the distribution of first-round firing times.

Figure E-3 shows the actual firing time distribution for clearly pointed fire and an estimated distribution for aimed fire that attempts to statistically remove the effect of the pointing fire cases that were indistinguishable photographically from aimed fire.\* The very short firing times for pointed fire (52 percent at less than .2 seconds) presumably reflects firer-inferred demands for extreme speed and go hand in hand with the firer's decision to point rather than aim. The median difference between clearly pointed and estimated aimed fire is about 1.2 seconds. The estimated distribution of aimed fire shows at least half the firings to be less than 1.4 seconds, considerably shorter than the generally accepted minimums of 1.5 to 2 seconds for aiming. This may reflect either a violation of the statistical assumptions underlying the estimating methods or a large proportion of firings somewhere between pointing and aiming.

It is interesting to compare the means of the distributions of firing times shown in Figure E-3 with the means of similar times measured in previous small arms tests. Mean times to first trigger pull (timed

---

\*The estimated frequency distribution for aimed fire was calculated by (1) assuming that the aimed or pointed fire distribution was a weighted mixture of two distributions: the "pure" aimed fire distribution (unknown) and the "pure" pointed fire distribution (assumed equal to the actual clearly pointed fire distribution), (2) estimating the proportion,  $k$ , of "pure" pointed fire in the aimed or pointed sample, assuming that all the aimed or pointed firings at .2 seconds or less were, in fact, "pure" pointed firings, (3) applying the defining equation for mixtures of frequency distributions,

$$f_{\text{aim or point}} = kf_{\text{point}} + (1-k)f_{\text{aim}},$$

to "subtract out" the frequency distribution of "pure" pointed fire. Using that equation and the previous assumptions, the proportion,  $k$ , was calculated as the percent of all aimed or pointed firings that had firing times less than .2 seconds, divided by the percent of all clearly pointed firings that had firing times less than .2 seconds. Thus, the estimated proportion of "pure" pointed fire in the aimed or pointed sample was .17, or 17 percent.

from initial target appearance<sup>\*</sup>) are reported from the SALVO II experiment<sup>\*\*</sup> and two experiments conducted at Fort Benning, the Quick-Fire Experiment and the Defense Experiment.<sup>\*\*\*</sup> The SALVO and Quick-Fire times are almost identical, with average times to first trigger pull of 2.74 and 2.72 seconds, respectively. In the Defense Experiment, however, the average time to first trigger pull was 4 seconds at about 100 meters. In contrast, clearly pointed average times from the combat films are about 0.6 seconds, while aimed or pointed average firing times are about 1.6 seconds.

The reasons for the large differences between the mean values from the combat firings and those from the various tests appear to rest in firer motivation. Although the subjects in the SALVO and Quick-Fire experiments were instructed to fire quickly so as to get maximum hits, it appears that the experiments far from reproduced the time pressures of combat. The firers in the Defense Experiment were told to aim accurately so as to

---

<sup>\*</sup>In the SALVO II and Defense experiments, the firers knew about where almost all the targets would appear; thus, time from target appearance to trigger pull would be slower than time from weapon positioning to trigger pull by only about .2 to .3 seconds.

<sup>\*\*</sup>Johns Hopkins University, Operations Research Office, Tactics Division, SALVO II: Rifle Field Experiment, by Leon Feldman et al., Technical Memorandum ORO-T-397, AD 325-385 (Bethesda, MD, May 1961).

<sup>\*\*\*</sup>Respectively, Litton Systems, Inc., Mellonics Systems Development Division, Infantry Weapons Test Methodology Study Quick-Fire Experiment I; Final Report, by Ronald D. Klein, Contract DAEA 18-68-C-0004, prepared for United States Army Infantry Board, USAIB Project 3091, AD 914-686L (Ft. Benning, GA, 27 June 1969), and U.S. Army Infantry Board, Defense Experiment I, TECOM Project 8-5-0070-01 (Ft. Benning, GA, 25 November 1971).

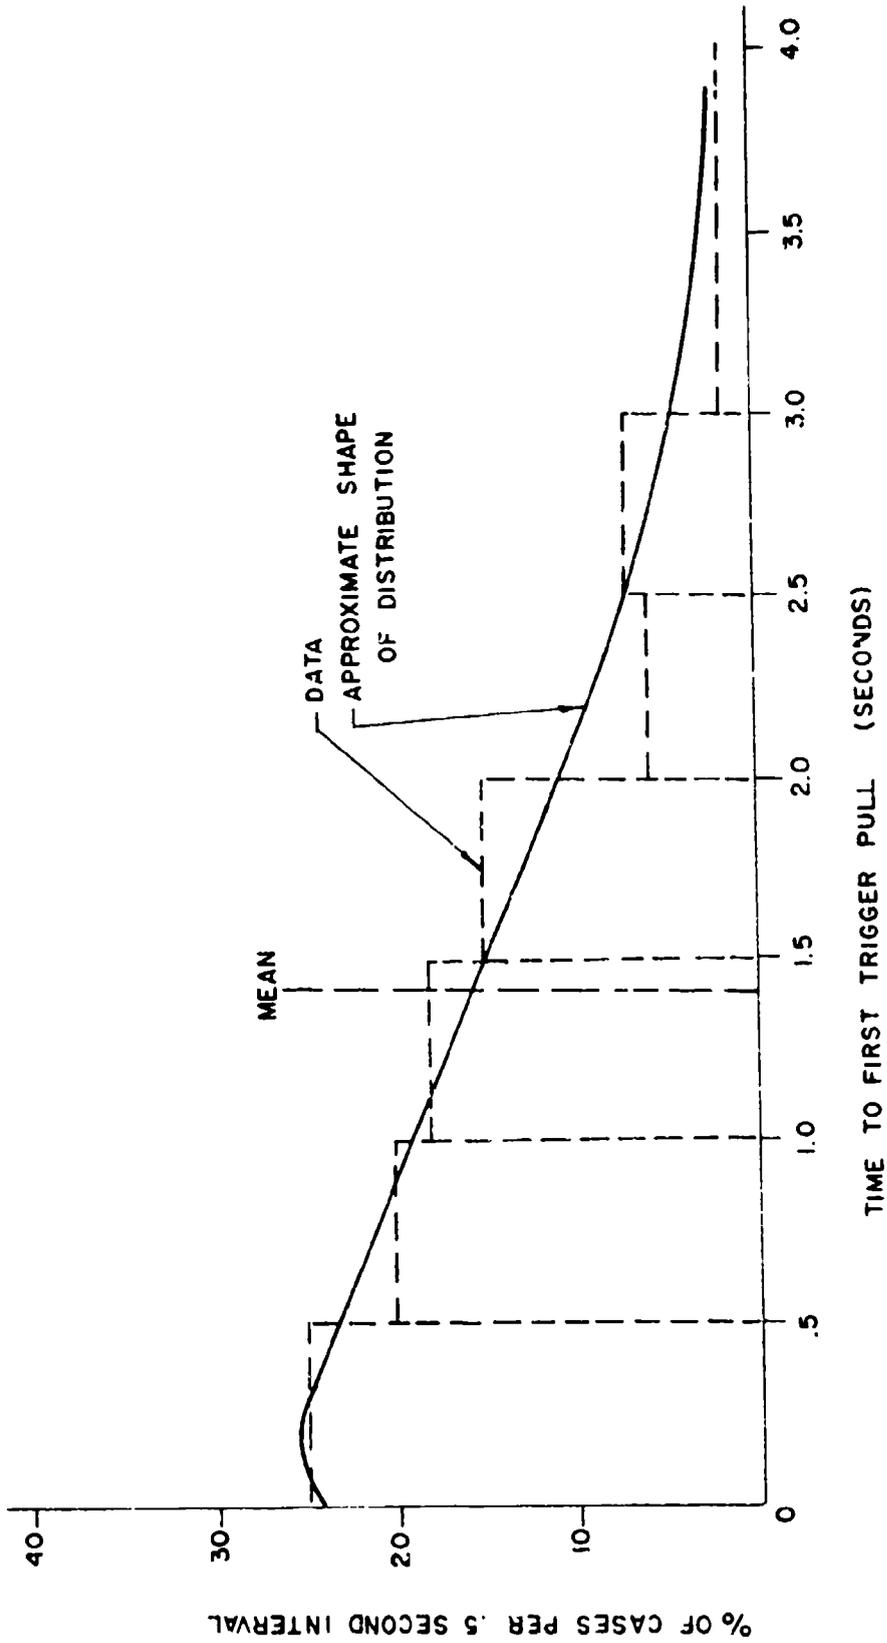


Figure E-2. Frequency distribution of first-round fire times.

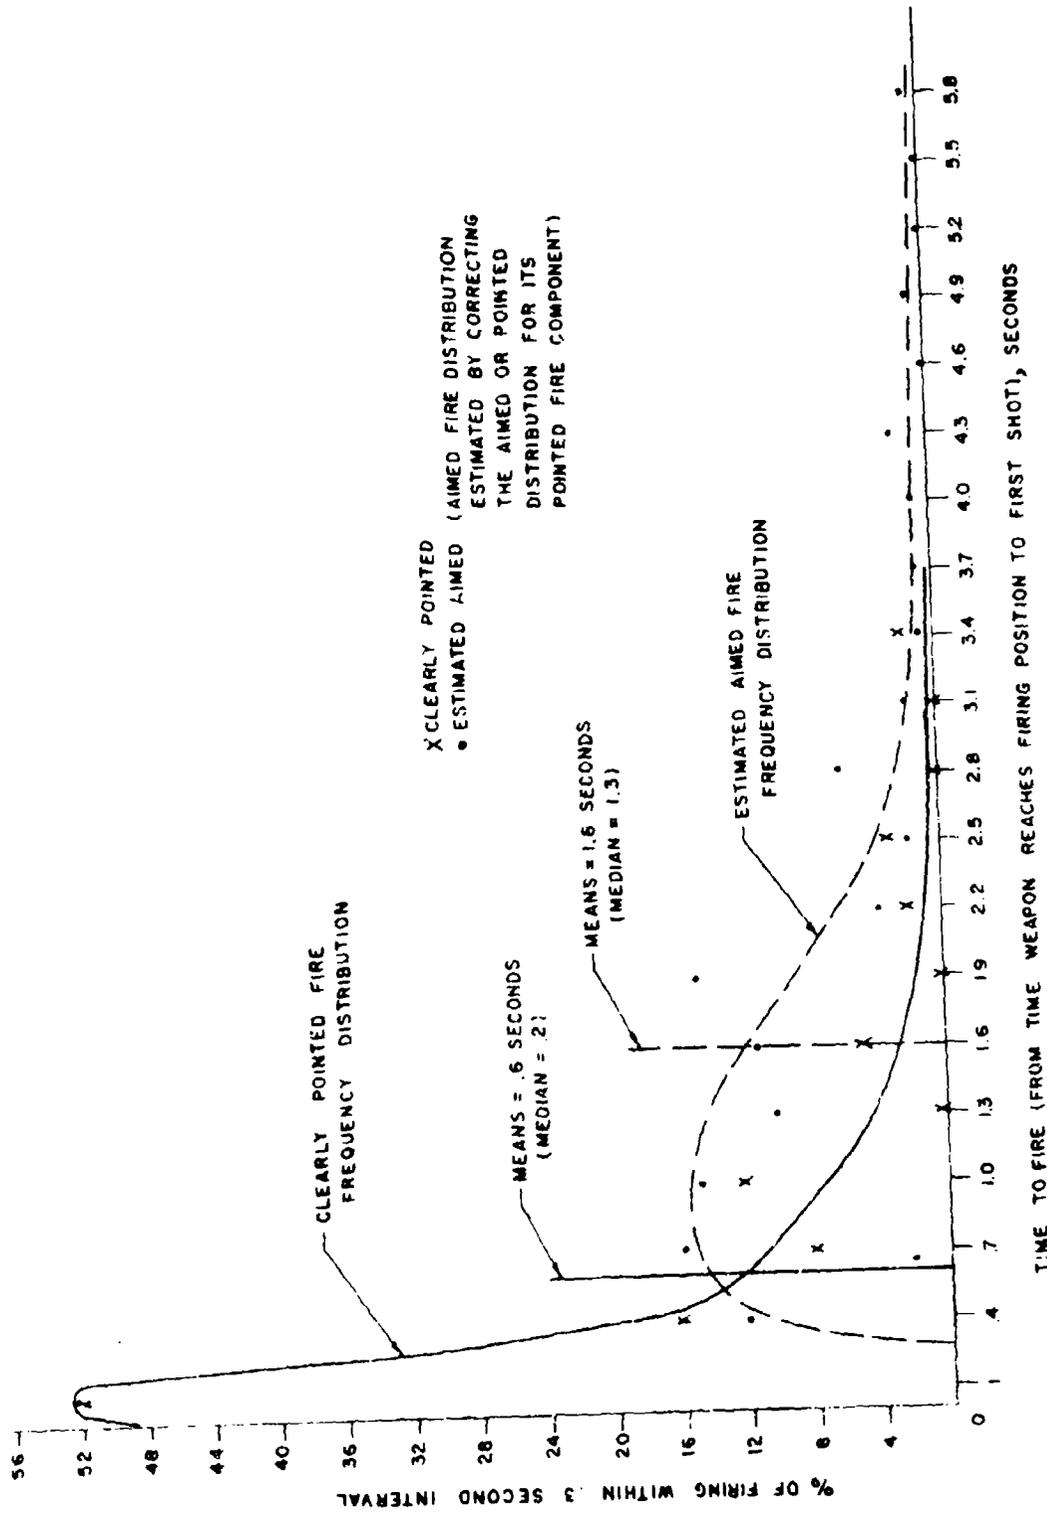


Figure E-3. Frequency distribution of first-round firing times for aimed and pointed fire.

maximize first-round hit probability and to expose themselves as little as possible while firing; as a consequence they took twice as long to fire as did firers in the other experiments and seven times as long as did those using clearly pointed fire in combat.

In all three experiments the firers were in position to fire before the targets were raised (and before time measurement began), and they roughly knew where to expect the targets to appear. In fact, in the Defense Experiment the firers had seen each group of four or five targets just before the same targets were exposed individually for them to engage. Thus, there is little reason to believe that the test firers were put at a time disadvantage to the combat firers (even though the experiment times are measured from target exposure, not from weapon in position). The combat firers had presumably already inferred or acquired a target before bringing the weapon to their shoulder. The shorter combat firing times probably reflect two factors: a stronger incentive to fire quickly, together with a greater willingness to aim less accurately, and the presence of few clearly defined targets to aim at.

It appears that the people who plan and conduct small arms tests can use measurements of test subjects' firing time (compared with the above combat firing times) to help assess whether the test subjects' training is achieving combat-like rapidity of fire. If the film sample had included a higher proportion of intense combat, the firing time distribution would likely have been even shorter than that shown.

Another aspect of firing speed is the number of rounds that are fired in each burst of automatic fire. Since the introduction of the M16 rifle, it has been alleged that its automatic fire capability produced excessively long bursts of fire in Vietnam and thus a great waste of ammunition (because during long bursts the muzzle may climb so high that most rounds pass high over the target).

Of the 319 M16 firings contained in the film data sample, 22 percent were automatic fire. The incidence of automatic fire was higher among Army soldiers (32 percent) than among Marines (11 percent). The number of rounds fired in each burst were counted and averaged for each firing sequence. (The sizes of the bursts used by a single man in a single firing sequence were checked and found not to vary much.) The frequency of occurrence of bursts of various sizes is shown in Figure E-4.

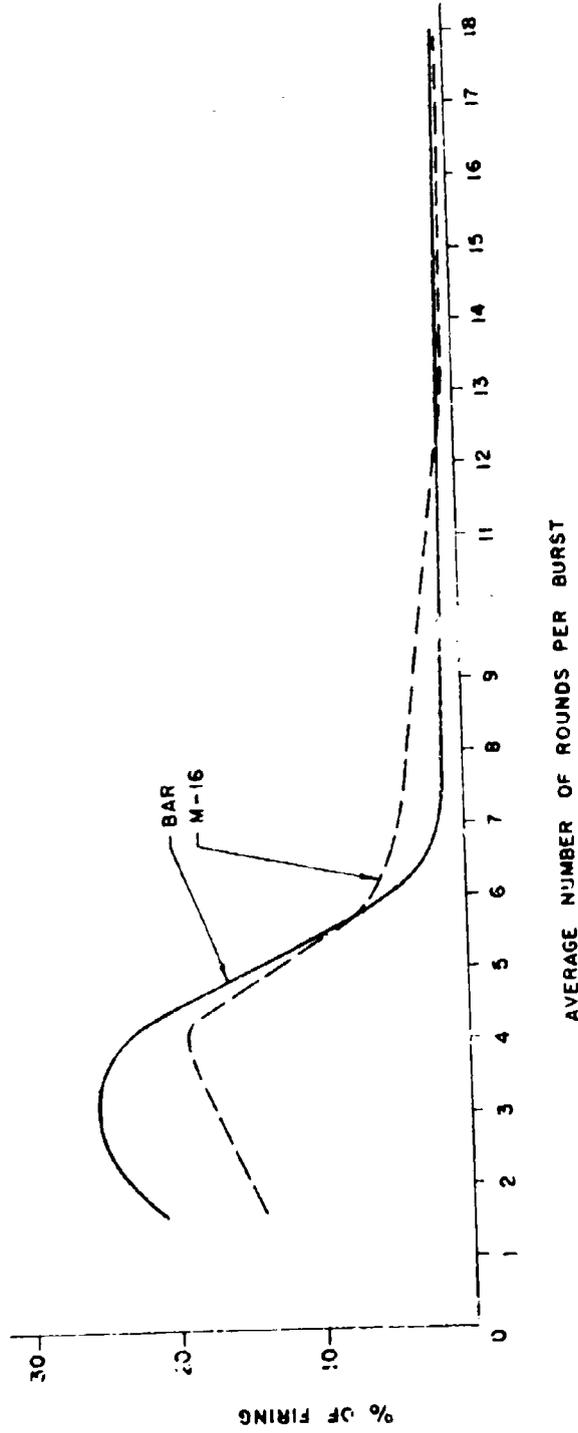


Figure E-4. Frequency distribution of sizes of M16 and BAR bursts of automatic fire.

The data show that firers used bursts longer than five rounds in only a small percentage of the 69 M16 automatic firings seen on film; about 60 percent of the firings are between two and four rounds. This is true even though many of these firers had not received any formal training in automatic fire techniques and there was no standard Army or Marine technique for such fire. The sizes of bursts shown in the figure cannot be considered optimum just because they were used in combat; as is discussed in Chapter IV, the CDEC-SAWS experiment discovered that two-round bursts are more effective than longer ones, when target effects and sustainability are weighed. Figure E-4 also shows the burst sizes used by BAR firers in World War II and Korea. These firers had been trained in 2- to 3-round burst and single-shot techniques, and it is apparent that they used slightly shorter bursts than the M16 firers; the BAR firers also had a much slower rate of fire.

#### OBSERVATIONS ON TARGET RANGE

The distribution of ranges from small arms firers to targets is generally known from various data sources, as described in Appendix D. In collecting information from combat film firing sequences, estimates were made of approximate ranges, and these are useful for comparison with range data from other sources to indicate how well the ranges in the filmed firing sequences agree with the known combat range distributions.

In 777 of the 1429 sequences, some estimate of range to target could be made. In many of these the estimate had to be rough, but in others it could be more precise.\* An estimating procedure was devised that allowed the data collectors to produce consistent estimates of ranges, based on the variety of views of target areas that were found in the filmed sample. This procedure presented the collectors with a choice of range intervals of varying sizes (e.g., 100-300 meters and 75-450 meters) so that they could appropriately express the degree of uncertainty with which they could make any

---

\* Information on camera focal length was not available, so the method of calculating distances to visible objects of known size from their dimensions in the picture could not be used.

particular estimate. The raw range data are shown in Figure E-5; each bar is the width of one of the range intervals that were available for choice. The bar's height indicates the percent of times that the collectors chose that bracket. A more useful form of presentation is in Figure E-6; the overlaps of bars have been accounted for by assuming that the actual ranges to all the targets within each estimated interval were distributed uniformly and then totaling the inferred frequencies in the overlapping areas. (The distribution of actual ranges within an interval is probably not uniform, and there are likely to be fewer actual ranges falling near the extremes of the intervals than near their centers.) The smoothed curve (shown as a solid line in Figure E-6) presents a usable approximation of the range frequency for the sample of filmed firing sequences. This curve agrees quite well with the target range frequencies from very different sources shown in Appendix D. To the extent that the film sample does not include a representative sample of assaults, the target range frequencies here represent a high estimate of ranges used in small arms combat.

Since the 777 cases in which range estimates could be made constitute little more than half the total set of filmed small arms firing sequences, it is of interest to see whether this subset represents an unbiased sample of the full set. Examination revealed that weapon types were represented in about the same proportions in the subset as in the complete set, that combat theaters were represented in the proper proportions, and that the incidence of clearly pointed versus aimed or pointed weapon sighting was similar to the full set. On the other hand, Marine firings were under-represented in the subset, apparently because Army photographers were more likely than Marine photographers to include views in the direction the firer was aiming.

The difference between target range frequencies for clearly pointed fire and aimed or pointed fire is of interest. Both distributions are shown in Figure E-7 as smoothed curves derived in the same way as the distribution in Figure E-6. The distributions differ only slightly, with clearly pointed firing ranges averaging only about 10 meters shorter than the aimed or pointed ranges.

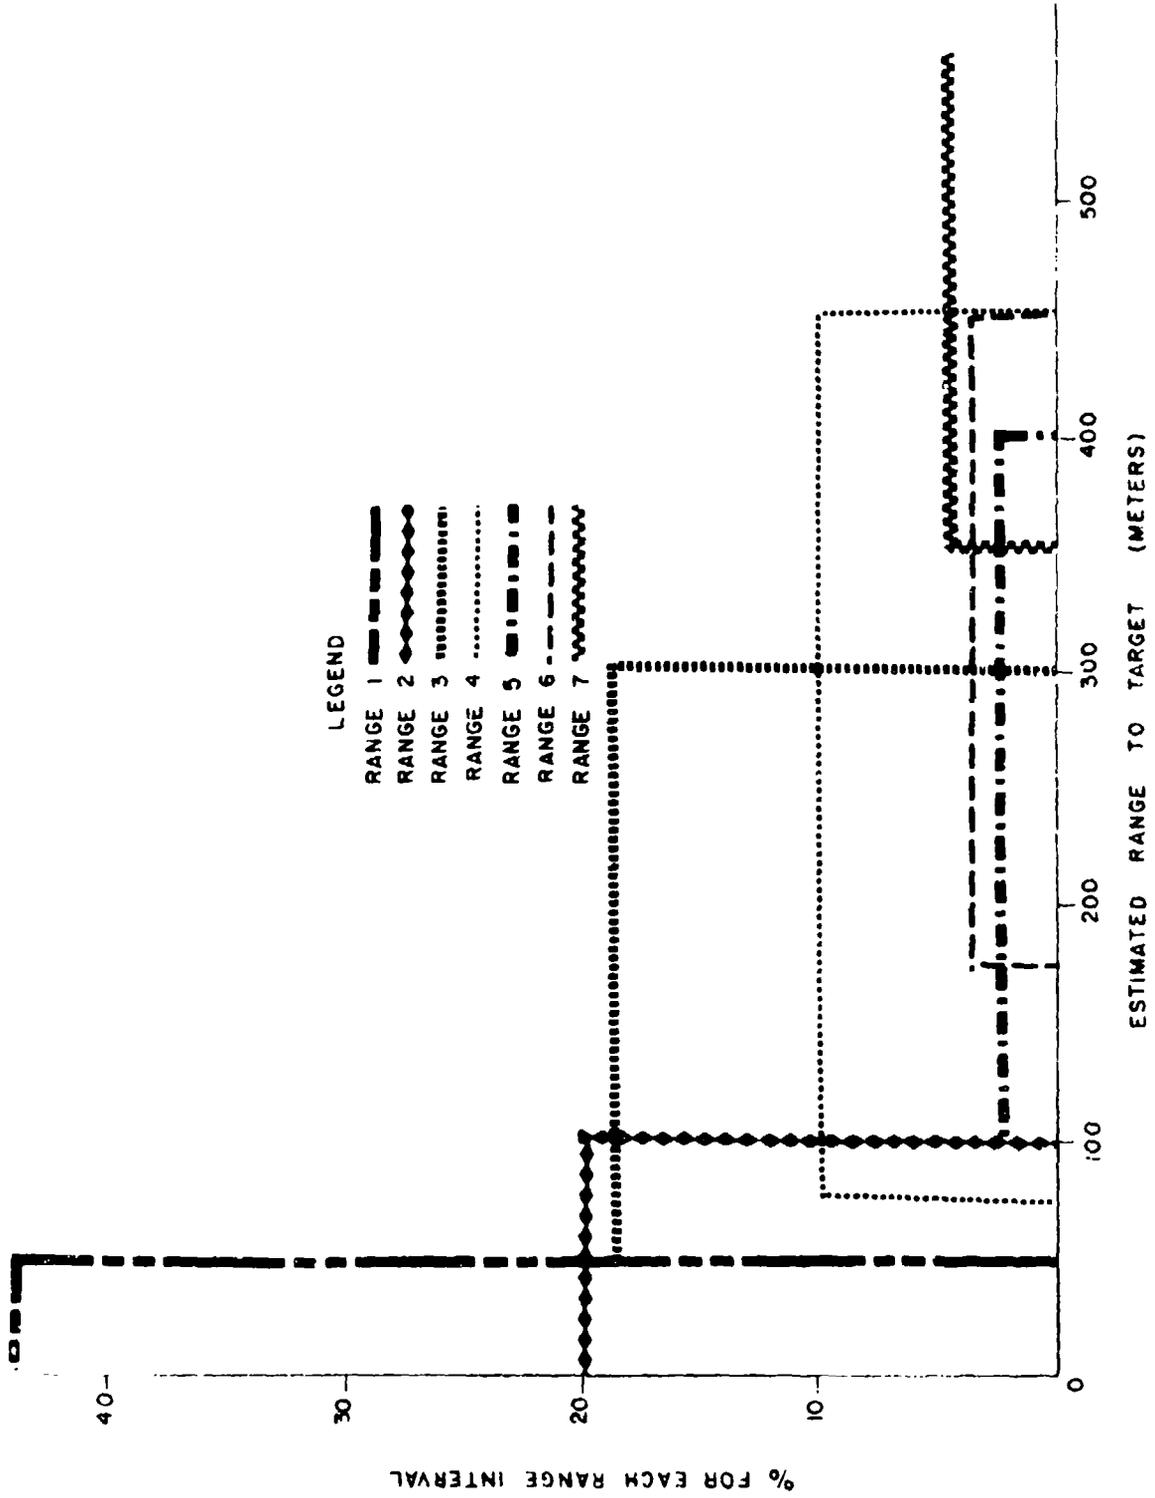


Figure E-5. Percent of times each range bracket was chosen.

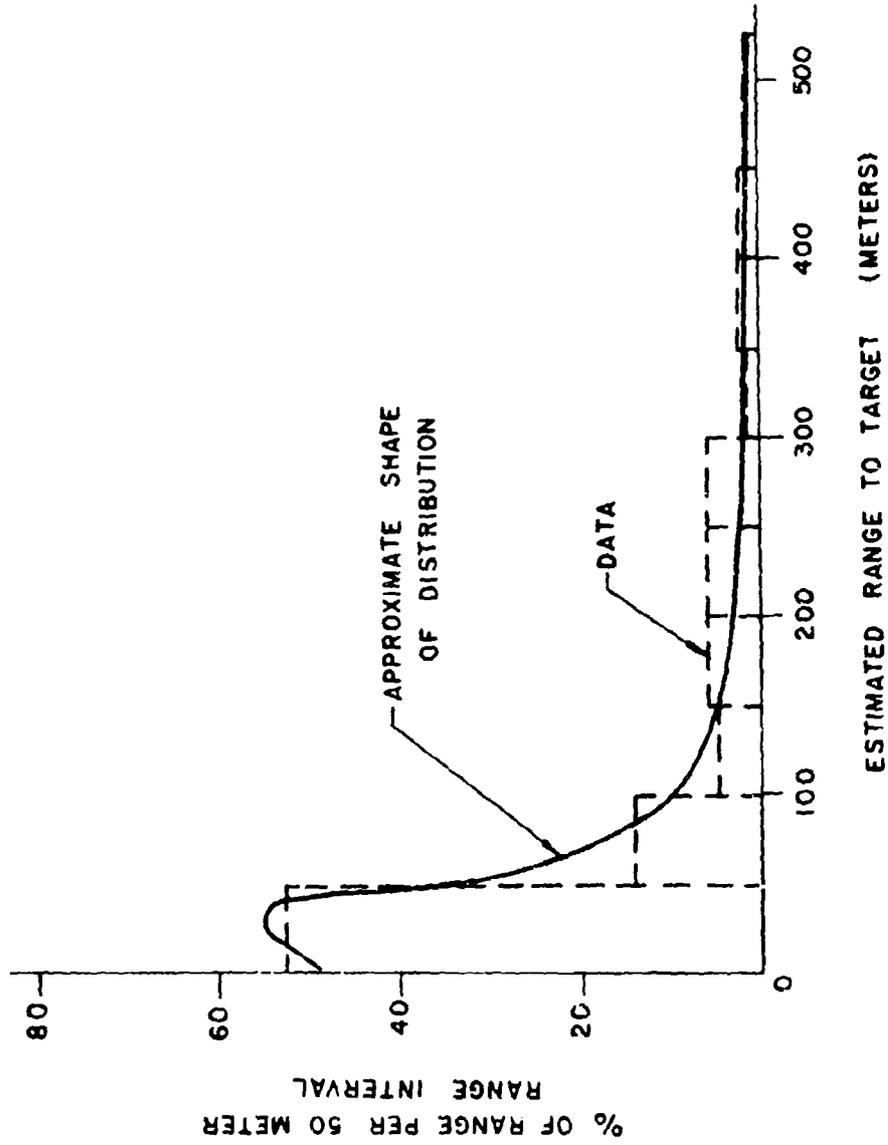


Figure E-6. Percent of estimated target range per 50-meter intervals.

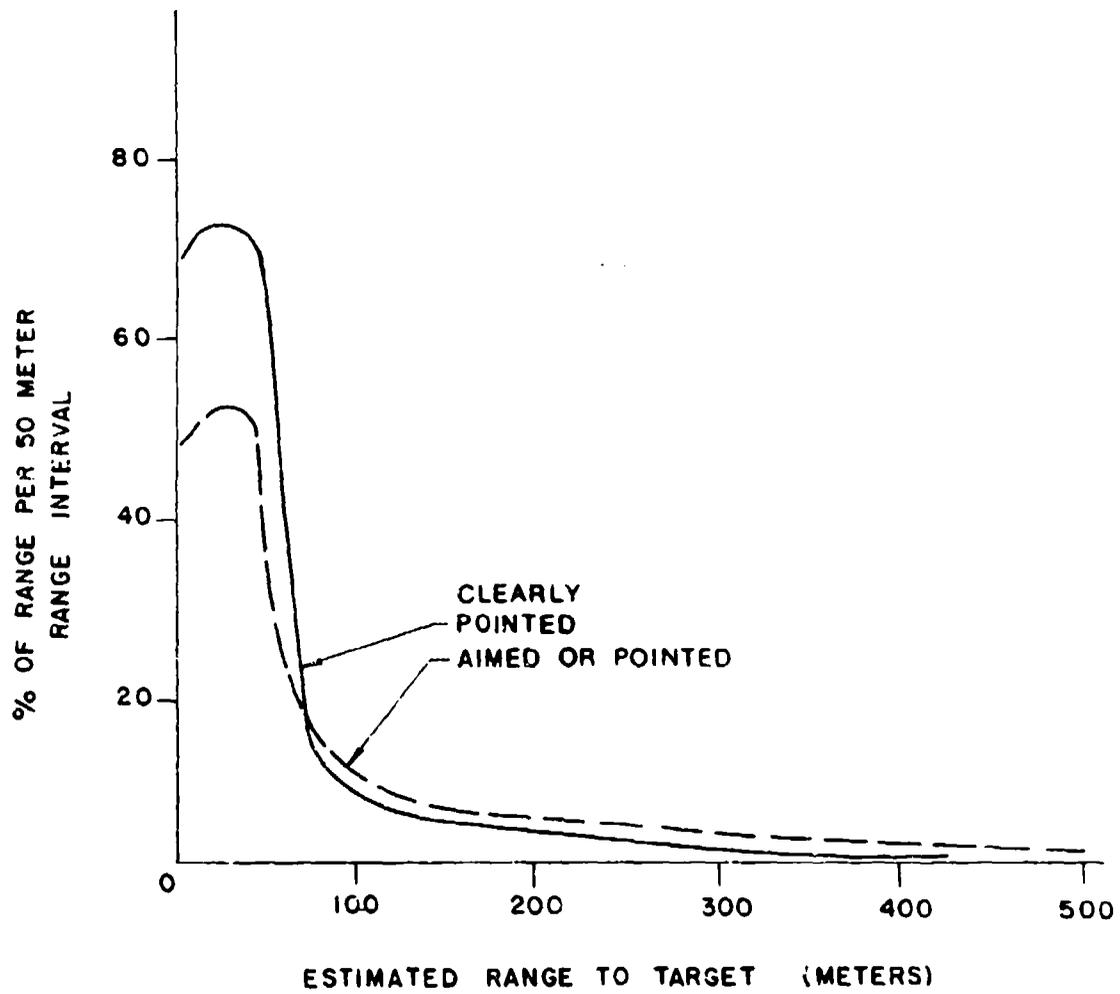


Figure E-7. Percent estimated target range per 50-meter intervals aimed and pointed fire.

COMPARISON OF FIRING POSITIONS TAUGHT IN TRAINING  
WITH THOSE TAKEN IN COMBAT

The films were also used to investigate the possibility that combat firers use firing positions that deviate significantly from the standard positions taught in U.S. infantry training. This was done by compiling the film sequences for each class of firing position (prone, standing, etc.), selecting representative samples, obtaining artists' drawings of the samples, and comparing these with the drawings of the standard firing positions contained in official training manuals. The BAR and M60 machine gun were excluded to simplify the comparison.

Selection of Firing Sequence Samples

The first step was to eliminate from further consideration the firing sequences that were not representative enough for the intended comparison. The criteria for elimination were as follows:

- o The firer's position had to be clearly visible (preferably from his right side).
- o The majority of the firer's body had to be within the camera's field of view.
- o The weapon being fired could not be supported (e.g., rested on a wall, etc.). It was believed that there were too few pictures of any one type of supported position to indicate a trend.
- o Films of firers located on steep slopes or pointing their weapons up or down at sharp angles would not be used.

When these criteria were applied, the sample of 1072 rifle and carbine firing sequences was reduced to a maximum of about 250 firings. From this group, 115 sequences were selected and prints were obtained. They were used for the following comparisons:

- o Comparison of filmed standing, kneeling, and prone positions (using the M1, M14, and M16 rifles and the carbine) with doctrinal positions.

- o Comparison of standing and kneeling positions when the firer was wearing an armored vest (M14 and M16 rifles) with positions of firers not wearing vests.
- o Comparison of firing positions when the butt of the weapon stock was not placed at the firer's shoulder (including both automatic and semiautomatic fire modes) with firing when the butt was at the shoulder.
- o Comparison of positions in which the firer clearly pointed his weapon with positions in which he appeared to aim (including both semiautomatic and automatic M16 fire).

After review of these films about half were selected as being particularly useful for more detailed examination and comparison. The specific frame of each film showing the firer just before his weapon fired was then enlarged; a tracing of the firer's main outlines was made; and the details of his body position were drawn in by a medical illustrator. These drawings were used for final comparisons and analyses of position variations.

#### Results of Drawing Comparisons

The standing, kneeling, and prone positions that were used by combat firers fell well within the allowed variation of standard positions prescribed in the applicable Army field manuals.\* None of the positions seen were awkward ones; on the contrary, most would have passed the rather exacting criteria of marksmanship trainers. Figure E-8 shows film-based drawings of standing positions with M1 and M16 rifles that are typical of the "preferred" high elbow position, and one of an M14 rifle typical of the "alternate" low elbow position. Figure E-9 shows drawings of typical kneeling positions with M1 and M16 rifles, and one of the prone position with an M16.

---

\* U.S. Army and U.S. Air Force, Carbine Caliber .30 M1, M1A1, M2, and M3, Field Manual 23-7 (Washington, January 1952); U.S. Army, M14 and M14A1 Rifles and Rifle Marksmanship, Field Manual 23-8 (Washington, April 1974); U.S. Army, M16A1 Rifle and Rifle Marksmanship, Field Manual 23-9 (Washington, June 1974); U.S. Army, Rifle Marksmanship, Field Manual 23-71 (Washington, December 1966).

E-24


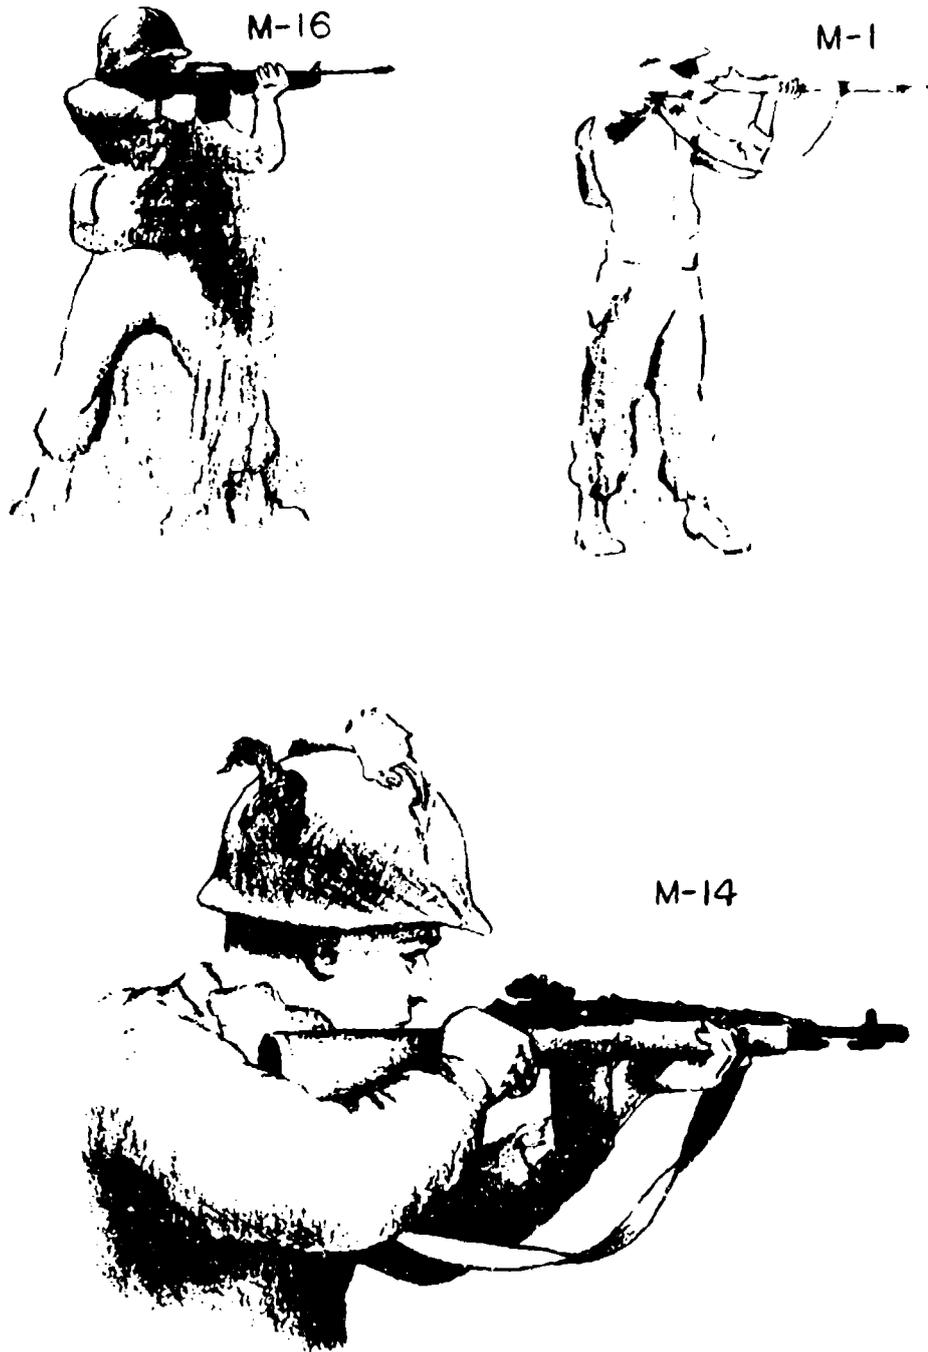


Figure E-8. Standing positions showing typical high elbow position (M1 and M16) and low elbow position (M14).



M-1

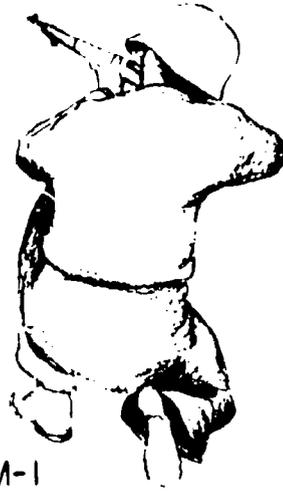

M-1



M-16



M-16

Figure E-9. Typical kneeling positions (M1 and M16) and typical prone position (M16).

When firings by men wearing armored vests were compared with similar non-vest firings using the same weapons and body positions, no difference was detectable. As far as could be seen, the vests did not affect the way the butt of the stock was placed against the firer's shoulder, change the position of his torso, or alter his normal elbow position. In all such pictures the right elbow was little if any lower than the shoulder (no prone positions were seen). Examination of the drawings of men firing weapons from other than the shoulder position revealed little variation. The rifle was mostly held above the waist but well below the armpit, with the right forearm approximately level and the wrist nearly straight, as shown in Figure E-10.

When the drawings of firers "pointing" their weapons (from shoulder positions) were compared with those in which they appeared to be looking through the sights, no difference in body position was seen, though of course the head position was different because "pointing" firings were detected by the head-up attitude of the firer (which causes him to look over the sights). Several M16 firers held the rifle butt a little lower on the shoulder during "pointing" firing. As shown in the example in Figure E-11, this increased the already substantial height above the sights of the firer's line of vision.

E-27

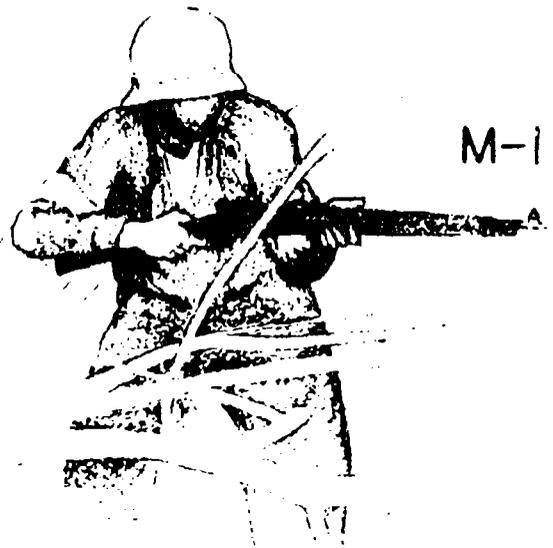
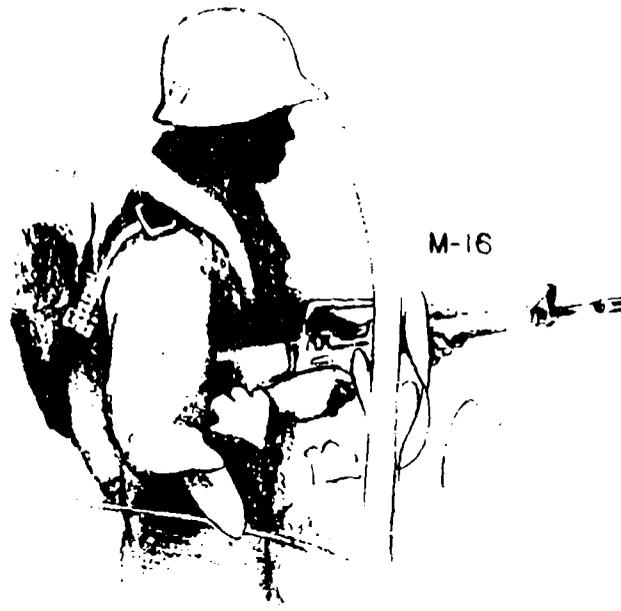


Figure E-10. Men firing weapons from other than shoulder position.



Figure E-11. Man firing M16 from other than shoulder position.

## Annex to Appendix E

## COMBAT FILM DATA OF SMALL ARMS FIRINGS

INTRODUCTION

This annex describes the procedures used to collect information about small arms firings from the combat films and fully lists the data that were collected.

The sources of film were the U.S. Army Motion Picture Depository and Records Center, Tobyhanna Depot, Tobyhanna, Pennsylvania, and the U.S. Marine Corps Motion Picture Archives, Quantico, Virginia. Both film repositories had similar facilities, and the collection techniques used were identical.

The specific objective was to record data that described the firer's actions (from the time he was first observed until he stopped firing or paused to reload), including his position, type of weapon, method and speed of aiming and firing, and available information about the target and the range to the target.

A tentative data collection format was developed, tested, and used to collect the following categories of information:

- o Where and when the firing sequence took place (i.e., World War II in Europe, or in the South Pacific, the Korean War, or Vietnam).
- o Activities of the firer, such as his firing position, weapon, method of aiming, and rate of fire.
- o An estimate of the range to the target area and target movement and size.
- o Assessment of the utility of the sequence for comparing firing positions with each other and with doctrinal positions (judging from film quality, camera angle, and the amount of the firer's body that could be seen).
- o Information identifying the firer's unit.

### THE COLLECTION PROCESS

The research team conducted a search of all films at both film centers by examining the identification cards that briefly describe each film (e.g., "Marine infantry and tank attack in Korea," "M-1's and tank firing"). These cards are categorized by subject (e.g., M-1, tank) and are extensively cross-referenced. Initially, 84,000 film identification cards were examined to identify the film reels which contained small arms firing sequences. Over 800 reels of film, constituting 615,000 feet of combat footage, appeared to contain such firings. All 615,000 feet of film were examined, and a total of 1429 weapon firing sequences was collected.

Selection of firing sequences was made only from footage of actual combat; training films, staged shots, and reenactments were excluded.

Items of information collected during the combat film examination were recorded on data collection sheets, checked for completeness and validity, and then entered into a computer so that they could be sorted and listed in ways convenient for analysis.

### DATA DESCRIPTORS

Below are described each of the data elements that were collected from the films. They are described in the order in which they appear in the computer printouts of the complete data (Figure 1, beginning p. E-57). The left-hand column presents the headings as they appear across the top of Figure 1 from left to right. The right-hand column describes these headings and explains the data codes.

---

**FIGURE 1 HEADING  
ABBREVIATIONS****DATA ELEMENT DESCRIPTION**

---

LSN

This heading contains four columns which represent the "Line Sequence Number." Those lines in the data listing that are blank represent data items which were deleted because they were not usable. Thus there are 1464 line numbers but only 1429 data items.

O

Column "O" describes the "Type of Operation" (Attack, Defense, Undetermined) during the firing sequence. The code numbers below describe the items they represent:

Type of Operation

- 1 - Attack
- 2 - Defense
- 3 - Undetermined

When code number 1 - "Attack" appears in column "O" the term attack means that the firer seemed to be moving forward before and after the firing sequence or that the enemy was seen in prepared positions (foxholes, bunkers, etc.). Code number 2 - "Defense" appears when the firer was seen in a prepared position such as a foxhole or when enemy forces were seen advancing toward the firer.



---

 FIGURE 1 HEADING  
 ABBREVIATIONS
 

---

 DATA ELEMENT DESCRIPTION
 

---

(cont.)

POS "Not to Shoulder" indicates only that the rifle was not at the firer's shoulder (e.g., weapon held underarm or at waist or at hip).

FSr

Code number 1 - "Elbow" in the center column was not entered when the use of the elbow as a support was a normal aspect of that position (e.g., left elbow placed on knee in the kneeling position or both elbows on the ground in the prone position).

The right hand column describes the firer's last stationary position before he assumed his firing position.

AIM This heading contains three columns that describe the method of sighting the firer apparently used, any movement or lack of movement of the firer during the firing sequence, and the consistency of such movement.

M

The left hand (M) column contains code numbers which represent six different methods of sighting. The center column (I) contains code numbers which represent five different

---

**FIGURE 1 HEADING  
ABBREVIATIONS**
**DATA ELEMENT DESCRIPTION**


---

(cont.)

AIM types of movement. The right hand column (M)  
M contains code numbers which represent three  
different types of consistency. The code  
numbers below describe the items they represent:

<u>Sighting Method</u>	<u>Movement Between Trigger Pulls</u>	<u>Consistency of Movement</u>
1-Aim	0-Not Applicable	0-No Change
2-Point*	1-No Change	1-Most of time/ always
3-Aim/Track	2-Raised Head	2-Some of the time
4-Aim/Traverse	3-Lowered Rifle	
5-Point/Track*	4-Other	
6-Point/Traverse*		

In the sighting method column the term  
"aim" means the firer appeared to be able to  
see through the sights of his weapon. The

---

\*When code number 7 - "Not to Shoulder" appears in the firing  
position (F) column, one of three code numbers (2, 5, 6) appears in  
the sighting method column, because it would be impossible for the  
firer to use a clearly aimed method of fire from the "Not to Shoulder"  
position.

---

 FIGURE 1 HEADING  
 ABBREVIATIONS
 

---



---

 DATA ELEMENT DESCRIPTION
 

---

(cont.)

AIM

M

term "point" means the firer did not appear to have been able to see through the sights of his weapon. The term "track" means that the firer was moving his weapon smoothly in a horizontal direction as if tracking a moving target. The term "traverse" means the firer was moving his weapon in a horizontal direction but stopped for each trigger pull.

In the "movement between trigger pulls" column the entry 0 - "Not Applicable" means that there was only one trigger pull. 1 - "No Change" appears when there was more than one trigger pull in which no movement of head or rifle between trigger pulls was observed. When 4 - "Other" appears in the center column, this describes more than one movement, usually meaning that both 2 - "Raised Head" and 3 - "Lowered Rifle" occurred.

In the "consistency of movement" column 0 - "No Change" appears when there was only one trigger pull or when no change was entered in the previous column.

---

 FIGURE 1 HEADING  
 ABBREVIATIONS
 

---

## DATA ELEMENT DESCRIPTION

W

This heading contains two columns that

A

describe the type of weapon and mode of fire.

The left hand column (W) contains six code numbers which represent the different types of weapons. The right hand column (A) contains two code numbers which represent the fire mode. The code numbers below describe the items they represent:

<u>Weapon ("W")</u>	<u>Fire Mode ("A")</u>
1 - M-1 Rifle	1 - Single Shot
2 - M-1 or M-2 Carbine	2 - Burst (full automatic)
3 - M-14 Rifle	
4 - M-16 Rifle	
5 - Browning Automatic Rifle	
6 - M-60 Light Machine Gun (Bipod Mounted Only)	

In the weapon column when the code number 2 - "M-1 or M-2 Carbine" appears the weapon can be an M-2 carbine when the code number 2 - "Burst" also appears in the fire mode column.

---

**FIGURE 1 HEADING  
ABBREVIATIONS**
**DATA ELEMENT DESCRIPTION**


---

RD/  
BUR

This heading contains two columns which present the average number of rounds per trigger pull when code number 2 - "Burst" appears in the fire mode ("A") column (see p. E-36). The average number of rounds per trigger pull was determined by dividing the total number of rounds expended by the total number of trigger pulls. When "1" appears in the TRG PUL column the number appearing in the RD/BUR column represents the exact number of rounds expended for one trigger pull.

16  
B  
T

This heading contains two columns which present data about the M-16 rifle.

The left hand column contains two code numbers which represent M-16 burst length. The right hand column contains three code numbers which represent M-16 tracer use. The code numbers below describe the items they represent:

---

**FIGURE 1 HEADING  
ABBREVIATIONS**
**DATA ELEMENT DESCRIPTION**


---

(cont.)	<u>M-16 Burst Length</u>	<u>M-16 Tracer Use</u>
16	0 - Not Applicable	0 - Not Applicable
B		
T	1 - More than 8 rounds*	1 - Yes
		2 - No

**FIRE TIME  
1ST SUB ALL**

The Fire Time heading contains three columns which contain fire times in seconds and tenths of seconds. Fire time is defined as meaning the time it took to aim/point at a target and pull the trigger. This time starts with the weapon in position (e.g., rifle at shoulder) and ends with the trigger pull. Times were calculated from numbers of film frames and camera speed.

The left hand ("1st") column contains the fire time for the aim/point time for the first trigger pull. In some cases this first fire time may not be the complete time because the firer had his weapon at his shoulder when the

---

\* This was only a gross indicator, but burst size was also determined more precisely as described above (see RD/BUR).

---

 FIGURE 1 HEADING  
 ABBREVIATIONS
 

---

 DATA ELEMENT DESCRIPTION
 

---

 (cont.)  
 FIRE TIME

1ST SUB ALL

sequence started. In these cases, it was impossible to tell how long he had been sighting. Those cases are identifiable under the heading TIM/TO/POS (p. E-41). If in this column the time entered is 0.0, the first fire time cannot be considered to be the full aim/point time.

The center ("SUB") column contains the average aim/point fire time for each subsequent trigger pull. (When this number is 0.0 it means there was only one trigger pull, which is also shown in the TRG/PUL column.)

The right hand ("ALL") column contains the average aim/point fire time for all trigger pulls (including the first).

 R  
 C  
 H

This heading contains one column which represents the change of trigger pull rate. The term "trigger pull rate" means the speed with which the firer discharged his weapon in a series of trigger pulls. This data was collected to see if there was any noticeable change in trigger pull rate during sustained

FIGURE 1 HEADING ABBREVIATIONS	DATA ELEMENT DESCRIPTION
(cont.)	<p>firing sequences. Code numbers 2 - "Fast to Slow" and 3 - "Slow to Fast" are the ones that show a (recognizable) change (however, they only appear in 4 percent of the cases). Code numbers 0 - "Not Applicable" (i.e., only one trigger pull shows on the film) and 1 - "Constant" appear the rest of the time.</p>
R C H	
D I R	<p>This heading contains one column which represents the direction of fire. The term "Direction of Fire" refers to pointing the weapon up or down. The code numbers are listed below:</p> <p><u>Direction of Fire</u></p> <p>0 - Not Applicable</p> <p>1 - Up</p> <p>2 - Down</p> <p>When code numbers 1 - "Up" or 2 - "Down" appear in the direction of fire column this means that the weapon's vertical angle was great enough to distort the normal body firing position (e.g., man in street firing into upper story window).</p>

---

 FIGURE 1 HEADING  
 ABBREVIATIONS

 DATA ELEMENT DESCRIPTION
 

---

 TIM  
 TO  
 POS

This heading contains two columns which contain the "Time to Position" in seconds and tenths of seconds. This data was collected in an effort to see how long it took a firer to go from a prefire position to a firing position (e.g., standing to prone). By referring to the POS/FSP headings and comparing the left hand (F) column code number to the right hand (P) column code number, it is possible to single out those few occurrences where there was a difference between the prefire and fire positions. When the left hand (F) column and the right hand (P) column have the same code numbers, there was no change in position just before firing, and the time that appears in the "time to position" column describes the time it took the firer to get the weapon to his shoulder.

The times that appear in the "Time to Position" column are somewhat misleading because some of them also include time in which no movement occurred (e.g., a firer was seen standing, stood for some seconds, and then went into a

---

**FIGURE 1 HEADING  
ABBREVIATIONS**
**DATA ELEMENT DESCRIPTION**


---

(cont.)

prone fire position). Only the minimum times entered in this column are useful indicators of time required. When 0.0 appears in the "time to position" column this means that the firer had his weapon at his shoulder when the firing sequence was first seen on the film.

TIM  
TO  
POS

TRG  
PUL

                    This heading contains two columns which represent the total number of trigger pulls. These numbers describe the total number of times the firer pulled the trigger (e.g., a firer firing two rounds semi-automatic would appear as 02; a firer firing three bursts of automatic fire would appear as 03).

2ND POSN  
FS M A D

                    This heading contains five columns which describe changes in firing positions, aim methods, use of automatic fire, and pointing up or down during a single firing sequence. These data were collected to see if there was any detectable change made by the firer after the first trigger pull in a firing sequence (in a

---

 FIGURE 1 HEADING  
 ABBREVIATIONS
 

---

 DATA ELEMENT DESCRIPTION
 

---

(cont.)

2ND POSN

FS M A D

majority of the cases there was no change in any of the items noted). When a change took place after the first trigger pull, the data do not describe at what point during the sequence it took place.

The left hand (F) column represents the second firing position (parent column - "F" - Firing Position). The "S" column represents the second type of support (parent column - "S" type support). The "M" column represents the second sighting method (parent column - "M" sighting method). The "A" column represents the second firing mode (parent column - "A" firing mode). The right hand (D) column represents the second direction of fire (parent column - "DIR" direction of fire).

R  
G  
E

This heading contains one column of code numbers which describe the firing range. The term "firing range" is defined as meaning estimated distance from the firer to the target area. Because range was difficult to estimate from the film, a process which produced

---

**FIGURE 1 HEADING  
ABBREVIATIONS****DATA ELEMENT DESCRIPTION**

---

(cont.)

R  
G  
E

consistent estimates from three observers was developed on the basis of brackets of range within which the estimate could be confidently estimated to fall (e.g., code number 3 means the target was not further away than 300 meters and was not closer than 50 meters to the firer). The code numbers below describe the range brackets they correspond to:

Firing Range

- 0 - Undetermined
- 1 - Not more than about 50 meters
- 2 - Not more than about 100 meters
- 3 - Not less than about 50 meters and not more than about 300 meters
- 4 - Not less than about 75 meters and not more than about 450 meters
- 5 - Not less than about 100 meters and not more than about 400 meters
- 6 - Not less than about 175 meters and not more than about 450 meters
- 7 - Not less than about 350 meters

---

 FIGURE 1 HEADING  
 ABBREVIATIONS
 

---

 DATA ELEMENT DESCRIPTION
 

---

 M  
 E  
 C

This heading contains three columns which describe how firers moved to the location of their firing positions (when such movement was seen), the amount each was exposed to view from the direction of the target area, and whether the part of each that was not exposed was behind physical cover or only concealed.

The left hand ("M") column describes any movement of the firer to his fire location.

The center ("E") column describes the amount of each firer that was visible from the area toward which he was firing.

The right hand ("C") column describes the firer's use of cover and concealment. The code numbers below describe the items they represent:

<u>Moving into Fire Location</u>	<u>Firer's Exposure</u>	<u>Use of Cover and Concealment</u>
0 - No movement	1 - Full	0 - None
1 - Walk	2 - Half	1 - Cover
2 - Run	3 - Minimum	2 - Concealment
3 - Crawl		3 - Cover/ Concealment

---

**FIGURE 1 HEADING  
ABBREVIATIONS**
**DATA ELEMENT DESCRIPTION**


---

(cont.)

M  
E  
C

When the code number 0 - "no movement observed" appears in the left hand ("M") column this means the firer was, when first seen on the film, already at his fire location. The code number 4 - "Other" appears when more than one way was used to move into fire location (e.g., firer walked and then ran to his fire location).

When code number 1 - "Full"\* appears in the center ("E") column this means the firer was as completely visible to his target area as his firing position would permit (e.g., firer in prone position with no cover or concealment). The code number 2 - "Half" appears when the firer had roughly half of his body (as it appeared in that position) exposed in the direction of his target area (e.g., firer standing in waist high grass).

---

\* When this code number appears the code number 0 - "None" will always appear in the right hand "C" column.

FIGURE 1 HEADING ABBREVIATIONS	DATA ELEMENT DESCRIPTION
(cont.) M E C	<p>When the code number 3 - "Minimum" appears in the center ("E") column the firer had a very small portion of his body exposed in the direction of his target area (e.g., firer kneeling behind a fallen tree).</p>
	<p>When code number 0 - "None" appears in the right hand ("C") column this means the firer was fully exposed. When code number 1 - "Cover" appears this means the firer was partly behind some type of material that would presumably stop a bullet, e.g., standing behind a wall. (The amount of the firer that was behind the cover is indicated in the center column.) The code number 2 - "Concealment" appears when the firer was behind some type of material that would not stop a bullet, such as a bush. When code number 3 - "Cover/Concealment" appears this means that the firer was behind a mixture of the two types of materials--some part of him was "concealed" (e.g., kneeling behind a fallen tree with branches concealing a further part of his body).</p>

---

 FIGURE 1 HEADING  
 ABBREVIATIONS
 

---

 DATA ELEMENT DESCRIPTION
 

---

 OTHR  
 C U  
 F

This heading contains four columns which describe the action of other soldiers who were visible in the film of soldier firing a small arm.

The left hand ("O") column describes whether or not there were others in the firing sequence. Column "C" describes the appearance of other soldiers in the sequences in terms of whether or not they appeared to be concerned about what the firer was doing. Column "F" indicates whether anyone else in the group of men who were visible was firing a weapon. Column "U" indicates whether most of these other men had taken cover or not.

The code numbers below describe the items they represent:

Others in Sequence

0 - Not applicable  
 1 - Other in sequence

Concerned

0 - Not applicable  
 1 - Yes  
 2 - No

---

 FIGURE 1 HEADING  
 ABBREVIATIONS

 DATA ELEMENT DESCRIPTION
 

---

(cont.)	<u>Firing</u>	<u>Undercover</u>
OTHR	0 - Not applicable	0 - Not applicable
C U	1 - Yes	1 - Yes
F	2 - No	2 - No

In the left hand ("0") column when the code number 0 - "Not applicable" appears, this describes that the firer was the only soldier seen in the film of the firing sequence. (When this code number ("0") appears, columns "C", "F", and "U" will, also, appear as zeros.) When the code number 1 - "Other in sequence" appears, this means some number of people were present in the firing sequence other than the firer. There is no way of accurately determining how many people were in a firing sequence.\*

When the code number 1 - "Yes" appears in column "C" this describes the apparent attitude of the majority of the people, other than the firer, as being interested in or concerned

---

\*When code number 1 - "Others in sequence" appears in column "0", the number that appears under column "No" describes the position of the firer in the group, counting from the left--see p. E-54.

FIGURE 1 HEADING ABBREVIATIONS	DATA ELEMENT DESCRIPTION
(cont.)	about what the firer was shooting at. When
OTHR	the code number 2 - "no" appears, this indicates
C U	that the majority of the other soldiers were
F	taking little or no interest in what the firer was shooting at.
	When code number 1 - "Yes" appears in column "F" this describes that one or more of the other soldiers in the firing sequence was also firing.
	When code number 1 "Yes" appears in column "U" this meant that soldiers other than the firer were seen taking cover.
MSUM OIRA VZBN	This heading contains four columns which describe the target's movement or lack of move- ment, the size of the target, whether or not the firer's location was in an urban area, and if the firer was firing from a man-made position or not (e.g., foxhole, building, etc.).
	The left hand ("V") column describes whether the target appeared to be moving. Column "Z" describes the estimated size of the

---

 FIGURE 1 HEADING  
 ABBREVIATIONS

 DATA ELEMENT DESCRIPTION
 

---

(cont.)

 MSUM  
 OIRA  
 VZBN

target area being fired at. Column "B" describes whether or not the firing sequence took place in a city or large village. Column "N" describes whether or not the firer's position was man-made (such as a foxhole, bunker, etc.). The code numbers below describe the items they represent:

Target Movement

- 0 - Undetermined\*
- 1 - Stationary
- 2 - Moving

Urban Area

- 1 - Yes
- 2 - No

Target Size

- 0 - Undetermined\*
- 1 - Point
- 2 - Small Area
- 3 - Large Area

Position Man-Made

- 1 - Yes
- 2 - No

In column "Z" when the code number 1 - "point" appears, the term point describes the target size as being about that of a field fortification embrasure or an individual. When the code number 2 - "small area" appears the

---

 \*I.e., target could not be seen.

---

 FIGURE 1 HEADING  
 ABBREVIATIONS

 DATA ELEMENT DESCRIPTION
 

---

(cont.)

 MSUM  
 OIRA  
 VZBN

term small area describes the target size as being about that of a window/door or large weapon signature or tank/truck. When the code number 3 - "large area" appears, the term large area describes the target size as being about that of a building (shooting through walls) or a tree/line or no specifically defined target.

The remaining headings contain columns which describe data items that were used for administrative use (e.g., DATE, FRAME, etc.) and in the selection of pictures of men firing for analysis of firing positions details.

Q

The "Q" column describes how clearly the firer can be seen-- "1" means "well" and "2" means "poorly."

V

Column "V" describes how much of the firer appears in the film--"1" means "full" view, "2" means "half" and "3" means that only a small "portion" of the firer's body was visible.



---

**FIGURE 1 HEADING  
ABBREVIATIONS****DATA ELEMENT DESCRIPTION**

---

NO	Column "No" describes the position of the firer when some number of people were present in the firing sequence other than the firer, counting from the left (e.g., 04 means there were 3 other people to the left of the firer). "00" appears when only the firer was present in the firing sequences.
REEL	This heading describes where the film was viewed and the reel number. In the left hand column "1" means the film was viewed at the Army Motion Picture Depository and Records Center (AMPD-RC) and "2" means the U.S.M.C. Motion Picture Archives. The remaining columns indicate the reel number.
FE	This heading contains columns which describe (in feet and frames) the starting point of the firing sequence.
DATE	This heading contains columns which describe the calendar date (day, month, year) the firing sequences took place (e.g., 050345 means 5 March 1945).



---

**FIGURE 1 HEADING  
ABBREVIATIONS**
**DATA ELEMENT DESCRIPTION**


---

DIV	This heading contains three columns which describe the firer's Division numerical designation (right justified, e.g., 99th Division appears as 099).
B	Column "B" describes the firer's "Division Branch Type" and has the same code numbers as the "B" column. R
A M	Column "A" describes which "Military Force" the firer was in--"1" means "U.S. Army" and "2" means "U.S. Marine Corps." M
L O C	Column "L" describes in which conflict the firing sequence took place--"1" means "World War II in Europe," "2" means "World War II in the South Pacific," "3" means "Korea" and "4" means "Vietnam." O C



SMALL ARMS EFFECTIVENESS DATA

LSN	0	POS	AIM	RD/16	FIRE	TIME	R D	TIM	TRG	2ND	POSH	R M	OTH	MSUM	O	A M O	REEL	FRAME	DATE	BM	B	REG	DIV	AO
		FSP	M	A	T	1ST	SUB	ALL	H	M	POS	PUL	F	S	M	A	D	E	C	F	VZBN	AN	S	
0050	1	151	111	21	0.000	0.3	1.2	0.8	1	0	0.0	0.2	0	0	0	0	0	0	0	0	0	0	0	0
0051	1	252	100	11	0.000	1.7	0.0	1.7	0	0	5.2	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0052	1	353	100	11	0.000	2.0	0.0	2.0	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0053	1	434	111	11	0.000	1.0	2.5	2.0	1	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0
0054	3	131	100	11	0.000	1.2	4.8	3.0	1	0	0.0	0.2	0	0	0	0	0	0	0	0	0	0	0	0
0055	3	131	100	52	2.000	1.0	1.0	1.0	1	0	1.3	0.2	0	0	0	0	0	0	0	0	0	0	0	0
0056	3	252	100	21	0.000	1.0	0.0	1.0	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0057	3	131	100	11	0.000	1.0	6.2	5.1	1	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0
0058	3	343	111	52	4.000	2.3	0.0	2.3	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0059	3	243	100	52	5.000	2.2	0.0	3.1	1	0	0.0	0.2	0	0	0	0	0	0	0	0	0	0	0	0
0060	3	252	111	11	0.000	0.7	1.3	1.1	1	0	0.0	0.4	0	0	0	0	0	0	0	0	0	0	0	0
0061	3	252	111	11	0.000	0.7	1.5	1.2	1	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0
0062	3	151	111	11	0.000	1.4	2.1	1.8	1	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0
0063	3	353	200	52	2.000	6.1	0.0	6.2	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0064	3	252	100	11	0.000	0.6	0.0	0.6	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0065	3	414	111	11	0.000	2.4	0.0	2.4	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0066	3	414	111	11	0.000	1.5	1.7	1.6	1	0	0.0	0.2	0	0	0	0	0	0	0	0	0	0	0	0
0067	3	151	111	11	0.000	0.6	0.4	0.5	1	0	0.0	0.4	0	0	0	0	0	0	0	0	0	0	0	0
0068	3	151	100	21	0.000	2.2	0.0	2.2	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0069	3	151	100	11	0.000	1.8	0.0	1.8	0	0	1.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0070	3	151	111	11	0.000	1.2	3.1	2.1	1	0	0.0	0.2	0	0	0	0	0	0	0	0	0	0	0	0
0071	3	555	121	11	0.000	1.3	4.1	2.7	1	0	0.0	0.2	0	0	0	0	0	0	0	0	0	0	0	0
0072	3	151	100	11	0.000	5.7	0.0	5.7	0	0	1.3	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0073	3	151	100	11	0.000	7.6	0.0	7.6	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0074	3	151	100	11	0.000	3.3	1.0	1.7	1	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0
0075	3	151	100	11	0.000	1.5	7.9	4.7	1	0	0.0	0.2	0	0	0	0	0	0	0	0	0	0	0	0
0076	3	131	111	11	0.000	1.4	1.5	1.4	1	0	0.0	0.2	0	0	0	0	0	0	0	0	0	0	0	0
0077	3	454	100	11	0.000	7.1	0.0	7.1	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0078	3	151	100	11	0.000	3.9	0.0	3.9	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0079	3	151	100	11	0.000	4.3	0.0	4.3	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0080	3	151	100	11	0.000	0.6	1.5	1.2	1	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0
0081	3	151	100	11	0.000	1.2	1.1	1.2	1	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0
0082	3	151	100	11	0.000	3.0	0.0	3.0	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0083	3	151	100	11	0.000	1.2	0.0	1.2	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0084	3	151	100	11	0.000	3.8	0.0	3.8	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0085	3	151	131	11	0.000	0.5	2.4	1.8	1	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0
0086	3	131	100	11	0.000	4.7	0.0	4.7	0	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0
0087	3	151	111	11	0.000	2.5	1.4	1.8	1	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0
0088	3	151	111	11	0.000	0.7	2.3	1.5	1	0	0.0	0.2	0	0	0	0	0	0	0	0	0	0	0	0
0089	3	151	100	21	0.000	1.3	0.0	1.3	0	0	0.4	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0090	3	151	100	11	0.000	4.9	0.0	4.9	0	0	0.0	0.1	0	0	0	0	0	0	0	0	0	0	0	0
0091	3	151	111	11	0.000	0.5	1.4	1.1	1	0	0.0	0.3	0	0	0	0	0	0	0	0	0	0	0	0

SMALL ARMS EFFECTIVENESS DATA

LSN 0	POS AIM	RD/16	FIRE TIME	R D TIM	TRG 2ND	POSN	R M	OTHR	MSUM	O	A NO	REEL	FRAME	DATE	BN B	DIV	AO
FSP M	A	W BUR B	IST SUB ALL	H R POS	PUL FS M A D	E C	G .E	C U	OIRA	V H	AM S			R	R	REG	B MC
0099	1 256 111	11 0.000	0.5 0.8 0.7 1 1	2.5 03	00 0 0 0	1 022	1121	1222	22072103	1000004037	007500	27034500000	0000325	12			
0100	1 156 111	11 0.000	0.8 0.3 0.5 1 0	1.1 03	00 0 0 0	1 122	1111	1222	11072102	1000004037	009710	27034500000	0000325	12			
0101	1 252 141	11 0.000	2.7 5.1 3.9 1 0	0.0 02	00 0 0 0	1 033	1111	1322	11062002	1000004970	039607	13074500000	0000320	12			
0102	1 752 211	52 2.300	0.9 0.8 0.8 1 0	2.5 06	00 0 0 0	1 033	1111	1322	11052001	1000004970	041905	13074500000	0000320	12			
0103	1 111 111	21 0.000	2.3 1.1 1.7 1 0	0.0 02	00 0 0 0	2 031	0000	1321	13062000	1000004970	054605	13074500000	0000320	12			
0104	1 754 211	11 0.000	0.6 1.4 1.1 1 0	0.0 03	00 0 0 0	1 031	1122	1221	22092001	1000004825	054902	15064500000	0000075	12			
0105	1 151 111	11 0.000	0.7 2.0 1.6 1 1	1.2 03	00 0 0 0	2 110	1111	0022	11092001	1000004768	027609	30054500000	0000375	12			
0106	1 751 211	11 0.000	0.9 2.0 1.7 1 1	5.3 04	00 0 0 0	2 010	1111	0022	11082002	1000004768	027706	30054500000	0000375	12			
0107	1 751 211	11 0.000	4.1 0.6 1.8 1 1	0.0 03	00 0 0 0	2 110	1111	0022	21032007	1000004768	075015	30054500000	0000375	12			
0108	1 151 100	11 0.000	1.0 0.0 1.0 0 0	3.8 01	00 0 0 0	1 010	1112	0022	21032003	1000004768	090600	30054500000	0000375	12			
0109	1 454 100	11 0.000	1.2 0.0 1.2 0 0	0.0 01	00 0 0 0	0 032	1111	0022	21032002	1000004768	090600	30054500000	0000375	12			
0110	1 752 200	11 0.000	4.3 0.0 4.3 0 0	0.0 01	00 0 0 0	0 022	1111	0022	13062008	1000004765	018411	00000000000	1450375	12			
0111	1 252 100	11 0.000	1.0 0.0 1.0 0 0	0.0 01	00 0 0 0	1 022	1121	1322	11052002	1000004630	000210	27054500000	0000355	12			
0112	1 151 132	21 0.000	0.6 2.2 1.9 2 2	0.0 05	00 0 0 0	1 021	1111	1222	11042001	1000004630	000210	27054500000	0000355	12			
0113	1 751 200	11 0.000	1.2 0.0 1.2 0 2	0.0 01	00 0 0 0	1 021	1111	1222	12062003	1000004423	029109	30044500000	0000113	11			
0114	1 151 100	11 0.000	3.0 0.0 3.0 0 0	0.0 01	00 0 0 0	1 010	1121	1212	12032000	1000004423	030700	30044500000	0000113	11			
0115	1 151 111	52 2.500	1.9 2.5 2.2 1 0	0.0 02	00 0 0 0	1 010	0000	1212	11032003	1000004423	038206	30044500000	0000113	11			
0116	1 151 111	21 0.000	0.8 0.0 1.0 0 0	0.0 02	00 0 0 0	0 010	1111	0022	12032002	1000004423	038206	30044500000	0000113	11			
0117	1 111 100	11 0.000	1.6 0.0 1.6 0 0	0.0 01	00 0 0 0	0 021	1111	0021	11072001	1000004184	010306	30044500000	0300035	11			
0118	1 111 111	11 0.000	5.6 2.5 4.1 1 0	0.0 02	00 0 0 0	6 031	1111	1221	11082002	1000004184	011613	30044500000	0300035	11			
0119	1 353 100	11 0.000	4.5 0.0 4.5 0 0	0.0 01	00 0 0 0	6 031	1111	1221	11082003	1000004184	011613	30044500000	0300035	11			
0120	1 131 111	11 0.000	0.9 0.7 0.8 1 0	0.0 02	00 0 0 0	6 031	1111	1221	11062012	1000004184	025213	30044500000	0300035	11			
0121	1 757 241	11 0.000	0.0 1.4 1.2 3 0	0.0 06	00 0 0 0	2 210	1111	1322	11062011	1000004184	025611	30044500000	0300035	11			
0122	1 757 200	11 0.000	0.0 0.0 0.0 0 0	0.0 01	00 0 0 0	2 210	1111	1322	11062001	1000004184	025611	30044500000	0300035	11			
0123	1 757 200	11 0.000	0.0 0.0 0.0 0 0	0.0 01	00 0 0 0	1 010	1121	1322	11082002	1000003960	068614	12044500000	0300035	11			
0124	1 256 100	21 0.000	2.2 0.0 2.2 0 0	0.0 01	00 0 0 0	0 031	0000	0011	12072000	1000003923	000902	05044500244	0040000	11			
0125	1 151 111	11 0.000	1.8 0.0 1.8 0 0	6.0 01	00 0 0 0	1 110	1122	1212	11032003	1000003923	022512	05044500244	0040000	11			
0126	1 151 111	11 0.000	0.0 0.8 0.9 1 1	0.6 03	00 0 0 0	1 031	1111	1211	12072001	1000003923	022512	05044500244	0040000	11			
0127	1 131 111	21 0.000	0.7 1.5 1.3 1 0	0.0 03	00 0 0 0	1 010	1111	1211	12042002	1000009627	021109	00000000000	0000000	22			
0128	1 751 211	21 0.000	0.4 1.0 0.7 1 0	0.0 02	00 0 0 0	0 010	1122	1122	12042002	1000009589	001200	00004400000	0000000	22			
0129	1 751 211	11 0.000	1.5 1.0 1.3 1 0	0.0 02	00 0 0 0	0 022	1111	0022	12032001	1000009589	003907	00004400000	0000000	22			
0130	1 151 111	21 0.000	0.5 0.1 0.3 1 0	0.0 02	00 0 0 0	0 022	1111	0022	12032003	1000009589	003907	00004400000	0000000	22			
0131	1 555 122	11 0.000	0.5 0.7 0.7 1 0	0.0 05	00 0 0 0	4 031	1121	1322	11062003	1000004417	014502	01054500015	1510385	11			
0132	1 151 100	11 0.000	5.6 0.0 5.6 0 0	0.0 01	00 0 0 0	0 010	1121	1322	11102005	1000004417	032607	01054500015	1510385	11			
0133	1 151 111	11 0.000	3.3 3.7 3.5 1 1	0.7 02	00 0 0 0	0 010	1121	0022	22032001	1000004217	047209	18044500000	0371005	11			
0134	1 151 111	11 0.000	1.4 0.7 1.0 1 0	2.5 02	00 0 0 0	3 031	1121	1321	11092002	1000009743	006308	29044500000	0000000	11			
0135	1 252 111	11 0.000	2.2 0.9 1.3 1 0	0.0 03	00 0 0 0	2 010	1111	1212	11092008	1000009743	006308	29044500000	0000000	11			
0136	1 252 111	21 0.000	1.8 1.4 1.5 1 1	0.0 05	00 0 0 0	2 010	1111	1212	11072001	1000009743	007715	29044500000	0000000	11			
0137	1 252 100	21 0.000	0.6 0.0 0.6 0 0	0.0 01	00 0 0 0	2 010	1121	1212	12072001	1000009743	039304	29044500000	0000000	11			
0138	1 252 100	11 0.000	2.1 0.0 2.1 0 0	0.0 01	00 0 0 0	2 010	0000	1211	12052001	1000009743	028500	12094400000	0000000	11			
0139	1 151 311	52 1.400	0.9 0.8 0.8 2 0	0.0 07	00 0 1 0	3 022	1111	1322	11072002	1000010429	029313	12094400000	0000000	11			
0140	1 252 111	11 0.000	0.0 1.5 0.8 1 0	0.0 02	00 0 0 0	0 010	1112	0022	11052000	1000010429	030011	12094400000	0000000	11			
0141	1 151 111	11 0.000	1.3 1.5 1.4 1 0	0.0 02	00 0 0 0	3 010	0000	1322	13062000	1000010434	036800	06084400035	3150855	11			
0142	1 151 111	21 0.000	0.4 0.7 0.6 1 0	0.0 03	00 0 0 0	1 010	0000	1212	13062002	1000010434	036403	06084400035	3150855	11			
0143	1 151 111	52 6.500	1.0 3.9 2.4 2 1	0.0 02	00 0 0 0	2 010	1121	1211	22062004	1000010434	040100	02084400035	3150858	11			
0144	1 151 100	21 0.000	0.9 0.0 0.9 0 0	0.0 01	00 0 0 0	2 010	1121	1212	11052000	1000003085	001400	07014500044	2000000	11			
0145	1 151 100	21 0.000	0.4 0.0 0.7 0 0	0.0 01	00 0 0 0	7 010	0000	1321	11032003	1000003085	004210	07014500044	2000000	11			
0146	1 151 100	11 0.000	0.3 0.0 0.4 0 0	0.0 01	00 0 0 0	7 010	1111	1321	11032003	1000003085	004210	07014500044	2000000	11			
0147	1 151 100	11 0.000	1.5 0.0 1.5 0 0	3.0 01	00 0 0 0	7 010	1111	1321	11032003	1000003085	004210	07014500044	2000000	11			

SMALL ARMS EFFECTIVENESS DATA

LSN 0	POS AIM	RD/16	FIRE TIME	R D TIM	TRG 2ND	POSN	R M	OTHR	MSUM	U	A NO	REEL	FRAME	DATE	BN B	DIV	AO
FSP M	W RUR R	A	T 1ST SUB ALL	C I TO	M A D	F S M A D	E C	C U OTHA	V ZBN	V R	AN S			R	R	REG	B MC
0148	3 151 100	11 0.000	2.2 0.0 2.2	0 0	0 0 0	0 0 0	0 010	0000	0022	13012000	1000003085	005412	0701450004	0701450004	2000000	11	
0149	3 252 100	11 0.000	3.7 0.0 3.7	0 0	0 0 0	0 0 0	0 010	1121	0022	11032004	1000003085	005208	0701450004	0701450004	2000000	11	
0150	3 151 111	11 0.000	0.7 1.8 1.5	1 0	0 0 0	0 0 0	0 010	1112	0022	11092001	1000003085	007711	0701450004	0701450004	2000000	11	
0151	3 252 111	11 0.000	1.1 1.6 1.4	1 0	0 0 0	0 0 0	0 010	1112	0022	11092003	1000003085	007711	0701450004	0701450004	2000000	11	
0152	3 252 111	11 0.000	2.5 2.1 2.3	1 0	0 0 0	0 0 0	0 010	1112	0022	11092004	1000003085	008008	0701450004	0701450004	2000000	11	
0153	3 252 111	11 0.000	2.3 5.0 4.1	1 0	0 0 0	0 0 0	0 032	0000	0022	13092000	1000003085	014002	0701450004	0701450004	2000000	11	
0154	3 151 111	11 0.000	0.3 0.4 0.4	1 0	0 0 0	0 0 0	6 010	0000	1322	12052000	1000003085	025910	0701450004	0701450004	2000000	11	
0155	3 252 111	11 0.000	0.8 1.8 1.5	1 0	0 0 0	0 0 0	6 010	1122	1322	11072004	1000003085	027000	0701450004	0701450004	2000000	11	
0156	3 252 100	41 0.002	0.3 0.0 0.3	0 1	0 0 0	0 0 0	1 010	1111	1322	11092001	1000048136	016601	2008642000	2008642000	0000077	14	
0157	3 252 100	41 0.002	0.8 0.0 0.9	0 1	1.2 0 1	0 0 0	1 110	1111	1322	11092101	1000048136	021914	2008642000	2008642000	0000077	14	
0158	3 252 111	41 0.002	1.2 0.7 0.9	1 1	0.5 0 3	0 0 0	1 210	1111	1322	11092103	1000048136	022812	2008642000	2008642000	0000077	14	
0159	3 252 100	4210.012	0.0 0.0 4.7	0 0	0 0 0	0 0 0	1 022	0000	0022	21072000	1000052867	016505	1804680000	1804680000	0000255	14	
0160	3 252 111	41 0.002	1.6 1.0 1.1	2 0	0 0 0	0 0 0	1 032	0000	0022	23042000	1000052867	016601	1804680000	1804680000	0000255	14	
0161	3 252 111	41 0.002	1.4 0.4 0.7	1 0	0 0 0	0 0 0	1 032	0000	0022	23052000	1000052867	017735	1804680000	1804680000	0000255	14	
0162	3 252 400	42 5.002	0.3 0.0 1.8	0 0	0 0 0	0 0 0	1 022	0000	0022	22071000	1000052867	018018	1804680000	1804680000	0000255	14	
0163	3 1752 211	42 4.002	1.4 2.2 1.8	1 0	0 0 0	0 0 0	1 021	1121	1222	21032002	1000052867	019016	1804680000	1804680000	0000255	14	
0164	3 751 200	42 2.502	0.0 0.0 2.4	0 0	0 0 0	0 0 0	1 010	1121	0022	11081001	1000052867	019604	1804680000	1804680000	0000255	14	
0165	3 752 511	42 2.502	0.6 1.1 0.9	1 0	0 0 0	0 0 0	1 032	1111	0022	12082001	1000054913	031708	2902680000	2902680000	0000255	14	
0166	3 751 200	41 0.002	0.7 0.0 0.7	0 0	0 0 0	0 0 0	1 032	0000	0022	13032000	1000054913	033203	2902680000	2902680000	0000255	14	
0167	3 755 231	42 3.502	0.3 3.9 2.1	1 0	0 0 0	0 0 0	1 010	0000	1222	11042000	1000051335	035306	2604672000	2604672000	0310000	14	
0168	3 141 411	62 3.200	0.0 3.5 2.6	1 0	0 0 0	0 0 0	3 031	0000	0021	13052000	1000051350	024510	1103670000	1103670000	0000000	14	
0169	3 136 100	41 0.002	0.5 0.0 0.5	0 0	0 0 0	0 0 0	3 031	1111	0021	13102001	1000051350	024510	1103670000	1103670000	0000000	14	
0170	3 353 111	41 0.002	0.7 2.0 1.6	1 0	0 0 0	0 0 0	3 031	1121	0022	13032002	1000051350	024510	1103670000	1103670000	0000000	14	
0171	3 353 111	42 4.002	0.8 5.9 3.4	1 0	0 0 0	0 0 0	1 032	1111	0022	23032003	1000050869	064200	0402670000	0402670000	0000000	14	
0172	3 353 100	42 2.002	6.0 0.0 6.2	0 0	0 0 0	0 0 0	1 032	1111	0022	23032001	1000050869	064200	0402670000	0402670000	0000000	14	
0173	3 343 111	6212.000	0.0 2.4 1.9	3 0	0 0 0	0 0 0	2 031	1121	1322	12042003	1000049957	028604	1801662000	1801662000	0000015	14	
0174	3 151 111	32 4.000	1.0 2.5 1.8	1 0	0 0 0	0 0 0	0 010	1112	0022	11092002	1000049957	062504	1801662000	1801662000	0000015	14	
0175	3 151 111	31 0.000	1.0 0.6 0.7	1 0	0 0 0	0 0 0	0 010	1112	0022	11092005	1000049957	062505	1801662000	1801662000	0000015	14	
0176	3 741 200	62 5.000	0.0 0.0 1.8	0 0	0 0 0	0 0 0	4 021	1121	0021	21032004	1000054141	068200	1303690000	1303690000	0040255	14	
0177	3 751 200	42 2.002	0.1 0.0 0.5	0 0	0 0 0	0 0 0	4 021	1121	0021	21032003	1000054141	068907	1303690000	1303690000	0040255	14	
0178	3 343 200	62 9.000	0.8 0.0 4.1	0 0	0 0 0	0 0 0	1 010	1111	1222	22072001	1000054552	048317	3101680000	3101680000	0470095	14	
0179	3 151 111	41 0.002	0.1 1.0 0.7	1 0	0 0 0	0 0 0	1 022	1111	1322	21091004	1000054552	048536	3101680000	3101680000	0470095	14	
0180	3 151 111	41 0.002	0.6 0.0 0.6	0 0	0 0 0	0 0 0	1 031	1111	1321	23051002	1000054552	050936	3101680000	3101680000	0470095	14	
0181	3 434 111	62 7.000	0.2 2.3 1.6	1 0	0 0 0	0 0 0	4 031	1121	1321	11021004	1000051699	037205	2609670000	2609670000	0000095	14	
0182	3 232 100	62 3.000	0.7 0.0 1.5	0 0	0 0 0	0 0 0	4 031	1121	1321	12031005	1000051699	036001	2609670000	2609670000	0000095	14	
0183	3 151 100	41 0.002	2.0 0.0 2.0	0 0	0 0 0	0 0 0	2 022	1121	1322	12062002	1000051787	039713	2607672000	2607672000	0040019	14	
0184																	
0185	3 353 100	42 3.002	3.9 0.0 4.4	0 0	0 0 0	0 0 0	1 010	0000	1212	13071000	1000052643	002700	3101680000	3101680000	0000000	14	
0186	3 151 111	32 2.000	0.9 1.5 1.3	1 0	0 0 0	0 0 0	2 031	1111	0011	22041003	1000052643	004100	3101680000	3101680000	0000000	14	
0187	3 141 211	62 5.000	1.2 6.1 3.6	1 0	0 0 0	0 0 0	1 021	0000	0021	22051000	1000051805	057212	2107670000	2107670000	0000255	14	
0188	3 151 100	42 3.002	4.2 0.0 5.2	0 0	0 0 0	0 0 0	1 021	1121	1321	22051002	1000051805	062205	2107670000	2107670000	0000255	14	
0189	3 141 211	62 2.200	1.3 1.7 1.6	1 0	0 0 0	0 0 0	4 021	0000	1321	23042000	1000051805	064930	2107670000	2107670000	0000255	14	
0190	3 151 100	31 0.000	0.2 0.0 0.2	0 0	0 0 0	0 0 0	0 010	1122	0022	13092002	1000051824	001236	0204670000	0204670000	0000095	14	
0191	3 252 200	41 0.002	1.5 0.0 1.5	0 0	0 0 0	0 0 0	0 010	0000	0022	21031000	1000051824	051603	2807670000	2807670000	0390095	14	
0192	3 252 111	41 0.002	1.0 0.5 0.8	1 0	0 0 0	0 0 0	2 021	0000	1321	12061000	1000052788	051603	0904682000	0904682000	0000019	14	
0193	3 111 111	42 2.502	0.2 3.1 1.7	1 0	0 0 0	0 0 0	3 021	0000	1321	12031000	1000052788	051817	0904682000	0904682000	0000019	14	
0194	3 343 100	6231.000	0.0 0.012.5	0 0	0 0 0	0 0 0	7 032	1121	1322	12032002	1000052788	054007	0904682000	0904682000	0000019	14	
0195	3 751 211	41 0.002	1.2 0.8 0.9	1 0	0 0 0	0 0 0	0 010	1122	0022	12031001	1000052788	056313	0904682000	0904682000	0000019	14	
0196	3 343 111	62 3.000	0.4 3.9 2.7	1 0	0 0 0	0 0 0	0 032	1121	0022	13032004	1000052788	056910	0904682000	0904682000	0000019	14	

SMALL ARMS EFFECTIVENESS DATA

LSN	POS	AIM	RD/16	FIRE	TRG	2ND	POSN	R	M	OTH	MSUM	O	A	NO	REEL	FRAME	DATE	BI	B	R	REG	DIV	AO	MC
	FSP	M	A	T	1ST	SUB	ALL	R	D	I	M	C	H	R	P	O	S	E	C	F	U	O	V	R
0197	1	343	111	6215.000	2.0	5.1	4.1	1.0	0.0	0.3	00	0	0	0	2	033	1111	0022	23032001	100050883	043305	08016700000	0000015	14
0198	1	252	111	41 0.002	1.1	0.6	0.7	1.0	0.0	0.3	00	0	0	0	2	032	1111	0022	21022001	100050883	045207	08016700000	0000015	14
0199	1	151	200	42 2.002	0.6	0.0	0.7	0.2	0.0	0.1	00	0	0	0	1	021	1121	1222	11092001	100050933	068708	26016700000	0000000	14
0200	3	752	600	6280.000	0.5	0.0	0.11	2.0	0.0	0.1	00	0	0	0	3	010	1122	1322	12032002	100050962	005801	10016700000	0000255	14
0201	1	752	200	42 2.001	0.8	0.0	1.0	0.0	0.0	0.1	00	0	0	0	1	032	0000	0022	11032000	100051034	003300	22026700000	0000255	14
0202	1	751	211	62 3.300	0.2	2.7	1.9	1.0	0.0	0.3	00	0	0	0	2	010	1122	1322	11092001	100051184	045604	13046700000	0000095	14
0203	1	151	111	41 0.001	0.4	2.6	1.9	1.0	0.0	0.3	00	0	0	0	3	010	0000	1322	12051000	100051184	046503	13046700000	0000095	14
0204	1	454	111	41 0.002	0.2	1.6	0.9	1.0	0.0	0.2	00	0	0	0	3	031	1111	1321	13042001	100051183	051107	13046700000	0000095	14
0205	1	744	211	62 3.500	1.0	1.8	1.6	1.0	0.0	0.4	00	0	0	0	0	022	1121	0022	11032201	100052121	017208	23096720015	0080019	14
0206	1	752	200	6215.000	0.0	0.0	3.9	0.2	0.0	0.1	00	0	0	0	7	010	0000	1321	23052000	100052811	020701	05056800000	0000000	14
0207	1	754	200	42 3.001	0.8	0.0	1.4	0.2	0.0	0.1	00	0	0	0	7	010	0000	1321	22061000	100052811	046804	05056800000	0000000	14
0208	3	252	100	42 4.002	0.2	0.0	1.3	0.0	0.0	0.1	00	0	0	0	0	031	0000	0022	13032000	100052437	023213	28126700025	0350045	14
0209	3	555	100	41 0.002	0.9	3.1	2.3	3.0	0.0	0.3	00	0	0	0	6	010	1122	1222	11032003	100050512	012508	06096620175	0001015	14
0210	3	555	100	41 0.002	5.3	0.0	5.3	0.0	0.0	0.1	00	0	0	0	6	010	0000	1322	11062000	100050512	013605	06096620175	0001015	14
0211	1	151	111	31 0.000	0.3	1.4	1.1	1.0	0.0	0.4	00	0	0	0	1	022	0000	0022	12092000	100050697	065315	10056600015	0180015	14
0212	3	252	100	32 4.000	0.2	0.0	0.9	0.0	0.0	0.1	00	0	0	0	1	031	0000	1222	21062000	100050697	066314	10056600015	0180015	14
0213	3	252	100	42 5.002	0.5	0.0	1.8	0.0	0.0	0.1	00	0	0	0	1	031	1121	0022	12092001	100050697	067109	10056600015	0180015	24
0214	3	555	111	41 0.002	1.6	0.7	0.8	1.0	0.0	0.13	00	0	0	0	2	010	1111	1322	21091001	100054059	020612	20026920000	0000000	14
0215	3	232	111	41 0.002	20.0	1.5	7.7	1.0	0.0	0.3	00	0	0	0	2	031	0000	1321	23062000	100054059	023633	20026920000	0000000	14
0216	3	151	111	41 0.002	0.3	1.2	1.0	1.0	0.0	0.6	00	0	0	0	1	022	0000	1322	23062000	100054059	025316	20026920000	0000000	14
0217	3	151	100	41 0.002	0.2	0.0	0.2	0.0	0.0	0.1	00	0	0	0	1	010	0000	1222	12061000	100054006	025319	23026920000	0110000	14
0218	1	151	100	41 0.002	0.7	0.0	0.7	0.0	0.0	0.1	00	0	0	0	1	010	0000	1322	12072000	100054006	031017	23026920000	0110000	14
0219	1	151	200	41 0.002	0.3	0.0	0.3	0.0	2.0	0.1	00	0	0	0	1	122	1121	1322	12071002	100054358	021918	00046900000	0000255	14
0220	3	151	111	41 0.002	12.8	1.4	2.1	1.0	0.0	0.16	00	0	0	0	1	032	0000	0022	21051000	100053735	008028	25116900000	0000045	14
0221	1	753	211	42 3.002	1.5	4.4	3.0	1.0	0.0	0.2	00	0	0	0	1	022	0000	1212	11072000	100052556	019818	31016800000	0000255	14
0222	3	252	100	42 5.002	0.4	0.0	1.7	0.0	2.0	0.1	00	0	0	0	1	031	0000	0021	22052000	100052556	020310	31016800000	0000255	14
0223	3	252	111	41 0.002	1.4	0.9	0.9	1.0	0.0	0.09	00	0	0	0	2	021	0000	0011	13091000	100052556	021819	31016800000	0000255	14
0224	3	131	100	41 0.000	1.5	0.0	1.5	0.0	0.0	0.0	00	0	0	0	2	031	1121	0011	22092002	100052556	022321	31016800000	0000255	14
0225	1	353	111	41 0.002	0.5	1.2	1.0	1.0	0.0	0.06	00	0	0	0	0	010	0000	0022	12082000	100055495	024317	02037002303	0000000	14
0226	1	353	111	41 0.002	1.0	1.3	1.2	1.0	0.0	0.07	00	0	0	0	0	010	0000	0022	12091000	100055495	024317	02037002303	0000000	14
0227	1	353	111	41 0.002	1.0	0.9	0.9	1.0	0.0	0.07	00	0	0	0	0	010	0000	0022	12091000	100055495	024317	02037002303	0000000	14
0228	1	353	111	41 0.002	3.6	1.1	1.5	1.0	0.0	0.06	00	0	0	0	0	010	0000	0022	11112000	100055495	026411	02037002303	0000000	14
0229	1	151	100	41 0.000	3.0	0.0	3.0	0.0	0.0	0.0	00	0	0	0	2	010	1111	1212	13091000	100055495	058930	02037002303	0000000	14
0230	1	751	211	41 0.002	0.7	0.2	0.5	1.0	0.0	0.02	00	0	0	0	1	110	1122	1222	11041001	100052554	010135	31016800000	0000015	14
0231	1	751	211	41 0.002	1.3	0.7	0.9	1.2	0.0	0.03	00	0	0	0	1	010	1122	1222	11031002	100054628	020933	03036700015	0260015	14
0232	1	751	211	31 0.000	0.7	1.0	0.9	1.0	0.0	0.03	00	0	0	0	1	021	1121	1222	11031002	100054628	020933	03036700015	0260015	14
0233	1	252	111	41 0.002	0.8	1.0	1.0	1.0	0.0	0.03	00	0	0	0	0	022	1111	0022	21032002	100054628	028634	03036700015	0260015	14
0234	1	152	100	41 0.002	0.6	0.0	0.6	0.0	1.9	0.1	00	0	0	0	0	010	1111	0022	11031002	100054628	032511	03036700015	0260015	14
0235	1	252	111	41 0.002	1.0	0.9	0.9	1.0	0.0	0.03	00	0	0	0	0	010	1111	0022	11032002	100054628	032838	03036700015	0260015	14
0236	1	151	100	41 0.002	1.6	0.0	1.6	0.0	0.0	0.0	00	0	0	0	1	010	0000	1322	11042000	100052867	016215	18046800000	0000255	14
0237	1	454	200	42 8.012	0.6	0.0	3.0	0.0	0.0	0.03	00	0	0	0	1	022	0000	1322	11041000	100052867	016514	18046800000	0000255	14
0238	1	454	111	42 2.302	1.7	2.0	1.9	1.0	0.0	0.03	00	0	0	0	1	022	0000	1222	23071000	100052867	016810	18046800000	0000255	14
0239	1	252	111	41 0.002	0.7	0.7	0.7	1.0	0.0	0.04	00	0	0	0	1	010	0000	1222	23072000	100052867	017804	18046800000	0000255	14
0240	1	252	400	42 5.002	0.6	0.0	2.1	0.0	0.0	0.01	00	0	0	0	1	010	0000	1222	12052000	100052867	018026	18046800000	0000255	14
0241	1	752	211	42 3.502	1.2	2.5	1.9	1.0	0.0	0.02	00	0	0	0	1	021	1121	1222	11091002	100052867	019025	18046800000	0000255	14
0242	1	151	200	42 7.002	0.0	0.0	1.7	0.0	0.0	0.01	00	0	0	0	1	010	1122	0022	11052002	100052867	019613	18046800000	0000255	14
0243	1	151	100	41 0.002	0.2	0.0	0.2	0.0	0.0	0.01	00	0	0	0	1	032	1121	0022	22051005	100054801	022434	24076920005	0310000	14
0244	1	134	411	62 7.500	2.1	4.0	5.6	1.0	0.0	0.02	00	0	0	0	0	022	1111	0022	12042002	100053425	041035	25046800000	0000255	14
0245	1	252	100	42 3.002	1.8	0.0	2.7	0.0	0.0	0.01	00	0	0	0	0	022	1111	0022	12042001	100053425	041536	25046800000	0000255	14



SMALL ARMS EFFECTIVENESS DATA

LSN 0	POS AIM	ROX 16	FIRE TIME	R D TIM	TRG 2ND	POSN	R M	OTHR	MSUM	O	A NO	REEL	FRAME	DATE	BN B	DIV	L
FSP M	A	V RUR B	Y 1ST SUB ALL	HR POS	PUL FS M A D	E C	G E C	C U OIRA	V R AN S					R	R REG	B MC	
0295	3 252	111 32	3.700	2.3 2.3 2.3	1 0	0.0 03	0 010	0.00	0022	12042000	2000004162	030320	26016700000	00000000	00000000	24	
0296	1 242	111 62	4.200	0.3 2.2 1.9	1 0	0.0 05	0 021	1121	0022	11092002	2000004257	032812	12126600000	00000000	00000000	24	
0297	1 242	111 62	3.000	0.0 2.8 1.9	1 0	0.0 03	0 021	1121	1022	13062002	2000004257	033400	12126600000	00000000	00000000	24	
0298	1 252	111 62	4.300	0.5 2.0 1.5	1 0	0.0 03	0 021	1121	0022	12031001	2000004257	033812	12126600000	00000000	00000000	24	
0299	3 252	111 41	0.002	0.2 2.4 1.9	1 0	0.0 04	0 032	0000	0022	22042000	2000004275	025310	08026700000	00000000	00000000	24	
0300	1 151	100 31	0.000	1.9 0.0 1.9	0 0	0.0 01	0 010	1112	1322	11061003	2000004286	004822	14016700015	00100000	00100000	24	
0301	1 751	200 31	0.000	1.0 0.0 1.0	0 0	0.0 01	0 010	1112	1322	11031001	2000004286	004822	14016700015	00100000	00100000	24	
0302	1 252	100 31	0.000	0.9 0.0 0.9	0 0	0.0 01	0 032	0000	1322	11061003	2000004286	005429	14016700015	00100000	00100000	24	
0303	1 353	100 31	0.000	1.4 0.0 1.4	0 0	0.0 01	0 032	0000	1322	23061000	2000004286	013732	14016700015	00100000	00100000	24	
0304	1 252	100 31	0.000	0.5 0.0 0.5	0 0	0.0 01	0 032	1121	0022	12031002	2000004286	014400	14016700015	00100000	00100000	24	
0305	1 151	111 31	0.000	1.6 3.2 2.9	1 0	0.0 05	0 010	1111	0022	11051001	2000004286	020134	14016700015	00100000	00100000	24	
0306	1 252	100 31	0.000	1.2 0.0 1.2	0 0	0.0 01	0 010	1112	1322	11051001	2000004286	021104	14016700015	00100000	00100000	24	
0307	1 454	111 31	0.000	3.1 1.1 2.1	1 0	0.0 02	0 010	1112	1322	11041002	2000004286	021104	14016700015	00100000	00100000	24	
0308	1 454	111 31	0.000	2.4 2.5 2.4	1 0	0.0 02	0 010	1111	0022	11041002	2000004286	021439	14016700015	00100000	00100000	24	
0309	1 454	111 31	0.000	2.4 2.2 2.3	1 0	0.0 02	0 021	1111	0022	11051003	2000004286	021439	14016700015	00100000	00100000	24	
0310	1 454	100 31	0.000	1.3 0.0 1.3	0 0	0.0 01	0 021	0000	0022	12021000	2000004286	021903	14016700015	00100000	00100000	24	
0311	3 353	111 31	0.000	1.2 4.3 2.8	1 0	0.0 02	0 031	1111	1322	11071001	2000004301	030632	05016700025	00300000	00300000	24	
0312	3 353	100 31	0.000	1.4 0.0 1.4	0 0	0.0 01	0 031	1111	1322	11071002	2000004301	030632	05016700025	00300000	00300000	24	
0313	3 252	111 31	0.000	3.6 2.4 3.0	1 0	0.0 03	0 031	0000	1322	13051000	2000004301	031133	05016700025	00300000	00300000	24	
0314	3 353	111 31	0.000	5.8 2.1 3.4	1 0	0.0 03	0 031	1111	1322	13071002	2000004301	031234	05016700025	00300000	00300000	24	
0315	3 353	111 31	0.000	2.1 5.1 3.6	1 0	0.0 02	0 031	1111	1322	11041001	2000004301	032334	05016700025	00300000	00300000	24	
0316	3 353	111 31	0.000	2.7 4.5 3.6	1 0	0.0 02	0 031	0000	1322	12031000	2000004301	033010	05016700025	00300000	00300000	24	
0317	3 353	100 31	0.000	7.8 0.0 7.8	0 0	0.0 01	0 031	0000	1322	12051000	2000004301	033702	05016700025	00300000	00300000	24	
0318	3 156	200 3218	0.000	1.1 0.0 2.3	0 0	2.4 01	0 022	0000	1322	12021000	2000004322	001622	17106500000	00000000	00000000	24	
0319	3 444	111 62	5.000	2.4 2.5 2.5	1 0	0.0 05	0 031	1121	0021	11032002	2000004327	022422	05106600000	00000000	00000000	24	
0320	3 646	111 62	5.200	0.7 2.2 1.9	1 0	0.0 05	0 031	1121	0022	13041002	2000004327	023317	05106700000	00000000	00000000	24	
0321	3 343	142 62	3.200	0.0 4.1 3.3	2 0	0.0 05	0 031	0000	0021	13051000	2000004327	023932	05106700000	00000000	00000000	24	
0322	3 343	111 62	4.000	0.7 3.0 2.6	1 0	0.0 05	0 031	1121	0021	12051002	2000004327	025012	05106700000	00000000	00000000	24	
0323	3 444	111 62	4.400	0.0 2.3 1.8	1 0	0.0 05	0 031	1121	0022	12031001	2000004327	027423	05106700000	00000000	00000000	24	
0324	3 444	100 62	3.000	1.4 0.0 2.1	0 0	0.0 01	0 031	0000	0021	12041000	2000004339	032500	17036700000	00900000	00900000	24	
0325	3 444	100 62	3.000	5.1 0.0 6.1	0 0	0.0 01	0 031	1122	0021	12091001	2000004339	032710	17036700015	00900000	00900000	24	
0326	3 454	100 62	4.000	11.7 0.0 12.4	0 0	0.0 01	0 031	1121	0021	12091001	2000004339	033338	17036700015	00900000	00900000	24	
0327	1 242	100 62	3.000	0.0 0.0 0.9	0 0	0.0 01	0 031	1121	0021	11042002	2000004740	013036	06106700000	00000000	00000000	24	
0328	1 242	111 6218	5.000	0.4 5.9 3.1	1 0	0.0 02	0 031	1121	0022	11032101	2000004740	013312	06106700000	00000000	00000000	24	
0329	1 252	100 41	0.002	0.0 3.0 2.0	1 0	0.0 03	0 031	1121	0022	11061003	2000004791	014035	06106700000	00000000	00000000	24	
0330	1 252	100 41	0.002	0.6 0.0 0.6	0 0	0.0 01	0 031	1121	1322	11061003	2000004791	024102	09086700025	00900000	00900000	24	
0331	1 252	111 41	6.002	0.3 0.5 0.5	1 0	0.0 01	0 010	1121	1322	11071002	2000004791	024207	09086700025	00900000	00900000	24	
0332	1 252	111 41	0.002	0.1 2.2 1.1	1 0	0.0 02	0 010	1112	1322	11071003	2000004791	024337	09086700025	00900000	00900000	24	
0333	1 252	100 41	0.002	4.0 0.0 4.0	0 0	0.0 01	0 010	1111	1322	11071002	2000004791	024337	09086700025	00900000	00900000	24	
0334	3 353	100 31	0.000	4.2 0.0 4.2	0 0	0.0 01	0 031	1121	0021	11041001	2000005104	000412	23026800000	00000000	00000000	24	
0335	3 252	100 31	0.000	3.5 0.0 3.5	0 0	0.0 01	0 021	1121	0021	12031001	2000005104	000720	23026800000	00000000	00000000	24	
0336	3 343	100 62	9.000	5.2 0.0 6.2	0 0	0.0 01	0 031	1111	0022	12032106	2000005156	000232	17036800025	00300000	00300000	24	
0337	3 343	111 62	8.700	0.1 5.1 2.6	3 0	0.0 02	0 031	0000	0022	13032100	2000005156	000828	17036800025	00300000	00300000	24	
0338	3 343	111 62	4.000	0.7 2.2 1.7	3 0	0.0 03	0 031	1121	0022	12031002	2000005156	002402	17036800025	00300000	00300000	24	
0339	3 343	111 62	4.800	0.4 1.0 0.9	1 0	0.0 05	0 031	1121	0022	13041001	2000005156	004124	17036800025	00300000	00300000	24	
0340	3 353	111 41	0.002	0.0 1.0 0.9	1 0	0.0 11	0 031	1121	0022	13041001	2000005156	004124	17036800025	00300000	00300000	24	
0341	3 353	111 41	0.002	0.5 0.6 0.6	1 0	0.0 12	0 031	1111	0021	13101008	2000005030	014031	02126700000	00000000	00000000	24	
0342	3 252	131 41	0.002	1.1 1.7 1.5	1 0	0.0 03	0 021	1111	0021	12111007	2000005030	014031	02126700000	00000000	00000000	24	
0343	3 353	111 41	0.002	0.8 0.4 0.9	1 0	0.0 05	0 031	1111	0021	13101005	2000005030	014031	02126700000	00000000	00000000	24	

## SMALL ARMS EFFECT DATA

LSN 0	POS AIM	RD/16	FIRE TIME	TRG 2ND	MSUM	Q	A NO	REEL	FRAME	DATE	RM 8	REG	AO	L
FSP M	W BUR R	A	T 1ST SUB ALL	HR POS	R D CI TO	R G E C	V R	F VZUN	AN S	R	R	R	B	B MC
0344	1 252	111 41	0.002	0.5 1.0	0.9 1 0	0.0 09	00 0 0	0 02	0000 0022	11021000	2000004755	007610	07106700015	0090000 24
0345	3 751	211 41	2.502	2.3 1.0	1.2 1 0	0.0 08	00 0 2	0 110	1112 0022	11112002	2000004775	020004	07106700015	0090000 24
0346	3 751	211 41	0.002	0.7 1.0	1.9 1 0	0.0 08	00 0 0	0 010	1112 0022	11102001	2000004775	019915	07106700015	0090000 24
0347	1 252	111 41	0.002	0.6 0.8	0.8 1 0	0.0 14	00 0 0	0 031	1111 0021	11031002	2000005731	036916	20096800025	0070015 24
0348	1 252	111 41	0.002	1.9 1.0	1.0 1 0	0.0 11	00 0 0	0 031	1111 0021	11031001	2000005731	036916	20096800025	0070015 24
0349	1 252	111 41	0.002	0.2 0.4	0.2 1 0	0.0 11	00 0 0	0 010	0000 0022	11041000	2000005731	036107	20096800025	0070015 24
0350	1 252	111 41	0.002	0.4 0.4	0.4 1 0	0.0 05	00 0 0	0 022	1111 0022	12032002	2000005734	003417	30116800035	0050015 24
0351	1 252	111 41	0.002	1.6 3.0	2.3 1 0	0.0 02	00 0 0	0 022	1111 0022	12032001	2000005734	003417	30116800035	0050015 24
0352	1 252	111 41	0.002	1.3 0.3	0.4 1 0	6.4 11	00 0 0	0 022	1111 0022	11062002	2000005734	003425	30116800035	0050015 24
0353	1 252	111 41	0.002	7.7 1.9	4.8 1 0	0.0 02	00 0 0	0 022	1111 0022	11062001	2000005734	003425	30116800035	0050015 24
0354	1 252	111 41	0.002	0.5 0.4	0.4 1 0	0.0 13	00 0 0	0 022	0000 0022	13042000	2000005734	004623	30116800035	0050015 24
0355	3 252	111 41	0.002	0.3 1.4	1.3 1 0	0.0 09	00 0 0	0 032	1111 0022	13022002	2000005734	022427	01126800035	0050015 24
0356	3 252	111 41	0.002	1.4 2.2	2.1 1 0	0.0 05	00 0 0	0 032	1111 0022	13022001	2000005734	022427	01126800035	0050015 24
0357	3 252	111 41	0.002	0.6 0.6	0.6 1 0	0.8 07	00 0 0	0 032	1121 0022	12032002	2000005734	024123	01126800035	0050015 24
0358	3 151	111 41	0.002	0.4 0.2	0.2 1 0	0.0 05	00 0 0	0 010	1121 0022	11032001	2000005734	024630	01126800035	0050015 24
0359	1 141	100 624	0.000	0.0 0.0	5.9 0 0	0.0 01	00 0 0	0 031	0000 0022	12062000	2000005734	034628	01126800035	0050015 24
0360	3 454	100 41	0.002	0.3 0.0	0.3 0 0	5.7 01	00 0 0	0 031	1121 0022	11052001	2000005734	034328	01126800035	0050015 24
0361	1 454	111 41	0.002	1.5 0.7	1.1 1 0	0.0 02	00 0 0	0 031	1121 0022	11032001	2000005734	034712	01126800035	0050015 24
0362	3 252	111 41	0.002	0.0 0.7	0.5 2 0	0.0 03	00 0 0	2 032	0000 0022	23042000	2000005766	000417	16016900015	0050015 24
0363	3 151	111 41	0.002	0.4 0.4	0.4 1 0	2.5 03	00 0 0	2 032	1121 0022	23092001	2000005766	000436	16016900015	0050015 24
0364	3 252	111 41	0.002	0.0 0.5	0.4 1 0	0.0 06	00 0 0	2 032	0000 0022	12021000	2000005766	001129	16016900015	0050015 24
0365	3 252	111 41	0.002	0.1 0.4	0.2 1 0	0.0 02	00 0 0	0 032	0000 0022	12031000	2000005766	001702	16016900015	0050015 24
0366	3 151	111 41	0.002	0.0 0.5	0.4 1 0	0.0 06	00 0 0	0 032	1121 0022	12041001	2000005766	025410	16016900015	0050015 24
0367	3 151	111 41	0.002	0.2 0.5	0.4 1 0	0.0 04	00 0 0	0 042	0000 0022	12042000	2000005766	025400	16016900015	0050015 24
0368	3 151	111 41	0.002	1.1 1.0	1.0 1 0	0.0 06	00 0 0	0 010	1112 0022	11091003	2000005767	000002	16016900000	0000015 24
0369	3 151	111 41	0.002	0.5 1.6	1.3 1 0	2.8 04	00 0 0	0 033	0000 0022	11092002	2000005767	000130	16016900000	0000015 24
0370	3 752	211 62	6.000	0.0 2.6	1.7 1 0	0.0 03	00 0 0	0 033	0000 0022	23031000	2000005782	000921	28106800035	0030035 24
0371	3 252	111 41	0.002	0.8 1.0	1.0 1 0	0.0 04	00 0 0	0 033	1111 0022	22041002	2000005782	001230	29126800035	0030035 24
0372	3 252	111 41	0.002	1.2 0.5	0.6 1 0	0.0 12	00 0 0	0 033	0000 0022	23061000	2000005782	001703	29126800035	0030035 24
0373	3 151	111 41	0.002	0.3 3.0	2.1 1 0	0.0 03	00 0 0	0 032	1111 0022	21032002	2000005797	008223	28106800035	0050015 24
0374	3 151	111 41	0.002	3.4 4.9	4.1 1 0	0.0 02	00 0 0	0 032	1121 0022	22072002	2000005797	008702	28106800035	0050015 24
0375	3 343	111 62	2.000	1.7 5.3	3.5 1 0	0.0 02	00 0 0	0 031	1121 0022	22022002	2000005797	009210	28106800035	0050015 24
0376	3 353	111 62	2.000	2.9 8.6	5.7 1 0	0.0 02	00 0 0	0 031	1121 1322	12062002	2000005797	009921	28106800035	0050015 24
0377	3 343	111 62	3.000	1.0 1.5	1.2 1 0	0.0 02	00 0 0	0 031	1121 0022	12042002	2000005797	014835	28106800035	0050015 24
0378	3 353	111 62	2.000	1.4 1.2	1.3 1 0	1.2 02	00 0 0	0 031	1121 0022	12042002	2000005797	015132	28106800035	0050015 24
0379	3 343	111 62	3.700	0.0 0.9	0.9 1 0	0.0 12	00 0 0	0 032	0000 1322	13052000	2000005797	015315	28106800035	0050015 24
0380														
0381														
0382														
0383	3 252	111 41	0.002	0.2 0.4	0.9 3 0	0.0 09	00 0 0	0 032	1111 0022	11092001	2000005983	016016	21046900015	0050015 24
0384	3 752	242 62	7.300	0.0 2.0	1.4 3 0	0.0 03	20 1 0	0 010	0000 0022	21042000	2000005983	016617	21046900015	0050015 24
0385	3 252	111 62	2.500	0.0 1.4	1.2 1 0	0.0 10	00 0 0	0 021	1121 0022	11072002	2000005983	016836	21046900015	0050015 24
0386	3 252	100 6237	0.000	0.2 0.0	7.9 0 0	0.0 01	00 0 0	0 010	1122 0022	11042002	2000005983	017610	21046900015	0050015 24
0387	3 252	111 41	0.001	0.9 0.7	0.7 1 0	0.0 13	00 0 0	2 021	0000 132	11041000	2000005983	016113	21046900015	0050015 24
0388	3 414	100 31	0.000	6.8 0.0	6.8 0 0	0.0 01	00 0 0	0 021	0000 1321	11041000	2000005983	018714	21046900015	0050015 24
0389	3 151	111 41	0.002	0.3 0.6	0.6 1 0	0.6 12	00 0 0	0 032	1111 0022	11092002	2000005983	020025	21046900015	0050015 24
0390	3 252	100 41	0.002	1.6 0.0	1.6 0 0	0.0 01	00 0 0	0 032	1121 0022	11092002	2000005983	020637	21046900015	0050015 24
0391	1 751	211 41	0.002	0.1 0.5	0.4 1 0	0.0 05	00 0 0	0 110	0000 1322	11051000	2000005983	021100	21046900015	0050015 24
0392	1 751	211 41	0.000	1.1 2.3	1.7 1 0	0.0 02	00 0 0	0 110	0000 1322	11051000	2000005983	021319	21046900015	0050015 24

SMALL ARMS EFFECTIVENESS DATA

LSN O	POS AIM	RD/16	FIRE TIME	R D TIM	TRG 2ND	POSN	R M	OTHR	MSUM	O	A NO	REEL	FRAME	DATE	BN B	DIV	L
FSP M	W BUR R	A	T 1ST SUB ALL	H R POS	C I TO	PUL FS M A D	G E	C U	OIRA	V R	AN S			R	R	REG	B MC
0393	1 756 200	31 0.000	1.1 0.0 1.1 0 0	0.0 01	0.0 01	00 0 0 0	1 01C	0000	1122	11061000	2000005983	021933	210469000015	00500015	24		
0394	1 751 211	41 0.002	3.8 2.4 3.1 1 0	0.0 02	0.0 02	00 0 0 0	1 110	1112	1322	11092002	2000005983	022505	210469000015	00500015	24		
0395	1 751 211	41 0.002	3.8 0.8 1.6 1 0	0.0 04	0.0 04	00 0 0 0	1 110	1112	1322	11091003	2000005983	022505	210469000015	00500015	24		
0396	1 751 211	41 0.002	2.2 0.7 1.0 1 0	0.0 06	0.0 06	00 0 0 0	1 110	1112	1322	11091004	2000005983	022505	210469000015	00500015	24		
0397	1 751 211	41 0.002	0.7 0.6 0.6 1 0	0.0 08	0.0 08	00 0 0 0	1 110	0000	1322	11081000	2000005983	023038	210469000015	00500015	24		
0398	1 751 211	41 0.002	4.1 1.6 2.4 1 0	0.0 03	0.0 03	00 0 0 0	0 031	1121	0922	23072102	2000006000	018437	100569000000	00500015	24		
0399	3 343 111	62 3.200	3.2 2.6 2.7 1 0	20.8 05	00 0 0 0	00 0 0 0	5 031	1121	1322	12051002	2000006000	020205	100569000000	00500015	24		
0400	1 151 111	41 0.002	1.8 0.4 0.5 3 0	14.2 15	00 0 0 0	00 0 0 0	2 031	0000	1221	13051000	2000006102	003807	040669000015	00300035	24		
0401	3 454 111	52 2.500	0.2 1.1 0.6 1 2	0.0 02	0.0 02	00 0 0 0	1 022	1121	1122	21092203	2000000398	000032	210344000000	00000000	22		
0402	3 454 111	52 1.500	1.5 1.3 1.4 1 2	0.0 02	0.0 02	00 0 1 0	1 022	1121	1122	22092201	2000000398	000223	210344000000	00000000	22		
0403	3 454 100	52 2.900	2.1 0.0 2.2 0 2	0.0 01	0.0 01	00 0 0 0	1 022	0000	1122	21092200	2000000398	001619	210344000000	00000000	22		
0404	3 454 100	52 2.000	0.5 0.0 0.5 0 2	0.0 01	0.0 01	00 0 0 0	1 022	1121	2122	22032207	2000000398	001822	210344000000	00000000	22		
0405	1 751 211	52 4.000	0.0 1.9 1.0 1 0	0.0 02	0.0 02	00 0 0 0	1 010	0000	1122	12062000	2000000404	001929	250844000000	00000000	22		
0406	1 111 100	52 3.000	0.1 0.0 0.3 0 0	0.0 01	0.0 01	00 0 0 0	0 031	0000	0021	12052000	2000000467	017108	080345000000	00000000	22		
0407	1 353 100	11 0.000	0.9 0.0 0.9 0 0	0.0 01	0.0 01	00 0 0 0	0 031	0000	0022	12032000	2000000460	023838	220245000000	00000000	22		
0408	1 343 409	62 2.000	0.0 0.0 0.2 0 0	0.0 01	0.0 01	00 0 0 0	1 031	1121	1321	11051003	2000005577	012617	090968000035	00500015	24		
0409	1 343 111	62 4.000	0.0 1.6 1.4 1 0	0.0 08	0.0 08	00 0 0 0	0 031	1121	0022	11052003	2000005577	012828	090968000035	00500015	24		
0410	1 343 111	62 3.500	1.3 0.9 1.0 1 0	0.0 04	0.0 04	00 0 0 0	0 031	1121	0022	11052003	2000005577	013907	090968000035	00500015	24		
0411	3 343 100	62 3.000	0.3 0.0 0.5 0 0	0.0 01	0.0 01	00 0 0 0	0 031	0000	0022	12032000	2000005577	014123	090968000035	00500015	24		
0412	1 343 111	62 4.000	0.1 1.2 1.1 1 0	0.0 07	0.0 07	00 0 0 0	0 031	1121	0021	11032001	2000005577	014500	090968000035	00500015	24		
0413	3 151 100	41 0.002	0.5 0.0 0.5 0 0	0.0 01	0.0 01	00 0 0 0	0 031	1122	0022	12062001	2000005577	015310	090968000035	00500015	24		
0414	1 212 111	11 0.000	1.4 3.0 2.4 1 0	0.0 03	0.0 03	00 0 0 0	0 031	0000	0021	23102000	2000000456	006807	210344000000	00000035	22		
0415	1 313 111	11 0.000	0.7 3.6 2.2 1 0	0.0 02	0.0 02	00 0 0 0	0 031	0000	0022	23092000	2000000456	007534	210344000000	00000035	22		
0416	1 751 200	11 0.000	0.0 0.0 0.0 0 0	0.0 01	0.0 01	00 0 0 0	1 010	0000	1122	23052000	2000000433	013815	260245000025	00900000	22		
0417	3 232 111	11 0.000	0.6 1.3 0.9 1 0	0.0 02	0.0 02	00 0 0 0	1 031	0000	0021	21092000	2000000695	013810	0000000000	00000045	22		
0418	1 212 111	11 0.000	0.9 1.4 1.1 1 0	0.0 02	0.0 02	00 0 0 0	2 031	1111	1222	11062003	2000000695	013810	0000000000	00000045	22		
0419	1 212 111	11 0.000	0.6 1.1 0.8 1 0	0.0 02	0.0 02	00 0 0 0	2 031	1111	1222	11062002	2000000695	013810	0000000000	00000045	22		
0420	1 212 111	11 0.000	1.8 1.7 1.8 1 0	0.0 02	0.0 02	00 0 0 0	2 031	1111	1222	11072001	2000000695	013810	0000000000	00000045	22		
0421	1 755 211	11 0.000	1.1 0.5 0.8 1 0	0.0 02	0.0 02	00 0 0 0	1 110	1112	1122	11032002	2000000695	017108	0000000000	00000045	22		
0422	1 751 211	51 0.000	0.2 1.1 0.8 1 0	0.0 03	0.0 03	00 0 0 0	1 110	1112	1222	11032001	2000000695	017113	0000000000	00000045	22		
0423	1 151 211	11 0.000	0.7 0.5 0.5 1 0	0.0 08	0.0 08	00 0 0 0	1 110	1112	1222	11062003	2000000695	017022	0000000000	00000045	22		
0424	1 751 211	11 0.000	0.2 0.9 0.7 1 0	0.0 04	0.0 04	00 0 0 0	1 110	1112	1222	11062004	2000000695	017128	0000000000	00000045	22		
0425	1 252 100	21 0.000	2.9 0.0 2.9 0 2	0.0 01	0.0 01	00 0 0 0	1 010	1112	1122	11082002	2000000822	026128	000345000000	00000000	22		
0426	1 252 100	11 0.000	2.8 0.0 2.8 0 0	0.0 01	0.0 01	00 0 0 0	1 010	1112	1122	11072001	2000000822	026128	000345000000	00000000	22		
0427	1 252 100	21 0.000	4.2 0.0 4.2 0 0	10.8 01	00 0 0 0	00 0 0 0	1 010	1112	1122	11082002	2000000822	026808	000345000000	00000000	22		
0428	1 252 100	21 0.000	3.5 0.0 3.5 0 0	19.1 01	00 0 0 0	00 0 0 0	1 010	1112	1122	11082002	2000000822	027307	000345000000	00000000	22		
0429	1 353 111	21 0.000	2.0 1.5 1.6 1 0	0.0 03	0.0 03	00 0 0 0	0 031	0000	0022	13032000	2000000822	027625	000345000000	00000000	22		
0430	1 353 100	11 0.000	1.7 0.0 1.7 0 0	0.0 01	0.0 01	00 0 0 0	0 031	1121	0022	12052002	2000000831	007835	060345000000	00000000	22		
0431	1 414 100	11 0.000	4.4 0.0 4.4 0 0	0.0 01	0.0 01	00 0 0 0	0 031	1121	0021	12092002	2000000836	032714	080345000000	00000000	22		
0432	1 454 100	11 0.000	0.5 0.0 0.5 0 0	0.0 01	0.0 01	00 0 0 0	2 010	0000	0022	11062000	2000001805	005621	170944000000	00000000	22		
0433	1 252 100	11 0.000	1.2 0.0 1.2 0 0	0.0 01	0.0 01	00 0 0 0	3 021	1111	1322	12062001	2000001284	003315	000244000035	02500000	22		
0434	1 252 100	11 0.000	2.7 0.0 2.7 0 0	0.0 01	0.0 01	00 0 0 0	3 021	1111	1321	12062002	2000001284	003315	000244000035	02500000	22		
0435	1 252 111	11 0.000	1.5 4.2 3.3 1 0	0.0 03	0.0 03	00 0 0 0	2 021	0000	1321	13062000	2000001284	003708	000244000035	02500000	22		
0436	1 751 211	52 4.000	0.6 1.4 1.2 3 0	0.0 04	0.0 04	00 0 0 0	1 010	1121	1122	11042003	2000001175	001220	160545000000	02900000	22		
0437	1 151 100	11 0.000	0.8 0.0 0.8 0 0	0.0 01	0.0 01	00 0 0 0	0 031	0000	0021	12012000	2000001175	023214	160545000000	02900000	22		
0438	1 252 111	52 2.700	0.2 1.0 0.7 1 0	0.0 03	0.0 03	00 0 0 0	0 031	1121	0021	12092003	2000001175	024126	160545000000	02900000	22		
0439	1 755 200	11 0.000	0.0 0.0 0.0 0 0	0.0 01	0.0 01	00 0 0 0	0 010	1122	0022	12062002	2000001261	006510	140144000000	00000000	22		
0440	1 252 100	11 0.000	0.2 0.0 0.2 0 0	0.0 01	0.0 01	00 0 0 0	1 031	1121	1322	11052002	2000001116	006515	290744000000	00000000	22		
0441	1 252 111	11 0.000	2.0 2.4 2.3 1 0	0.0 03	0.0 03	00 0 0 0	1 031	1111	1322	11052002	2000001116	006524	290744000000	00000000	22		





SMALL AHHS EFFECTIVENESS DATA

LSN 0	POS AIM	W PUR B	CSZ 16	FIRE TIME	R D TIM	TRG 2ND	POSN	R M	OTH4	MSUM	Q A NO	REEL	FRAME	DATE	BN B	DIV	AO	
	FSP M	A	T	ST SUB ALL	C I TO	H R POS	PUL FS M A D	G E	C U	O IHA	V R			R	R	REG	B MC	
0589	1	151	111	21	0.000	0.2	1.7	1.3	1	0	0.0	0.4	00	0	0	0	0	0
0590	1	151	100	21	0.000	3.0	0.0	5.2	0	0	0	0	00	0	0	0	0	0
0591	1	151	100	11	0.000	3.0	0.0	3.0	0	1	0.0	0.1	00	0	0	0	0	0
0592	1	751	241	11	0.000	1.0	1.0	1.0	1	0	0.0	0.6	00	0	0	0	0	0
0593	1	151	100	11	0.000	0.2	0.0	0.2	0	2	0.0	0.1	00	0	0	0	0	0
0594	1	151	100	11	0.000	0.0	0.0	0.0	0	2	2.5	0.1	00	0	0	0	0	0
0595	1	751	200	52	5.000	0.2	0.0	1.5	0	2	0.4	0.1	00	0	0	0	0	0
0596	1	353	100	11	0.000	4.5	0.0	4.5	0	0	0.0	0.1	00	0	0	0	0	0
0597	1	252	142	11	0.000	0.9	0.7	0.7	2	0	3.5	0.8	10	3	0	0	0	0
0598	1	353	100	11	0.000	0.3	0.0	0.3	0	0	0.0	0.1	00	0	0	0	0	0
0599	1	252	100	21	0.000	0.5	0.0	0.5	0	0	0.0	0.1	00	0	0	0	0	0
0600	1	751	200	42	3.002	0.0	0.0	1.2	0	0	0.0	0.1	00	0	0	0	0	0
0601	1	751	211	42	3.002	0.3	3.0	1.7	1	0	0.0	0.2	00	0	0	0	0	0
0602	1	151	211	62	6.000	0.0	0.9	0.7	1	0	0.0	0.5	00	0	0	0	0	0
0603	1	751	200	42	18.012	0.0	0.0	0.9	0	0	0.0	0.1	00	0	0	0	0	0
0604	1	751	211	42	3.502	0.1	0.4	0.2	1	0	0.0	0.2	00	0	0	0	0	0
0605	1	151	111	42	3.002	0.1	0.9	0.5	1	0	0.0	0.2	00	0	0	0	0	0
0606	1	151	211	42	3.002	0.2	1.5	0.8	1	0	0.0	0.2	00	0	0	0	0	0
0607	1	751	211	62	5.000	0.1	1.2	0.9	1	0	0.0	0.4	00	0	0	0	0	0
0608	1	751	611	62	10.000	0.1	2.0	1.1	1	0	9.0	0.2	00	0	0	0	0	0
0609	1	751	200	42	5.002	0.0	0.0	0.6	0	0	0.0	0.1	00	0	0	0	0	0
0610	1	151	211	41	0.002	0.2	0.6	0.5	1	0	0.0	0.1	03	00	0	0	0	0
0611	1	751	200	62	20.000	0.3	0.0	2.0	0	0	2.6	0.1	00	0	0	0	0	0
0612	1	454	111	41	0.002	0.5	2.0	1.8	1	0	1.5	1.1	00	0	0	0	0	0
0613	1	454	111	41	0.002	1.8	2.6	2.6	1	0	2.2	1.3	00	0	0	0	0	0
0614	1	353	100	41	0.002	1.5	0.0	1.5	0	0	3.0	0.1	00	0	0	0	0	0
0615	1	252	131	41	0.002	1.4	4.7	3.0	1	0	0.0	0.2	00	0	0	0	0	0
0616	1	252	111	42	4.002	0.7	0.0	0.7	0	0	0.6	0.1	00	0	0	0	0	0
0617	1	252	111	42	4.002	2.5	1.1	1.4	1	0	0.0	0.5	00	0	0	0	0	0
0618	1	252	111	42	9.012	1.2	2.7	2.0	2	0	5.2	0.2	00	0	0	0	0	0
0619	1	454	111	42	2.002	0.6	2.2	1.9	1	0	4.4	0.5	00	0	0	0	0	0
0620	1	454	111	41	0.002	0.9	2.4	1.9	1	0	0.5	0.3	00	0	0	0	0	0
0621	1	353	100	31	0.000	1.3	0.0	1.3	0	0	2.4	0.1	00	0	0	0	0	0
0622	1	353	111	42	4.002	0.3	1.3	1.0	1	0	0.0	0.3	00	0	0	0	0	0
0623	1	151	100	31	0.000	0.2	0.0	0.2	0	0	0.0	0.1	00	0	0	0	0	0
0624	1	252	111	32	5.000	0.2	4.3	3.3	1	0	0.0	0.4	00	0	0	0	0	0
0625	1	353	112	41	1.202	0.9	1.1	1.1	1	0	0.0	0.10	00	0	0	0	0	0
0626	1	252	111	42	2.202	0.9	2.0	1.9	1	0	0.0	0.08	00	0	0	0	0	0
0627	1	353	111	41	0.002	0.2	0.9	0.8	1	0	0.0	0.14	00	0	0	0	0	0
0628	1	252	111	42	6.002	1.0	8.5	4.7	1	0	7.8	0.2	00	0	0	0	0	0
0629	1	656	122	41	0.002	0.7	2.4	1.9	1	0	5.0	0.3	00	0	0	0	0	0
0630	1	252	100	42	4.002	1.1	0.0	1.5	0	0	15.1	0.1	00	0	0	0	0	0
0631	1	353	111	41	0.002	0.9	1.2	1.2	1	0	0.0	0.09	00	0	0	0	0	0
0632	1	656	122	41	0.002	0.2	1.6	1.4	1	0	7.5	0.4	00	0	0	0	0	0
0633	1	252	100	42	4.002	1.2	0.0	1.7	0	0	14.7	0.1	00	0	0	0	0	0
0634	1	232	311	42	6.012	0.7	2.2	1.7	3	0	1.0	0.3	00	0	0	0	0	0
0635	1	232	400	42	12.012	0.5	0.0	3.2	0	0	0.5	0.1	00	0	0	0	0	0
0636	1	232	411	42	7.012	0.7	1.7	1.2	1	0	0.0	0.2	00	0	0	0	0	0
0637	2	454	211	41	0.001	0.0	0.4	0.3	1	1	0.0	0.09	00	0	0	0	0	0



SMALL ARMS EFFECTIVENESS DATA

LSN	Q	POS	AIM	RD/16	FIRE	TIME	R	D	TIM	THG	2ND	POSN	R	M	OTHER	MSUM	Q	A	NO	REEL	FRAME	DATE	BN	B	DIV	AO
		FSP	M	BUR	1ST	SUB	ALL	M	R	POS	PUL	FS	M	A	D	E	C	F	VZHN	AN	S	R	R	REG	B	MC
0687	2	131	100	21	0.000	1.2	0.0	1.2	0.0	0.0	0.1	0.0	0.0	0.0	0.0	4	031	0000	1221	23022000	100009463	016501	13015100000	0000000	13	
0688	2	131	111	11	0.000	2.7	2.6	2.6	1.0	0.0	0.3	0.0	0.0	0.0	0.0	3	023	1111	1321	23022002	100009463	018301	13015100000	0000000	13	
0689	2	131	132	11	0.000	0.7	7.2	4.0	1.0	0.0	0.2	0.0	0.0	0.0	0.0	4	033	1111	1321	23022001	100009463	018301	13015100000	0000000	13	
0690	2	111	111	11	0.000	0.4	1.1	0.9	1.0	0.0	0.4	0.0	0.0	0.0	0.0	4	033	1111	1221	13012002	100009463	019609	13015100000	0000000	13	
0691	2	111	111	11	0.000	0.9	1.2	1.1	1.0	0.0	0.7	0.3	0.0	0.0	0.0	4	033	1111	1321	13012001	100009463	019711	13015100000	0000000	13	
0692	2	111	111	11	0.000	0.3	1.3	1.1	1.0	0.0	0.6	0.0	0.0	0.0	0.0	4	033	1111	1321	13012002	100009463	020313	13015100000	0000000	13	
0693	2	111	100	11	0.000	1.9	0.0	1.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0	4	033	1111	1321	13012001	100009463	020312	13015100000	9000000	13	
0694	2	131	100	11	0.000	1.9	0.0	1.9	0.0	0.0	0.1	0.0	0.0	0.0	0.0	4	033	0000	1321	23062000	100009463	021413	13015100000	0000000	13	
0695	2	131	100	11	0.000	1.5	0.0	1.5	0.0	0.0	0.1	0.0	0.0	0.0	0.0	4	033	1121	1321	23062001	100009463	022615	13015100000	0000000	13	
0696	2	111	100	11	0.000	0.2	2.4	1.6	1.0	0.0	0.3	0.0	0.0	0.0	0.0	4	033	1121	1221	23012001	100009414	061308	25065120000	0000000	13	
0697	2	131	100	11	0.000	0.1	0.0	0.1	0.0	0.0	0.1	0.0	0.0	0.0	0.0	4	033	1121	1321	23022001	100009414	062015	25065120000	0230000	13	
0698	1	151	111	52	3.700	0.1	0.9	0.7	1.2	0.0	0.3	0.0	0.0	0.0	0.0	0	022	1121	0022	11042102	100009363	022205	17115100000	0000000	13	
0699	1	454	111	52	4.700	1.3	4.9	3.7	1.0	0.0	0.3	0.0	0.0	0.0	0.0	0	032	1111	0022	11082001	100009184	036214	00000000000	0000000	13	
0700	1	252	100	22	5.000	1.7	0.0	2.7	0.0	4.8	0.1	0.0	0.0	0.0	0.0	0	032	1111	0022	11082002	100009184	037002	00000000000	0000000	13	
0701	1	212	100	11	0.000	1.5	0.0	1.5	0.0	0.0	0.1	0.0	0.0	0.0	0.0	2	032	0000	1222	23062000	100009184	047203	00000000000	0000000	13	
0702	1	252	111	52	4.500	0.6	1.9	1.6	1.0	0.0	0.4	0.0	0.0	0.0	0.0	0	022	1111	0022	23032004	100009184	053714	00000000000	0000000	13	
0703	1	252	100	52	4.000	0.2	0.0	2.8	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0	033	0000	0022	12042000	100009184	055308	00000000000	0000000	13	
0704	1	151	100	21	0.000	1.0	0.0	1.0	0.0	1.0	0.0	0.0	0.0	0.0	0.0	0	010	1121	0012	12022001	100008372	073003	25095000000	0000000	13	
0705	1	131	100	21	0.000	2.3	0.0	2.3	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0	031	0000	0011	12432000	100008372	072909	25095000000	0000000	13	
0706	1	131	100	52	4.000	7.1	0.0	7.7	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0	031	0000	0011	12092003	100008372	085813	25095000000	0000000	13	
0707	1	131	100	52	3.000	9.6	0.0	10.2	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0	031	1121	0011	13102001	100008372	087110	25095000000	0000000	13	
0708	1	252	100	11	0.000	3.0	0.0	3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0	010	0000	0022	21022000	100008370	052501	25095000000	0000000	13	
0709	1	454	111	11	0.000	1.6	3.7	2.6	1.2	0.0	0.2	0.0	0.0	0.0	0.0	7	010	1122	1322	11062001	100008370	051415	25095000000	0000000	13	
0710	1	252	141	11	0.000	0.8	2.2	1.5	1.2	0.0	0.2	0.0	0.0	0.0	0.0	7	010	1112	1322	23022003	100008370	055706	25095000000	0000000	13	
0711	1	353	142	52	3.000	0.4	5.8	4.0	1.0	0.0	0.3	0.0	0.0	0.0	0.0	0	010	1112	0022	23022001	100008680	032006	29015120000	0000019	13	
0712	1	353	100	11	0.000	2.6	0.0	2.6	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0	010	1112	0022	23012002	100008680	032006	29015120000	0000019	13	
0713	1	252	111	11	0.000	0.0	0.6	0.5	1.0	0.0	0.5	0.0	0.0	0.0	0.0	0	010	0000	0022	12042000	100008680	033811	29015120000	0000019	13	
0714	1	252	111	11	0.000	0.6	0.7	0.7	1.0	0.0	0.6	0.0	0.0	0.0	0.0	3	010	0000	1322	12042000	100008680	034308	29015120000	0000019	13	
0715	1	252	111	11	0.000	5.0	1.1	1.6	1.0	0.0	0.7	0.0	0.0	0.0	0.0	5	032	0000	1322	12042000	100008680	035409	29015120000	0000019	13	
0716	1	353	142	11	0.000	0.5	0.0	0.5	0.0	1.7	0.1	0.0	0.0	0.0	0.0	5	032	0000	1322	12042000	100008680	038002	29015120000	0000019	13	
0717	1	151	111	21	0.000	0.3	0.9	0.8	1.0	6.0	0.9	0.0	0.0	0.0	0.0	0	010	0000	0022	23112000	100008680	038107	29015120000	0000019	13	
0718	1	243	142	52	4.700	0.1	5.5	3.7	1.0	0.0	0.3	0.0	0.0	0.0	0.0	0	010	0000	0022	23022000	100008680	039308	29015120000	0000019	13	
0719	1	254	111	11	0.000	0.4	0.8	0.6	1.0	4.0	0.2	0.0	0.0	0.0	0.0	0	010	1122	0022	12032001	100008680	055015	29015120000	0000019	13	
0720	1	353	142	11	0.000	3.5	1.6	2.2	1.0	0.0	0.3	0.0	0.0	0.0	0.0	0	010	1121	0022	12022001	100008680	055411	29015120000	0000014	13	
0721	1	151	111	11	0.000	1.7	2.3	2.0	1.1	0.0	0.2	0.0	0.0	0.0	0.0	0	010	1122	0022	23022001	100008695	072208	06025100000	0271255	13	
0722	1	151	100	11	0.000	0.2	0.0	0.2	0.0	0.4	0.1	0.0	0.0	0.0	0.0	4	210	1122	1322	11082001	1000033262	070606	28055300000	0000405	13	
0723	1	751	200	11	0.000	0.8	0.0	0.8	0.0	0.5	0.1	0.0	0.0	0.0	0.0	3	110	1222	1322	11082001	1000033262	071700	28055300000	0000405	13	
0724	1	751	200	11	0.000	3.4	0.0	3.4	0.0	0.5	0.1	0.0	0.0	0.0	0.0	2	110	1122	1322	22022004	1000033262	073702	28055300000	0000405	13	
0725	1	151	100	11	0.000	0.2	0.0	0.2	0.0	0.0	0.1	0.0	0.0	0.0	0.0	2	010	0000	1322	21042000	1000033262	074507	28055300000	0000405	13	
0726	1	151	100	11	0.000	2.4	2.7	2.6	1.2	0.0	0.5	0.0	0.0	0.0	0.0	0	031	0000	0021	13022000	1000033258	002509	28055300000	0000405	13	
0727	2	131	611	52	3.600	4.3	2.5	2.8	1.2	0.0	0.6	0.0	0.0	0.0	0.0	0	031	0000	0021	12021000	1000033258	006008	28055300000	0000405	13	
0728	2	131	411	11	0.000	0.6	0.0	0.6	0.2	0.0	0.1	0.0	0.0	0.0	0.0	0	010	0000	0022	23011000	1000033258	006008	28055300000	0000405	13	
0729	2	131	100	11	0.000	1.4	1.4	1.4	1.0	0.0	0.6	0.0	0.0	0.0	0.0	0	031	0000	0021	12031000	1000033265	009503	28055300000	0000405	13	
0730	2	252	111	11	0.000	1.6	1.8	1.8	1.0	0.0	0.7	0.0	0.0	0.0	0.0	0	031	0000	0021	12031000	1000033265	010904	28055300000	0000405	13	
0731	2	232	111	11	0.000	0.0	1.8	1.8	1.0	0.0	0.7	0.0	0.0	0.0	0.0	0	031	0000	0021	12031000	1000033265	010904	28055300000	0000405	13	
0732	2	131	111	11	0.000	0.0	1.8	1.5	1.0	0.0	0.6	0.0	0.0	0.0	0.0	5	031	0000	1321	12061000	1000033265	013108	28055300000	0000405	13	
0733	2	131	111	11	0.000	0.0	0.3	0.3	1.0	0.0	0.7	0.0	0.0	0.0	0.0	0	031	0000	0021	13021000	1000033265	015203	28055300000	0000405	13	
0734	2	131	111	11	0.000	0.0	1.3	1.1	1.0	0.0	0.7	0.0	0.0	0.0	0.0	0	031	0000	0021	13021000	1000033265	015203	28055300000	0000405	13	
0735	2	131	111	11	0.000	0.0	1.3	1.1	1.0	0.0	0.7	0.0	0.0	0.0	0.0	0	031	0000	0021	13021000	1000033265	015615	28055300000	0000405	13	

SMALL ARMS EFFECTIVENESS DATA

LSN	0	POS	AIM	RD/16	FIRE	R	C	I	R	TRG	2ND	POSN	R	M	OTHER	KSUM	O	A	NO	HEEL	FRAME	DATE	UN	B	REG	DIV	AO	L
		FSP	M	W	T	IST	SUB	ALL	H	R	POS	PUL	FS	M	A	D	E	C	F	VZBN	V	AN	S	R	R	R	B	MC
0735	2	131	111	11	0.000	1.7	1.0	1.1	1.2	0.0	0.4	0.0	0	0	0	0	0	0.31	1111	0021	11071002	1000033265	018008	28055300000	0000405	13		
0737	2	131	111	11	0.000	0.7	1.0	1.0	1.2	0.0	0.6	0.0	0	0	0	0	0	0.31	1111	0021	11071003	1000033265	018008	28055300000	0000405	13		
0738	2	131	111	52	3.000	0.3	1.3	1.1	1.2	0.0	0.6	0.0	0	0	0	0	6	0.31	1121	1321	12071001	1000033265	019307	28055300000	0000405	13		
0739	2	131	111	11	0.000	0.2	0.4	0.4	1.2	0.0	0.3	0.0	0	0	0	0	6	0.31	1121	1321	12071002	1000033265	020315	28055300000	0000405	13		
0740	2	131	111	52	3.600	0.0	1.9	1.5	1.2	0.0	0.5	0.0	0	0	0	0	0	0.31	0000	0021	23021000	1000033265	021307	28055300000	0000405	13		
0742	1	151	241	11	0.000	0.5	1.7	1.3	1.0	0.6	0.3	0.0	0	0	0	0	2	110	1122	1222	21022004	1000033263	018301	28055300000	0000405	13		
0743																												
0744																												
0745																												
0746																												
0747	1	151	100	11	0.000	0.2	0.0	0.2	0.0	0.0	0.1	0.0	0	0	0	0	3	010	0000	1322	12062000	1000036690	053501	03025100000	0000000	13		
0748	1	151	111	11	0.000	0.8	0.3	0.5	1.0	0.0	0.4	0.0	0	0	0	0	3	010	0000	1322	12062000	1000036690	054110	03025100000	0000000	13		
0749	3	151	111	52	2.100	0.7	1.1	1.0	1.0	0.0	0.9	0.0	0	0	0	0	0	010	0000	0022	23012000	1000033261	000302	28055300000	0000405	13		
0750	1	353	111	11	0.000	0.4	1.4	1.3	1.0	0.0	0.4	0.0	0	0	0	0	0	010	1122	0022	23112001	1000033261	019111	28055300000	0000405	13		
0751	1	353	111	11	0.000	0.7	1.0	0.8	1.1	0.0	0.2	0.0	0	0	0	0	6	0.33	0000	0022	23111000	1000033261	028805	28055300000	0000405	13		
0752	3	153	111	11	0.000	4.3	1.0	2.7	1.1	0.0	0.2	0.0	0	0	0	0	0	0.33	0000	0022	23111000	1000033261	030600	28055300000	0000405	13		
0753	2	131	100	52	5.000	6.0	0.0	6.8	0.2	0.0	0.0	0.0	0	0	0	0	0	0.31	0000	0021	23101000	1000033259	038511	28055300000	0000405	13		
0754	2	131	100	11	0.000	1.1	0.0	1.1	0.2	0.0	0.1	0.0	0	0	0	0	0	0.31	0000	0021	13021000	1000033259	078811	28055300000	0000405	13		
0755	2	131	111	11	0.000	0.7	1.2	1.1	1.2	0.0	0.5	0.0	0	0	0	0	0	0.31	0000	0021	12031000	1000033259	079615	28055300000	0000405	13		
0756	1	252	111	52	4.800	1.2	2.3	2.1	1.1	0.0	0.4	0.0	0	0	0	0	0	0.23	0000	0022	12031000	1000033257	084212	28055300000	0000405	13		
0757	1	151	100	11	0.000	0.1	0.0	0.1	0.0	1.5	0.1	0.0	0	0	0	0	0	0.22	1122	0022	22081102	1000033255	041603	28055300000	0000405	13		
0758	1	151	111	11	0.000	1.8	2.4	2.1	1.0	0.4	0.2	0.0	0	0	0	0	0	0.22	1121	0022	22041006	1000033255	044605	28055300000	0000405	13		
0759	1	252	211	11	0.000	2.4	2.0	2.0	1.0	2.8	0.5	0.0	0	0	0	0	0	0.10	1122	0022	23011001	1000033255	046915	28055300000	0000405	13		
0760	1	252	111	11	0.000	1.7	2.0	1.9	1.1	0.0	0.6	0.0	0	0	0	0	0	0.10	0000	0022	23011001	1000033255	048715	28055300000	0000405	13		
0761	1	252	111	52	3.600	1.1	2.0	1.8	1.1	0.0	0.5	0.0	0	0	0	0	0	0.22	0000	0022	23021000	1000033255	050514	28055300000	0000405	13		
0762	3	751	211	52	3.600	0.7	0.8	0.8	1.1	4.2	0.5	0.0	0	0	0	0	0	0.10	0000	0022	23021000	1000033255	052801	28055300000	0000405	13		
0763	3	751	211	22	2.500	0.3	3.1	1.7	2.0	0.0	0.2	0.0	0	0	0	0	0	0.10	0000	0022	23022000	1000032569	007101	28035300000	0150035	13		
0764	2	131	111	21	0.000	1.6	0.7	0.9	1.0	0.0	0.5	0.0	0	0	0	0	0	0.10	0000	0021	11033000	1000032569	008205	28035300000	0150035	13		
0765	2	131	111	21	0.000	1.4	1.7	1.7	1.0	0.0	0.7	0.0	0	0	0	0	0	0.31	0000	0021	13052000	1000031608	075311	28035300000	0150035	13		
0766	2	131	411	21	0.000	0.2	0.7	0.6	1.2	0.0	0.5	0.0	0	0	0	0	6	0.31	0000	0021	13052000	1000031608	076105	28035300000	0150035	13		
0767	2	141	111	52	5.000	1.5	8.2	4.9	1.0	0.0	0.2	0.0	0	0	0	0	0	0.31	1121	0021	22062002	1000031497	057904	16125200000	0000025	13		
0768	2	141	111	52	8.000	0.5	3.8	2.2	1.0	0.0	0.2	0.0	0	0	0	0	0	0.31	0000	0021	23112000	1000031497	059403	16125200000	0000025	13		
0769	2	141	100	52	14.000	0.9	3.0	2.2	0.0	0.0	0.1	0.0	0	0	0	0	0	0.31	0000	0021	23112000	1000031497	060409	16125200000	0000025	13		
0770	2	131	111	11	0.000	0.0	1.1	0.8	1.0	0.0	0.4	0.0	0	0	0	0	0	0.31	0000	0021	13022000	1000031497	062104	16125200000	0000025	13		
0771	2	151	111	11	0.000	1.0	0.8	0.6	1.0	0.8	0.3	0.0	0	0	0	0	0	0.31	0000	0021	23022000	1000031497	063410	16125200000	0000025	13		
0772	1	242	200	62	8.000	1.0	0.0	0.6	1.0	0.0	0.1	0.0	0	0	0	0	0	0.33	0000	0022	13042000	2000005449	024900	00000000000	0000000	24		
0773	1	242	200	62	12.000	8.8	0.0	10.2	0.0	0.0	0.1	0.0	0	0	0	0	0	0.33	0000	0022	13042000	2000005449	025602	00000000000	0000000	24		
0774	1	751	200	52	6.000	0.1	0.0	2.7	0.0	2.0	0.1	0.0	0	0	0	0	3	010	1122	1222	23022005	2000000503	030512	00000000000	0000000	24		
0775	3	751	211	52	6.000	6.1	2.9	4.0	1.0	0.0	0.3	0.0	0	0	0	0	0	0.10	1112	0022	11022002	2000000547	010213	00004400000	0000000	22		
0776	3	751	242	52	4.000	7.7	3.1	4.0	1.0	0.0	0.5	0.0	0	0	0	0	0	0.10	1112	0022	11022002	2000000547	010213	00004400000	0000000	22		
0777	1	751	211	52	2.500	0.6	1.0	1.0	1.0	0.0	0.7	0.0	0	0	0	0	0	0.10	1122	0022	11022002	2000000547	013511	00004400000	0000000	22		
0778	3	252	111	52	3.300	4.2	2.0	2.0	1.0	0.0	0.6	0.0	0	0	0	0	0	0.10	1112	0022	11012001	2000000547	015200	00004400000	0000000	22		
0779	3	252	111	52	2.500	3.0	2.3	2.4	1.0	0.0	0.7	0.0	0	0	0	0	0	0.10	1112	0022	11012002	2000000547	015200	00004400000	0000000	22		
0780	3	751	200	51	3.000	1.1	0.0	1.1	0.0	2.2	0.1	0.0	0	0	0	0	0	0.10	0000	0022	12032000	2000000547	020514	00004400000	0000000	22		
0781	3	751	211	52	3.000	0.6	1.4	1.2	1.0	6.0	0.6	0.0	0	0	0	0	0	0.10	0000	0022	12032000	2000000547	020514	00004400000	0000000	22		
0782	3	751	211	52	5.000	0.8	1.2	1.1	1.0	0.0	0.4	0.0	0	0	0	0	0	0.10	0000	0022	12032000	2000000547	021508	00004400000	0000000	22		
0783	3	252	111	52	2.500	0.9	1.4	1.3	1.0	0.0	0.7	0.0	0	0	0	0	0	0.10	0000	0022	11022000	2000000547	026211	00004400000	0000000	22		
0784	3	152	132	52	3.000	0.7	3.9	3.3	1.0	0.0	0.2	0.0	0	0	0	0	0	0.10	0000	0022	11022000	2000000547	028709	00004400000	0000000	22		

SMALL ARMS EFFECTIVENESS DATA

LSN 0	POS AIM	RD/16	FIRE TIME	R O TIM	TRG 2ND	POSN	R M	OTHR	MSUM	O A NO	REEL	FNAME	DATE	BN B	REG	DIY	AC
FSP M	A	W BUR B	Y IST SUB ALL	C I TO	M R POS	PUL FS M A D	E C	C U	GIRA	V R			R	R		B	M C
0785	1 751 211 21	0 000	1.4 1.8 1.7 1 0	0 0 0	0 0 0	0 0 0	0	022 112 0022	12072001	200000551	058405	0000440000	000000	22			
0786	3 751 611 21	0 000	0.5 1.5 1.4 1 0	0.7 09	0 0 0	0 0 0	0	422 112 0022	12062001	200000551	059810	0000440000	000000	22			
0787	1 157 200 11	0 000	0.5 0.0 0.5 0 0	2.0 01	0 0 0	0 0 0	2	210 112 1222	23042003	200000558	033405	12054500035	0220065	22			
0788	1 751 241 52	2 000	0.2 2.6 1.4 1 0	0.5 02	0 0 0	0 0 0	1	110 112 1222	11062003	200000558	034208	12054500035	0220065	22			
0789	1 151 142 11	0 000	1.0 3.7 2.4 1 0	0.0 02	0 0 0	0 0 0	1	033 000 1222	23102100	200000971	018311	20074400035	0000015	22			
0790	1 151 111 52	5 000	0.3 1.6 1.0 1 0	0.0 02	0 0 0	0 0 0	0	010 112 0022	23062002	200000971	027600	20074400035	0000015	22			
0791	1 131 600 52	9 000	1.5 0.0 2.4 0 0	0.0 01	0 0 0	0 0 0	0	033 000 0022	23032000	200000971	042515	24094400035	0000015	22			
0792	3 454 111 52	3 800	0.8 1.1 1.1 1 0	0.0 02	0 0 0	0 0 0	0	033 000 0022	23042000	200000972	008506	24094400000	0000015	22			
0793	3 131 111 52	4 500	0.5 3.4 1.9 1 0	0.0 04	0 0 0	0 0 0	0	033 000 0022	11042002	200000974	034104	29094400035	0050000	22			
0794	1 131 142 52	4 500	3.310.5 8.7 1 0	0.0 01	0 0 0	0 0 0	0	033 000 0022	13022000	200000974	030305	29074400035	0050000	22			
0795	1 454 211 11	0 000	1.0 0.0 1.2 0 0	0.0 03	0 0 0	0 0 0	2	010 112 1222	13072002	200000974	061013	28094400025	0070000	22			
0796	1 252 121 11	0 000	0.4 1.2 0.9 1 0	2.4 03	0 0 0	0 0 0	0	010 1121 0022	23092002	200000974	061903	28094400025	0070000	22			
0797	1 252 121 11	0 000	0.5 3.2 1.9 1 0	0.0 02	0 0 0	0 0 0	0	010 1121 0022	13112003	200000974	062615	28094400025	0070000	22			
0798	1 151 111 52	4 000	2.3 3.7 3.0 1 0	0.0 02	0 0 0	0 0 0	0	010 1122 0022	13052001	200000977	017709	25014400025	3210000	22			
0799	1 151 100 21	0 000	5.0 0.0 5.0 0 0	4.0 01	0 0 0	0 0 0	0	019 000 0022	23022000	200000977	020011	25014400025	3210000	22			
0800	3 151 111 11	0 000	1.2 3.5 2.4 1 1	0.0 02	0 0 0	0 0 0	0	031 000 0022	23022000	200000977	022714	25014400025	3210000	22			
0801	3 131 100 21	0 000	0.3 0.9 0.3 0 1	0.0 01	0 0 0	0 0 0	1	010 1121 1122	23022005	200000977	036914	25014400025	3210000	22			
0802	1 151 100 11	0 000	0.0 0.0 0.0 0 0	1.2 01	0 0 0	0 0 0	1	010 1122 2122	11062001	200001013	020903	15094400000	0000000	12			
0803	1 151 300 11	0 000	1.9 0.0 1.9 0 0	0.6 02	0 0 0	0 0 0	2	033 1122 1221	23042007	200001013	044205	15094400000	0000000	12			
0804	1 252 100 11	0 000	0.8 0.0 0.8 0 0	0.0 02	0 0 0	0 0 0	0	023 000 0021	13042002	2000004726	019101	00004400000	0000025	22			
0805	1 151 111 11	0 000	1.4 1.6 1.5 1 0	3.7 01	0 0 0	0 0 0	0	033 1121 0021	23022003	2000004726	029611	00004400000	0000025	22			
0806	1 252 111 11	0 000	1.9 0.0 1.9 0 0	0.0 03	0 0 0	0 0 0	1	010 1121 1122	22022002	2000004718	047508	00004500000	0000000	22			
0807	1 151 100 21	0 000	0.1 0.7 0.5 1 0	0.0 02	0 0 0	0 0 0	0	023 000 0022	23022000	2000004718	050006	00004500000	0000000	22			
0808	1 151 132 52	4 500	0.8 3.4 2.1 1 0	0.0 01	0 0 0	0 0 0	0	010 1122 0022	12032002	2000004709	008211	00024500000	0000000	22			
0809	1 151 100 11	0 000	0.6 0.0 0.6 0 0	0.0 01	0 0 0	0 0 0	0	022 1122 0022	23022001	2000004709	009514	00024500000	0000000	22			
0810	1 151 100 11	0 000	0.1 0.0 0.1 0 0	0.0 01	0 0 0	0 0 0	4	021 000 1321	11062002	2000011795	009001	20074400000	0000035	22			
0811	1 151 100 11	0 000	1.6 0.0 1.6 0 0	0.0 02	0 0 0	0 0 0	1	032 1121 0022	23022002	2000011795	009001	20074400000	0000035	22			
0812	1 751 211 21	0 000	0.3 0.8 0.6 1 0	0.0 01	0 0 0	0 0 0	0	032 1121 0022	22022001	2000011640	061202	10074400000	0000035	22			
0813	1 252 111 21	0 000	2.0 2.5 2.2 1 0	0.0 02	0 0 0	0 0 0	0	032 1121 0022	22022001	2000011640	061202	10074400000	0000035	22			
0814	3 454 100 21	0 000	3.0 0.0 3.0 0 0	0.0 01	0 0 0	0 0 0	0	033 1121 0021	23022002	2000011640	012707	10084400000	0000000	22			
0815	3 434 100 11	0 000	2.2 0.0 2.2 0 0	0.0 01	0 0 0	0 0 0	0	010 000 0022	23022002	2000011640	012707	10084400000	0000000	22			
0816	1 151 111 11	0 000	0.5 1.6 1.0 1 0	0.0 02	0 0 0	0 0 0	2	023 000 1222	13042000	2000000830	005510	18094400000	0240015	22			
0817	1 353 111 21	0 000	0.9 1.3 1.2 1 0	0.0 04	0 0 0	0 0 0	2	023 000 1222	13042000	2000000830	005510	18094400000	0240015	22			
0818	3 151 100 51	0 000	0.4 0.0 0.4 0 0	0.0 01	0 0 0	0 0 0	0	022 000 0022	23032000	2000001137	024815	00124300000	0000000	22			
0819	3 151 100 11	0 000	1.5 0.0 1.5 0 0	2.5 01	0 0 0	0 0 0	0	022 1121 0022	23032002	2000001137	024815	00124300000	0000000	22			
0820	3 454 100 31	0 000	7.2 0.0 7.2 0 0	0.0 01	0 0 0	0 0 0	0	010 1122 0022	23032004	2000005715	010818	06106800000	0000000	24			
0821	3 454 100 51	0 000	3.2 0.0 3.2 0 0	0.0 01	0 0 0	0 0 0	0	010 1122 0022	23032004	2000005715	011421	06106800000	0000000	24			
0822	1 343 142 62	5 000	0.0 5.4 2.7 3 0	0.0 02	0 0 0	0 0 0	4	032 000 1322	13061000	2000005606	001031	00056800000	0000000	24			
0823	1 242 100 622	5 000	0.0 0.0 3.1 0 0	0.0 01	0 0 0	0 0 0	2	031 000 1222	13061000	2000005606	002427	00056800000	0000000	24			
0824	1 151 111 62	5 000	0.0 2.4 1.6 1 0	0.0 03	0 0 0	0 0 0	0	010 1122 0022	21031002	2000005606	023707	00056800000	0000000	24			
0825	1 151 212 11	0 000	0.0 0.0 0.3 2 0	0.0 05	0 0 0	0 0 0	0	010 1122 0022	21042001	2000001019	019806	02084400000	0000045	22			
0826	1 252 111 11	0 000	0.3 0.2 0.2 1 0	0.0 01	0 0 0	0 0 0	0	032 000 0022	23072000	2000011252	017306	16025300035	0000015	23			
0827	1 252 100 11	0 000	0.6 0.0 0.6 0 0	0.0 01	0 0 0	0 0 0	0	022 000 0022	23072000	2000011252	016204	16025300035	0000015	23			
0828	1 151 111 22	5 000	0.3 0.8 0.6 1 0	0.0 03	0 0 0	0 0 0	0	022 000 0022	23052000	2000011252	018413	16025300035	0000015	23			
0829	3 131 111 52	2 000	0.2 0.0 0.5 1 0	0.0 03	0 0 0	0 0 0	0	033 000 0022	22032000	2000004664	015409	00004500000	0000000	22			
0830	3 454 100 11	0 000	0.2 0.0 0.2 0 0	0.0 01	0 0 0	0 0 0	0	010 000 0022	21062000	2000004664	015707	00004500000	0000000	22			



SMALL ARMS EFFECTIVENESS DATA

LSN	POS	AIM	RD/16	FIRE	TIME	R	C	I	TO	TRG	2ND	POSN	R	M	OTMR	MSUM	O	A	NO	REEL	FRAME	DATE	BN	B	REG	B	MC
	FSP	M	A	Y	IST	SUB	ALL	H	R	POS	PUL	FS	M	A	D	E	C	F	VZBN	U	OIRA	V	R		R		
0883	1	232	111	21	0.000	1.3	0.9	1.0	3	0	0.0	0.7	00	0	0	0	0.33	0000	0022	11082000	1000000576	034710	0001440000	00000000	00000000	11	
0884	1	252	111	51	0.000	2.1	0.7	0.8	1	0	0.0	1.0	00	0	0	0	0.10	0000	0022	13032000	1000000576	042607	0001440000	00000000	00000000	11	
0885	1	252	111	51	0.000	1.0	0.5	0.6	1	0	0.0	1.5	00	0	0	0	0.10	0000	0022	13032000	1000000576	043903	0001440000	00000000	00000000	11	
0886	1	752	111	51	0.000	1.0	1.0	1.0	1	0	0.0	0.4	00	0	0	0	0.21	0000	0022	13022000	1000000576	047905	0001440000	00000000	00000000	11	
0887	1	152	100	5216	0.000	1.1	0.0	2.9	0	0	0.0	0.1	00	0	0	0	0.22	0000	0022	13032000	1000000576	048711	0001440000	00000000	00000000	11	
0888	1	353	141	11	0.000	0.8	1.2	7	8	1	0	6.0	03	00	0	0	0.33	0000	0022	13102000	1000000576	059413	0001440000	00000000	00000000	11	
0889	1	353	122	11	0.000	1.6	1.1	1.1	2	0	0.0	0.8	00	0	0	0	0.31	1112	0022	12022001	1000000576	065100	0001440000	00000000	00000000	11	
0890	1	353	111	11	0.000	0.9	0.9	0.9	1	0	0.0	0.8	00	0	0	0	0.22	1111	0022	13032002	1000000576	066906	0001440000	00000000	00000000	11	
0891	1	317	111	11	0.000	1.1	1.5	1.4	1	0	0.0	0.7	00	0	0	0	0.33	0000	0022	11052000	1000000576	066906	0001440000	00000000	00000000	11	
0892																											
0893																											
0894	2	131	122	21	0.000	0.2	2.4	2.2	1	0	0.0	1.2	00	0	0	0	0.33	0000	1221	12032000	1000000689	000211	0903440000	00000000	1450375	12	
0895	2	131	111	21	0.000	1.9	2.1	2.0	1	0	0.5	0.4	00	0	0	0	0.33	1121	1121	22052001	1000000689	007013	0903440000	00000000	1450375	12	
0896	1	253	111	11	0.000	1.3	1.4	1.3	1	0	0.0	0.2	00	0	0	0	4	010	1111	1322	12082002	1000000832	059203	0000000037	00000000	11	
0897	1	353	111	52	2.000	10.0	1.5	5.7	1	0	0.0	0.2	00	0	0	0	4	010	1111	1322	12072001	1000000832	059203	0000000037	00000000	11	
0898	1	253	100	11	0.000	2.3	0.0	2.3	0	0	0.0	0.0	00	0	0	0	0	0.32	0000	0022	12042000	1000000890	066305	0002440000	00000000	11	
0899	1	353	111	11	0.000	1.0	3.1	2.8	1	0	0.0	0.6	00	0	0	0	0	0.31	0000	0022	12042000	1000000890	066615	0002440000	00000000	11	
0900	1	353	111	11	0.000	1.0	1.4	1.3	1	0	0.0	0.6	00	0	0	0	0	0.10	0000	0022	12042000	1000000890	070912	0002440000	00000000	11	
0901	3	353	100	11	0.000	2.6	3.0	2.6	0	2	0.0	0.1	00	0	0	0	7	031	0000	1322	23072000	1000000907	070140	0002440000	00000000	11	
0902	3	353	211	11	0.000	2.2	2.9	2.7	1	1	0.0	0.4	00	0	0	0	4	032	0000	0022	13022100	1000000907	016612	0002440000	00000000	11	
0903	3	733	211	11	0.000	0.6	0.9	0.9	1	0	4.4	0.4	00	0	0	0	4	031	0000	0022	22052000	1000000907	039615	0002440000	00000000	11	
0904	1	131	111	52	3.700	2.2	2.4	2.3	2	0	0.0	0.3	00	0	0	0	0	0.31	0000	0011	23042000	1000001141	042505	2502440025	00000000	11	
0905	1	131	111	11	0.000	1.4	1.4	1.4	1	0	0.0	0.3	00	0	0	0	3	033	0000	1222	12082000	1000002308	071503	0700440000	3700925	11	
0906	1	434	100	11	0.000	1.0	6.0	1.8	0	0	0.0	0.1	00	0	0	0	3	031	1121	0011	22072002	1000002084	028315	0608440000	3130000	11	
0907	1	434	100	11	0.000	1.8	0.0	1.8	0	0	0.0	0.1	00	0	0	0	3	031	1121	0011	13072002	1000002084	029106	0608440000	3130000	11	
0908	1	252	131	11	0.000	2.7	0.8	1.7	1	0	1.1	0.2	00	0	0	0	1	010	1112	1222	21052001	1000001957	041607	0303450004	00000000	11	
0909	1	151	111	11	0.000	0.8	1.7	1.3	1	0	2.3	0.2	00	0	0	0	1	110	1112	1222	21042002	1000001957	041908	0303450004	00000000	11	
0910	1	151	111	11	0.000	0.6	3.2	1.9	1	0	0.6	0.2	00	0	0	0	6	021	1121	1321	21062002	1000001754	014115	2804450003	0000203	11	
0911	1	151	100	11	0.000	3.7	0.0	3.7	0	0	0.0	0.1	00	0	0	0	6	021	1111	1321	22032001	1000001754	016414	2804450003	0000203	11	
0912	1	131	111	11	0.000	1.3	2.2	1.7	1	0	0.0	0.2	00	0	0	0	1	031	0000	1211	11062000	1000001486	077509	1906440000	0000795	11	
0913	1	252	111	11	0.000	1.2	0.7	0.8	3	0	1.7	0.5	00	0	0	0	1	021	0000	0911	23082000	1000001486	081000	1906440000	0000795	11	
0914	1	252	100	11	0.000	2.0	0.0	2.0	0	0	5.0	0.1	00	0	0	0	1	032	1221	0022	13032002	1000001525	043502	3004442000	00000000	12	
0915	1	131	111	52	2.500	1.5	2.1	1.8	1	0	0.0	0.2	00	0	0	0	2	023	1111	0022	13082102	1000001525	044409	3004442000	00000000	12	
0916	1	151	100	21	0.000	2.8	0.0	2.8	0	0	4.3	0.1	00	0	0	0	1	022	1122	2122	12032002	1000001525	044201	3004442000	00000000	12	
0917	1	151	111	11	0.000	0.2	1.1	0.9	1	0	0.0	0.5	00	0	0	0	0	0.31	0000	0022	12062000	1000002663	050803	0000000000	00000000	12	
0918	1	353	100	11	0.000	2.2	0.0	2.2	0	0	0.0	0.1	00	0	0	0	2	010	1111	1322	13072001	1000002977	013512	0011440000	00000000	12	
0919	1	353	100	11	0.000	1.4	0.0	1.4	0	0	0.0	0.1	00	0	0	0	0	0.19	1111	0022	13082001	1000002977	014408	0011440000	00000000	12	
0920																											
0921	1	151	100	11	0.000	1.0	0.0	1.0	0	0	1.4	0.1	00	0	0	0	1	110	1112	1122	11102002	1000003228	014007	1701450000	00000000	12	
0922	1	151	100	21	0.000	0.3	0.0	0.3	0	0	2.6	0.1	00	0	0	0	1	110	1112	1122	11102001	1000003228	014203	1701450000	00000000	12	
0923	1	151	100	11	0.000	0.0	0.0	0.0	0	0	0.0	0.1	00	0	0	0	2	010	1222	0022	11092001	1000003333	015115	07024500030	1610255	12	
0924	1	252	111	11	0.000	1.5	2.4	1.9	1	0	0.0	0.2	00	0	0	0	0	0.42	1111	0022	11042002	1000003333	015100	07024500030	1610255	12	
0925	1	252	100	11	0.000	1.7	0.0	1.7	0	0	0.5	0.1	00	0	0	0	0	0.32	1111	0022	12042003	1000003333	015412	07024500030	1610255	12	
0926	3	732	211	52	3.000	1.0	1.1	1.1	1	0	0.0	0.3	00	0	0	0	0	0.31	0000	0021	22052000	1000002176	020402	2102450000	1480375	12	
0927	3	751	211	11	0.000	0.5	0.3	0.3	1	0	0.0	0.8	00	0	0	0	2	010	0000	0012	22062000	1000002176	022106	2102450000	1480375	11	
0928	3	232	100	11	0.000	0.3	0.0	0.3	0	0	1.2	0.1	00	0	0	0	2	0.31	1121	0011	23082002	1000002176	023713	2102450000	1480375	11	
0929	3	111	100	21	0.000	3.3	0.0	3.3	0	0	0.0	0.1	00	0	0	0	0	0.10	1222	0021	11032000	1000003723	039504	2503450000	00000000	12	
0930	3	111	111	21	0.000	2.9	5.2	4.1	1	0	0.0	0.2	00	0	0	0	2	010	0000	2121	21082000	1000003723	041209	2503450000	00000000	11	
0931	3	454	100	11	0.000	0.1	0.0	0.1	0	0	0.0	0.1	00	0	0	0	2	022	0000	2121	11082000	1000003723	045907	2503450000	00000000	11	

SMALL ARMS EFFECTIVENESS DATA

LSN 0	PCS AIM	RDY 16	FIRE TIME	R D TIM	THG 2ND	POSN	R M	OTHR	MSUM	Q	A NO	REEL	FRAME	DATE	BN B	DIV	AO
	W BUR 9	A T	1ST SUB ALL	H R POS	PUL FS	M A D	E C	C U	OIRA	V R	AN S			R	R	REG	R MC
0932	3 235	111 11	0.000	1.1 4.7 3.5 3 0	4.7 03	00 0 0 0	3 031	0000	1111	1102000	100003481	022303	19024500000	0000375	12		
0933	3 232	111 11	0.000	0.4 1.1 0.9 1 0	0.0 03	00 0 0 0	3 031	0000	1111	1305200	100003481	024003	19024500000	0000375	12		
0934	3 535	100 52	4.000	0.5 1.0 1.2 0 0	0.0 01	00 0 0 0	3 031	1111	0011	2105200	100003481	025011	19024500000	0000375	12		
0935	3 232	111 11	0.000	1.3 1.6 1.5 1 0	0.0 04	00 0 0 0	3 031	1111	0011	2105200	100003481	025011	19024500000	0000375	12		
0936	1 151	100 11	0.000	0.2 0.0 0.2 0 0	0.7 01	00 0 0 0	1 110	1222	0022	2306200	100003474	012714	17024500000	0000115	12		
0937	1 252	111 11	0.000	0.3 2.3 1.6 3 0	5.7 03	00 0 0 0	1 010	0000	0022	1107200	100003474	016313	17024500000	0000115	12		
0938	1 353	111 11	0.000	3.0 3.1 3.1 1 0	0.0 04	00 0 0 0	0 032	1122	0022	1108200	100003773	020912	00004400000	0000000	12		
0939	1 353	111 11	0.000	1.2 2.4 2.1 1 0	0.0 04	00 0 0 0	0 032	1122	0022	1107200	100003773	023411	00004400000	0000000	12		
0940	1 333	122 11	0.000	2.0 4.7 4.0 3 0	3.1 04	00 0 0 0	1 231	1111	1321	1105200	100003773	047607	00004400000	0006000	12		
0941	1 333	111 11	0.000	4.0 3.9 3.9 1 0	1.4 04	00 0 0 0	1 233	1111	1321	1205200	100003773	047508	00004400000	0000000	12		
0942	3 353	100 11	0.000	1.5 0.0 1.5 0 0	0.0 01	00 0 0 0	0 242	1111	0022	1203200	100003773	053307	00004400000	0000000	12		
0943	1 353	111 11	0.000	1.5 1.4 1.5 1 0	2.2 03	00 0 0 0	2 422	1111	0022	1108200	100003773	066212	00004400000	0000000	12		
0944	1 353	111 11	0.000	1.5 2.4 2.2 1 0	2.5 04	00 0 0 0	2 433	1111	0022	1206200	100003773	066212	00004400000	0000000	12		
0945	3 353	106 11	0.000	0.2 0.0 0.2 0 0	0.0 01	00 0 0 0	0 022	1111	0022	1203200	100003675	009301	28034500000	0000073	11		
0946	3 353	100 21	0.000	1.2 0.0 1.2 0 0	0.0 01	00 0 0 0	0 022	1111	0022	1305200	100003875	009301	28034500000	0000073	11		
0947	1 151	100 21	0.000	1.3 0.0 1.3 0 0	0.0 01	00 0 0 0	0 022	1111	0022	1108200	100003875	027904	28034500000	0000073	11		
0948	3 151	100 11	0.000	0.5 0.0 0.5 0 0	9.8 01	00 0 0 0	0 010	0000	0022	1305200	100003934	022604	08044500000	0200045	11		
0949	2 232	111 52	3.500	1.2 2.3 2.3 3 0	0.0 02	00 0 0 0	0 031	0000	0021	2308200	100003934	039502	09044500000	1370355	11		
0950	1 232	121 11	0.000	1.826.8.14.3 1 0	0.0 02	00 0 0 0	0 031	1121	1321	1305200	100003990	000805	12044500000	0000000	11		
0951	2 232	100 11	0.000	3.2 0.0 3.2 0 0	0.0 01	00 0 0 0	6 031	1121	1321	1305200	100003990	004303	12044500000	0000000	11		
0952	2 232	100 11	0.000	2.0 0.0 2.0 0 0	0.0 01	00 0 0 0	1 031	1111	1221	1306200	100003990	005303	12044500000	0000000	11		
0953	2 232	100 11	0.000	1.5 0.0 1.5 0 0	0.0 01	00 0 0 0	1 031	1111	1221	1308200	100003990	005303	12044500000	0000000	11		
0954	3 222	100 21	0.000	4.2 0.0 4.2 0 0	0.0 01	00 0 0 0	1 031	0000	1221	1103200	100003990	016709	12044500000	0000000	11		
0955	3 212	111 21	0.000	2.0 1.8 1.9 1 0	0.0 02	00 0 0 0	1 031	0000	1221	1305200	100003990	016208	12044500000	0000000	11		
0956	1 333	111 11	0.000	0.7 2.7 1.7 1 0	0.0 02	00 0 0 0	1 031	1111	1322	1103200	100007315	025900	00000000000	3060770	11		
0957	1 414	100 11	0.000	0.6 0.0 0.6 0 0	1.0 01	00 0 0 0	1 031	1111	1322	1203200	100007315	026007	00000000000	3060770	11		
0958	1 751	231 11	0.000	0.2 1.0 0.6 1 0	0.5 02	00 0 0 0	1 110	1122	0022	2204200	100004824	016604	00064500000	0000075	12		
0959	1 751	111 11	0.000	0.3 2.6 1.5 1 0	0.0 02	00 0 0 0	1 022	1112	0022	1204200	100004824	032014	00064500000	0000075	12		
0960	1 151	100 11	0.000	0.4 0.0 0.4 0 0	2.6 01	00 0 0 0	1 022	1112	0022	1104200	100004824	032413	00064500000	0000075	12		
0961	1 756	200 52	5.000	0.1 0.0 0.2 0 0	0.0 01	00 0 0 0	1 022	1122	0022	2205200	100004824	033610	00064500000	0000075	12		
0962	1 751	211 21	0.000	1.1 0.4 0.6 1 2	0.7 04	00 0 0 0	1 110	1112	0022	2106200	100004850	022711	21064500000	1840075	12		
0963	1 151	100 11	0.000	0.8 0.0 0.8 0 0	0.0 01	00 0 0 0	1 010	1112	1222	1106200	100004720	041309	01034500000	0000375	12		
0964	1 151	132 21	0.000	0.5 0.5 0.5 2 0	0.0 03	00 0 0 0	1 010	1112	1222	1108200	100004720	041309	01034500000	0000375	12		
0965	1 252	100 11	0.000	2.2 0.0 2.2 0 0	0.0 01	00 0 0 0	1 022	0000	0022	1206200	100004389	001310	16044500000	0000665	12		
0966	3 154	111 51	0.000	1.3 0.7 0.9 1 0	0.0 04	00 0 0 0	0 610	1121	0012	2108200	100004158	021412	28044500000	3510885	11		
0967	3 151	100 11	0.000	0.9 0.0 0.9 0 0	0.0 01	00 0 0 0	0 021	1221	0012	2109200	100004158	022212	28044500000	3510885	11		
0968	3 151	131 51	0.000	1.4 4.5 3.0 1 0	0.0 02	75 2 0 0	0 021	1221	0011	2108200	100004158	023410	28044500000	3510885	11		
0969	3 232	100 11	0.000	2.2 0.0 2.2 0 0	0.0 01	00 0 0 0	0 031	1111	0011	2108200	100004158	026506	28044500000	3510885	11		
0970	1 151	100 11	0.000	0.5 0.0 0.5 0 0	1.2 01	00 0 0 0	1 010	1112	1222	2306200	100002735	074307	17114400000	0000000	11		
0971	1 151	100 11	0.000	0.6 0.0 0.6 0 0	0.3 01	00 0 0 0	1 010	1112	1222	2206200	100002735	074307	17114400000	0000000	11		
0972	1 151	200 11	0.000	0.4 0.0 0.4 0 0	1.0 01	00 0 0 0	1 010	1122	1222	2206200	100002735	074804	17114400000	0000000	11		
0973	3 151	111 11	0.000	0.4 3.0 1.7 1 0	0.0 02	00 0 0 0	2 010	1121	1322	2207200	100002735	076409	17114400000	0000000	11		
0974	3 353	100 11	0.000	1.3 0.0 1.3 0 0	0.0 01	00 0 0 0	2 010	1122	1322	1208200	100003163	024511	22064500000	3030795	11		
0975	3 353	100 11	0.000	0.1 0.0 0.1 0 0	7.5 01	00 0 0 0	2 010	1121	1322	1305200	100003163	025700	22064500000	3030795	11		
0976	3 252	111 11	0.000	1.2 1.8 1.7 1 0	0.0 05	00 0 0 0	2 031	0000	1022	2308200	100003163	031815	22064500000	3030795	11		
0977	3 252	100 11	0.000	2.6 0.0 2.6 0 0	3.6 01	00 0 0 0	0 021	1111	0022	2109200	100003163	034700	22064500000	3030795	11		
0978	3 131	111 11	0.000	3.2 1.6 2.2 1 0	1.0 03	00 0 0 0	0 021	1121	0022	2108200	100003163	036402	22064500000	3030795	11		
0979	1 252	100 11	0.000	1.6 0.0 1.6 0 0	1.6 01	00 0 0 0	0 131	1111	0022	2203200	100003492	022304	13044500000	0000000	11		
0980	1 252	100 52	5.000	0.9 0.0 1.1 0 0	0.0 01	00 0 0 0	1 031	0000	1211	1106200	100003942	063004	10044500000	0000975	11		





## SMALL ARMS EFFECTIVENESS DATA

LSN 0	POS	AIM	RD/16	FIRE TIME	H C I TO	D T M	TRG	2ND	POSN	R M	OTHR	MSUM	O	A NO	REEL	FRAME	DATE	BN	B	REG	DIV	AO				
	FSP	M	A	T	1ST	SUB	ALL	H R	POS	PUL	FS	M	A	D	E	C	F	VZRN	AN	S						
1079	3	751	641	62	2.500	0.8	2.2	2.1	1	2	0.0	12	00	0	0	1	010	1122	1322	22062001	1000053528	015421	22076820015	0080019	14	
1080	3	751	200	62	5.000	1.4	0.0	1.7	0	0	0.0	01	00	0	0	2	010	1222	1322	21092001	1000052355	068130	05096720000	0000000	14	
1081	3	151	111	41	0.002	0.5	2.6	1.9	1	0	0.0	03	00	0	0	0	022	1111	0022	22042008	1000052355	070710	05096720000	0000000	14	
1082	3	151	100	41	0.002	5.5	0.0	5.5	0	0	0.0	01	00	0	0	0	022	1111	0022	22042007	1000052355	070710	05096720000	0000000	14	
1083	3	151	111	41	0.002	3.8	0.0	2.0	1	0	0.0	02	00	0	0	0	022	1111	0022	23042004	1000052355	070710	05096720000	0000000	14	
1084	3	454	100	31	0.000	2.6	0.0	2.6	0	0	0.0	01	00	0	0	1	010	1111	1322	21092001	1000052555	040307	31016800000	0000255	14	
1085	3	151	111	31	0.000	0.6	10.2	5.4	1	0	0.0	02	00	0	0	3	010	1122	1322	11072003	1000050478	017518	01106500025	0160015	14	
1086	3	151	111	62	5.000	0.0	1.0	0.5	1	0	0.0	02	00	0	0	0	032	1111	0022	11032002	1000050478	020433	01106500025	0160015	14	
1087	3	151	211	62	7.000	0.0	2.9	4.6	1	0	0.0	02	00	0	0	0	022	1111	0022	13032001	1000050478	021323	01106500025	0160015	14	
1088	3	151	211	62	7.000	0.0	2.9	1.5	1	0	0.0	02	00	0	0	0	022	1122	0022	12092001	1000056031	003605	21087000015	0610055	14	
1089	3	151	211	62	7.000	0.0	4.1	2.1	1	0	0.0	02	00	0	0	0	022	0000	0022	12102000	1000056031	003813	21067000015	0610055	14	
1090	3	151	211	41	0.002	0.0	1.0	0.5	1	1	1.1	02	00	0	0	1	010	1222	1222	12042006	1000056419	060909	15017120000	0000019	14	
1091	3	151	200	41	0.002	1.1	0.0	1.1	0	1	0.0	01	00	0	0	1	010	1222	1222	22122003	1000056419	061437	15017120000	0000019	14	
1092	3	751	611	62	4.700	0.0	1.0	1.5	1	0	0.0	03	00	0	0	3	022	1121	1322	21061002	1000055334	084520	01126900000	0000000	14	
1093	3	751	641	62	8.300	0.0	5.4	3.6	1	0	0.0	05	00	0	0	0	010	1122	0022	21042004	1000055334	096818	01126900000	0000000	14	
1094	3	751	611	62	3.400	0.1	0.5	0.4	1	0	0.0	04	00	0	0	1	110	1112	1222	21042002	2000004476	096818	01126900000	0000000	14	
1095	3	751	241	42	3.002	0.1	0.5	0.4	1	0	0.0	04	00	0	0	1	110	1112	1222	21042002	2000004476	096818	01126900000	0000000	14	
1096	3	751	200	42	6.002	0.0	0.0	0.4	0	0	0.0	04	00	0	0	1	110	1112	1222	21042002	2000004476	096818	01126900000	0000000	14	
1097	3	751	241	42	4.002	0.5	2.0	1.6	1	0	0.0	04	00	0	0	1	010	1112	1222	21052001	2000004476	012122	08056700000	0000030	24	
1098	3	151	141	41	0.002	0.6	0.3	0.4	1	0	0.0	04	00	0	0	1	010	1112	1222	21041001	2000004476	013800	08056700000	0000000	24	
1099	2	151	132	42	4.002	1.6	1.2	1.3	1	0	3.4	03	00	0	0	3	023	1222	1321	12071002	2000004476	014133	08056700000	0000000	24	
1100	3	751	100	62	4.000	6.5	0.0	7.0	0	0	0.0	01	00	0	0	0	022	1121	0022	21061002	2000004476	021108	08056700000	0000000	24	
1101	3	751	211	62	15.000	0.1	4.3	2.2	1	0	0.0	02	00	6	0	3	010	1112	1322	23062001	2000005747	003103	20116800000	0000000	24	
1102	3	751	211	62	7.500	0.0	2.8	1.4	1	0	0.0	02	00	6	0	3	010	1112	1322	13082001	2000005747	004315	20116800000	0000000	24	
1103																				23082001	2000005747	004605	20116800000	0000000	24	
1104																										
1105	3	151	111	41	0.002	0.0	1.6	1.2	1	2	0.0	04	00	0	0	1	010	1122	1222	21031004	2000006860	030337	18047000000	0000000	24	
1106	3	151	111	41	0.002	1.9	0.5	0.6	3	2	3.7	18	00	0	0	1	010	0900	1222	11032200	2000006861	027303	18047000000	0000000	24	
1107	3	151	111	41	0.002	3.8	2.6	3.2	1	2	0.0	02	00	0	0	1	010	0000	1222	11032000	2000006861	027917	16047000000	0000000	24	
1108	3	655	100	31	0.000	1.3	0.0	1.3	0	0	0.0	01	00	0	0	3	021	0000	1321	22052000	2000004003	010934	08066600015	0000000	24	
1109	3	151	111	62	4.500	1.2	1.5	1.5	1	0	0.0	04	00	0	0	0	022	1122	0022	13052001	2000004006	014414	10966600000	0000035	24	
1110	3	151	111	62	2.000	0.5	0.0	0.7	0	0	0.0	01	00	0	0	0	022	1122	0022	13052001	2000004006	014737	10066600000	0000035	24	
1111	3	151	111	62	2.000	0.5	0.0	0.5	0	0	0.0	01	00	0	0	1	010	0000	1122	11020000	2000004006	018133	10066600000	0000035	24	
1112	3	151	100	31	0.000	0.4	0.0	0.4	0	0	0.0	01	00	0	0	0	010	1122	0022	11020000	2000004006	018133	10066600000	0000035	24	
1113	3	151	200	31	0.000	2.0	0.0	2.0	0	0	0.0	01	00	0	0	0	010	1122	0022	11032003	2000004006	018133	10066600000	0000035	24	
1114	3	645	111	62	8.500	3.7	2.5	3.1	1	0	0.0	02	00	0	0	2	010	1112	1222	11032002	2000004006	019033	10066600000	0000035	24	
1115	3	343	100	62	5.000	0.0	0.0	0.3	0	0	0.0	01	00	0	0	0	022	0000	0022	23062001	2000004006	020834	10066600000	0000035	24	
1116	3	343	111	62	4.300	0.6	1.0	0.4	1	0	0.0	04	00	0	0	0	022	0000	0022	13082000	2000004013	035521	06076600015	0030000	24	
1117	3	712	211	31	0.000	0.5	1.0	0.7	1	0	0.0	02	00	0	0	0	021	0000	0022	13072000	2000004016	013422	10066600000	0000000	24	
1118	3	242	100	62	6.000	0.1	0.0	0.5	0	0	0.0	01	00	0	0	5	031	0000	1321	13072000	2000004016	016412	10066600000	0000000	24	
1119	3	242	111	62	5.000	0.0	1.6	0.8	1	0	0.0	02	00	0	0	5	031	0000	1321	13082000	2000004016	016505	10066600000	0000000	24	
1120	3	242	111	62	5.700	0.5	1.2	1.1	1	0	0.0	07	00	0	0	5	031	0000	1321	12092000	2000004016	016810	10066600000	0000000	24	
1121	3	111	111	31	0.000	0.9	2.1	1.7	1	0	0.0	03	00	0	0	0	010	1112	0022	11031002	2000004035	013314	00076600000	0000000	24	
1122	3	151	100	31	0.000	1.4	0.0	1.4	0	0	1.6	01	00	0	0	0	010	1112	0022	11031001	2000004035	013413	00076600000	0000000	24	
1123	3	151	100	31	0.000	1.8	0.0	1.8	0	0	2.5	01	00	0	0	0	010	1112	0022	11041003	2000004035	013434	00076600000	0000000	24	
1124	3	343	111	62	4.000	2.0	1.8	1.9	1	0	0.0	03	00	0	0	0	031	1121	0022	21062101	2000004037	025304	05096600000	0000000	24	
1125	3	343	100	62	5.000	2.9	0.0	3.5	0	0	0.0	01	00	0	0	0	031	1121	0022	11082101	2000004037	025722	05096600000	0000000	24	
1126	3	343	100	62	7.000	0.0	0.0	0.4	0	0	0.0	01	00	0	0	3	031	1121	1322	12072101	2000004037	026713	05096600000	0000000	24	
1127	3	131	100	42	4.002	3.5	0.0	3.8	0	0	0.0	01	00	0	0	2	031	1121	0021	12041003	2000005260	015123	14026800000	0000000	24	

SMALL ARMS EFFECTIVENESS DATA

LSN 0	POS AIM	RD/16	FIRE TIME	R D TIM	TRG 2ND POSN	R M	OTHR MSUM	Q	A NO	REEL	FRAME	DATE	BN B	DIV	L											
FSP M	A	BUR 9	T 1ST SUB ALL	C I TO	H R POS	E C	F VZBN	V R	R			R	R	B	MC											
1128	3	111	200	42	5.002	0.8	0.0	1.4	0	0	0	0	0	0	0	2	031	1111	1321	23042001	2000005260	015408	14026800000	0000000	0000000	24
1129	3	131	411	42	2.292	0.2	0.5	0.5	1	0	0	0	0	0	0	2	031	1111	1321	21061007	2000005260	015408	14026800000	0000000	0000000	24
1130	3	131	100	42	3.002	1.0	0.0	1.1	0	0	0	0	0	0	0	2	031	1111	1321	21071008	2000005260	015408	14026800000	0000000	0000000	24
1131	3	151	111	62	3.700	0.2	1.8	1.5	1	0	0	0	0	0	0	2	010	1112	1212	12061001	2000005260	016002	14026800000	0000000	0000000	24
1132	3	151	100	41	0.002	0.7	0.0	0.7	0	0	0	0	0	0	0	2	010	1112	1212	12081002	2000005260	016527	14026800000	0000000	0000000	24
1133	3	232	111	41	0.002	2.6	2.7	2.7	1	0	0	0	0	0	0	0	010	1121	0012	11091003	2000005260	023505	14026800000	0000000	0000000	24
1135	3	151	211	41	0.002	0.2	0.4	0.3	1	0	0	0	0	0	0	0	021	0000	0012	21091000	2000005260	027307	14026800000	0000000	0000000	24
1136	3	751	211	41	0.901	0.2	0.3	0.3	1	0	0	0	0	0	0	0	010	1111	0012	12091003	2000005260	028225	14026800000	0000000	0000000	24
1137	3	641	111	62	6.500	0.0	1.0	0.8	1	0	0	0	0	0	0	0	010	1111	0012	13091001	2000005260	028227	14026800000	0000000	0000000	24
1138	3	151	111	41	0.002	1.7	2.1	2.0	1	0	0	0	0	0	0	0	010	1112	0011	11021003	2000005260	028903	14026800000	0000000	0000000	24
1139	3	646	111	62	4.000	0.4	1.0	0.7	1	0	0	0	0	0	0	0	010	1112	0011	11021001	2000005260	028903	14026800000	0000000	0000000	24
1140	3	151	100	41	0.901	1.5	0.0	1.5	0	0	0	0	0	0	0	0	010	1112	0011	11021003	2000005260	029303	14026800000	0000000	0000000	24
1141	3	155	100	41	0.002	2.4	0.0	2.4	0	0	0	0	0	0	0	1	031	1121	0011	11081001	2000005274	011627	07026800000	0000000	0000000	24
1142	3	242	111	62	2.500	0.0	1.5	1.3	1	0	0	0	0	0	0	1	410	0000	2121	11071000	2000004365	031527	22126700000	0000000	0000000	24
1143	3	154	111	41	0.002	2.7	1.9	2.3	1	0	0	0	0	0	0	1	010	0000	2121	11071000	2000004365	032237	22126700000	0000000	0000000	24
1144	3	151	111	41	0.001	2.1	2.4	2.2	1	0	0	0	0	0	0	1	022	1121	1211	22071001	2000005216	016020	15026800000	0000000	0000000	24
1145	3	252	100	41	0.002	0.1	0.0	0.1	0	0	0	0	0	0	0	0	031	0000	0011	11071000	2000005216	017617	15026800000	0000000	0000000	24
1146	3	252	211	41	0.002	0.3	0.8	0.6	1	0	0	0	0	0	0	2	031	0000	0011	13081000	2000005216	026817	15026800000	0000000	0000000	24
1147	3	111	100	41	0.002	0.9	0.0	0.9	0	0	0	0	0	0	0	2	031	0000	0011	13071000	2000005216	027204	15026800000	0000000	0000000	24
1148	3	111	111	41	0.002	0.7	1.5	1.4	1	0	0	0	0	0	0	2	021	1122	0022	21071001	2000005235	024100	24036800000	0000000	0000000	24
1149	3	252	100	41	0.002	1.4	0.0	1.4	0	0	0	0	0	0	0	0	033	1121	0022	22081001	2000004410	010415	21036700000	0000000	0000000	24
1150	3	242	211	62	4.900	0.6	5.2	3.7	1	0	0	0	0	0	0	6	033	1121	0022	22071001	2000004410	011334	21036700000	0000000	0000000	24
1151	3	444	142	62	5.000	1.3	2.3	2.1	1	0	0	0	0	0	0	6	033	1121	0022	11091001	2000004410	012603	21036700000	0000000	0000000	24
1152	3	444	111	62	7.000	3.5	1.7	2.1	1	0	0	0	0	0	0	6	033	1121	0022	12061002	2000004410	014137	21036700000	0000000	0000000	24
1153	3	242	111	62	7.500	1.5	6.2	3.9	1	0	0	0	0	0	0	6	033	1111	0022	22032001	2000004805	001737	01036700000	0000000	0000000	24
1154	3	252	100	41	0.002	8.1	0.0	8.1	0	0	0	0	0	0	0	0	010	1111	0022	23102002	2000004805	001737	01036700000	0000000	0000000	24
1155	3	353	111	41	0.002	6.9	3.0	4.0	1	0	0	0	0	0	0	0	021	1111	0022	23102003	2000004805	001737	01036700000	0000000	0000000	24
1156	3	454	111	41	0.002	1.2	3.7	3.2	1	0	0	0	0	0	0	0	021	1111	0022	11092003	2000004805	002803	01036700000	0000000	0000000	24
1157	3	454	111	41	0.002	0.7	3.5	2.1	1	0	0	0	0	0	0	0	021	1111	0022	12092002	2000004805	002803	01036700000	0000000	0000000	24
1158	3	353	100	41	0.002	2.9	0.0	2.9	0	0	0	0	0	0	0	0	031	1111	0022	23062001	2000004805	002803	01036700000	0000000	0000000	24
1159	3	252	111	41	0.002	1.5	4.6	3.0	1	0	0	0	0	0	0	5	010	0000	0022	13062000	2000004805	003137	01036700000	0000000	0000000	24
1160	3	353	100	41	0.002	0.5	3.6	2.6	1	0	0	0	0	0	0	3	010	0000	1222	13062000	2000004805	003504	01036700000	0000000	0000000	24
1161	3	353	111	41	0.002	0.5	3.6	2.6	1	0	0	0	0	0	0	0	021	1122	0022	13032001	2000004805	004037	01036700000	0000000	0000000	24
1162	3	454	111	41	0.002	1.0	4.2	3.1	1	0	0	0	0	0	0	0	032	1121	0022	13102002	2000004805	004037	01036700000	0000000	0000000	24
1163	3	343	121	62	7.000	0.4	6.2	3.3	1	0	0	0	0	0	0	0	010	1111	0022	23071002	2000004421	037528	21026700000	0000000	0000000	24
1164	3	353	111	31	0.000	0.2	2.0	1.4	1	0	0	0	0	0	0	0	022	1111	0022	13042001	2000004421	037917	21026700015	0090000	0090000	24
1165	3	252	111	31	0.000	0.4	1.9	1.6	1	0	0	0	0	0	0	0	022	1111	0022	12092002	2000004421	039426	21026700015	0090000	0090000	24
1166	3	555	131	31	0.000	2.2	9.6	5.9	1	0	0	0	0	0	0	0	022	1111	0022	11092002	2000004421	039426	21026700015	0090000	0090000	24
1167	3	353	100	31	0.000	2.5	0.0	2.5	0	0	0	0	0	0	0	0	022	1111	0022	21091007	2000004421	039426	21026700015	0090000	0090000	24
1168	3	454	111	31	0.000	0.5	1.8	1.5	1	0	0	0	0	0	0	0	022	1111	0022	23042005	2000004421	000408	24056700000	0000000	0000000	24
1169	3	252	100	31	0.000	2.2	0.0	2.2	0	0	0	0	0	0	0	0	022	1111	0022	13032003	2000004420	000408	24056700000	0000000	0000000	24
1170	3	252	111	41	0.002	0.1	0.3	0.3	1	0	0	0	0	0	0	0	021	1111	0022	13032003	2000004420	000408	24056700000	0000000	0000000	24
1171	3	242	111	62	6.700	0.4	1.0	0.8	1	0	0	0	0	0	0	0	021	1111	0022	12092003	2000004420	000408	24056700000	0000000	0000000	24
1172	3	242	111	62	2.500	0.6	0.4	0.4	1	0	0	0	0	0	0	4	021	1121	0022	13022001	2000004420	001604	24056700000	0000000	0000000	24
1173	3	242	111	62	4.800	2.2	1.6	1.6	1	0	0	0	0	0	0	0	021	1111	0022	13072000	2000004420	002813	24056700000	0000000	0000000	24
1174	3	713	200	41	0.002	0.2	0.0	0.2	0	0	0	0	0	0	0	0	031	1111	0022	21032002	2000004420	005428	24056700000	0000000	0000000	24
1175	3	750	211	41	0.002	1.9	1.5	1.7	1	0	0	0	0	0	0	0	031	1111	0022	23032001	2000004420	005327	24056700000	0000000	0000000	24
1176	3	222	111	41	0.002	1.1	1.9	1.6	1	0	0	0	0	0	0	2	031	1121	1322	23042001	2000005420	028339	24056700000	0000000	0000000	24



## SMALL ARMS EFFECTIVENESS DATA

LSN	POS	AIM	RD/16	FIRE TIME	R D TIM	TRG 2ND	POSN	R M	OTHR	MSUM	O	A NO	REEL	FRAME	DATE	BN B	R H	REG	B MC	
	FSP	M	A	T	1ST	SUB	ALL	H R	POS	PUL	FS	M A	D	E	C	F	VZRN	AN S		
1224	3	454	100	41	0.002	1.9	0.0	1.9	0.0	0.0	0.1	00	0	0	0	0	0	0	0	0
1227																				
1228	1	252	111	31	0.000	0.3	0.3	0.3	1.0	0.0	0.3	00	0	0	0	0	0	0	0	0
1229	3	343	100	62	4.000	4.7	0.0	5.1	0.0	0.0	0.1	00	0	0	0	0	0	0	0	0
1230	1	454	100	31	0.000	1.6	0.0	1.6	0.0	0.0	0.1	00	0	0	0	0	0	0	0	0
1231	1	751	211	42	2.302	0.0	0.7	0.5	1.0	0.0	0.3	00	0	0	0	0	0	0	0	0
1232	3	151	111	31	0.000	2.5	1.3	1.5	1.2	0.0	0.5	00	0	0	0	0	0	0	0	0
1233	3	454	100	41	0.002	1.1	0.0	1.7	0.1	0.0	0.3	00	0	0	0	0	0	0	0	0
1234	3	253	111	31	0.000	1.0	0.4	0.6	1.1	6.2	0.3	00	0	0	0	0	0	0	0	0
1235																				
1236	3	452	132	41	0.002	0.0	4.5	3.4	3.0	0.0	0.4	00	0	0	0	0	0	0	0	0
1237	1	151	111	41	0.002	0.4	0.4	0.4	1.0	0.0	0.4	00	0	0	0	0	0	0	0	0
1238	3	131	411	62	6.200	0.5	2.6	2.3	1.0	0.0	0.8	00	0	0	0	0	0	0	0	0
1239	3	353	100	61	0.000	3.5	0.0	3.5	0.0	0.0	0.1	00	0	0	0	0	0	0	0	0
1240	3	353	411	62	3.200	0.0	0.6	0.4	1.0	0.0	0.3	00	0	0	0	0	0	0	0	0
1241	3	141	611	62	5.400	0.0	1.2	1.0	1.0	0.0	0.7	00	0	0	0	0	0	0	0	0
1242	3	131	611	62	2.400	0.9	1.1	1.1	1.0	0.0	0.0	00	0	0	0	0	0	0	0	0
1243	3	232	611	62	3.200	0.2	1.1	0.8	1.0	0.0	0.3	00	0	0	0	0	0	0	0	0
1244	3	232	611	62	3.200	0.0	1.2	1.0	1.0	0.0	0.6	00	0	0	0	0	0	0	0	0
1245	3	212	111	31	0.000	0.4	0.4	0.5	1.0	0.0	0.6	00	0	0	0	0	0	0	0	0
1246	3	212	132	31	0.000	0.1	0.3	0.3	2.0	0.0	0.8	00	0	0	0	0	0	0	0	0
1247	3	555	111	41	0.002	2.7	1.2	1.7	1.0	1.7	0.3	00	0	0	0	0	0	0	0	0
1248	3	252	111	41	0.002	2.2	1.7	1.8	1.0	2.4	0.9	00	0	0	0	0	0	0	0	0
1249	3	252	111	41	0.002	1.0	1.9	1.7	1.0	0.0	0.5	00	0	0	0	0	0	0	0	0
1250	3	357	111	41	0.002	0.0	0.5	0.4	1.0	0.0	0.9	00	0	0	0	0	0	0	0	0
1251	3	454	111	41	0.002	0.8	0.5	0.5	1.0	0.0	0.17	00	0	0	0	0	0	0	0	0
1252	3	343	111	62	6.100	0.6	1.7	1.6	1.0	0.0	0.9	00	4	0	0	0	0	0	0	0
1253	3	347	111	62	5.500	5.8	1.4	2.1	1.2	1.1	0.6	00	0	0	0	0	0	0	0	0
1254	3	111	111	41	0.002	0.8	1.1	1.0	1.0	0.0	0.9	00	0	0	0	0	0	0	0	0
1255	3	131	132	41	0.002	2.1	1.9	1.9	1.0	0.0	0.15	00	0	0	0	0	0	0	0	0
1256	3	131	111	41	0.002	0.3	1.8	1.5	3.0	0.0	0.3	00	0	0	0	0	0	0	0	0
1257	3	131	111	41	0.002	1.1	2.7	2.4	1.0	0.0	0.5	00	4	0	0	0	0	0	0	0
1259	3	111	100	42	9.012	1.6	0.0	3.2	0.0	0.6	0.1	00	0	0	0	0	0	0	0	0
1260	3	131	111	41	0.001	5.9	0.5	1.4	1.0	3.6	0.5	00	0	0	0	0	0	0	0	0
1261	3	131	100	41	0.002	1.4	0.0	1.8	0.0	2.0	0.1	00	0	0	0	0	0	0	0	0
1262	3	414	122	41	1.812	1.4	0.0	0.7	0.3	0.9	0.9	00	0	0	0	0	0	0	0	0
1263	3	414	111	41	0.002	5.5	6.0	5.7	1.0	5.4	0.2	00	0	0	0	0	0	0	0	0
1264	3	131	100	41	0.002	4.2	0.0	4.2	0.0	12.6	0.1	00	0	0	0	0	0	0	0	0
1265	3	751	242	41	2.502	0.2	1.2	1.1	3.0	7.5	0.7	00	6	2	0	0	0	0	0	0
1266	3	751	242	41	2.502	1.0	1.1	1.1	3.0	7.5	0.7	00	6	2	0	0	0	0	0	0
1267	3	751	200	41	0.002	0.0	0.0	0.0	0.0	0.5	0.1	00	0	0	0	0	0	0	0	0
1268	3	141	111	62	5.000	0.0	2.2	1.7	1.0	0.0	0.4	00	0	0	0	0	0	0	0	0
1269	3	141	111	62	6.800	0.0	3.3	2.5	1.0	0.0	0.4	00	0	0	0	0	0	0	0	0
1270	3	141	111	62	8.500	0.0	3.4	2.6	1.0	0.0	0.4	00	0	0	0	0	0	0	0	0
1271	3	141	111	62	10.500	0.0	3.6	1.8	1.0	0.0	0.2	00	0	0	0	0	0	0	0	0
1272	3	252	100	41	0.002	2.3	0.0	2.3	0.0	0.0	0.1	00	0	0	0	0	0	0	0	0
1273	1	752	642	62	10.4500	0.0	3.0	2.2	2.0	0.7	0.4	00	0	0	0	0	0	0	0	0
1274	1	151	211	41	0.002	0.3	2.2	1.6	1.0	0.0	0.3	00	1	0	0	0	0	0	0	0

## SMALL ARMS EFFECTIVENESS DATA

LSN 0	PUS	ATH	RD/16	FIRE	R D	TRG	2ND	POSN	R M	OTHR	MSUM	Q	A	NO	WEEL	FRAME	DATE	BN	B	REG	DIV	L		
FSP	M	A	BUR	R	C	I	T	TO	E	C	U	V	R	R	R	R					B	MC		
M				ALL	H	R	POS	M A D	E	F	VZRN	AN S												
1275	3	111	100	41	0.002	1.9	0.0	0	0	1.7	01	00	0	0	0	1.31	1221	0021	22051001	2000005701	020633	130368000000	0000035	24
1276	3	111	100	41	0.002	2.8	0.0	2.8	0	0.0	01	00	0	0	0	0.31	0000	0021	11041000	2000005701	021026	130368000000	0000035	24
1277	3	131	100	31	0.000	2.2	0.0	2.2	0	0.0	01	00	0	0	0	0.31	1121	0021	11091001	2000005504	026304	000268000000	0000000	24
1278	3	131	100	31	0.000	0.8	0.0	0.8	0	0.0	01	00	0	0	0	0.31	0000	0021	13091000	2000005504	026533	000268000000	0000000	24
1279	3	131	100	31	0.000	3.2	0.0	3.2	0	0.0	01	00	0	0	0	0.31	0000	0021	13081000	2000005504	024038	000268000000	0000000	24
1280	3	252	111	41	0.002	0.5	0.5	1.0	0	0.0	06	00	4	0	0	0.10	0000	0012	13081000	2000005544	040503	180968000025	0070015	24
1281	1	752	600	62	4.000	1.1	0.0	1.4	0	0.0	01	00	0	0	0	0.32	1122	1322	13091001	2000005544	040837	180968000025	0070015	24
1282	3	454	111	41	0.002	0.8	1.5	1.4	0	0.0	09	00	0	0	0	0.32	1111	0022	13081003	2000005544	041027	180968000025	0070015	24
1283	3	252	111	41	0.002	3.5	1.2	1.5	1	0.0	09	00	0	0	0	0.22	1111	0022	13091004	2000005544	041027	180968000025	0070015	24
1284	3	252	111	41	0.002	1.2	0.7	0.8	1	0.0	12	00	0	0	0	0.32	1111	0022	13091004	2000005544	041830	180968000025	0070015	24
1285	3	454	132	41	0.002	0.5	1.3	1.2	1	0.0	07	00	2	0	0	0.10	1111	0022	13081003	2000005544	041830	180968000025	0070015	24
1286	3	752	642	62	5.200	1.4	2.0	1.9	1	0.0	05	20	0	0	0	0.10	1111	0022	23081004	2000005544	043004	180968000025	0070015	24
1287	3	252	111	62	4.700	0.0	1.4	1.0	0	0.0	03	00	0	0	0	0.10	0000	0022	13091000	2000005544	043534	180968000025	0070015	24
1288	3	252	611	62	4.800	0.6	1.1	1.0	0	0.0	05	00	0	0	0	0.22	1121	0022	22031002	2000005544	044303	180968000025	0070015	24
1289	3	151	111	41	0.002	0.5	1.0	0.8	1	0.0	02	00	0	0	0	0.31	0000	0011	12091000	2000006364	004928	000068000000	0000000	24
1290	1	252	600	626	6.000	0.0	0.0	2.8	0	0.0	01	00	0	0	0	0.10	0000	1322	12051000	2000006686	031117	200570000025	0050015	24
1291																								
1292	3	353	111	11	0.000	11.7	2.5	7.1	1	0.0	02	00	0	0	0	3.031	0000	0022	13062000	2000002523	000001	080645000000	0290065	22
1293	1	333	100	11	0.000	0.0	0.0	0.0	0	0.0	01	00	0	0	0	0.31	0000	0022	11062100	2000002523	015471	080645000000	0290065	22
1294	1	151	100	52	4.000	0.3	0.0	0.8	0	0.0	01	00	0	0	0	0.10	1112	0022	12032002	2000002523	019220	080645000000	0290065	22
1295	1	151	111	11	0.000	2.0	2.0	2.0	1	11.9	02	00	0	0	0	0.10	1122	0022	12032002	2000002523	019926	080645000000	0290065	22
1296	1	212	160	11	0.000	3.2	0.0	3.2	0	0.0	01	00	0	0	0	0.31	0000	0022	12092000	2000002523	022805	080645000000	0290065	22
1297																								
1298																								
1299																								
1300	1	151	411	41	0.002	0.2	1.4	1.0	1	0.0	03	00	0	0	0	0.22	1121	0022	12031002	2000005792	007919	231168000025	0070015	24
1301	3	151	132	41	0.002	0.5	2.8	2.5	1	0.0	07	00	0	0	0	0.22	0000	0022	12031000	2000005792	008626	231168000025	0070015	24
1302	1	751	200	41	0.002	0.0	0.0	0.0	0	0.6	01	00	0	0	0	1.122	0000	1222	12071000	2000005792	010118	231168000025	0070015	24
1303	1	151	111	62	5.100	0.1	1.1	0.9	1	0.0	07	00	0	0	0	1.022	1121	1322	22031002	2000005792	010203	231168000025	0070015	24
1304	3	751	241	41	0.002	2.4	2.5	2.5	1	0.0	03	00	0	0	0	2.010	1122	0022	21041004	2000005792	011212	231168000025	0070015	24
1305	3	151	400	62	7.000	0.2	0.0	1.0	0	0.0	01	00	0	0	0	1.010	0000	1322	13061000	2000005792	012602	231168000025	0070015	24
1306	3	752	211	41	0.002	0.9	0.9	0.9	1	0.0	02	00	0	0	0	0.22	1111	0022	23081002	2000005792	014023	231168000025	0070015	24
1307	3	252	111	62	4.760	0.0	1.2	0.8	1	0.0	03	00	0	0	0	2.010	0000	0022	23041003	2000005792	015007	231168000025	0070015	24
1308	1	252	100	31	0.000	0.2	0.0	0.2	0	0.0	01	00	0	0	0	2.010	1122	0022	11081000	2000004409	022235	210367000000	0000015	24
1309	1	252	100	31	0.000	0.2	0.0	0.2	0	0.0	01	00	0	0	0	2.010	1122	0022	21051003	2000004409	022709	210367000000	0000015	24
1310	3	252	100	31	0.000	1.9	0.0	1.9	0	0.0	01	00	0	0	0	2.010	1122	0022	21051003	2000004409	022709	210367000000	0000015	24
1311	3	252	111	31	0.000	4.1	3.2	3.5	1	0.0	03	00	0	0	0	2.010	1112	1222	21061005	2000004409	023301	210367000000	0000015	24
1312	1	731	600	6215	0.000	0.4	0.0	2.2	0	2.4	01	00	0	0	0	3.031	0000	0022	12051100	2000004409	035832	210367000000	0000015	24
1313	3	353	111	31	0.000	1.2	3.8	3.2	1	0.0	04	00	0	0	0	0.10	1111	0022	23031001	2000004409	036300	210367000000	0000015	24
1314	3	252	100	31	0.000	1.0	0.0	1.0	0	10.9	01	00	0	0	0	0.31	1111	0022	23031001	2000004409	036912	210367000000	0000015	24
1315	3	353	111	31	0.000	1.1	0.9	0.9	1	0.2	03	00	0	0	0	0.31	1111	0022	21031004	2000004409	037110	210367000000	0000015	24
1316	3	252	411	31	0.000	0.6	0.9	0.8	1	0.0	05	00	0	0	0	0.21	1111	0022	22031002	2000004409	037104	210367000000	0000015	24
1317	3	333	111	31	0.000	0.6	1.2	0.9	1	0.0	02	00	0	0	0	0.31	1111	0022	23031001	2000004409	037104	210367000000	0000015	24
1318	3	454	100	41	0.002	0.3	0.0	0.3	0	0.0	01	00	0	0	0	0.21	1112	0022	12041003	2000005858	000817	070369000015	0050015	24
1319	3	343	111	62	4.500	0.4	1.4	1.1	1	0.0	04	00	0	0	0	0.21	1111	0022	13041002	2000005858	000817	070369000015	0050015	24
1320	1	151	111	41	0.002	1.0	0.0	0.6	1	0.0	03	00	0	0	0	1.033	1111	0022	21051002	2000005860	025705	140369000035	0010015	24
1321	1	151	141	41	0.002	0.3	3.6	2.5	1	2	0.0	03	00	0	0	0.22	1121	0022	22041002	2000005860	026300	140369000035	0010015	24
1322	1	751	242	11	0.000	0.0	2.4	1.9	1	0.0	05	10	1	0	0	0.110	1122	0022	11112004	2000000500	015716	150644000000	0000045	22
1323	1	251	141	11	0.000	2.7	1.2	2.0	1	0	0.0	12	2	0	0	0.010	1111	0022	21032001	2000000500	016013	150644000000	0000045	22

## SMALL ARMS EFFECTIVENESS DATA

LSN	POS	AIM	RD/16	FIRE	TIME	H D	I TC	TRG	2ND	POSN	R M	OTHM	MSUM	Q	A NO	REEL	FRAME	DATE	BN B	R	REG	DIV	AG	L		
																									FSP	M
1324	1	151	100	11	0.000	4.7	0.0	4.7	0.1	0.0	0.1	0.0	1111	0022	21022002	2000000500	017737	15064400000	00000045	22						
1325	1	151	111	11	0.000	0.5	0.8	0.7	1.2	0.0	0.4	0.0	0000	1222	21062000	2000000501	027832	15064500000	00000000	22						
1326	1	151	200	11	0.000	0.0	0.0	0.0	0.0	0.6	0.1	0.0	0000	0022	21072000	2000000519	000709	07064400000	00000045	22						
1327	1	151	200	21	0.000	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0000	1222	21082000	2000000519	000735	07064400000	00000045	22						
1328	1	151	100	11	0.000	0.2	0.0	0.2	0.0	0.0	0.1	0.0	0000	0022	21072000	2000000519	000823	07064400000	00000045	22						
1329	1	151	200	11	0.000	0.1	0.0	0.1	0.0	0.0	0.1	0.0	0000	0022	21082000	2000000519	000910	07064400000	00000045	22						
1330	1	151	131	11	0.000	0.1	1.0	0.6	1.0	0.0	0.2	0.0	1112	0022	11092002	2000000519	001100	07064400000	00000045	22						
1331	1	151	100	11	0.000	0.7	0.0	0.7	0.0	0.0	0.1	0.0	1112	0022	21032001	2000000525	022126	02074400000	00000045	22						
1332	1	151	100	11	0.000	0.2	0.0	0.2	0.0	0.0	0.1	0.0	1122	0022	11032001	2000000525	022417	02074400000	00000045	22						
1333	1	151	100	11	0.000	1.5	0.0	1.5	0.0	0.0	0.1	0.0	0000	1322	23062000	2000000526	019004	07074400000	00000045	22						
1334	1	151	100	11	0.000	0.2	0.0	0.2	0.0	19.5	0.1	0.0	031	1111	0022	12092204	2000000526	024232	05074400000	00000045	22					
1335	1	151	100	11	0.000	0.4	0.0	0.4	0.0	0.0	0.1	0.0	031	1121	0022	13092204	2000000526	024232	05074400000	00000045	22					
1336	1	151	100	11	0.000	2.7	0.0	2.7	0.0	0.0	0.1	0.0	031	0000	0022	12032000	2000000525	027633	05074400000	00000045	22					
1337	1	151	232	11	0.000	0.0	0.8	0.5	3.1	0.3	0.3	0.0	122	1121	0022	23052002	2000000556	015634	04084400000	00000045	22					
1338	1	151	200	52	4.000	0.6	1.4	1.1	1.0	0.0	0.3	0.0	031	1122	0022	23032002	2000000556	013101	04084400000	00000045	22					
1339	1	151	100	11	0.000	2.5	0.0	2.5	0.0	3.5	0.1	0.0	010	0000	0022	12092000	2000000556	013101	04084400000	00000045	22					
1340	1	151	100	11	0.000	0.9	0.0	0.9	0.2	0.0	0.1	0.0	1021	0000	0022	23062001	2000000556	011836	02034500000	00000000	22					
1341	1	151	100	11	0.000	0.0	0.0	0.0	0.0	0.0	0.1	0.0	021	0000	0022	21052000	2000000613	002423	05034500000	00000000	22					
1342	1	151	200	51	0.000	0.0	0.0	0.0	0.0	0.0	0.1	0.0	021	0000	0022	21052000	2000000613	002423	05034500000	00000000	22					
1343	1	151	200	51	0.000	0.0	0.0	0.0	0.0	0.0	0.1	0.0	021	0000	0022	23042000	2000000613	002703	05034500000	00000000	22					
1344	1	151	141	52	2.500	0.6	1.7	1.3	1.2	0.3	0.3	0.0	031	0000	0022	23062100	2000000660	010617	02034500000	00000000	22					
1345	1	151	100	11	0.000	0.0	0.0	0.0	0.0	0.0	0.1	0.0	031	0000	0022	21032102	2000000677	003033	00034500000	00000000	22					
1346	1	151	100	11	0.000	0.1	0.0	0.1	0.0	0.0	0.1	0.0	1110	1122	1222	23062100	2000000677	003033	00034500000	00000000	22					
1347	1	151	100	11	0.000	1.0	0.0	1.0	0.0	6.1	0.1	0.0	1010	1112	0022	23062001	2000000677	007123	00034500000	00000000	22					
1348	1	151	132	11	0.000	3.1	0.0	3.1	0.2	0.0	0.1	0.0	022	1121	0022	23012004	2000000677	012032	00034500000	00000000	22					
1349	1	151	100	11	0.000	1.2	3.3	2.3	1.0	0.0	0.2	0.0	010	1122	0022	11042002	2000002428	004319	00034500000	00000065	22					
1350	1	151	100	11	0.000	2.9	0.0	2.9	0.0	0.0	0.1	0.0	032	0000	0022	13022000	2000002428	009728	00034500000	00000065	22					
1351	1	151	100	11	0.000	0.4	3.5	1.9	1.0	0.0	0.2	0.0	010	0000	0022	23062100	2000002428	007314	00034500000	00000065	22					
1352	1	151	100	11	0.000	1.8	0.0	1.8	0.0	0.0	0.1	0.0	010	0000	0022	23062100	2000002428	008824	00034500000	00000065	22					
1353	1	151	100	11	0.000	1.6	3.1	2.4	1.0	0.0	0.2	0.0	010	0000	0022	12062000	2000002428	009728	00034500000	00000065	22					
1354	1	151	100	11	0.000	0.5	2.1	1.3	1.0	0.0	0.2	0.0	021	0000	0022	12052000	2000002428	010232	00034500000	00000065	22					
1355	1	151	100	11	0.000	1.3	6.5	3.9	1.0	0.0	0.2	0.0	010	1112	0022	11082001	2000002428	010232	00034500000	00000065	22					
1356	1	151	100	11	0.000	0.1	0.0	0.1	0.0	0.0	0.1	0.0	010	1112	0022	13082002	2000002428	010232	00034500000	00000065	22					
1357	1	151	100	11	0.000	11.0	0.0	0.0	0.0	0.0	0.1	0.0	032	1121	0022	11092002	2000002428	010735	00034500000	00000065	22					
1358	1	151	100	11	0.000	4.0	0.0	4.0	0.0	0.0	0.1	0.0	032	1121	0022	11062002	2000002428	011511	00034500000	00000065	22					
1359	1	151	100	11	0.000	1.0	2.9	1.4	2.0	0.0	0.2	0.0	010	1122	1222	11072002	2000002428	011939	00034500000	00000065	22					
1360	1	151	100	11	0.000	2.6	1.5	2.0	1.0	0.0	0.2	0.0	032	1111	0022	22042002	2000002428	012636	00034500000	00000065	22					
1361	1	151	100	11	0.000	0.2	1.6	1.1	1.0	0.0	0.3	0.0	032	1111	0022	22042001	2000002428	013939	00034500000	00000065	22					
1362	1	151	100	11	0.000	1.4	2.2	2.0	1.0	0.0	0.3	0.0	010	0000	1322	23052000	2000002428	014522	00034500000	00000065	22					
1363	1	151	100	11	0.000	1.1	0.0	1.1	0.0	0.0	0.1	0.0	010	0000	0022	23052000	2000002428	014916	00034500000	00000065	22					
1364	1	151	100	11	0.000	1.1	0.0	1.1	0.0	0.0	0.1	0.0	010	1122	0022	13032001	2000002428	015027	00034500000	00000065	22					
1365	1	151	100	11	0.000	0.3	0.0	0.3	0.0	0.0	0.1	0.0	010	1112	0022	23072001	2000002428	015217	00034500000	00000065	22					
1366	1	151	100	11	0.000	1.1	1.7	1.5	1.0	0.0	0.3	0.0	010	1112	0022	23072002	2000002428	015217	00034500000	00000065	22					
1367	1	151	100	11	0.000	1.4	1.5	1.6	1.0	0.0	0.3	0.0	010	1112	0022	23072003	2000002428	015217	00034500000	00000065	22					
1368	1	151	100	11	0.000	2.4	0.0	2.4	0.0	0.0	0.1	0.0	010	1112	0022	23072005	2000002428	015217	00034500000	00000065	22					

SMALL ARMS EFFECTIVENESS DATA

LSN 0	POS AIM	RDY 16	FIRE TIME	R Q TIM	TRG 2ND	POSN	R M	OTHR	MSUM	O	A NO	REEL	FRAME	DATE	BN B	DIV	AO											
	FSP M	A	T	IST	SUB	ALL	H R	POS	C I	TO	HR	POS	PUL	FS	M	A	D	E	C	F	VZHN	AN S	V R	AN S	R	REG	B	MC
1373	1	454	131	11	0.000	1.1	4.5	2.8	1	0	7.2	02	00	6	0	0	0	0	0.33	1121	0022	13072003	2000002429	003323	12054500035	0290000	22	
1374	3	454	111	11	0.000	1.8	2.5	2.0	1	0	0.0	02	00	0	0	0	0	0	0.31	0000	0022	11062000	2000002429	003726	12054500035	0290000	22	
1375	3	454	111	11	0.000	0.3	2.9	1.6	1	0	0.0	02	00	0	0	0	0	0	0.31	1121	0022	13052001	2000001198	010820	04104400035	0050000	22	
1376	3	454	111	11	0.000	0.2	3.7	2.5	1	0	0.0	03	00	0	0	0	0	0	0.31	1111	0022	11042001	2000001198	011130	04104400035	0050000	22	
1377	3	454	100	21	0.000	7.0	0.0	7.0	0	0	0.0	01	00	0	0	0	0	0	0.31	1111	0022	11052102	2000001198	011130	04104400035	0050000	22	
1378	3	232	100	11	0.000	1.5	0.0	1.5	0	0	0.0	01	00	0	0	0	0	0	0.31	1111	0022	13032001	2000001198	011630	04104400035	0050000	22	
1379	3	252	111	11	0.000	0.4	1.1	0.9	1	0	0.0	04	00	0	0	0	0	0	0.31	0000	0022	13062000	2000001198	011907	04104400035	0050000	22	
1380	3	151	111	11	0.000	0.9	2.7	2.1	1	0	0.0	03	00	0	0	0	0	0	0.33	1121	0022	21032101	2000000719	002121	25094400000	0000000	22	
1381	1	151	100	11	0.000	4.8	0.0	2.8	0	2	1.3	01	00	0	0	0	0	0	0.33	1121	0022	12022001	2000000067	003413	16094400000	0000015	22	
1382	3	151	100	11	0.000	0.6	0.0	0.6	0	2	0.0	01	00	0	0	0	0	0	0.10	1122	1222	23032004	2000000234	000702	17094400000	0000000	22	
1383	1	252	100	52	0.000	2.4	0.0	2.4	0	0	5.3	01	00	0	0	0	0	0	0.31	1121	1221	23062002	2000000226	003708	15074400000	0000015	22	
1384	3	434	100	11	0.000	2.6	0.0	2.6	0	0	0.0	01	00	0	0	0	0	0	0.31	1121	1221	23062002	2000000226	005220	15074400000	0000015	22	
1385	3	434	100	11	0.000	2.0	0.0	2.0	0	0	0.0	01	00	0	0	0	0	0	0.31	1111	0022	11052102	2000000200	019420	04104400035	0050000	22	
1386	3	333	100	52	2.000	1.8	0.0	1.9	0	0	0.0	01	00	0	0	0	0	0	0.31	1121	0022	22042103	2000000200	020310	04104400035	0050000	22	
1387	1	353	100	11	0.000	0.1	0.0	0.1	0	0	0.0	01	00	0	0	0	0	0	0.10	1112	0022	21042001	20000003461	024533	00000000000	0000000	22	
1388	3	252	111	11	0.000	0.8	0.3	0.5	1	0	4.9	02	00	0	0	0	0	0	0.10	1112	0022	23042004	20000003461	024533	00000000000	0000000	22	
1389	3	252	111	11	0.000	0.1	0.7	0.6	1	2	0.0	06	00	0	0	0	0	0	0.10	1112	0022	23042004	20000003461	024533	00000000000	0000000	22	
1390	3	454	100	52	2.000	0.0	0.0	0.1	1	0	0.0	01	00	0	0	0	0	0	0.10	0000	1122	23042004	20000003461	037322	00000000000	0000000	22	
1391	3	151	111	11	0.000	0.3	1.1	0.9	1	0	0.0	05	00	0	0	0	0	0	0.21	0000	0022	23062000	2000001526	008122	06054500000	0000065	22	
1392	1	131	100	11	0.000	2.1	0.0	2.1	0	0	0.0	01	00	0	0	0	0	0	0.31	1112	1322	13052001	2000000085	33305	26094400015	0050000	22	
1393	1	151	100	11	0.000	0.4	0.0	0.4	0	0	0.0	01	00	0	0	0	0	0	0.10	1111	0022	21032001	2000000085	03360	26094400015	0050000	22	
1394	3	555	100	11	0.000	0.2	0.0	0.2	0	0	0.0	01	00	0	0	0	0	0	0.10	1111	0022	21052002	2000000085	03360	26094400015	0050000	22	
1395	3	151	100	11	0.000	0.7	0.0	0.7	0	0	0.0	01	00	0	0	0	0	0	0.10	1111	0022	11062001	2000000085	034928	26094400015	0050000	22	
1396	3	151	100	11	0.000	1.2	0.0	1.2	0	0	0.0	01	00	0	0	0	0	0	0.10	1111	0022	23042002	2000000044	036017	16084400000	0000000	22	
1397	3	151	100	11	0.000	0.7	0.0	0.7	0	0	0.0	01	00	0	0	0	0	0	0.10	1111	0022	23042002	2000000044	036017	16084400000	0000000	22	
1398	3	151	100	11	0.000	2.7	0.0	2.7	0	0	0.2	01	00	0	0	0	0	0	0.10	1111	0022	23042003	2000000044	036304	16084400000	0000000	22	
1399	3	151	131	52	2.000	1.4	3.2	2.5	1	0	0.0	02	00	0	0	0	0	0	0.10	1121	0022	23032001	2000000044	036309	16084400000	0000000	22	
1400	3	252	100	52	4.000	1.6	0.0	1.9	0	0	0.0	01	00	0	0	0	0	0	0.33	0000	0022	23052003	2000000044	036929	16084400000	0000000	22	
1401	3	232	411	52	5.000	0.0	2.9	1.5	1	0	0.0	02	00	0	0	0	0	0	0.33	0000	0022	13052000	2000000132	016217	05054500035	0070000	22	
1402	3	131	100	11	0.000	2.0	0.0	2.0	0	0	0.0	01	00	0	0	0	0	0	0.33	1111	0022	13052000	2000000132	016217	05054500035	0070000	22	
1403	1	151	100	11	0.000	4.4	0.0	4.4	0	1	1.7	01	00	0	0	0	0	0	0.10	1121	0022	23042002	2000000127	024217	02054500000	0000000	22	
1404	3	111	111	11	0.000	5.1	4.5	4.4	1	0	0.0	02	00	0	0	0	0	0	0.31	0000	0022	13072000	2000001528	005723	00054500000	0000000	22	
1405	2	111	131	11	0.000	1.6	10.9	6.3	1	0	0.0	02	00	0	0	0	0	0	0.31	1111	0021	23022002	2000001528	007006	00054500000	0000000	22	
1406	2	111	111	11	0.000	3.3	3.5	3.5	1	0	0.0	04	00	0	0	0	0	0	0.31	1111	0021	23022003	2000001528	007006	00054500000	0000000	22	
1407	3	454	100	11	0.000	1.2	0.0	1.2	0	0	0.0	01	00	0	0	0	0	0	0.02	1121	0021	21062002	2000001528	008817	00054500000	0000000	22	
1408	3	414	160	11	0.000	3.1	0.0	3.1	0	0	0.0	01	00	0	0	0	0	0	0.21	1121	0021	21062002	2000001528	009336	00054500000	0000000	22	
1409	3	414	100	11	0.000	0.3	0.0	0.3	0	0	0.0	01	00	0	0	0	0	0	0.21	1121	0021	21062002	2000001528	009336	00054500000	0000000	22	
1410	3	252	100	11	0.000	0.4	0.0	0.4	0	0	0.0	01	00	0	0	0	0	0	0.32	0000	0021	13092000	2000000208	004426	01074400000	0000000	22	
1411	3	454	142	11	0.000	3.5	3.7	3.7	3	0	0.0	05	00	0	0	0	0	0	0.32	0000	0022	13092000	2000000208	004426	01074400000	0000000	22	
1412	1	111	111	52	3.000	0.0	2.1	1.6	1	0	0.0	04	00	0	0	0	0	0	0.31	0000	0022	22052000	2000000208	007325	01074400000	0000000	22	
1413	3	454	111	11	0.000	0.2	1.6	1.1	1	0	0.0	03	00	0	0	0	0	0	0.10	1122	0022	22042100	2000002457	001213	006450000	0000000	22	
1414	3	151	100	11	0.000	0.7	0.0	0.7	0	0	0.0	01	00	0	0	0	0	0	0.33	1111	0021	23042002	2000002459	013716	00054500000	0000000	22	
1415	3	151	100	21	0.000	0.3	0.0	0.3	0	0	0.0	01	00	0	0	0	0	0	0.33	1121	0021	12092005	2000002459	015000	00054500000	0000000	22	
1416	1	151	111	52	5.000	0.6	2.0	1.3	2	0	0.9	02	00	0	0	0	0	0	0.21	0000	1222	11062000	2000002459	022525	00054500000	0000000	22	
1417	3	252	111	51	1.500	3.4	6.5	3.1	1	0	0.0	02	00	0	0	0	0	0	0.21	0000	0021	13042000	2000002477	022025	14064500000	0220000	22	
1418	3	252	111	11	0.000	0.2	3.9	2.1	1	0	0.0	02	00	0	0	0	0	0	0.10	1121	0022	13042000	2000002477	022635	14064500000	0220000	22	
1419	3	333	111	52	2.000	2.4	3.1	2.8	1	0	0.0	03	00	0	0	0	0	0	0.31	0000	0022	11102001	2000002481	033312	06204500000	0000065	22	
1420	3	252	111	51	0.000	1.3	2.2	2.0	1	0	0.0	03	00	0	0	0	0	0	0.31	0000	0022	13062000	2000002481	033406	06204500000	0000065	22	
1421	1	755	241	11	0.000	1.5	6.2	3.4	1	2	5.4	02	00	0	0	0	0	0	0.10	1122	1122	11062002	2000002494	036430	00064500000	0290000	22	



## Appendix F

### FURTHER DATA ON CDEC AND IB TESTING RANGES AND NEW RANGE EQUIPMENT AVAILABLE

#### INTRODUCTION

This appendix supplements and adds detail to the information on the small arms testing ranges discussed in Chapter V. It also describes range target systems and components that are available for instrumenting such ranges but are not now being used. The range complexes are (1) the U.S. Army Infantry Board (IB) ranges at Fort Benning, Georgia, and (2) the test ranges at U.S. Army Combat Developments Experimentation Command (CDEC), Hunter Liggett Military Reservation (HLMR), California.

#### U.S. ARMY INFANTRY BOARD (IB) RANGES

##### History

The U.S. Army Infantry Board (IB) has three small arms test ranges. Design was begun in 1965, and though the first service tests were conducted in 1970, a prototype "attack range" was built in 1965. It was manually controlled, and data were collected on an oscillograph and paper-tape recorders. In 1968, the "quick-fire range" was completed, and in 1970, the "defense range." The defense range was the first computer-automated test range at Fort Benning. All three ranges are now computer-operated, and the same computer does all major data collection.

As each range was completed, an "acceptance" test was conducted to determine how well it functioned. Each test proved the instrumentation to be very reliable.\* Since their completion, the ranges have been used heavily. Examples of small arms tests recently conducted on the ranges are listed in Table F-1. Since a single computer and control system

---

\*U.S. Army Infantry Board, Defense Experiment I (Ft. Benning, GA, 25 November 1971); hereafter referred to as Defense Experiment I.

Table F-1

## SMALL ARMS TESTS RECENTLY CONDUCTED ON IB RANGES

Test <sup>a</sup>	Date
Combat pack with removable pockets .....	1973
Rimfire adapter, M16 .....	1974
Reflex columnator sight, M16 .....	1974
Muzzle break compensator, M16 .....	1974
Control burst mechanism, M16 .....	1974
Chemical protective overgarment .....	1974
Body armor vest .....	1974
Improved conventional munitions .....	1974
Bandoleer, XM-8 .....	1974
Accuracy test, M60 .....	1974
Low light level sight, M16 .....	1974
Small arms measures of effectiveness methodology ....	1974
Airborne equipment methodology .....	1974
Night operations test .....	1974
Squad automatic weapons engineering test .....	1974

<sup>a</sup>These are informal titles for the tests. The list is not exhaustive but indicates the variety of tests undertaken.

support each range separately, only one range can be used at a time. A single range is used approximately 60-85 hours per month.

### Instrumentation

#### Targets

All three ranges use the stationary head and upper torso (M-silhouette) target and one or more moving targets.\* The numbers and types of each are summarized in Table F-2.

Table F-2

NUMBER AND TYPES OF TARGETS ON IB TEST RANGES

Type of Target	Defense Range <sup>a</sup>	Attack Range <sup>b</sup>	Quick-Fire Range
Stationary (pop-up)	88 <sup>c</sup>	10	25
Moving (pop-up)	6	1	1

<sup>a</sup>In Chapter V, the firing situation for this range is called "Firing at targets at closer ranges." "Defense" is used in this appendix for simplicity and because it is the term IB uses.

<sup>b</sup>In Chapter V, the firing situation for this range is called "Assault." "Attack" is used in this appendix for simplicity and because it is the term IB uses.

<sup>c</sup>To the 60 day time targets, 28 close-in targets were added for use in night testing.

#### Programming Target Array

A radio link is used to transmit hit data for moving targets, and relays are used for the stationary targets. All targets can be programmed to appear and reappear in any sequence for varying durations.

---

\*The head and upper torso target has a presented area of 3.27 sq ft (as described in Chapter V). It will be referred to as the "kneeling-man" target throughout this appendix. Moving and stationary targets are described in Chapter V. Moving targets are also called "running-man" targets.

They can be programmed to stay in view for a certain time or to drop when hit. For checkout or trial, they can be controlled manually from the computer van.

The attack range normally uses a fixed, programmed target scenario; the defense range uses several scenarios; and the quick-fire range uses a sort of shooting gallery, where a single firer moves through a prescribed course, automatically activating targets and simulators.

#### Near-Miss Sensors

A time-difference near-miss sensor capable of scoring miss distance and miss direction is used on the ranges. Each target array on the defense range and each target on the quick-fire range has a set of four microphones positioned in front of the targets. The target line on the attack range has three near-miss sensors. The microphones tally near misses by sensing the shock wave of passing rounds.

The set of microphones is located along an axis perpendicular to the line of flight of the projectile and directly in front of the target so that the target is at the exact center of the line of microphones. The four microphones are positioned 5 ft and 7 ft from the target, one pair on each side. The supersonic shock wave of a projectile passing over the area between the pairs of microphones causes the microphones to send pulses over the coaxial data link. Their time of arrival is recorded by the computer just as are the pulses from the system to count rounds fired. The times of arrival of the shock wave at one pair and then the other pair of microphones are used to create equations that include the geometric configuration of the microphone location. The two equations thus produced can be solved for the x and y coordinates of the near miss as the projectile passed through the vertical plane of the target array. The resolution of the system, under ideal conditions, exceeds 3 inches.

Since only one target in each target array of three to five targets on the defense range is equipped with the miss distance indicator (MDI), described above, information on miss distance is collected by sample. It is assumed that other targets in the array undergo similar patterns of misses when they are in view. Not all targets have an MDI because of

the limited number of data recording channels (256). Each microphone requires one channel, so a set requires four channels. The target requires two other channels, one for hit recording and another that informs the computer that up and down commands have been carried out. Six input channels per target would quickly use up the available channels. Sampling permits more targets to be added without having to add an equal number of miss-distance microphones. A ratio of two targets for each MDI is maintained, however.

Near misses can be measured around each target position on the range, 16 of the 60 targets on the daytime defense range and 3 targets on the attack range.

Interference from small arms simulators is prevented by turning off the microphones (i.e., the computer does not record incoming data from nearby microphones while a simulator is firing).<sup>\*</sup> However, the probability of not recording a near miss while the microphones are turned off is very low.

#### Round Counters

The system for automatically counting rounds in stationary target firing consists of a sensor, data link, signal conditioner, and computer system. The sensor unit consists of one microphone located directly in front of each firing position. The microphone is attached to a single coaxial cable, which in turn is linked to the signal-conditioning unit in the computer van. The signal conditioner, one per microphone input, "conditions" by discriminating between the actual signal and extraneous noise and creates a pulse for computer input for each signal received. The pulse is fed directly into the computer interface unit that measures time of arrival.

The round-counting system for the attack range consists of a helmet-mounted radio system. The sensor element consists of two parts: an

---

<sup>\*</sup>U.S. Army Infantry Board, Technical Memorandum: Scoring Resolution of a Time Difference Miss Distance Scoring System (Ft. Benning, GA, December 1967).

infrared (IR) sensor that "sees" the muzzle blast and turns on an acoustic sensor, which senses the sound of the muzzle report. The short time "window" (the period of time the acoustic sensor is on) prevents "cross-talk" among firers. If a firer happens to be looking at an adjacent firer as the latter's rifle discharges, his IR sensor will open the circuit for the acoustic sensor; however, the window will close before the report of the adjacent firer's weapon arrives. Once a signal passes through the window, it is conditioned and placed on the RF carrier for transmission to the computer van. Tests have shown that firers must be separated by at least 4 ft to prevent crosstalk. Some crosstalk occurs between 4 ft and 16 ft, the degree diminishing with distance. No cross-talk has occurred with 16 ft of separation.\*

#### Recording Equipment

The recording (and target control) equipment consists of a PDP 15/30 computer and its interface equipment. All data recording programs are prepared automatically as the target control programs are written. The programs are written in a programming language close to natural English.\*\* When they are compiled by the computer to produce the actual program, the necessary data-collection routines are added. During the trial run, the computer controls the range according to the instructions of the program preparer and collects the data. A hard-copy "end-of-trial" summary is automatically produced.

Before each trial begins, the computer asks the operator for time, date, and other logging-in information. The information is recorded on magnetic tape along with the substantive data from the trial. The summary recaps each trial in terms of the number of rounds fired by each firer, hits by target, and near misses sensed by microphone. Programs are available to produce other types of hard-copy output.

---

\* U.S. Army Combat Development Experimentation Command, MFR--Live Fire Test of California Avionics Laboratories Inc. Portable Round Count System (Ft. Ord, CA, 20 June 1973).

\*\* Janes, Mean and Dakon, USAIB Compiler User's Guide (Ft. Benning, GA, February 1971).

The computer has three mini-magnetic tape drives, two teletype printers, one high-speed line printer, a high-speed paper-tape reader and punch, and is equipped with a memory-protection unit that prevents the loss of data in the event of a power failure. It uses either generator power or commercial power. It has 256 lines for data input and 128 lines for range control. A library of programs exists for range control.

#### Reliability of Instrumentation

The reliability of instrumentation subsystems is reported to be very good. It takes seven hours to move the computer van the 12 miles from the Infantry Board main post at Fort Benning to the range complex, connect it, and check it out. If the range has not been used for a month or more, about two weeks are required to install and recheck the range components. These are current estimates using the new equipment, such as radio data links, installed in recent years.

#### Rifle Situations

Up to four firers at a time can fire on the attack range,\* up to ten on the defense range, and a single firer on the quick-fire range.

#### Range Layouts

Figures F-1 through F-3 depict the layouts of the three IB ranges.

#### Cost

The procurement cost of instrumentation components for the IB is shown in Table F-3.

---

\* U.S. Army Infantry Board, A Pilot Experiment, Attack Experiment I, Small Arms Service Test Design for a Study of Small Arms Test Facilities and Methods, USAIB Project 3091 (Ft. Benning, GA, June 1966).

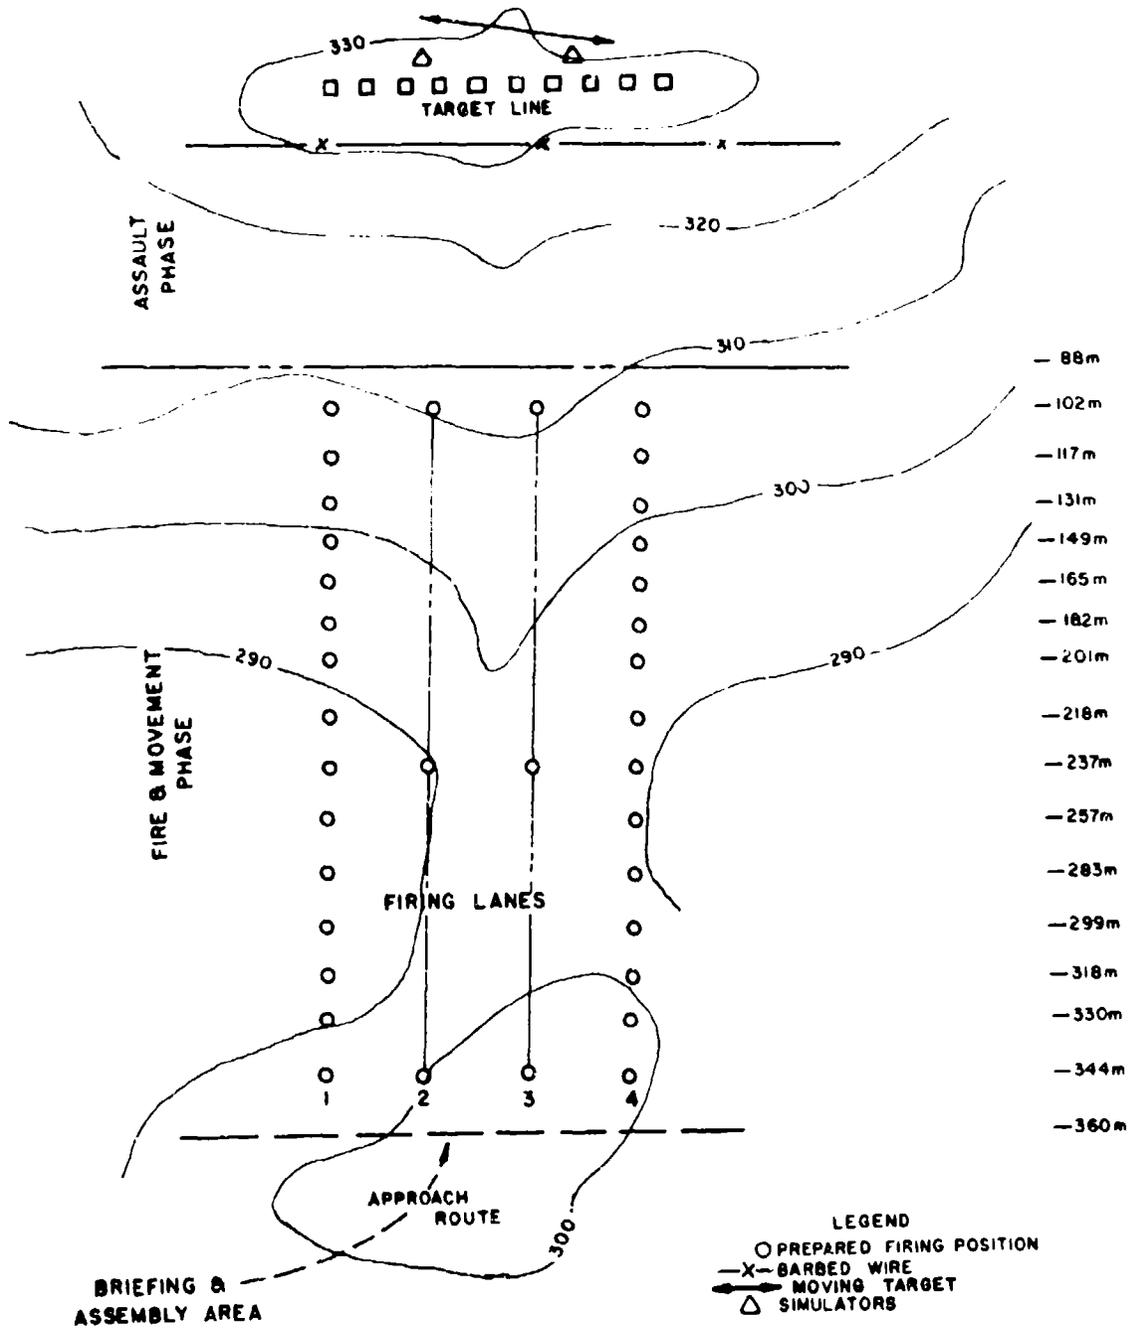


Figure F-1. Layout of IB attack range.

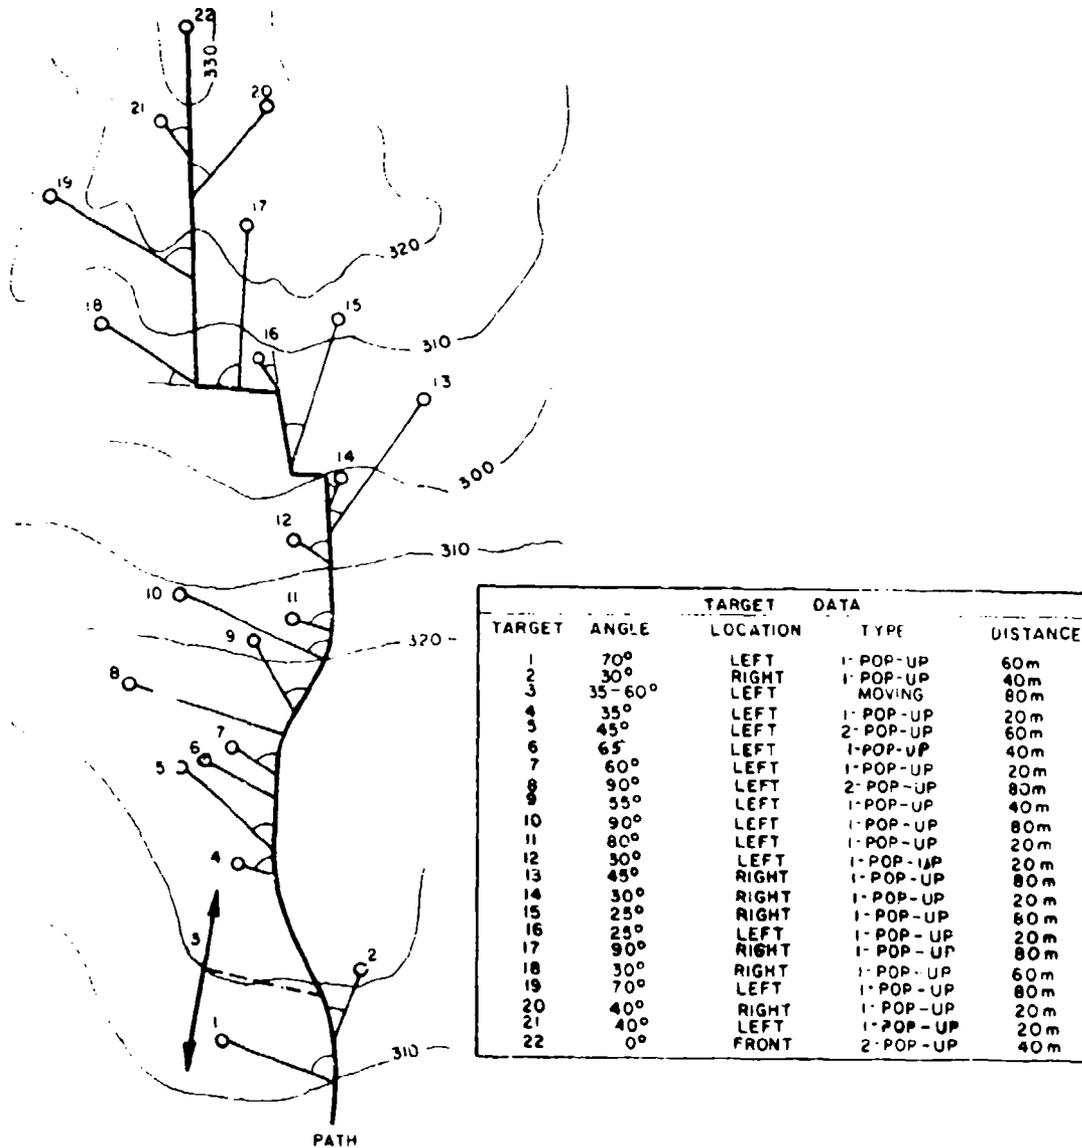


Figure F-2. Layout of IB quick-fire range. Adapted from Litton Systems Inc., Mellonics Systems Development Division, Infantry Weapons Test Methodology Study, Quick-fire Experiment I, by Ronald D. Klein (Ft. Benning, GA, 27 June 1969), p. 72.

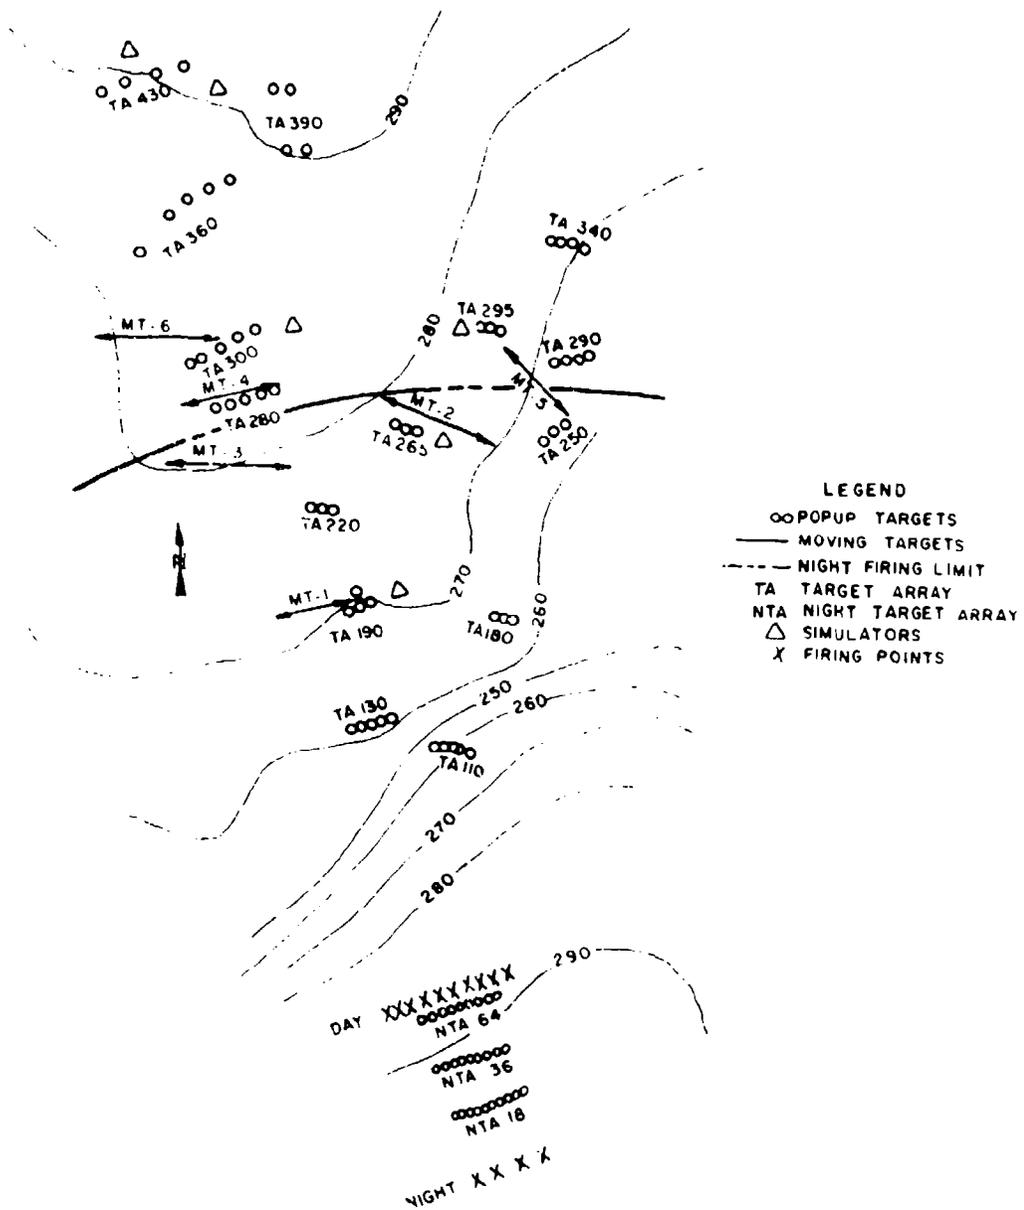


Figure F-3. Layout of IB day and night defense range.  
Adapted from IB, Defense Experiment 1, pp. 1-2 and 1-3.

Table F-3

ESTIMATED COST OF PROCURING IB DEFENSE RANGE  
(1974 DOLLARS)

Equipment	Cost
<b>Target instrumentation</b>	
Raising and lowering mechanism (88 @ \$350) .....	\$ 30,800
Moving man target (100-ft track) (6 @ \$4,000) .....	24,000
Weapon-signature simulator (5 @ \$1,200) .....	6,000
Hit sensor (target body) (88 @ \$4) .....	352
Near-miss sensor (64 microphones--16 target arrays with 4 microphones each @ \$60) .....	3,840
Round counter (10 @ \$60) .....	600
Wire network .....	16,000
Subtotal	\$ 81,592
<b>Recording Equipment</b>	
PDP 15/30 computer .....	\$ 49,500
Automatic addressor .....	25,000
Signal conditioner .....	16,000
Air conditioner .....	500
Software .....	60,000
Subtotal	\$151,000
Installation .....	\$250,000
Total	\$482,592 (\$331,592) <sup>a</sup>

<sup>a</sup>The \$482,592 is misleading to the extent that it includes the \$151,000 for recording equipment, which is not procured independently for each range but is shared among the three ranges. The figure in parentheses represents the truer cost of just setting up the defense range consisting of 88 stationary and 6 moving targets.

Personnel to operate the ranges are summarized below. Since only one range can be operated at a time, these personnel are adequate for all ranges.

<u>ADP Personnel:</u>	<u>Range Personnel:</u>
1 programmer	1 electrical engineer
1 programmer/operator	2 electronic technicians
<u>Others (numbers unknown):</u>	2-4 controllers
Ammunition handlers	1 statistician
Range guards	1 range officer
Medics	

The estimated daily cost of operating a single range is \$540. This includes the services of 6-8 military personnel, 3 Army-employed civilians, and all expendables such as target-body replacements.\*

U.S. ARMY COMBAT DEVELOPMENTS EXPERIMENTATION  
COMMAND (CDEC) SMALL ARMS RANGE

History

The U.S. Army Combat Developments Experimentation Command (CDEC) has three live firing ranges at Hunter Liggett Military Reservation (HLMR), California. Two of the ranges were initially installed at Fort Ord, California, conceived and designed especially for the CDEC-SAWS experiment discussed in Chapter IV. The equipment was moved to HLMR and installed in a different range layout in the spring of 1966. In 1972, a separate "moving target" range was installed at HLMR. The three ranges are designated Alpha, Bravo, and moving target, respectively. The configuration has not changed since. Examples of experiments recently conducted at CDEC are listed in Table F-4.

---

\*This \$540/day estimate is based on estimated personnel costs of \$480/day plus a target-body replacement cost of \$60/day. The target-body replacement was estimated as follows: for 10 trials a day, 60 targets exposed per trial, 2-3 hits per target, a replacement estimate of 25 percent was used (2.5 x 60 targets = 150 targets replaced per day x \$4 per target = \$60/day).

Table F-4

## SMALL ARMS EXPERIMENTS RECENTLY CONDUCTED AT CDEC

Experiment <sup>a</sup>	Year
Comparison of XM19 and M16 (CDEC 21.9) .....	1972
Army small arms rifle study (ASARS) II .....	1973-1974
Parapet-Fcxhole (PAR-FOX) .....	1974
Dispersion against concealed targets (DACTS) .....	1975

<sup>a</sup>Titles are informal ones. Except for CDEC 21.9, formal reports are not available from DDC.

### Targets

Three types of silhouette targets are available for use on the test ranges: head-and-shoulders, kneeling, and standing targets. These 3-dimensional infantry targets\* are made of foam laminated to stamped aluminum. There are 64 targets in five arrays on the Alpha range, 49 targets in six arrays on the Bravo range, and 2 targets on each of two cars on the moving target range.

### Target Raising and Lowering Mechanism

The CDEC target raising and lowering mechanism is the same M31 target holding mechanism that is used at IB. It was manufactured by the Rock Island Arsenal, Underwood Manufacturing Co., Hartford, Connecticut, and other companies for general use in the U.S. Army during the early 1960s. It operates on 110 volts AC current. It has been locally modified to raise a heavy target in winds up to 15 kn. Electrical filter devices were added to keep the mechanism from interfering with the other electrical components. A bracket has been fabricated locally to allow the height of the target to be adjusted and to provide armored protection

---

\*These targets are called 3-dimensional because they are curved to roughly resemble a human torso, shoulders, and head.

for the hit sensor mounted at the base of the target. Target raising and lowering mechanisms modified for a 24-volt DC power source were installed on the carts for the moving target range.

#### Weapon-Signature Simulators

Most stationary targets have a weapon-signature simulator that can simulate the noise, flash, and muzzle blast of a rifle, automatic rifle, or machine gun, with rate of fire and burst size controlled by the computer program (see Figure F-4). The simulators are located within the redwood box that houses the target mechanism. The simulation is produced by the spark ignition of a propane-oxygen mixture. The propane and oxygen tanks are located alongside the box that houses the target. The simulators are designed to operate at a maximum rate of 500 simulated rounds per minute.

#### Target Computer Units (TCUs)

The TCU is an electronic control and signal-conditioning device located at each target emplacement. It processes signals to raise and lower the target and to fire the simulator, and it conditions hit and near-miss signals before they are transmitted to the computer van. The TCU contains a five-position switch to preset the gain of the miss-distance sensors to one of four calibers of ammunition. The gain is usually set for near misses scoring within two meters of the microphone for bullets.

#### Hit Sensor

A piezo-electric, crystal hit transducer is attached to the aluminum body of the target to detect hits and initiate the lowering of the target. The foam rubber padding bonded to the aluminum surface prevents ricochets from being scored as "lethal" hits and minimizes the vibration likely to cause the sensor to score multiple hits when only a single round has penetrated. The shock detected when the projectile passes through the target is converted into an electrical impulse that is transmitted to the computer van via the TCU to be recorded as a hit on the control

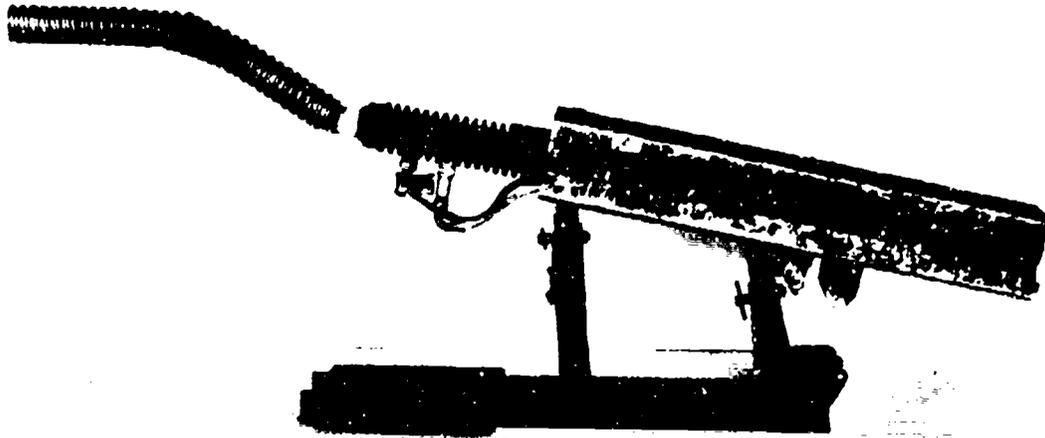


Figure F-4. Weapon-signature simulator (U.S. Army photograph).

console. When a hit is detected, the computer generates a signal that lowers the target.

#### Near-Miss Sensors

The acoustic near-miss sensor consists of an omnidirectional microphone available for use at each target position. The microphone is activated by the shock wave of a bullet passing within two meters of it.

The target components--raising and lowering mechanism, weapon-signature simulator, TCU, and near-miss sensor--are housed in a box armored with welded sheet steel and with a wooden cover (see Figure F-5).

#### Stationary Round Counters

An electronic round-counting device is installed at each stationary firing position so that all rounds fired can be sensed and recorded as a function of time. The stationary round-count system consists of a directional microphone connected to a signal-conditioning box. The microphone, mounted on the ground at one side of the weapon muzzle, senses the sound of the report when the weapon is fired. The generated signal is conditioned and transmitted to computer memory for recording on magnetic tape. By setting the gain volume for each sensor properly, the risk of counting rounds from nearby firers is reduced.

#### Portable Round Counters

A portable round-counting system consisting of a modified M16 rifle stock, a transmitter and power supply that fit in the M16's magazine pouch, and a helmet with a 14-inch whip antenna, provides the means for recording rounds fired as a function of time in moving situations. The portable round counter works only on the M16 rifle or on rifles that can be fitted with the M16's stock. The instrumented stock detects the rearward movement of the buffer group and generates a signal when the weapon is fired. The signal is then processed and transmitted to a radio receiver, which transmits the rounds fired as a function of time by firer to the computer van. The modified M16 rifle stock can be connected to a junction box at a fixed firing point so that round-count signals can be transmitted

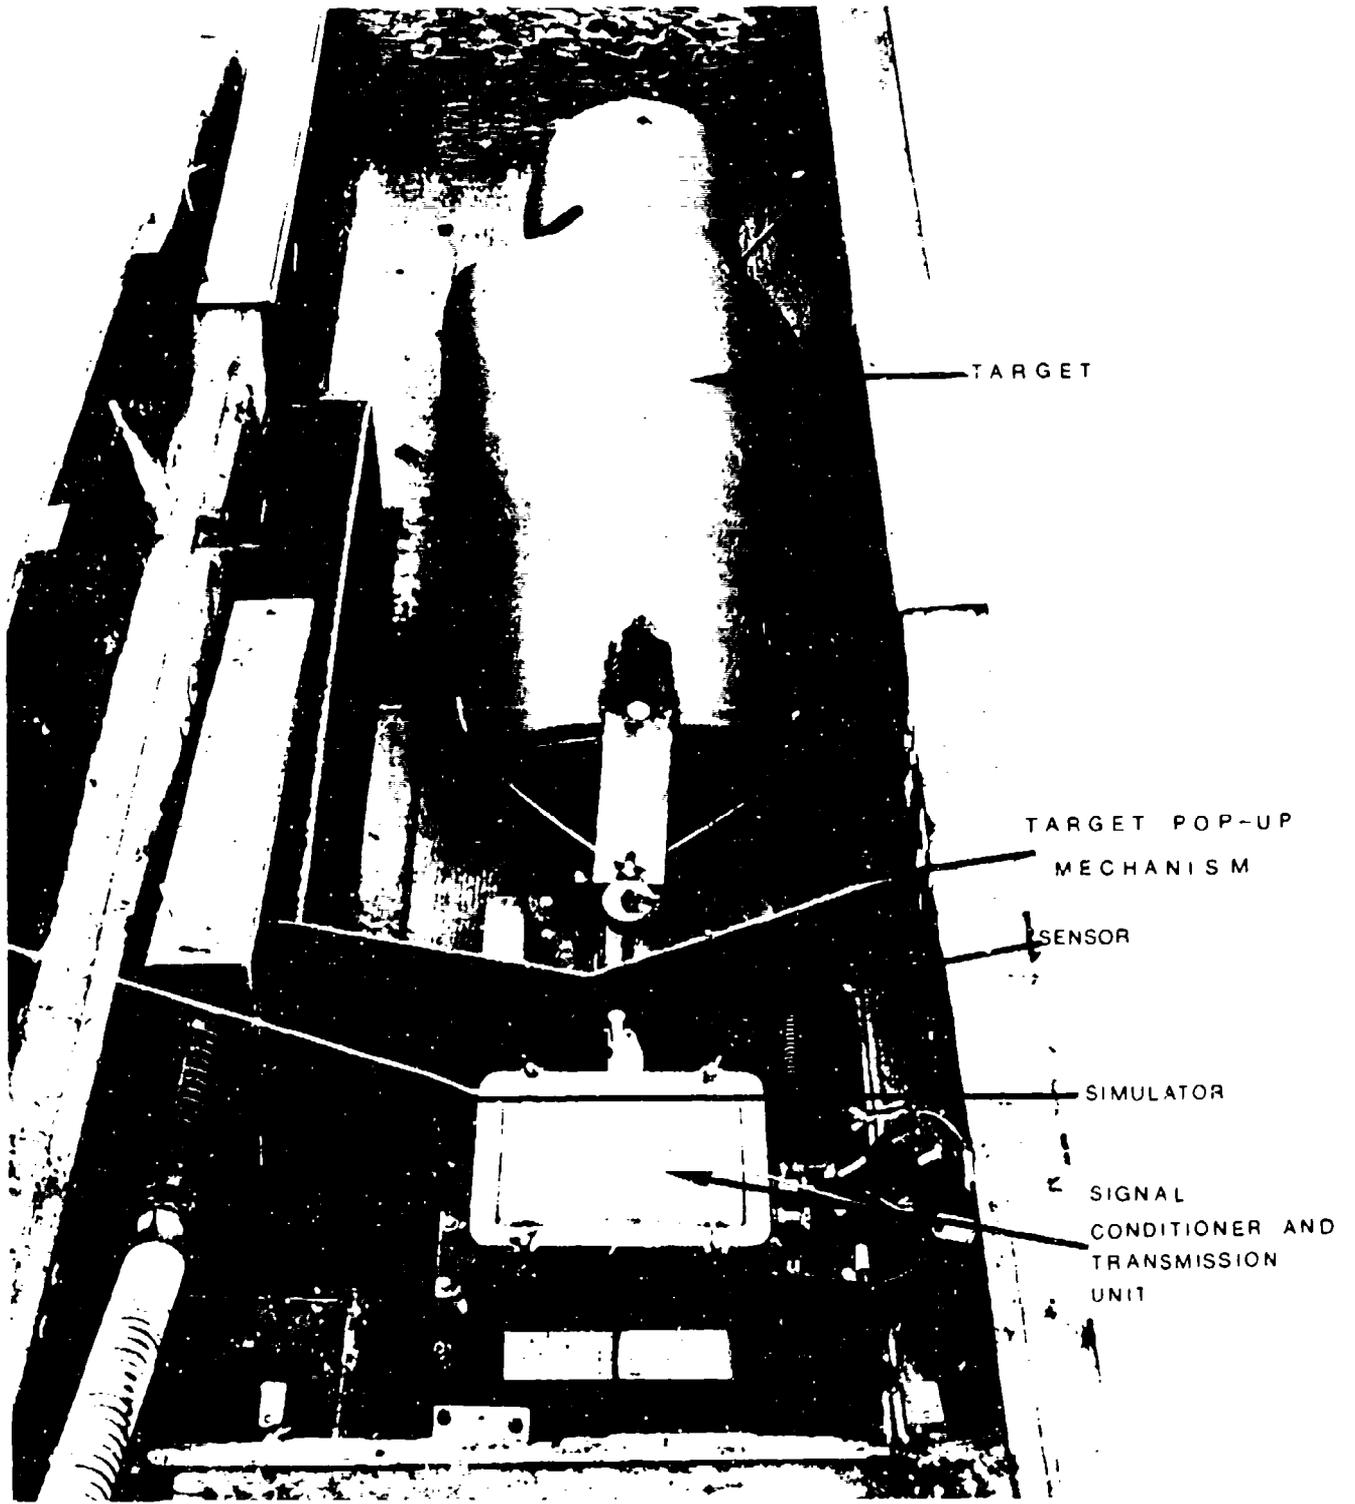


Figure F-5. Target components in armored target box (U.S. Army photograph).

by cable to the computer van. The portable round counter is illustrated in Figure F-6. The system is limited to line of sight, but since the portable round-count receiver is located with the computer vans on high ground at the rear of the ranges, this limitation is not serious.

The portable round-count receiver is a locally fabricated device that has 15 channels, each capable of monitoring a separate firer. The receiver operates on a carrier frequency of 148.020 to 150.740 MHz. Its output is wired to the adjacent computer van to be time-tagged and recorded.

#### Programming the Target Array

The raising and lowering of targets and the firing of the weapon-signature simulators are controlled from the computer van. The targets can be programmed to appear or reappear in any sequence for any selected duration. They can be programmed (1) to remain in view for a certain time, (2) to drop when hit, and (3) to respond to suppressive fire, i.e., projectile near misses, within a specified time interval. Individual targets can be controlled manually from the computer van for pretrial checkout. Control can be automatic via the computer program or direct by manual override, which can be used to raise or lower targets that fail to respond to the computer program.

In situations where targets are raised when the test squad crosses an event line, the program can be activated by a radio signal or by a visual signal from someone on the spot to an operator in the computer van as the firers move through the course.

#### Control and Recording Equipment

The control and recording equipment is housed in a mobile computer van. It consists of an SDS Model 910 computer, a magnetic tape unit, a teletype unit, a digital event activator, a digital event evaluator, and control console for monitoring up to 50 targets and their associated simulators. The digital event activator can command up to 102 contact closures to control the raising and lowering of targets, the firing of weapon-signature simulators, and a digital clock. The evaluator subsystem

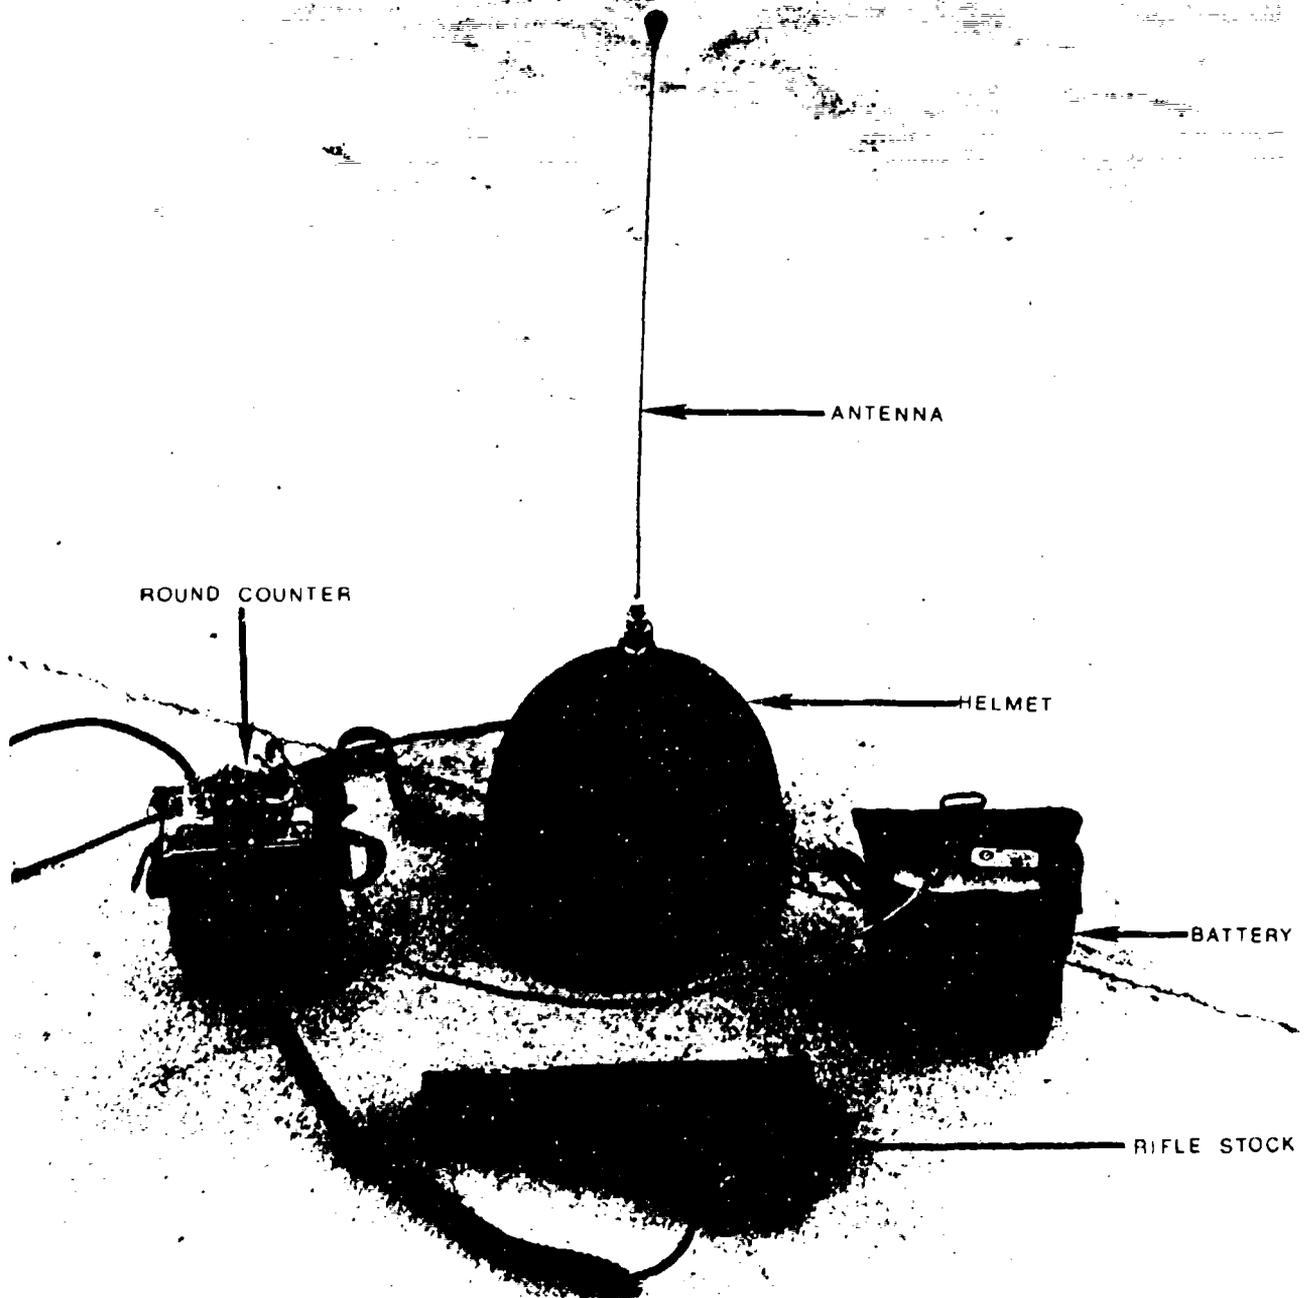


Figure F-6. Portable round counter for the M16 rifle (U.S. Army photograph).

can scan 384 input lines every 4 ms, detecting, storing, and processing signal changes under the program's control. Comparison of current input signals with results stored from the previous scan is the basis for detecting any change in status. Status changes are processed and recorded on magnetic tape. Each change can be summarized on a typed printout. Scanned input signals are classified into hits, near misses, target position, weapon simulator firing, and rounds fired.

The control console is placed in the van so that the console operators can view the firing situations from windows facing down-range. The console has five sections, from which five operators can each control and monitor ten targets and their weapon simulators. During calibration testing and warmup periods, manual controls are used. During experimental trials, the target arrays are driven by the computer program, with the possibility of manual override if necessary. Malfunctions of the target mechanism--raising and lowering devices or weapon-signature simulators--show up on the console by a lighted indicator. Manual controls are then activated to raise or lower the target or fire the simulator, as needed. Each console has ten sets of three push buttons. One push button fires a simulator as long as the button is depressed; the second raises or lowers a target when depressed; and the third reraises a target after it has been hit or suppressed.

#### Components of the Moving Target Range

The moving target range consists of two parallel aluminum tracks 600 ft long on which four-wheeled, aluminum target carts can be towed in either direction. Both carts are powered by a Volkswagen engine from a bunker by a draw-and-release cable. It is reported to be able to tow the cart along the track at up to 15 mph. The power unit has a hand-controlled accelerator and dial for regulating the speed of the cart. The cart and track are of a local design and fabrication.

Two modified M31A1 target raising and lowering mechanisms are installed on each cart. Modifications include a 24-volt DC battery system. The three-dimensional target bodies used on the Alpha and Bravo ranges are also used on this range. The target instrumentation consists of hit

counters and elapsed-time counters that indicate the total length of time the target was raised to the nearest tenth of a second. Both targets on one cart are raised and lowered simultaneously from the control bunker via an RF link. They are not programmed to fall when hit but remain up for a certain time, as ordered.

There are five foxholes in front of the moving target's berm at ranges of 100 to 300 yards. They are positioned so that the target's track makes an angle of  $45^{\circ}$  to  $60^{\circ}$  with the shooter's line of sight to the targets. None of the five firing positions is equipped with a round counter or other instrumentation.

#### Reliability of Instrumentation

During the approximately 10 years of operation of the CDEC small arms testing ranges, the reliability of the components has naturally varied with the amount of their use and care in their maintenance. Reliability, for example, that of an acoustic near-miss sensor, also depends on the attention given to calibration and checkout, on the age of the components, and on the weather conditions, e.g., rain or high humidity, in which the equipment is operated.

Tests have been made to assess the reliability of target raising and lowering mechanisms, the combined target and hit sensor for recording hits, the acoustic near-miss sensor, and both the stationary and portable round counters for their fidelity in counting the number of rounds fired. The tests have shown the instrumentation to be fairly reliable, but no current information is available. Nor are reliability data available for the SDS 910 computers. In 1974 the computer operated 1007 and 915 hours, respectively, on the Alpha and Bravo ranges. At 83 and 76 hours per month, respectively, that represents extensive use.

The officer in charge of the CDEC ranges estimated that each of the three ranges required 90 minutes of pretrial checkout daily to ensure proper operation, and longer if it was found necessary to replace a main component. If the ranges were shut down for six weeks, it would require about 20 working days to put the Alpha and Bravo ranges back in operation

and 5 days to restart trials on the moving target range.\*

Relocating any of the ranges would be a major undertaking. Only one target array of 14 targets has been moved during the ten years since the installation of the ranges at Hunter Liggett Military Reservation.\*\* Targets are not moved frequently because of the labor and the cost of rewiring (cabling) involved. In contrast, several new firing lines have been added to the ranges, e.g., five to Bravo range. A new firing line usually requires a single cable trench in front of the line, with junction boxes for each firing point and cabling to the nearest existing firing line for power and for linkage to the computer van. Though adding firing lines provides a variety of target distances for the firers, it may fail to provide situations to adequately test a weapon because of the artificiality of the terrain. It is too easy to detect targets before they are raised where the terrain has been burned out, shot off, or scarred by maintenance crews working on the targets.

#### Range Layouts

The layouts of Alpha and Bravo ranges are shown in Figures F-7 and F-8.

#### Cost

The CDEC Alpha and Bravo ranges were initially procured on a "sole source and best effort" basis from Del Mar Engineering Laboratories for \$2,253,263. This cost did not include (1) government-furnished equipment, e.g., M31A1 target mechanisms, or (2) installation, which, with minor exceptions, was done by Fort Ord post engineers and troop labor. The value of the labor is impossible to estimate, and in any case the cost

---

\*The Officer-in-Charge, Live Fire Ranges, Instrumentation Support Group, CDEC, gave these estimates on 13 February 1975, based on 22 months of experience.

\*\*Display A-3 on Alpha range, which was used for the IRUS experiment, was moved about 75 meters south of its initial position. In the process, the array was reduced from 14 to 7 targets and redesignated Array 3. This array is not depicted on the Alpha range layout in Figure F-7 since its exact location is not known.

F-23

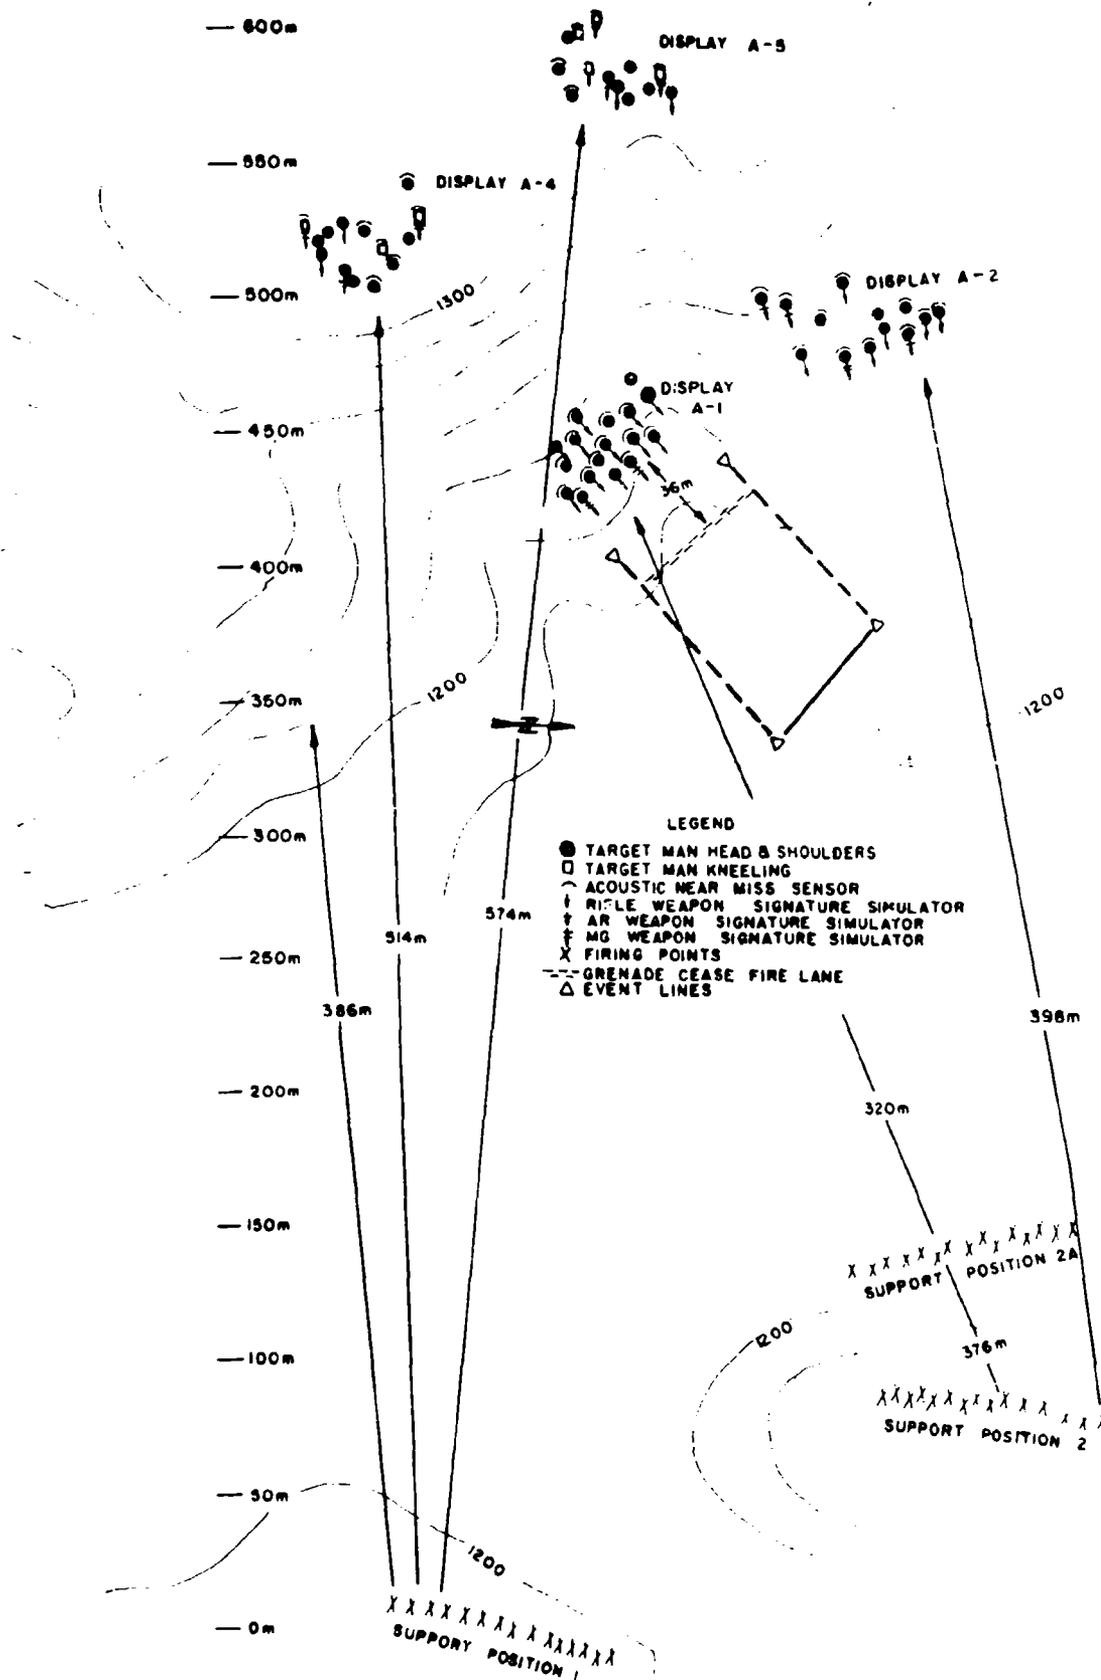


Figure F-7. Layout of Alpha Range, HLMR.

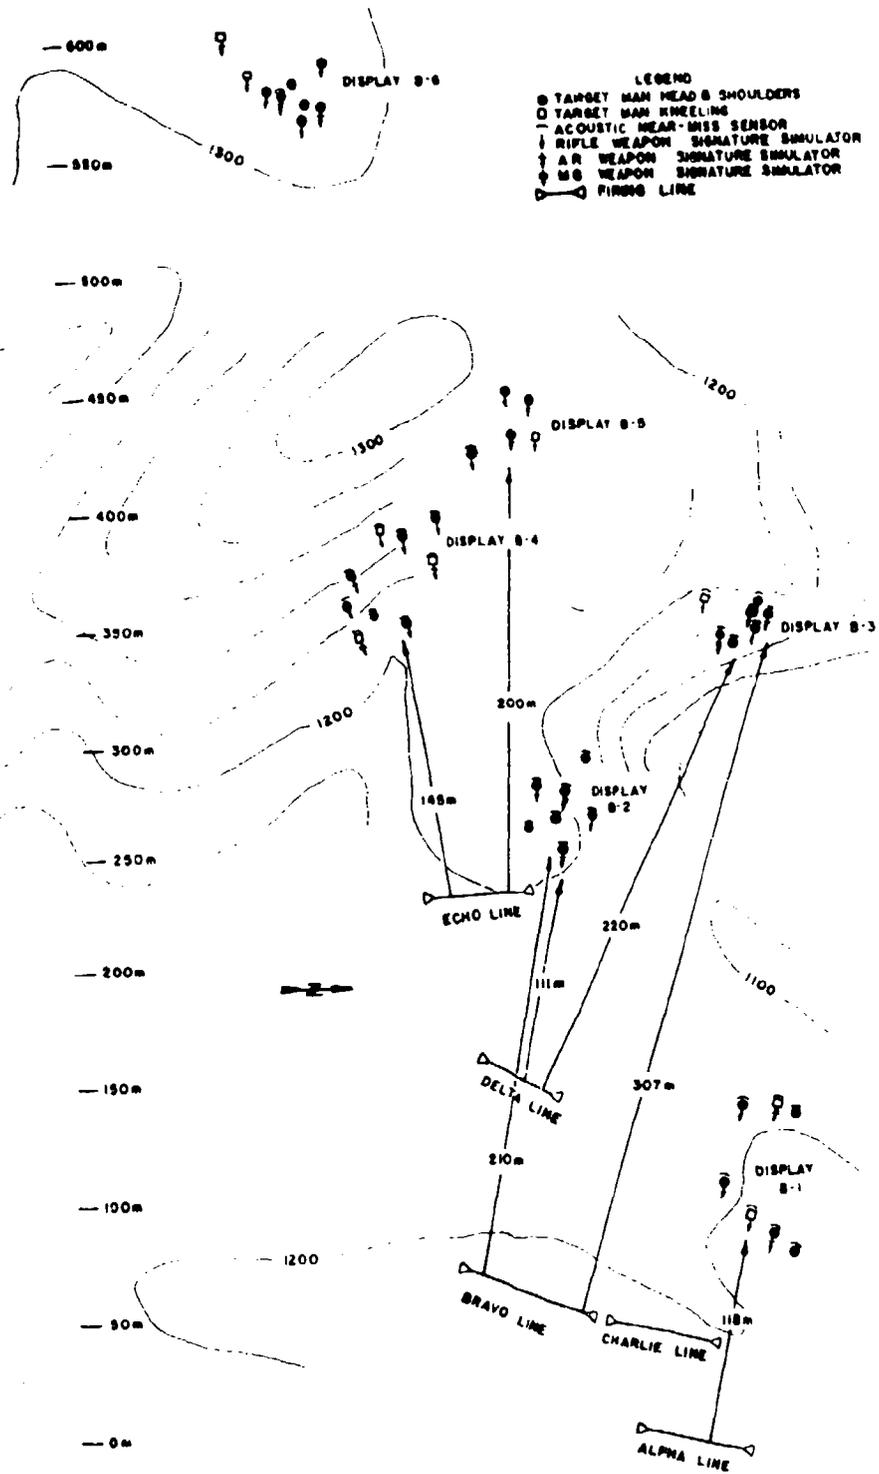


Figure F-8. Layout of Bravo Range, HLMR.

of installation varies from range to range depending on soil and other conditions. The contract did, however, cover unspecified "design costs" that were borne entirely by Del Mar. The cost of the moving target range could not be determined.

When they are being used, the CDEC ranges have a regularly assigned, full-time complement of soldiers supplemented by civilian contractors for technical and analytical support.\* The types of personnel involved are identified in Table F-5.

Table F-5

PERSONNEL DIRECTLY ASSIGNED TO CDEC RANGES  
WHEN IN OPERATION

Range	Officers	Enlisted Personnel		Contractor Personnel	
		Technician	Operator	Technician	Statistician
All (supervisor)	1	-	-	1	-
Alpha	-	1	10	3	1
Bravo	-	1	10	3	1
Moving target	-	-	2	2	1
Total (38) <sup>a</sup>	1	2	23	9	3

<sup>a</sup> Only when all three ranges are used concurrently.

The cost of replacing target bodies, plus the personnel costs, probably amount to \$2500/day.\*\* Maintenance and other operating and replacement costs were not determined and are not included in this estimate.

---

\* Equipment maintenance is provided under contract by Bell Aerospace Corporation; scientific support is provided by Braddock, Dunn and McDonald.

\*\* Each target body is replaced after about 100 hits. Therefore, the \$2500/day estimate is based on 2-3 hits per target per run, 10 trials per day. This implies that 33 percent of the 49 targets are replaced daily, which amounts to \$1536 (16.17 targets x \$95); \$1536 + \$896 (estimated personnel costs) = \$2432.

The procurement cost of instrumentation components is shown in Table F-6.

### NEW RANGE EQUIPMENT

Besides assessing the small arms range complexes at CDEC and IB, a search was conducted to find and assess other range systems and components available for use on such ranges. In all, the products of about 30 companies were surveyed. Below are described two complete range systems-- the DART system, produced by the Australasian Training Aids Pty., Ltd., Albury, N. S. W., Australia, and the SAAB Target System, produced by SAAB-Scania, Jonkoping, Sweden--and then individual component equipment available from various companies.

First, to make meaningful what capabilities the new target systems and components might be able to provide to small arms testing ranges, it is instructive to compare the current capabilities of CDEC and IB in target instrumentation and the capacity to handle test firers. This is done in Table F-7.

### DART Target System

#### Instrumentation

The DART Target System is manufactured by Australasian Training Aids Pty., Ltd. The system consists of a hit-sensitive panel or silhouette, a raising and lowering mechanism, battery or power pack, and weapon-signature simulator. Targets are manually controlled by an operator using a control panel, either through a wire or radio control link. An integrated control panel/transmitter system, which is portable, can be purchased to control up to 10 targets. The various target components are described below.

Raising and lowering mechanisms. The target raising and lowering unit is equipped to hold one target body each and consists of a water-proof, cast aluminum box housing a gear box and motor along with the electrical control module. If AC commercial power is not used, power is supplied by a 12-volt, rechargeable, lead acid battery, which will

The procurement cost of instrumentation components is shown in Table F-6.

### NEW RANGE EQUIPMENT

Besides assessing the small arms range complexes at CDEC and IB, a search was conducted to find and assess other range systems and components available for use on such ranges. In all, the products of about 30 companies were surveyed. Below are described two complete range systems-- the DART system, produced by the Australasian Training Aids Pty., Ltd., Albury, N. S. W., Australia, and the SAAB Target System, produced by SAAB-Scania, Jonkoping, Sweden--and then individual component equipment available from various companies.

First, to make meaningful what capabilities the new target systems and components might be able to provide to small arms testing ranges, it is instructive to compare the current capabilities of CDEC and IB in target instrumentation and the capacity to handle test firers. This is done in Table F-7.

### DART Target System

#### Instrumentation

The DART Target System is manufactured by Australasian Training Aids Pty., Ltd. The system consists of a hit-sensitive panel or silhouette, a raising and lowering mechanism, battery or power pack, and weapon-signature simulator. Targets are manually controlled by an operator using a control panel, either through a wire or radio control link. An integrated control panel/transmitter system, which is portable, can be purchased to control up to 10 targets. The various target components are described below.

Raising and lowering mechanisms. The target raising and lowering unit is equipped to hold one target body each and consists of a water-proof cast aluminum box housing a gear box and motor along with the electrical control module. If AC commercial power is not used, power is supplied by a 12-volt, rechargeable, lead acid battery, which will

Table F-6

## PROCUREMENT COSTS OF CDEC RANGE COMPONENTS

Component	Cost per Unit
Target raising and lowering mechanism M31A1 .....	\$ 400
Target silhouette without hit sensor	
2-dimensional target:	
head and shoulders .....	48
kneeling .....	62
standing .....	81
3-dimensional target:	
head and shoulders .....	65 <sup>a</sup>
kneeling .....	95 <sup>b</sup>
standing .....	110 <sup>a</sup>
Hit sensor with cable .....	120 <sup>c</sup>
Acoustic near-miss sensor .....	172
Hit-counting halo for sensing near misses with mount .....	1080
Target computer unit (TCU) .....	900
"A" cards for TCU (hit counting) .....	1195
"B" cards for TCU (miss measuring) .....	940
"C" cards for TCU (hit counting for halo) .....	355
Stationary round counter .....	1314
Portable round counter (for one soldier) .....	473
Helmet modification	\$ 12.50 <sup>d</sup>
Transmitter	\$ 40.00 <sup>e</sup>
Power unit	\$ 20.00 <sup>d</sup>
Modified M16 rifle stock	\$400.00 <sup>d</sup>
Portable rounds fired indicator receiver and rack .....	2100 <sup>b</sup>

NOTE: Unless otherwise footnoted, costs are taken from CDEC, Instrumentation Support Group, Memorandum for Record, "Historical Brief on Association with Del Mar Engineering Associates," ISG-POR-PFR (Ft. Ord, CA, 14 February 1967). Where necessary, costs were adjusted to 1974 replacement prices.

<sup>a</sup>"Purchase Request and Commitment for: Three-Dimensional Targets," P/N: 10492-501 and P/N: 10490-501 from CDEC Contract Officer to Del Mar Engineering Laboratories, 7 June 1974.

<sup>b</sup>Provided by Officer-in-Charge, Live Fire Ranges, Instrumentation Support Group, CDEC, 19 February 1975.

<sup>c</sup>"Purchase Request and Commitment for: Hit Transducer," P/N: 10419 from CDEC Contract Officer to Del Mar Engineering Laboratories, 7 June 1974.

<sup>d</sup>Provided by Don Werner, Braddock, Dunn and McDonald, Instrumentation Support Section, HLMR, 13 February 1975.

<sup>e</sup>Estimate.

Table F-7

**COMPARISON OF CURRENT IB AND CDEC RANGES IN TARGET INSTRUMENTATION  
AND CAPACITY TO HANDLE TEST FIRERS**

Situation (or Range)	Number of Simultaneous Firers		Cycle Time <sup>a</sup> (min)		Total Number of Targets		Number of Hit Sensors		Number of Near-Misc Sensors		Total Number of Simulators		Estimated Maximum Capacity (firers/day)	
	IB	CDEC	IB	CDEC	IB	CDEC	IB	CDEC	IB	CDEC	IB	CDEC	IB	CDEC
Assault	4	9	8	15	11	17	11	17	3	17	0	15	225	228
Firing at the same targets from different firing points (fire and movement phase)	4	12	15	30	11	28	11	28	3	28	3	21	128	192
Quick-fire	1	NA	15	NA	25	NA	25	NA	25	NA	14	NA	32	NA
Base of Fire: for assault for advance	10 NA	15 15	12 <sup>b</sup> NA	15 15	12 NA	30 28	12 NA	30 28	3 NA	30 28	3 NA	25 23	400 NA	480 480
Day defense	10	12	15 <sup>b</sup>	15	66	28	66	28	16	28	6	23	240	384
Night defense	4	NA	15 <sup>b</sup>	NA	57	NA	44	NA	--	NA	6	NA	128	NA

<sup>a</sup> Includes the length of the trial, the time to clear the range, and the time to test the instrumentation.

<sup>b</sup> Approximate.

allow over 4000 cycles, i.e., 4000 up and 4000 down actuations, before recharging is necessary.

Normally, the mechanism is controlled by a radio transmitter using the hit-and-fall method, but by continuously depressing the "Up" button, any target can be made to stay up, even when hit. Another form of control is furnished by a manual control and counter unit, which also can override the fall-when-hit mode and record hits on a counter mounted on the target mechanism.

The target holder is mounted on the final drive shaft and can be adjusted to accept flat targets 1/16-1/2-inch thick. It is designed to operate with the full range of targets currently used by NATO and SEATO countries.

Moving target carriers. A carrier capable of holding three target raising and lowering mechanisms is available. No operating specifications are provided. Brochures show the carrier operating on a two-rail, ground-mounted track similar to a railroad track. They do not indicate whether the carrier drive is ground-mounted with a pulley system or is self-propelled. Speeds are listed as equivalent to those of a walking and a running man.

Weapon-signature simulator. A 24-round, single-shot small arms simulator is available with the raising and lowering mechanism. It simulates noise, flash, and dust. Cartridges are reloaded into the simulator and are fired with the command to raise the target.

The simulator consists of a block made of specially hardened steel, drilled to accept twenty-four #33 commercial or marine electric detonators. The block is cable-connected to the mechanism via a 26-pin plug, and the leads of the electrical detonators are connected via a terminal strip. When the "Detonate" command is sent from the transmitter, the effect of a rifle shot is produced, with accompanying noise, flash, smoke, and dust.

Programmed target array. The targets are raised one time by an operator, using a control transmitter, who observes the firing of the test subjects. The targets can be set to drop when hit or to remain in view by continually giving the "Up" command. The running-man targets are also started normally from the control console.

Besides the control panel, the programmer has a transmitter and receiver system. The individual receivers are located at each target position.

The transmitter is powered by three internal, 6-volt cells made of nickel cadmium, which are recharged by a special constant current charger. The transmitter emits a single, radio frequency carrier wave that can be modulated by any of 10 audio channels to keep the target up. A common "Down" button causes all targets to drop simultaneously. A "Detonate" button, when pressed with a target "Up" button, will cause the chosen target to fire a simulated retaliatory or offensive shot.

The receiver consists of a waterproof, cast aluminum box that, although removable, is normally clamped to the mechanism-carrying frame. The receiver is connected by one cable to the mechanism via connectors, and is powered from the main mechanism battery.

Each mechanism requires one receiver, which is identified by number, namely channels 1 to 10, corresponding to the respective "Up" button numbers on the transmitter. The receiver is a conventional superheterodyne type operating in the 27-33 MHz band.

Hit sensors. The hit sensor appears to be a vibration-sensitive element located at the base of an almost rectangular, kneeling-man (type E) polyethylene target. The sensor activates a hit counter located on the target mechanism. Each target will sustain several hundred hits before needing replacement. The vibration-sensitive switch is connected by cable to the target raising and lowering mechanism. The detection of a hit either causes the target to fall or to register a hit on the counter, depending on the operation mode selected.

Night-firing attachment. The night-firing device consists of a small, waterproof aluminum box surmounted by a plastic dome. A light inside the dome illuminates the target when a button is pushed on the control/transmitter panel. When the target is hit, a red light shows briefly to inform the firer. The light is shielded to prevent illumination of the surrounding area.

Other instrumentation. The system has no near-miss sensor or round-counting system. Nor is there a means of producing hard-copy reports of either target presentations or resulting hit data.

Reliability

No data are available on the DART system's reliability. However, spare parts can be bought with the basic system, and malfunctioning components can be quickly changed by range crews.

Cost

The Marine Corps has bought the DART system for two of its installations.\* Judging from procurement plans, the cost of one target set is about \$2500.

SAAB Small Arms Training System

No technical reports of the SAAB system are available. The description below is based on information provided by the Detroit Bullet Trap Company, Schaumburg, Illinois. The firm is licensed to sell the SAAB system in the United States and is currently negotiating for the rights to manufacture the entire system in this country.\*\*

Instrumentation

The target system consists basically of a raising and lowering mechanism with a target holder capable of holding all sizes and types of target bodies. The mechanism can be purchased with several optional equipment items to produce the desired configuration. They include direct power hook-up, power pack, night-firing illuminator, weapon-signature simulator, wire or radio command link, hit counter, and control console.

Raising and lowering mechanism. The raising and lowering mechanism is equipped with a target holder capable of holding any type of small arms target. It consists of a waterproof, sheet-metal box galvanized for weather protection. It contains an electromechanical gear drive that

---

\* U.S. Marine Corps, Deputy Chief of Staff, Installation and Logistics, to Naval Training Equipment Center, Commanding Officer, Orlando, Florida, "Marine Corps Procurement Request," 27 June 1974; Naval Training Equipment Center, Commanding Officer, "List of Equipment Required for Commander General, Marine Corps Recruit Depot, Parris Island," (cost included), letter N3203: GDG, 22 May 1973.

\*\* Information provided by Mr. Joseph Nikoden, Marketing Representative, Detroit Bullet Trap Company.

operates on 14 volts DC provided either by a nickel-cadmium power pack or commercial power via reducer-converter. A special air-powered raising and lowering mechanism is also available. With the power pack the unit is capable of 3000 up-down cycles between charges.

The mechanism will operate in several modes: drop when hit, stay up for a preset time period, illuminate a night-firing light, or fire a simulator when raised. Control is by a wire or radio link.

Weapon-signature simulator. The system uses the SAAB "gun," a machine gun-shaped device that produces flash and noise by means of a mixture of oxygen and propane gas ignited by a spark plug. The simulators used at CDEC and IB are similar. The SAAB simulator will fire either single shots or bursts, and several thousand "shots" can be fired before the storage tanks must be recharged. The device is coupled with the raising and lowering mechanism for control.

Programmed target array. Several types of programs are available. Push-button tower or vehicle-mounted units are normally used on training ranges and can be configured for any number of targets. The control link can be either wire or radio. Small computers (PDP 8, Digital Equipment Corporation) have also been used as target controllers.

Hit sensor. The hit sensor is a special vibration-sensitive element located at the base of an aluminum target. Other types of hit-sensitive target bodies (like those used at CDEC and IB) may also be used with the target mechanism. The vibration-sensitive element is connected by cable to the target mechanism. Hits may be registered on a counter attached to the target or transmitted over wire to the recording device.

Night-firing attachment. On command, the night-firing device illuminates the target briefly. It is housed in a waterproof, sheet-metal box with a clear plastic cover. Power supply is from the target.

### Reliability

No data are available on the reliability of the SAAB system's instrumentation.

### Cost

No cost data are available.

### Individual Range Components Available

The various instrumentation components described below are available or have been used on test and training ranges. Some of these components were identified in the body of this report as components of existing ranges. Cross reference is made to their descriptions.

### Target Raising and Lowering Mechanisms

The standard M31A<sup>1</sup> and M30 mechanisms have been manufactured by several firms under the auspices of the Naval Training Devices Center.\* Joannell Engineering Laboratories, producer of the M30 mechanism (\$400 each) has designed an improved mechanism that has not been built in quantity. The new unit is lighter and simpler in design. It will hold flat or slightly curved target bodies (kneeling-man) of varying thickness. The operating principle is identical to the M30 mechanism. Estimated cost of the new mechanism is \$350 each.

### Moving Targets

Four companies were found that manufacture or have manufactured moving targets.

The IB running-man target system was manufactured by the Saratoga Conveyor Company, Atlanta, Georgia. Designated MTV-200, it consists of a ground-mounted pulley drive unit, 20-ft track sections bolted together in lengths of 80 to 200 ft, and a target-carrying cart. The system operates on 220 volts AC with a 1-hp, 3-phase, 208-V, AC reversing-brake motor coupled directly to a V-pulley. In a speed-reducing arrangement, the V-belt couples the drive motor to an axle, which drives an endless cable over an idler wheel at the opposite end of the track. Speeds of 5-15 mph can be obtained by substituting pulleys of various sizes.

The computer, which acts as a controller, sends a start signal to the drive unit; the start signal closes a power relay, which starts the unit in motion. As the carrier passes over a prepositioned friction bar (6 ft long), a small rubber wheel brings the target to an upright position.

---

\* U.S. Navy Training Devices Center, NAVSO Pamphlet 3108 (Orlando, FL, December 1967).

The target is held in this position by a solenoid until the cart passes over a prepositioned switch on the target or until it is hit. Then, the solenoid releases the target, which by gravity drops to its resting position. The cart continues along the track until the limit switch is triggered. It is then braked to a halt by the drive unit, which then reverses itself and automatically returns the target carrier to its starting position. These units have been in operation for four years. Periodic maintenance consists of adjusting the cable tension and replacing pulleys. The 1/4-inch steel cable tends to pick up dirt, which causes wear on the pulley. Hit data are transmitted to the computer via a radio link manufactured by California Avionics Laboratory, Inc.

Cost of the MTV-200, with 100 ft of track, is \$4000 to \$4500. The track may be installed on any fairly flat terrain. The target will not negotiate turns.

Two other moving target systems, manufactured by Aircraft Armaments, Inc. (AAI), Cockeysville, Maryland, and Joannell Engineering Laboratories, Livingston, New Jersey, were tested during the mid-1960s by the IB. The AAI system consisted of a self-propelled carrier, a pneumatic lifting mechanism, and a concrete runway with a center guide rail. Commands, current, and data collection were transmitted via the guide rail. The system operated on 200 volts AC on a circular track (one forward speed of 4 mph), powered by a 1-hp motor. The IB found the unit unsuitable because (1) the carrier was so heavy that a wrecker had to be used to emplace it, (2) the 4-ft height of the carrier required an unrealistic protective earth berm that impaired the realism desired for the range, (3) installation cost was \$4 per linear foot for the guide rail plus installation of a concrete pad, and procurement cost was \$8000 per target carrier.\*

The Joannell unit had the same basic components but operated on a 24-volt DC current using a 1-hp motor. The target-lifting mechanism was gear-driven; two rails were used to guide the target. As with the AAI target, the units were heavy and required a protective earth berm.

---

\*USAIB, Quick-Fire Experiment I, p. 83.

Joanell has manufactured an improved version that is being used on the training range at Camp Pendleton, California. The cost of this unit was \$6000. Installation cost included a concrete runway. The unit can operate on either circular or straight courses at a single speed of 4 mph forward or reverse.

The fourth moving target system is manufactured by the Detroit Bullet Trap Company and consists of a ground-mounted drive unit, a track system of 16-ft sections that can be arranged in any length to 500 ft, and an 8-wheeled cart that rides on the track. It operates on a V-pulley drive with a 1-hp, 200-volt AC motor and an endless cable. The carrier can be fitted with up to three SAAB raising and lowering mechanisms. Carrier speed can be varied up to 9 ft/sec. The system can be operated in either direction. It will not negotiate curves. The same company has produced another model that uses the same drive equipment but will operate on a loop or circular track. The track is galvanized for weather protection.

The CDEC moving target system, previously described, was fabricated in-house and the components bought by contract.

#### Weapon-Signature Simulators

The most commonly used small arms simulator or weapon-signature device is the SAAB machine gun simulator, which operates on a mixture of oxygen and propane gas ignited by a spark plug. The units can be fired remotely by wire and will fire single shots or short bursts. The system operates from a 24-volt DC power pack or, using a current-reduction converter, from commercial power. The rate of fire in the automatic mode is approximately 550 rounds per minute. These simulators were produced under the auspices of the Naval Training Devices Center. They cost approximately \$1200 each with pressure hoses and storage tanks.

The DART system uses a device that holds up to 24 blasting caps. As each is detonated, a single rifle shot is electrically simulated. No information is available on the cost of this unit when purchased separately.

Joanell Laboratories claims to have an improved model of the SAAB gun that can fire at a maximum rate of 3000 rounds per minute. Cost depends on the quantity ordered. The utility of this firing rate is doubtful.

### Near-Miss Sensors

Several types of near-miss sensors have been developed and used with varying degrees of success. The two most common and least expensive systems both utilize the ballistic shock wave of the passing projectile. One system measures the amplitude or loudness of the sound, while the second system measures the time differential of the arrival of the shock wave at various points. Both use a pressure transducer (microphone) as the sensing element. These systems are described in Chapter V.

CDEC uses the amplitude-measuring system, produced under the brand name Acousticscore by Del Mar Engineering Laboratories, Los Angeles. The cost of a single unit is estimated at \$1500. IB uses the time-differential sensing device. The cost is \$240 for the four microphones, plus four signal-conditioning units (\$250), plus a recording device. The total cost of a single system is thus \$490 plus a display unit.

Acubar, Inc., Overton, Pennsylvania, has developed a variation of the time-differential system. Two metal rods (16-40 ft long) are placed near the target, usually at 90° from each other. As the shock wave strikes the rods, they pick up the sound and transmit it to a sensor at each end of each rod. The time of arrival at each point is measured and used to calculate the point at which the shock wave first struck the rod; this is the x,y coordinate. The pulses are fed through signal-conditioning circuits into an electronic counter or computer. The system is claimed to be accurate to 1/10 inch under ideal conditions,\* the weapon in a fixed location. This system is also affected by angle of penetration. The cost of a single system with digital display readout is about \$13,000, installed. It counts 6000 rounds per minute, with 9100 achievable with special instrumentation.

The Acubar system has been installed at the following installations, almost entirely on indoor test ranges: Eglin Air Force Base, Aberdeen Proving Ground, Rock Island Arsenal, Lake City Arsenal, Twin Cities Arsenal, and Frankfort Arsenal. The systems at Twin Cities and Frankfort use a

---

\* According to George Rohrbaugh, Acubar, Inc.

PDP 8 computer (Digital Equipment Corporation) as the data collection device.

Aircraft Armaments, Inc. (AAI), Cockeysville, Maryland, has developed a "sky screen," consisting of a high-intensity lamp located near the base of the target that shines directly upward but does not illuminate the target in any way. As projectiles pass through the screen, light is reflected downward and picked up by several photo cells. The result is an x,y coordinate of the point of penetration. No cost data are available and no systems have been installed. The system requires no calibration and is not dependent on a precise angle of penetration.

The Elmer Corp., Wilton, Connecticut, has developed an improved sky screen consisting of a laser illuminator and two laser scanners on either side of the target base. The scanners sense the projectile and record the angle at which the scanner was aimed at the time of contact. The intersection angles of the two scanners determine the point of impact. No cost information is available for this system.

At least one French firm is marketing acoustic near-miss scorers; SFENA builds the acoustic scorers MAE-12B and MAE-14. Air Target, Ltd., in Sweden, is reported to make the AS100 acoustic scorer; SAAB-Bulow of Sweden markets the BT-27 and BT-14 acoustic sensors. These all appear to be air-to-ground strafing scorers. No information on them could be found.

#### Round-Counting Systems

Three round-counting systems are currently in use on the two major operational testing ranges. No other commercial systems were found.

Two of these systems were developed in-house at CDEC and IB and have been described earlier in this appendix. The third is a portable, helmet-mounted system that permits the firer complete freedom of movement. It is used at the IB during the fire and movement and assault phases of testing on the attack range. It is the only commercially available system and costs \$550 per helmet unit and \$6000 per eight-channel receiver. A display counting device or computer must be linked to the receiver for data recording. The system is manufactured by California Avionics Laboratory, Palo Alto, California.

Table F-8 lists the companies surveyed and their main products related to small arms testing and training.

Other Instrumentation

Besides what already exists on the CDEC and IB ranges, or what has been described immediately above, no new target programmers, cable networks, camera recording systems, or other ancillary instrumentation have been reported.

Table F-8

COMPANIES PRODUCING EQUIPMENT FOR SMALL ARMS  
TESTING AND TRAINING

Company	Product
Aircraft Armaments, Inc. Cockeysville, Maryland	Sky screen, miss-distance indicator, moving targets
ABA Industries, Inc. Pinellas Park, Florida	Raising and lowering mechanisms for tank targets
Acubar, Inc. Overton, Pennsylvania	Acubar miss-distance indicator
Air Target, Ltd. Stockholm, Sweden	Acoustic scorer
Australasian Training Aids Pty., Ltd. Albury, N.S.W., Australia	Complete small arms training range (DART system)
Babcock Electronics Corp. Costa Mesa, California	Automated target system Radar miss-distance system
California Avionics Laboratory, Inc. Palo Alto, California	Helmet-mounted round counter Moving target data units Range-computer interface systems Target program-control systems
Celesco Industries, Inc. Costa Mesa, California	Air-to-ground and bomb-scoring ranges
Del Mar Engineering Laboratories Los Angeles, California	Complete range system (CDEC) Acoustic score
Detroit Bullet Trap Co. Schaumburg, Illinois	Representative, SAAB complete training system Moving target mechanism
Digital Equipment Corp. Maynard, Massachusetts	Range-computer interface equipment, computers
Ecko Instruments, Ltd. Southend-on-Sea, Essex Great Britain	Radioactive miss-distance scorer
Elmer Corp. Wilton, Connecticut	Laser miss-distance indicator

Table F-8 (Continued)

Company	Product
EMR, Inc. Sarasota, Florida	SIMFIRE non-live fire tank vs. tank system
Essex Corp. Alexandria, Virginia	Human factors analysis and independent instrumentation Evaluation for small arms testing
A. Frederick Flender Co. Bucholdt, West Germany	Moving target drive systems
Joanell Engineering Laboratories Livingston, New Jersey	Hit-sensitive target material, moving targets, raising and lowering mechanisms
Instrumentfabriks AB Lyth Stockholm, Sweden	Air-to-air scorer
Mellonics Division, Litton Systems, Inc. Sunnyvale, California	Range-control software
RAI Research Corp. Hauppauge, New York	Representative, DART complete training system
REALTRAIN Chicago, Illinois	Simulated live fire training system, tank vs. tank laser system
SAAB-Bulow Linkoping, Sweden	Air-to-ground acoustic scorers
SAAB-Scania Jonkoping, Sweden	Ground target system
Sanders Associates Boston, Massachusetts	Radar miss-distance scorer
Saratoga Conveyor Company Atlanta, Georgia	Moving man and tank target mechanisms, stationary tank target mechanism
Societe Francaise d'Equipements pour la Navigation Aerienne (SFENA) Velizy-Villacoublay, France	Acoustic scorer

Table F-8 (Continued)

Company	Product
H.R.B. Singer Baltimore, Maryland	Developer of Acubar but no longer producing range equipment
System Consultants, Inc. Jerico, New York	Ammunition test services
Underwood Manufacturing Co. Hartford, Connecticut	Pop-up target mechanism
Wood Ivy, Inc. Alexandria, Virginia	Moving-man target
Xerox Data Systems El Segundo, California	CDEC range computers

**Appendix G**

**SAMPLE DECISION MEMORANDA FROM THE CDEC-SAWS PROJECT**

MARINE CORPS LIAISON OFFICER  
USACDC EXPERIMENTATION COMMAND  
Ft Ord, California 93941

CDEC-LO

18 October 1965

MEMORANDUM FOR RECORD

SUBJECT: Best Firing Technique Meeting of 15 October 1965

1. A meeting on best firing technique commenced at 1700 on 15 October, attended by the Board.

2. Technique of Fire for Approach-to-Contact Phase.

a. The Team Chief raised the question of our purpose in the design of the approach-to-contact situation on Range B. The original plan for this series of sub-situations was to examine the composite pointing characteristics of candidate weapons at typical firing distance for this mode of combat. There was a lengthy discussion which arrived at the consensus that different weapon "holding or pointing" techniques were applied to targets as a function of their range and number of targets that appear (urgency).

b. The Project Scientist reported he had planned the following exploratory firing trial sequence:

(1) Stoner rifle with 2-round burst

- (a) Shoulder aimed
- (b) Shoulder pointing
- (c) Under arm
- (d) Shoulder aimed
- (e) Shoulder pointing
- (f) Underarm without sling

(2) M-14 rifle

- (a) Shoulder aimed in 2-round burst
- (b) Shoulder aimed in semi-automatic fire
- (c) Shoulder aimed in 2-round burst

c. The Project Scientist continued to express concern about some of the short target exposure times in this situation. We concluded that the present command program was tentatively acceptable for target exposure, but it would be examined in the light of experience gained

with two new squads not previously exposed to this range. Our "exploratory firing" crew will continue the above series by the following trial sequence:

(1) Pointing (in a variety of weapon holding positions to meet the stress of each event conditioned by the distance to the target) in 2-round burst.

(2) Pointing in semi-automatic

(3) Pointing in 2-round burst

(4) Shoulder pointing 2-round burst

(5) Shoulder pointing semi-automatic

(6) Shoulder pointing 2-round burst

(7) Underarm 2-round burst

d. The Project Scientist then presented the initial exploratory firing data collected on the approach-to-contact situation of Range B on 11 October 1965. A total of 42 targets are included in this situation, with 10 targets being included in the ambush event. Data from four trials using the M-14 armed squad are shown in the table below:

TRIAL DATA FOR M-14 SQUAD, APPROACH-TO-CONTACT SITUATION

Trial	Time	Technique of Fire	Targets Hit	Total Hits	Targets Hit in Ambush	Total Ambush Exposure Time (min) <sup>a</sup>
1	0800	Shoulder aim, 2-rd burst	21	24	5 <sup>b</sup>	0.53 <sup>b</sup>
2	1100	Shoulder pointing, 2-rd burst	25	49	7	0.39
3	1330	"Low" underarm in 2-rd burst	19	25	5 <sup>b</sup>	0.59 <sup>b</sup>
4	1530	Shoulder aim, semi-automatic	32	55	10 <sup>c</sup>	0.23 <sup>c</sup>

<sup>a</sup>Maximum exposure time for all targets on ambush situation is 0.70 minutes.

<sup>b</sup>Probably the most typical of shooter unexposed to this combat situation. Even so our exploratory firers are more experienced than the normal player squad.

<sup>c</sup>Unrealistic performance reflecting strong learning (that would be expected). These results are probably not suitable for a comparison against earlier trials.

USACDC EXPERIMENTATION COMMAND  
Ft Ord, California 93941

CDEC-LO

20 October 1965

## MEMORANDUM FOR RECORD

SUBJECT: Best Firing Technique Meeting of 19 October 1965

1. A meeting on best firing technique commenced at 1930 on 19 October, attended by the Board.

2. The decision that common firing techniques for machineguns would be applied, where possible, to both machineguns in the rifle squad and machinegun squad was reviewed. The following data were presented on the M-60 machinegun fired on the defensive situation.

M-60 MACHINEGUN FIRED DURING DAYTIME ON RANGE C

<u>Date</u>	<u>Time</u>	<u>Squad</u>	<u>Burst Size (rd)</u>	<u>Ammo Used</u>	<u>Targets Hit</u>	<u>Total Hits</u>	<u>Cum. Exp. Time</u>	<u>Ammo Consumed</u>
7 Oct	0800	A	6	ball	37	62	7.36	767
7 Oct	0900	B	6	ball	32	54	9.47	573
7 Oct	1000	A	6	ball	33	53	8.16	1200
7 Oct	1100	B	6	4 + 1 tracer	42	75	6.58	486
7 Oct	1200	A	4	ball	35	55	8.94	769
1 Oct	0800	B	4	3 + 1 tracer	38	59	7.76	513
1 Oct	1000	A	2	ball	37	57	6.34	487
1 Oct	1330	B	2	4 + 1 tracer	41	67	6.10	370
1 Oct	1530	A	6	ball	36	70	6.42	1000
1 Oct <sup>a</sup>	1600	B	6	4 + 1 tracer	40	78	7.04	724

<sup>a</sup> One of two machineguns was out of action during part of this run.

3. Tracers, when used with the M-60, resulted in more targets being hit in each pairing, e.g., 8.16/6.58 (33/42); 8.94/7.76 (35/38); 6.34/6.10 (37/41); 6.42/7.04 (36/40). In the underlined case, one machinegun failed during the trial, so the results are biased. These pairings show that tracer ammunition improves machinegun first hit (and total targets hit) performance during the daytime. This conforms to established doctrine.

4. Burst size for the M-60 bipod mounted machinegun in terms of first hit performance is shown to be superior for the two-round burst over the other alternatives, i.e., 4- or 6-round burst size. This selection is further reinforced by considering the total ammunition expended in each trial. The machinegunner and ammunition bearer have 273 rounds between them. We will use 300 rounds per gun rather than 273 as it simplifies our logistic problem without prejudice to the M-60 system by allowing it an extra pound of ammunition. Exploratory firing indicates that the 273 rounds per gun will not be exceeded using our selected two-round burst size. The two-round burst results in a significantly lower ammunition consumption. We are also not overheating the barrels and hence minimizing possible "cook-offs." This latter, however, is not really a consideration in our selection of burst size. Tentative decision for the M-60 is to use a two-round burst with a 1-to-1 tracer-to-ball ratio, subject to examining Stoner machinegun exploratory firing data.

5. Bandoleers versus Boxed ammunition Range C were discussed as alternate possibilities for the Stoner and M-60 machinegun.

<u>Ammo type</u>	<u>Container Capacity</u> <u>(rounds metal link)</u>	
	<u>M-60 machinegun</u>	<u>Stoner machinegun</u>
Bandoleer .....	100	150
Boxed .....	150	6-150

It was decided that bandoleers are applicable to both machineguns, but that assistant gunner on the M-60 will help the gunner load the M-60, while the Stoner machinegunner has no loading assistance. The assistant gunner on the M-60 will not be permitted to link bandoleers. It is required that briefings include this prohibition. Both machineguns will be tried for both bandoleer and boxes and have photographs taken (to permit a subjective assessment of the problems).

6. Target acquisition alternatives when machineguns are used were discussed. Earlier, we had decided that assistant machinegunners and ammunition bearers would not assist the gunner in detecting the target because the assistant gunner and ammunition bearers had previously seen the ranges. It now appears that some of the machinegunners will also have seen the ranges once because of limitations on the available trained machinegunners. Thus, to minimize this possible bias, the gunner and assistant gunner will be applied to the target acquisition problem when

machinegun squads are fired. We will also permit machinegunners in the rifle squad mixes to be "talked on to the target," i.e., target acquisition assistance will be permitted.

7. Colt Rifle (M-16E1) exploratory firing results on Range C were presented as tabulated below.

COLT RIFLE (M-16E1) ON RANGE C

<u>Date</u>	<u>Time</u>	<u>Burst Size (rd)</u>	<u>Tracer Ratio</u>	<u>Total Targets Hit</u>	<u>Total Hits</u>	<u>Cum. Exp. Time</u>	<u>Ammo Consumed</u>
13 Oct	1130	3	2 + 1 tracer	43	121	4.33	1196
13 Oct	1340	2 <sup>a</sup>	1 + 1 tracer	44	114	5.40	1389
13 Oct	1535	Semi	1 + 1 tracer	44	71	5.03	NA
13 Oct	1710	3	2 + 1 tracer	42	74	5.67	1659
14 Oct	1320	3	ball	48	79	4.01	835
14 Oct	1550	3 <sup>b</sup>	ball	48	76	7.69	1492

<sup>a</sup>With bipod.

<sup>b</sup>Without bipod.

This data is not particularly conclusive. Two trials are interesting, i.e., the 1130 and 1710 trials with 2- and 3-round bursts. Unfortunately, they include the use of tracers, which we will not use with this weapon in any daytime firings, as per previous decision. Learning might be expected to favor the 1710 trial but is probably minimized because we suspect that the learning curve on our exploratory firers must be flattening out. Note that the two sighted trials (exposure time and ammunition consumption) support our previous decision (13 October meeting) to fire the Colt, Stoner, and M-14E2 in a two-round burst.

8. Forked Stick judgements were rendered and in the absence of factual information the subjective decision is that the forked stick will not be used with the M-14 or AK-47.

9. Colt and Stoner rifles will be fired with system weight on Range C, i.e., 300 and 210 rounds, respectively. If, as we acquire ammunition consumption data on this range, a lesser amount is adequate, we may reduce the ammunitions per firing point to reduce and simplify our logistic effort.

REPORT DISTRIBUTION

	<u>NUMBER OF COPIES</u>
Commander US Army Missile Command ATTN: AMSMI-RNM Redstone Arsenal, AL 35809	1
Director Defense Advanced Research Projects Agency ATTN: Program Management 1400 Wilson Boulevard Arlington, VA 22209	2
Battelle Columbus Laboratory ATTN: TACTEC 505 King Avenue Columbus, OH 43201	1
Institute of Defense Analysis 400 Army Navy Drive Arlington, VA 22202	1
Defense Documentation Center Cameron Station Alexandria, VA 22314	2

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author)		2a. REPORT SECURITY CLASSIFICATION	
Intrec, Inc.		Unclassified	
		2b. GROUP	
3. REPORT TITLE			
The Evaluation of Small Arms Effectiveness Criteria			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
Final Technical Report			
5. AUTHOR(S) (First name, middle initial, last name)			
6. REPORT DATE		7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
May 1975		315	53
8a. CONTRACT OR GRANT NO.		9a. ORIGINATOR'S REPORT NUMBER(S)	
DAAH01-74-C-0649		None	
b. PROJECT NO.			
c.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.		None	
10. DISTRIBUTION STATEMENT			
Distribution is limited to U.S. Government agencies--T and E. Other requests must be forwarded to ARPA-TIO, ARL, VA 22209			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY	
		Defense Advanced Research Projects Agency	
13. ABSTRACT			
<p>This study includes (1) a description of the various types of small arms tests, the agencies responsible for ordering, planning, and conducting them, and an assessment of the test management structure, (2) a description of the basic steps in designing, conducting, and analyzing operational tests (field experiments) of small arms, with the 1965-1966 small arms test at CDEC presented as a case study, and (3) an evaluation of the conduct of current small arms testing and the facilities and equipment for it at CDEC-HLMR and USAIB.</p>			