UNCLASSIFIED

AD NUMBER
ADB805755
LIMITATION CHANGES
TO: **Approved for public release; distribution is unlimited.**
FROM: **Distribution authorized to DoD only; Administrative/Operational Use; MAR 1943. Other requests shall be referred to National Aeronautics and Space Administration, Washington, DC. Pre-dates formal DoD distribution statements. Treat as DoD only.**
AUTHORITY
NASA TR Server website

THIS PAGE IS UNCLASSIFIED

Reproduction Quality Notice

This document is part of the Air Technical Index [ATI] collection. The ATI collection is over 50 years old and was imaged from roll film. The collection has deteriorated over time and is in poor condition. DTIC has reproduced the best available copy utilizing the most current imaging technology. ATI documents that are partially legible have been included in the DTIC collection due to their historical value.

If you are dissatisfied with this document, please feel free to contact our Directorate of User Services at [703] 767-9066/9068 or DSN 427-9066/9068.

Do Not Return This Document To DTIC

Reproduced by

AIR DOCUMENTS DIVISION

TECHNICAL INTELLIGENCE

T2

AMC

HEADQUARTERS AIR MATERIEL COMMAND

WRIGHT FIELD, DAYTON, OHIO

The U.S. GOVERNMENT

IS ABSOLVED

FROM ANY LITIGATION WHICH MAY ENSUE FROM THE CONTRACTORS INFRINGING ON THE FOREIGN PATENT RIGHTS WHICH MAY BE INVOLVED.

HEADQUARTERS AIR MATERIEL COMMAND

WRIGHT FIELD, DAYTON, OHIO

REEL – C

336

A.T.I.

9685

D52.1
Tailless
/2/

MR March 1943

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

ATI No. 9685

WARTIME REPORT

ORIGINALLY ISSUED

March 1943 as
Memorandum Report

INVESTIGATION OF THE LONGITUDINAL STABILITY AT HIGH SPEEDS OF A 1/5-SCALE MODEL OF A TAILLESS PURSUIT AIRPLANE

By Edmund V. Laitone

Ames Aeronautical Laboratory
Moffett Field, California

FILE COPY

DOCUMENTS DIVISION, T-2
R C-336 F 9685

NACA

RETURN TO
Document Branch - TSRWF-6
Wright Field Reference Library Section
Air Documents Division - Intelligence (T-2)
Wright Field, Dayton, Ohio

WASHINGTON

NACA WARTIME REPORTS are reprints of papers originally issued to provide rapid distribution of advance research results to an authorized group requiring them for the war effort. They were previously held under a security status but are now unclassified. Some of these reports were not technically edited. All have been reproduced without change in order to expedite general distribution.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

MEMORANDUM REPORT

for the

Air Materiel Command, U. S. Army Air Forces

INVESTIGATION OF THE LONGITUDINAL STABILITY AT HIGH SPEEDS OF A 1/5-SCALE MODEL OF A TAILLESS PURSUIT AIRPLANE

By Edmund V. Laitone

SUMMARY

Tests of a tailless pursuit airplane model at the Ames Aeronautical Laboratory have shown that in conditions corresponding to level flight at a Mach number less than 0.7 and at an altitude under 35,000 feet, no serious compressibility effects occurred and that no sudden adverse diving moments were encountered up to a Mach number of 0.74, the maximum speed of the tests. However, there were indications that the elevons might lose their effectiveness for longitudinal control during a pull-out from a steep dive.

INTRODUCTION

In order to determine the effect of high speeds upon its longitudinal stability and control and at the request of the Army Air Forces, Materiel Command, a 1/5-scale model of a tailless pursuit airplane was tested in the Ames 16-foot wind tunnel. Similar tests were made of the wing alone in order to determine the approximate characteristics of a flying wing.

APPARATUS AND METHODS

The model, made principally of mahogany, was provided

with a solid steel wing spar. The general model dimensions are shown in figure 1.

The model was mounted on two support struts in the Ames 16-foot wind tunnel, as shown in figure 1. Figure 2 shows the complete model. Figure 3 shows the wing alone as mounted for tests to determine the approximate characteristics of a flying wing.

RESULTS

The drag, lift, and pitching moments were corrected by deducting the approximate support-strut tares obtained from tests with only dummy booms mounted on the support struts (fig. 4). Figure 1 presents the significant model dimensions. The pitching-moment coefficients were computed for moments about the center of gravity and were based on the mean aerodynamic chord (fig. 1). The drag coefficients were corrected, by standard methods, for the tunnel-wall interference and for the upward inclination of the air stream as evaluated by testing the model upright and inverted. The buoyancy and constriction corrections were neglected, being less than one percent. The data were not corrected for the spanwise variation of the upflow angle or for induced velocities due to the support struts. The approximate spanwise variation of the upflow angle and local Mach number, as shown in figure 5, were determined by measurements made with only the dummy booms mounted on the support struts (fig. 4).

The data were obtained for a Mach number range of 0.3 to 0.74, corresponding to a Reynolds number range of 3,200,000 to 5,700,000 based on the M.A.C. of 1,567 feet. Figures 6 to 18 inclusive, show the variation with Mach number of the drag and pitching-moment coefficients for constant lift coefficients. Figures 6 to 11, inclusive, are for the complete model with various elevon angles (fig. 1), while figures 12 to 17, inclusive, present the results of the wing alone. A positive elevon angle (o) is defined as a downward movemoment of the trailing edge. Figure 18 shows the effect of adding roughness (1/4-inch-wide strip of No. 180 carborundum) at the 10-percent-chord line along the entire span of the complete model.

The general scatter of the test points at high speeds is

approximately 0.01 for the lift and pitching-moment coefficients and 0.001 for the drag coefficients.

DISCUSSION

The data indicate that no serious compressibility effects occurred up to a Mach number of approximately 0.7, provided the lift coefficient remained less than 0.4. A Mach number of 0.7 corresponds to a speed of 465 miles per hour at an altitude of 35,000 feet. These conditions require a lift coefficient of only 0.23 for the wing loading of the full-scale airplane, 39 pounds per square foot. Consequently, for conditions corresponding to level flight of the airplane at a Mach number less than 0.7 and at altitudes below 35,000 feet, no large adverse compressibility effects were indicated.

The variation of pitching moment with Mach number for the complete model and for the wing alone was similar to the characteristics of typical wing sections, no adverse diving moments being evident. However, figure 11, for the complete model, indicates that difficulties in longitudinal control may be experienced at high speeds with lift coefficients of 0.4 or more because the elevons ceased to be effective. Figure 11 shows that for elevon deflections of -6° the pitching-moment increment remained appreciable until a Mach number of 0.7 and a lift coefficient of 0.4 were exceeded, then the pitching-moment increment became negligible. Also at a lift coefficient of 0.4 or more and at a Mach number greater than 0.5, elevon deflections beyond -6° were ineffective for longitudinal control. Therefore, some trouble may occur during a pull-out from a steep dive. For example, a 5g pull-out at 506 miles per hour at an altitude of 15,000 feet requires a lift coefficient of 0.47 at a Mach number of 0.7, a condition for which the model test results show the elevons to be relatively ineffective. Figure 17, for the wing alone, exhibits the same general characteristics, showing that the effect was not produced by the addition of the fuselage or duct openings. However, it is important to note that appreciable scale effects may be involved. At the low Reynolds number of these tests (3,200,000 to 5,700,000), the tendency of the flow to separate is probably greater than it would be at full-scale Reynolds numbers. Surface roughness, the effect of which is indicated for the model by

comparison of figures 6 and 18, might be of smaller consequence in full scale, since it would probably have less tendency to promote separation. The support booms, which were flush with the inboard ends of the elevons, as shown in figure 1, may have produced interference, especially at the higher lift coefficients and Mach numbers.

Ames Aeronautical Laboratory,
National Advisory Committee for Aeronautics,
Moffett Field, Calif.

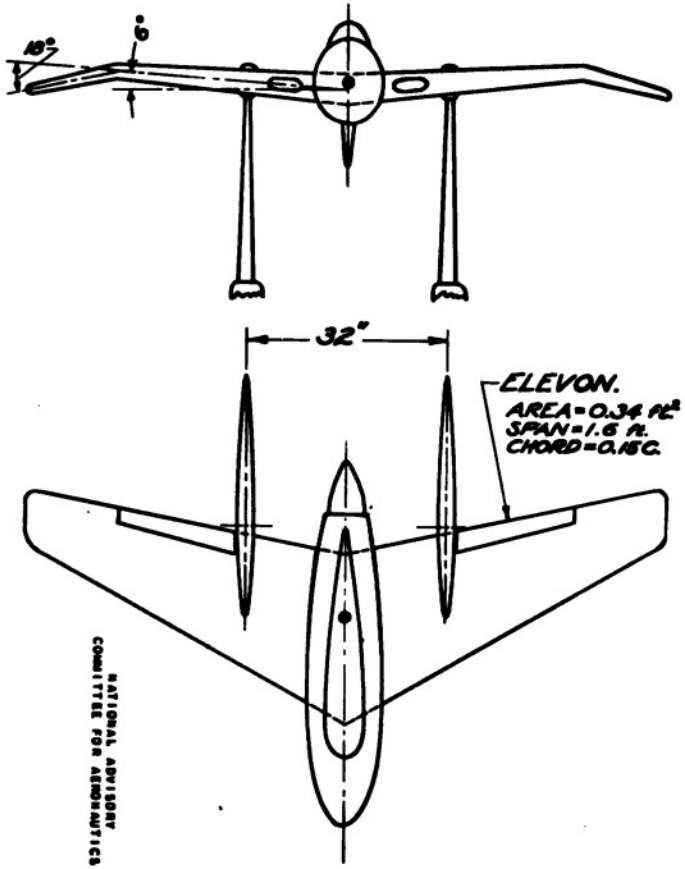

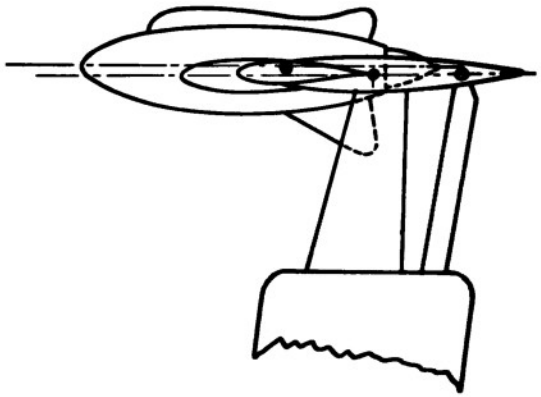

$\frac{1}{5}$ SCALE MODEL.

WING AREA = 12.28 ft²
M.A.C. = 1.567 ft.
SPAN = 8.515 ft.
ROOT CHORD = 2.171 ft., TIP = 0.722 ft.
C.G. 16.46 AFT OF ROOT CHORD L.E.
& 0.13 BELOW FUSELAGE ℄.
TUNNEL ℄ OF ROTATION 30.13 AFT
OF ROOT CHORD & 1.76 BELOW
FUSELAGE ℄.
ASPECT RATIO = 5.91
TAPER RATIO = 3:1
SWEEPBACK OF ¼ CHORD LINE = 25°

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 1.- Outline of the model mounted on support struts.

A77

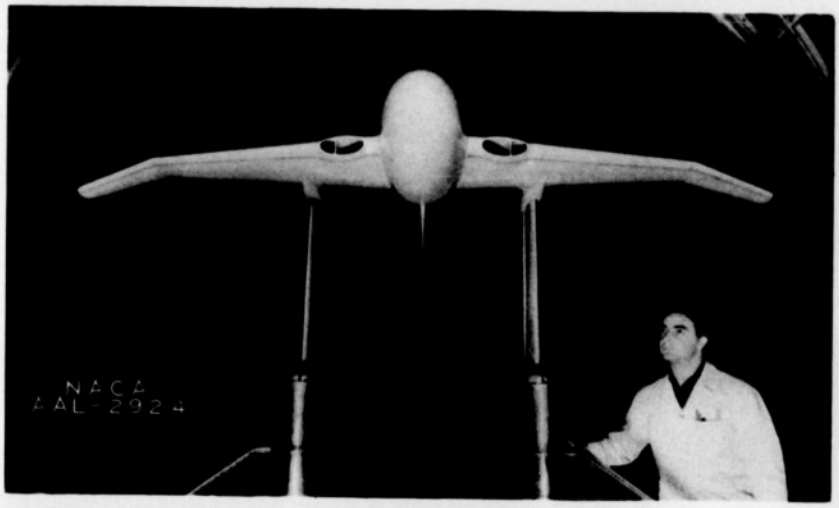

Figure 2.- Complete model.

Figure 3.- Wing alone.

A77

Figure 4.- Dummy booms mounted on support struts

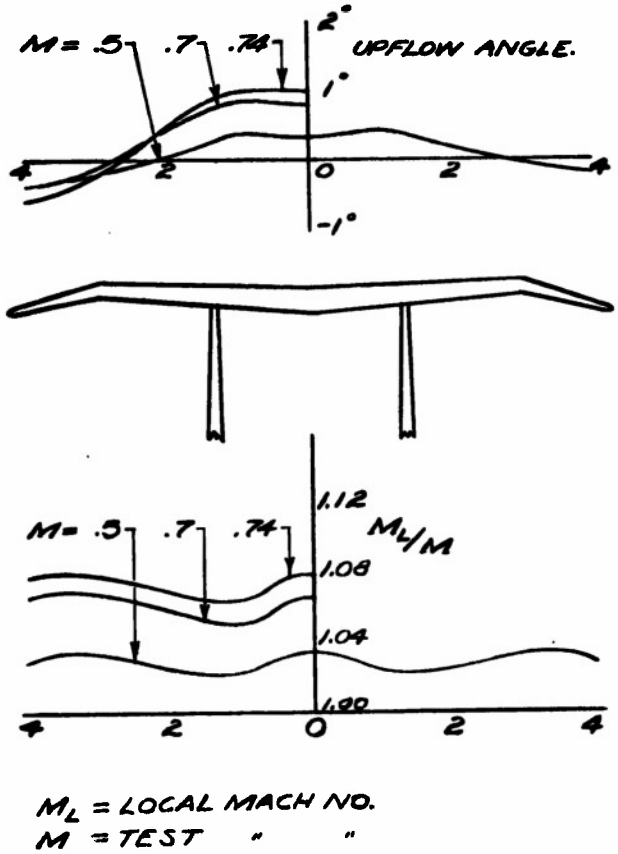

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 5.- Spanwise variation of upflow angle and local Mach number in vertical transverse plane through model center of gravity.

A77

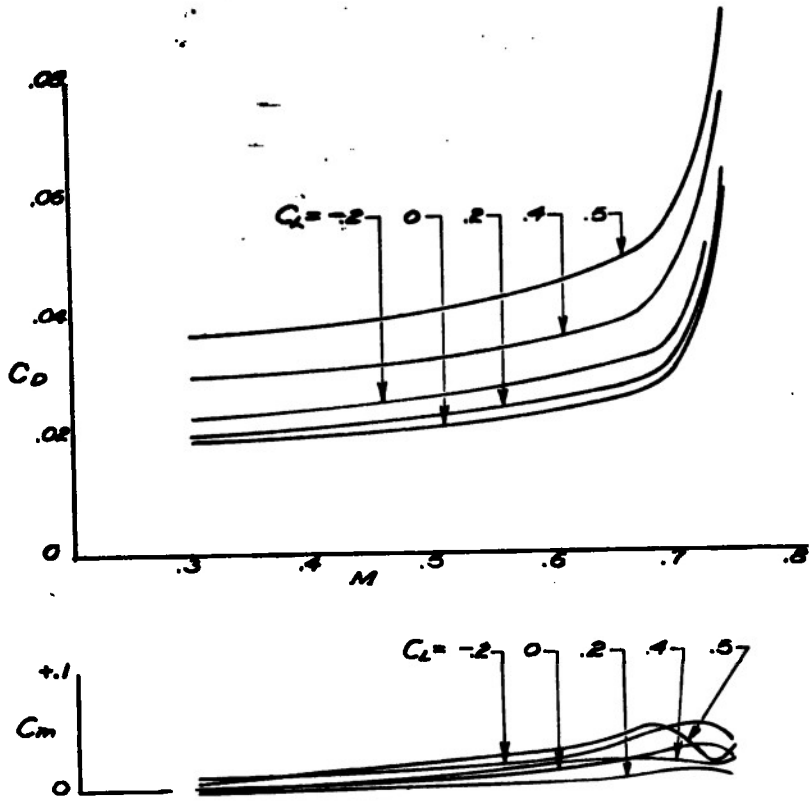

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 6.- Variation of C_D and C_m with M at constant C_L for complete model with elevons at 0°.

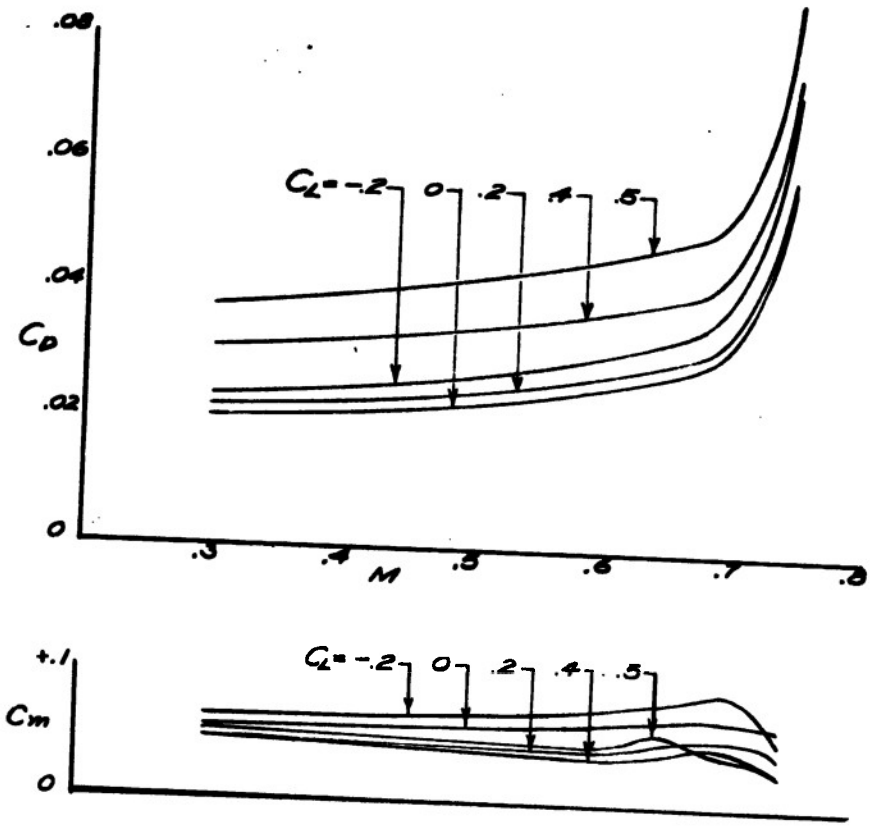

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 7.- Variation of C_D and C_m with M at constant C_L for complete model with elevons at -12°.

A77

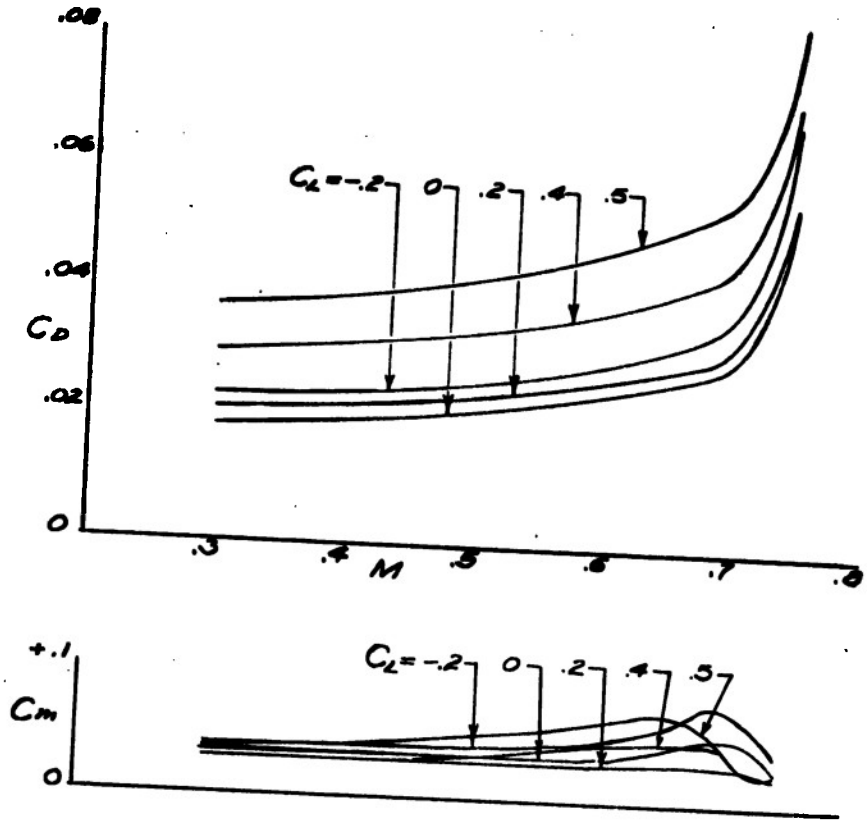

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 8.- Variation of C_D and C_m with M at constant C_L for complete model with elevons at -6°.

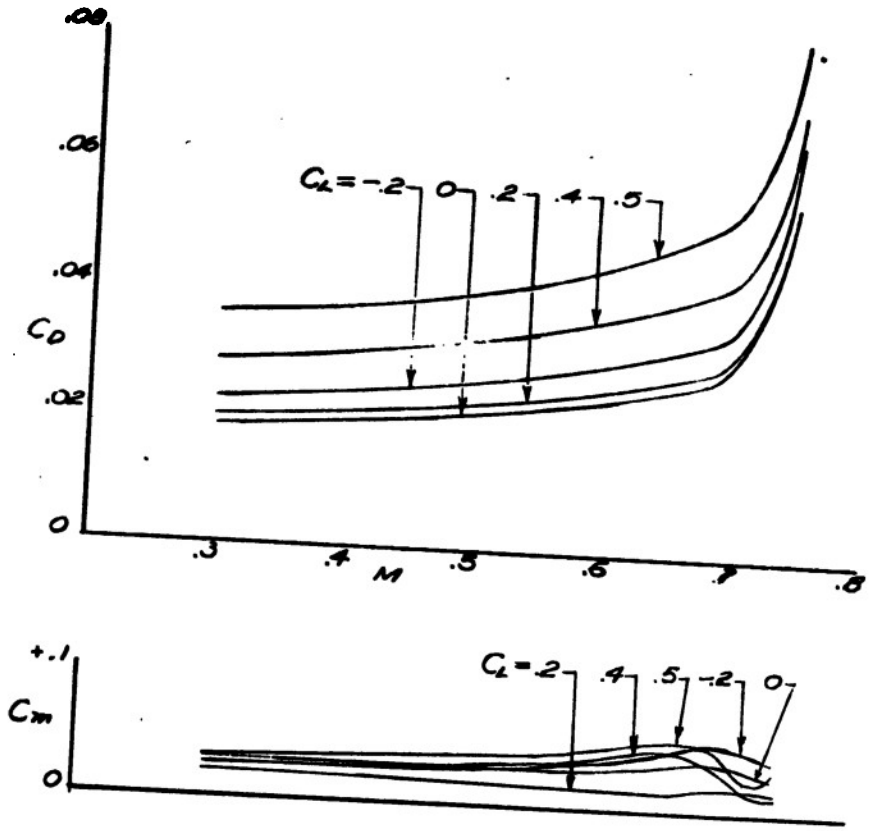

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 9.- Variation of C_D and C_m with M at constant C_L for complete model with elevons at -3°.

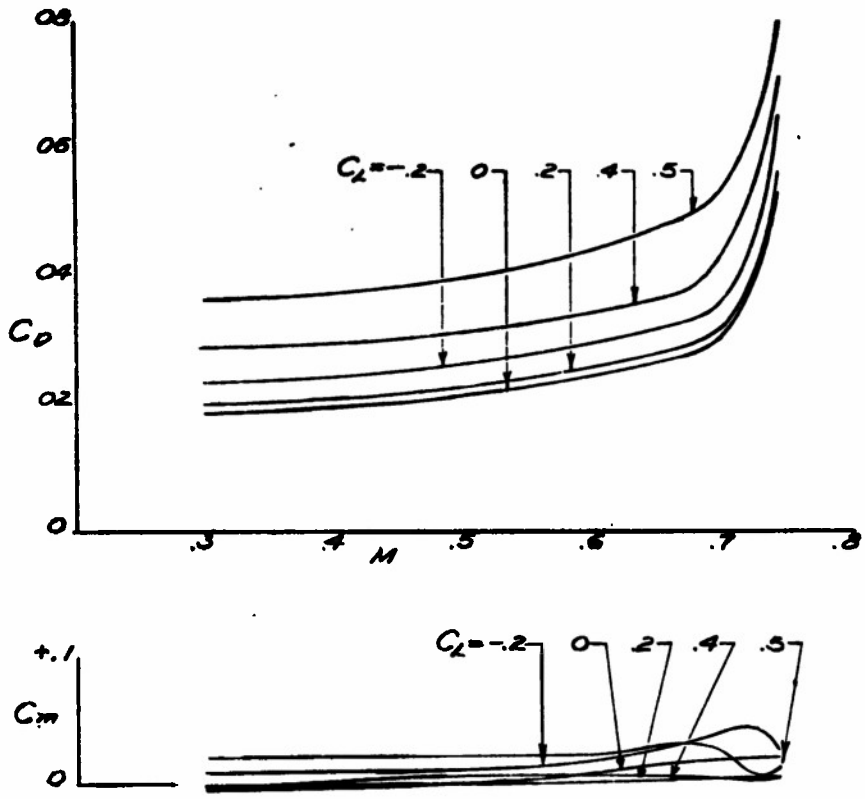

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 10.- Variation of C_D and C_m with M at constant C_L for complete model with elevons at +3°.

A77

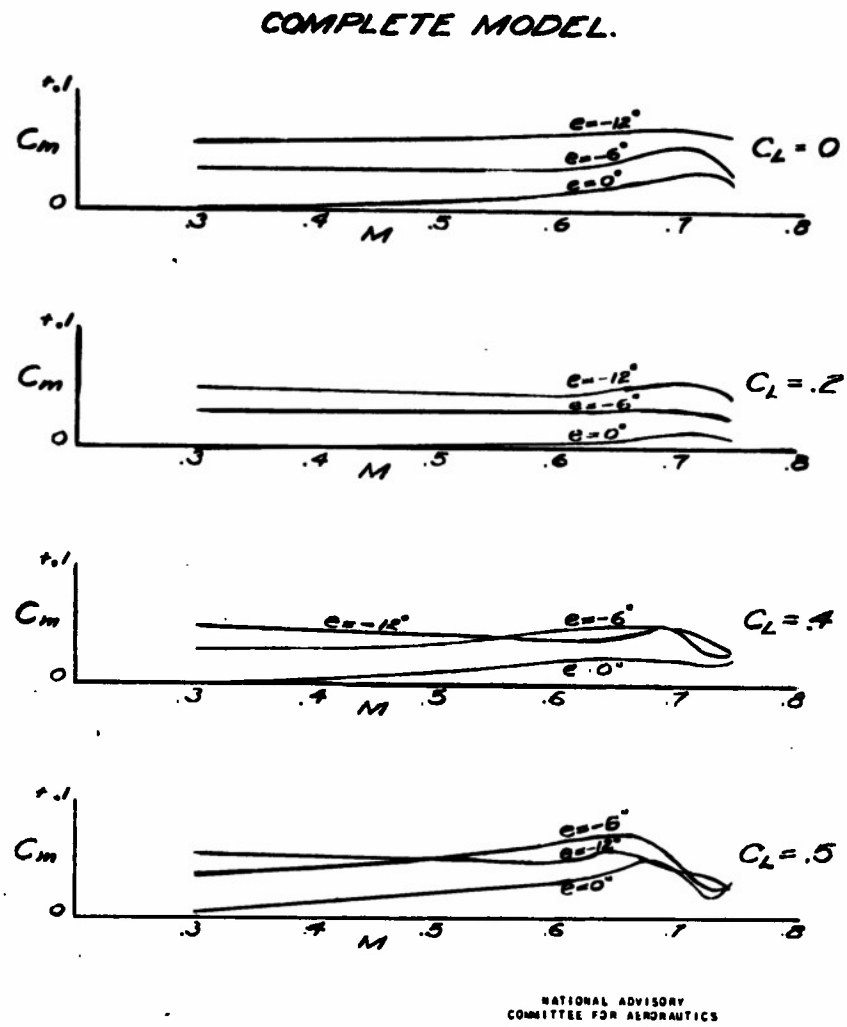

Figure 11.- Elevon effectiveness for the complete model.

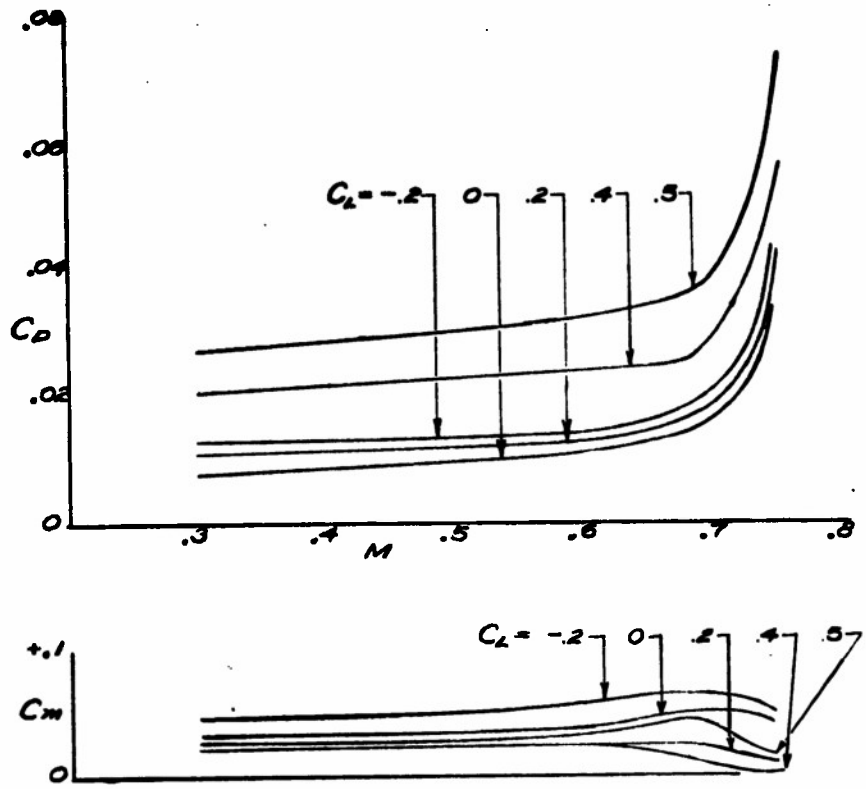

RATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 12.- Variation of C_D and C_m with M at constant C_L for wing alone with elevons at 0°.

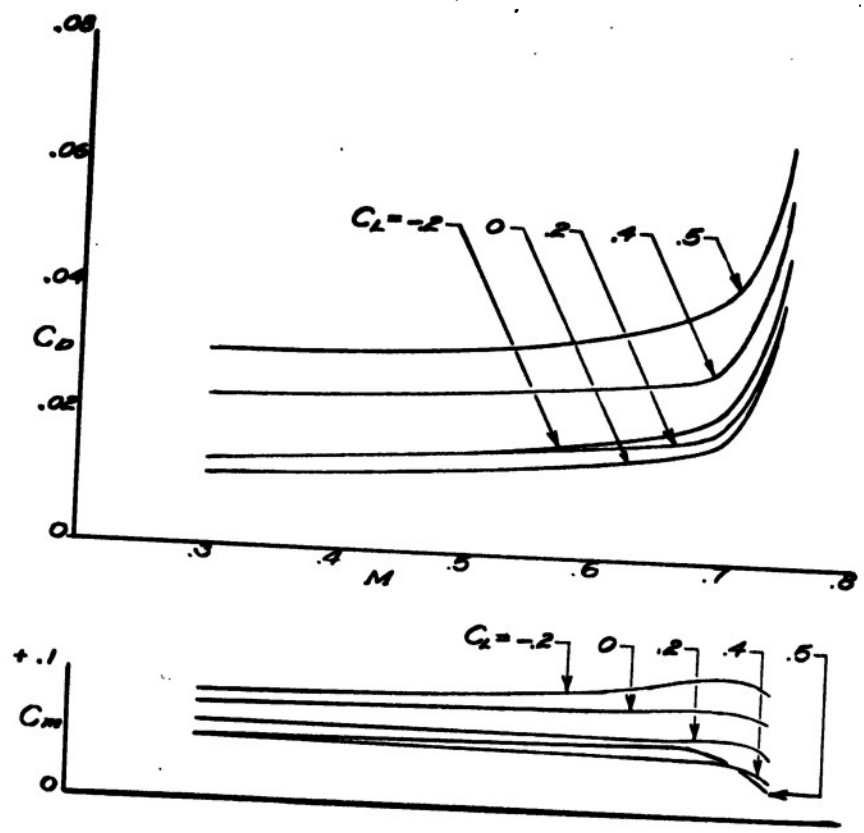

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 13.- Variation of C_D and C_m with M at constant C_L for wing alone with elevons at -12°.

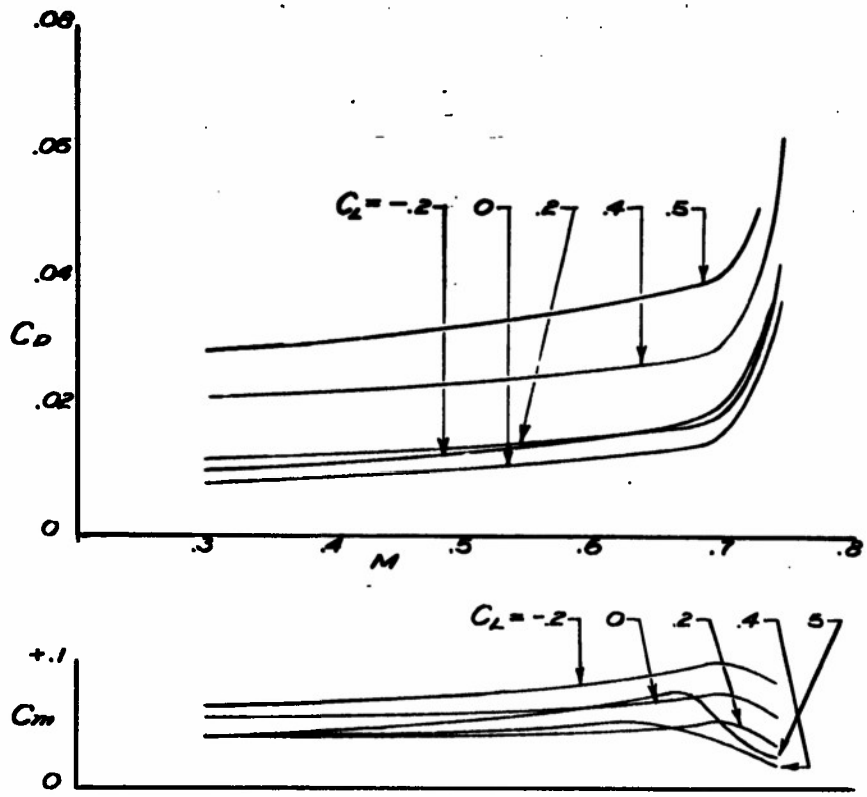

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 14.- Variation of C_D and C_m with M at constant C_L for wing alone with elevons at -6°.

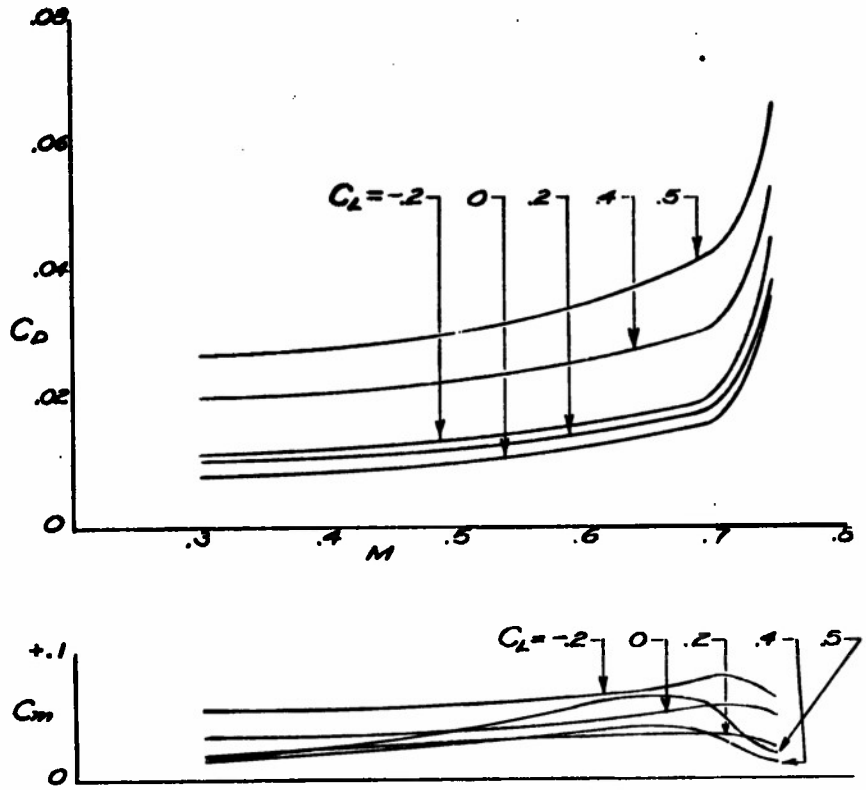

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 15.- Variation of C_D and C_m with M at constant C_L for wing alone with elevons at -3°.

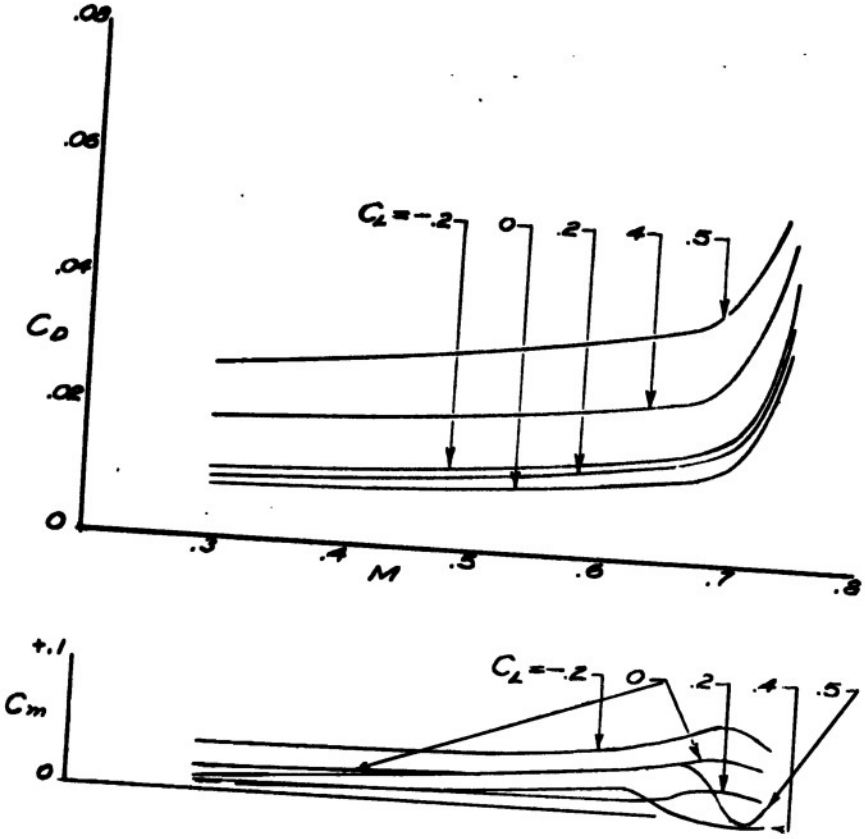

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 16.- Variation of C_D and C_m with M at constant C_L for wing alone with elevons at +3°.

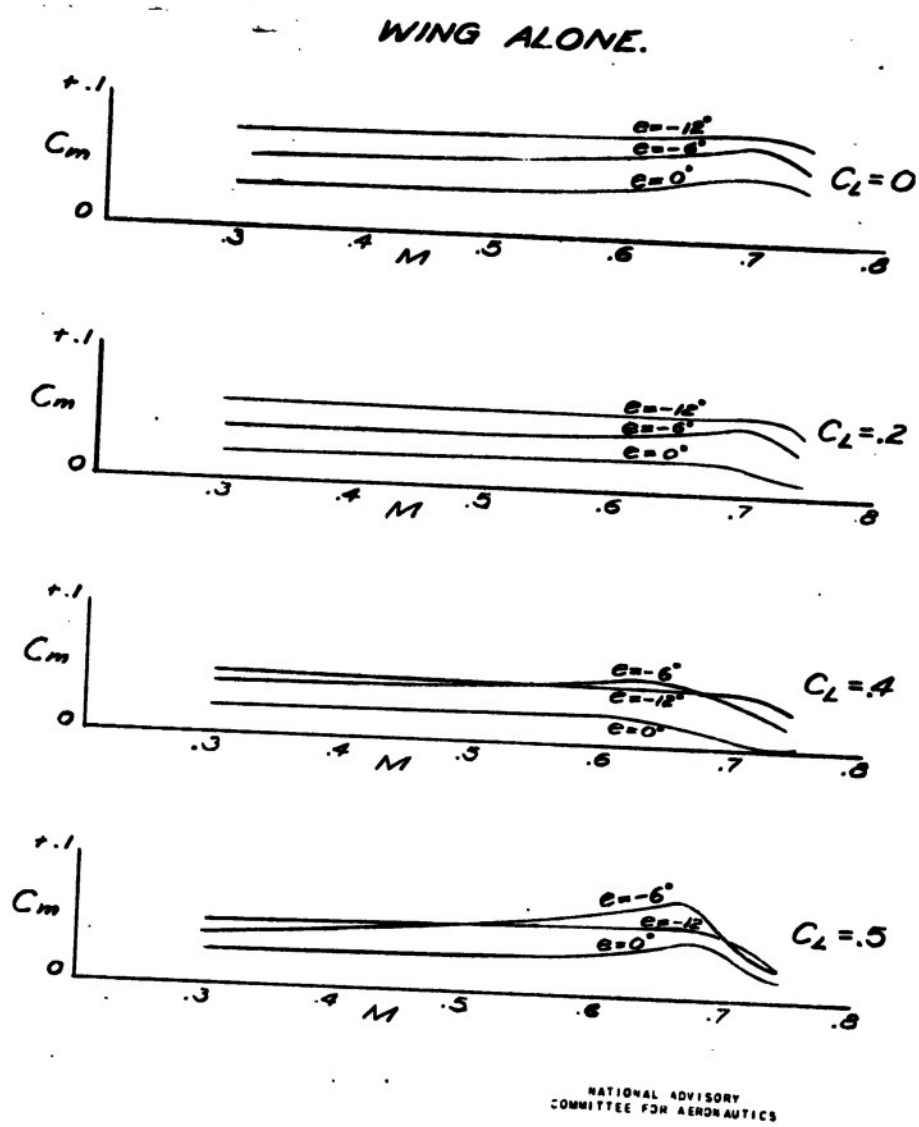

Figure 17.- Elevon effectiveness for wing alone.

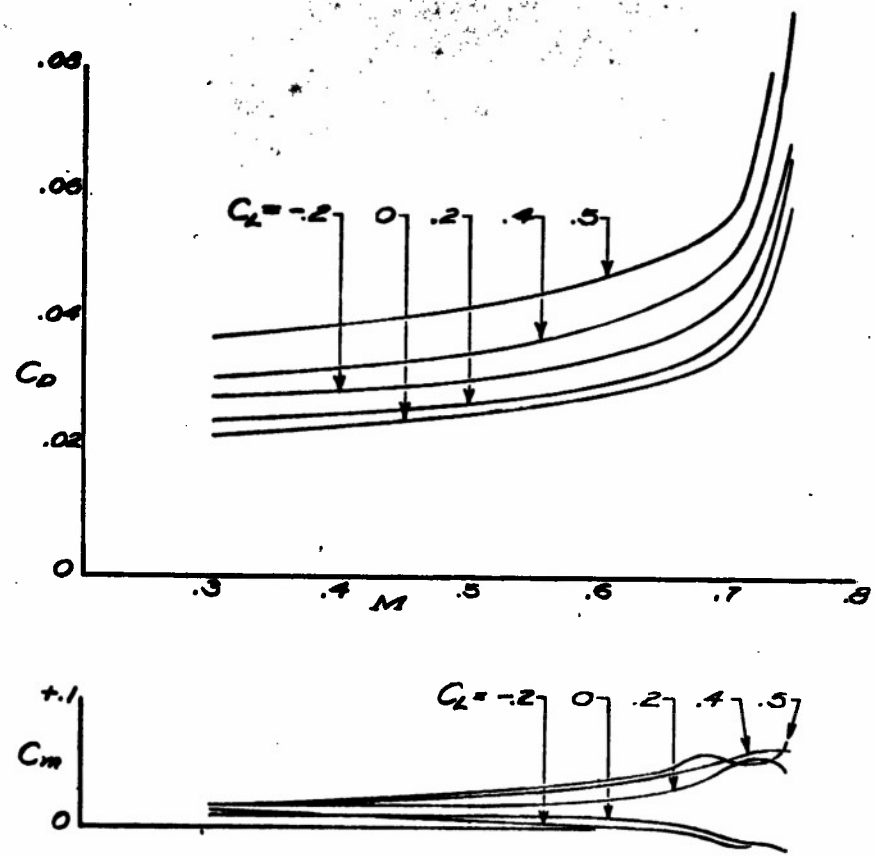

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 18.- Variation of C_D and C_m with M at constant C_L for complete model with roughness at 10 percent chord line. Elevons at 0°.

REEL – C

336

A.T.I.

9685

TSDIC FORM 60 (13 MAR 47)

Laitone, E. V.

AUTHOR(S)

DIVISION: Aerodynamics (2)
SECTION: Stability and Control (1)
CROSS REFERENCES: Airplanes, Tailless - Aerodynamics (08725); Longitudinal stability (56020.32); Elevons - Control characteristics (32242)

ATI- 9685

ORIG. AGENCY NUMBER

MR-A-77

REVISION

AMER. TITLE: Investigation of longitudinal stability at high speeds of a 1/5-scale tailless pursuit airplane

FORG'N. TITLE:

ORIGINATING AGENCY: National Advisory Committee for Aeronautics, Washington, D. C.

TRANSLATION:

COUNTRY	LANGUAGE	FORG'N.CLASS	U. S.CLASS.	DATE	PAGES	ILLUS.	FEATURES
U.S.	Eng.		Unclass.	Mar'43	22	18	photos, graphs

ABSTRACT

Tests show that in conditions corresponding to level flight at Mach number less than 0.7 and at an altitude under 35,000 ft, no serious compressibility effects occurred and no sudden adverse diving moments were encountered up to a Mach number of 0.74, the maximum speed of the tests. However, there were indications that the elevons might lose their effectiveness for longitudinal control during a pull-out from a steep dive.

NOTE: Requests for copies of this report must be addressed to: N.A.C.A., Washington, D. C.

TSDIN FORM 63 (13 MAR 47)

Laitone, E. V.

AUTHOR(S)

DIVISION: Aerodynamics (2)
SECTION: Stability and Control (1)
CROSS REFERENCES: Airplanes, Tailless - Aerodynamics (08725); Longitudinal stability (56020.32); Elevons - Control characteristics (32242)

ATI- 9685

ORIG. AGENCY NUMBER

MR-A-77

REVISION

AMER. TITLE: Investigation of longitudinal stability at high speeds of a 1/5-scale tailless pursuit airplane

FORG'N. TITLE:

ORIGINATING AGENCY: National Advisory Committee for Aeronautics, Washington, D. C.

TRANSLATION:

U

COUNTRY	LANGUAGE	FORG'N.CLASS	U. S.CLASS.	DATE	PAGES	ILLUS.	FEATURES
U.S.	Eng.		Unclass.	Mar'43	22	18	photos, graphs

ABSTRACT

Tests show that in conditions corresponding to level flight at Mach number less than 0.7 and at an altitude under 35,000 ft, no serious compressibility effects occurred and no sudden adverse diving moments were encountered up to a Mach number of 0.74, the maximum speed of the tests. However, there were indications that the elevons might lose their effectiveness for longitudinal control during a pull-out from a steep dive.

NOTE: Requests for copies of this report must be addressed to: N.A.C.A., Washington, D. C.

T-2, HQ., AIR MATERIEL COMMAND AIR TECHNICAL

AD-B805 755

P 1/1

23

* Aerodynamic Stability
Tailless Aircraft
Elevons