Serial No. 845,897

Filing Date 28 April 1997

Inventor M. Ashraf Imam
Satya B. Sastri
Tedyy M. Keller

NOTICE

The above identified patent application is available for licensing. Requests for information should be addressed to:

OFFICE OF NAVAL RESEARCH
DEPARTMENT OF THE NAVY
CODE OOCC3
ARLINGTON VA 22217-5660

19970710 063

DTIC QUALITY INSPECTED 4

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

POROUS METAL/ORGANIC POLYMERIC COMPOSITES

Background of the Invention

1. Field of the Invention

The present invention relates generally to metal composites and more particularly to metal/polymer composites.

2. Description of the Background Art

In many cases, such as in factories, motor vehicles, ships, and submarines, it is desirable to absorb as much noise as possible. In factories, absorbance of machinery noises can minimize noise pollution caused by industrial sounds. In motor vehicles, absorbance of engine noises and noises from road vibration enhances driver and rider comfort. In submarines and ships, the absorbance of machinery sounds helps prevent detection and identification by unfriendly forces. Additionally, in regions where earthquake are common, the structural components of buildings, bridges, and similar artifacts must not only be strong, but should be able to dampen vibrations.

Past noise reduction efforts have previously taken one of two approaches. The use of soft coupling components (e.g., bushings, pads) to isolate machinery, and the incorporation of structural acoustic damping materials.

Both of these prior art approaches have had drawbacks. Soft coupling components add weight to a device, may require maintenance, and may not be consistent with the required design and performance features. Currently available acoustic damping materials do not exhibit adequate acoustic behavior over broad ranges of temperature, lack the required strain amplitude and frequency, or do not have the desired strength and environmental resistance.

Significant advances have been made to increase the strength and stiffness of lightweight materials. Examples of these developments include the superior density-normalized strength and stiffness of Al-Li, hard dispersion strengthened aluminum and titanium, aluminides, and whisker or fiber reinforced aluminum and magnesium. Although those materials have excellent structural characteristics, the demand continues for high strength, lightweight structural materials that also vastly improve damping capability.

United States Patent No. 4,759,000, the entirety of which is incorporated herein by reference for all purposes, to Ronald P. Reitz describes acoustically transparent windows made of an aluminum/nickel foam impregnated with an acoustically non-absorbent rubber such as BE silicone rubber RTV-11. Nothing in that patent teaches or suggests that a useful material may be obtained by impregnating a metal foam with an acoustically absorptive polymer.

Summary of the Invention

Accordingly, it is an object of this invention to produce a light structural materials having good structural and acoustic damping properties.

It is another object of the present invention to reduce noise derived from the operation of machinery.

It is a further object of the present invention to acoustically isolate internal areas of a structure from their surrounding environment.

These and other objects are achieved by impregnating a metal foam with a polymer.

Brief Description of the Drawings

A more complete appreciation of the invention will be readily obtained by reference to the following Description of the Preferred Embodiments and the accompanying drawings in which like numerals in different figures represent the same structures or elements, wherein:

Fig. 1 shows the acoustic damping behavior of an aluminum alloy foam/phthalonitrile composite, heat treated under the various condition described in the accompanying Example 3.

Fig. 2, Fig. 3 and Fig. 4 show the results of damping

measurements for a copper foam/phthalonitrile composite, over a frequency range of 0.1 to 10 Hz.

Fig. 5, Fig. 6, and Fig. 7 show the damping behavior of a titanium foam/phthalonitrile composite under different heat treatment conditions as described in Example 5.

Fig. 8 and Fig. 9 show the damping behavior of a zinc foam/phthalonitrile composite under different heat treatment conditions as described in Example 5

Fig. 10 is a graph showing the Tanδ over a frequency range of 0.1 to 10 Hz for various polymers and metal foams.

Fig. 11 shows the damping behavior of a white rubber/aluminum alloy foam over the frequency range of 0.1 to 10 Hz.

Fig. 12 shows the damping behavior of a red rubber/aluminum alloy foam over the frequency range of 0.1 to 10 Hz.

Fig. 13 shows the damping behavior of an epoxy/aluminum alloy foam over the frequency range of 0.1 to 10 Hz.

Fig. 14 shows the damping behavior of an acrylic polymer/aluminum alloy foam over the frequency range of 0.1 to 10

Hz.

Fig. 15 shows the stress/strain diagram for an aluminum alloy foam/phthalonitrile composite that was heat treated at 280°C for 18 hours, at 325°C for 4 hours, and at 375°C for 4 hours.

Fig. 16 shows the stress/strain diagram for an aluminum alloy foam/acrylic composite.

Description of the Preferred Embodiments

The metal foam of the present invention may be any porous metal workpiece, particularly a metal foam, regardless of shape or percent density, having an open cell structure that permits impregnation with an uncured polymer. Particularly useful metals include aluminum, titanium, nickel, copper, iron, zinc, lead, silver, gold, platinum, tantalum, and alloys (including steel) based on these metals. Other metals may also be used. Aluminum and titanium and alloys thereof are particularly useful because of their low density.

Metal foams may be produced by a variety of known methods. For example, a molten metal may be placed under high pressure so that it dissolves a non-reactive gas. When the pressure is released and the metal is allowed to cool, the dissolved gas escapes and leaves open-celled pores in the metal body. In other

processes, foaming agents are added to molten metal. Another process mixes monomers with metal particles and heats the mixture to induce foaming and solidification of the resin. As used herein, the term "resin" encompasses prepolymers, monomers, and mixtures thereof. A "cured resin" is the cured polymer. With further heating, the metal particles consolidate and the polymer hydrolyzes. United States Patent No. 4,569,821, the entirety of which is incorporated herein by reference for all purposes, improves upon that process by substituting a stabilized hydrogel for the monomers, allowing more complete pyrolysis of the organic components during formation of the metal foam.

In a foam, pore size is defined as the number of pores per linear unit length. Because foams have only thin ligaments between the pores, the void diameter of a pore is approximately the reciprocal of the pore size of the foam. Decreasing the void diameter increases the contact surface area between the metal foam and the polymer. Also, as the percent foam density (*%Foam Density = Density of a One Unit Volume of Foam/Density of One Unit Volume of Metal* x 100) of the metallic foam decreases, the final product increasingly exhibits the structural characteristics of the polymer material. Thus, as the percent foam density of the metallic foam decreases, the stiffness of the composite decreases. Even with extremely low percent foam densities, however, the stiffness of the composite is greater superior to that of either of the individual components. Percent foam density and pore size also determine the

number of polymer/metal interfaces that an acoustic vibration must traverse. As explained below, the polymer/metal interfaces contribute mainly to the sound damping capabilities of the composites of the present invention. A typical useful pore size is 5-100 pores/inch. More often, a pore size of about 10-50 pores/inch is used, and most often a pore size of about 10-40 pores/inch is used. Typically, the percent foam density is about 5-40. More often, the percent foam density is about 8-10.

Typically, to improve the predictability of the structural and acoustic properties of the composite products of the present invention, the pores (also referred to in the present specification and claims as "cells") within the metal foam have a locally uniform size and distribution. Throughout the present specification and claims, a foam has a locally uniform size and distribution of pores if most of the pores of the foam are surrounded by evenly distributed pores having approximately the same void diameter as the surrounded pore. Local non-uniformity in the size or distribution of the pores within the metal foam decreases the predictability of the characteristics for the resulting composite. If desired, the metal foam may be divided into regions of different pore size, or may have a gradation of pores sizes in any direction along the metal foam, while maintaining locally uniform pore size, without harming the predictability of performance.

The metal foam may be impregnated by any available method. Typically, the metal foam is impregnated by contacting it with a

resin component. The resin component may be a neat resin or a neat blend of resins, or may include any catalysts, curing agents, or additives desired. The resin component may be a powder (of sufficiently small particle size to penetrate the pores of the metal foam), a melt, a room temperature liquid, or a solution, and may include mixtures of several prepolymers and/or monomers. A vacuum or positive pressure may be applied to assist the penetration of the resin component into the metal foam. Solvent, if present, is removed by evaporation. The resin component is then converted (solidified or consolidated by any method, typically heating to polymerize and/or cure the resin, or cooling to solidify a molten resin) to a solid bulk polymer (partially crosslinked, fully crosslinked, or non-crosslinked) that fills or partially fills the open-cells of the metal foam.

The viscosity of the resin component (i.e., the impregnant) can be adjusted both thermally or by adjusting the amount of any solvent used, if necessary. Preferably, the impregnant viscosity should be selected to allow the metal foam to be completely impregnated with the resin component under practical processing conditions. A high impregnant viscosity may restrict the ability of the resin component to completely penetrate the open porous structure of the metal foam. This problem may be overcome by forcing, under positive pressure, the resin component into the pores of the foam. For any given impregnant used, an appropriate impregnant viscosity may be selected empirically, without undue

experimentation, given the guidance provided by this specification and the accompanying examples. Resin component in powder form can be forced into the pores of the metal foam by any method. For example, the powdered resin component may be poured on top of the metal foam, and positive or negative pressure may be applied to the powder, forcing it into the pores of the foam. At the same time, the metal foam may be vibrated to aid in impregnation.

The polymeric component of the present invention is typically selected to have high intrinsic acoustic damping. Basically, the acoustic damping ability of a polymer is determined by its dynamic modulus at a given frequency. In the case of rubber materials, the acoustic damping ability of unhardened rubbers is significantly greater than that of hardened or fully hardened rubbers. In general, thermoplastics and thermosets, unlike elastomers, provide excellent results when used according to the presently claimed invention, whether cured or uncured.

Polymers particularly useful in the present invention include phthalonitriles, epoxies, acrylics, silicones, polyurethanes, polyimides, polyvinyls, polycarbonates, natural rubbers, synthetic rubbers, phenolics, polyolefins, polyamides, polyesters, fluoropolymers, poly(phenylene ether ketones), poly(phenylene ether sulfones), poly(phenylene sulfides) and melamine-formaldehyde resins.

The acoustic damping capabilities of the composite of the present invention arise in part from the acoustic properties of the

polymerized resin component and in part from dissipation of energy at the polymer/metal interface. Energy is never transferred without loss at interfaces between different materials. Therefore, as the number of interfaces that an acoustic vibration must traverse increases, the percentage of dissipated acoustic energy also increases. A metal foam/polymer composite provides numerous interfaces between the polymer and the metal matrix.

Additionally, relative motion between the polymer and metal at their interfaces increases the loss of acoustic energy at these interfaces. Thus, the acoustic damping properties of a polymer/metal matrix composite may be improved, in some cases, by forming the composite under conditions that avoid or minimize chemical or bonding between the metal and the polymer component. Bonding between the polymeric component and the interface may be controlled by the combination of metal and polymeric agent selected, the choice of curing agent and/or curing mechanism, and the application of a release agent, if any, to the metal foam before impregnation with resin component. In other cases, however, vibration of a bond between a metal foam and a polymer may be a loss mechanism that increases acoustical damping across the desired frequency range.

For acoustic damping applications, the composite of the present invention should provide a sufficient number of polymer/metal interfaces to allow good acoustic damping. Thus, particularly when formed as a sheet for acoustic damping

applications, the smallest dimension of the metal foam (for a sheet, the thickness) is usually at least about 1.5 times the average void diameter of the metal foam. In many cases, for acoustic damping applications, the smallest dimension of the metal foam will be three or more times greater than the average void diameter of the metal foam.

Also, acoustic damping in these materials might be further improved by the inclusion of polymer/gas and/or gas/metal interfaces, which further increase the number of interfaces that an acoustic vibration must traverse through the composite. These polymer/gas and/or gas/metal interfaces may be formed by many mechanisms, such as the use of a foamed resin component to produce the polymeric component of the composite, the dissolution of the neat resin or blend of resins in a solvent before impregnation, or the inclusion of minute amounts of gas, or materials that form a gas or a vapor during curing, within the resin component used to form the polymeric component. The amount of gas or gas forming materials should be sufficient to significantly enhance the acoustic damping capabilities of the composite, but should not provide sufficient gas to essentially destroy the structural integrity of the composite and/or the polymeric component thereof. The optimum amount of any gas or gas producing agent used in the resin component will vary depending upon the desired use for the composite and may be empirically determined without undue experimentation.

The interaction of the metal foam and the polymer matrix also contributes to the structural strength of the composite. Consequently, the structural strength of the metal foam/polymer composite is greater than the individual structural strengths of the metal foam and the polymer.

Composites according to the present invention may be constructed to exhibit acoustic damping across a frequency band residing within a range of typically about 0.001-80 kHz. The precise frequency band, as well as the bandwidth over which a composite according to the present invention exhibits acoustic damping, is determined by the selected polymer, metal, pore size and percent foam density. The frequency range of damping may be extending by stacking together metal foam/polymer composites having different pore sizes, percent metal foam densities, polymers and/or metals. Several sheets may be laminated together with adhesive, or in some cases will bond to each other during curing of one or more of the polymers within the metal foams, to form a laminate. Pore size and percent metal foam density may also be varied, without stacking, by providing a metal foam having regions of different average pore size or having an average pore size that is graded in one or more directions. It may also be possible to vary the polymer used within a single sheet. For example, a foam may be impregnated with a first resin component. The resin component-impregnated foam may then be subjected to pressure on, for example its upper surface, to force any portion of the first resin

component out in the upper portion of the metal foam down into the lower portion. The resin component-impregnated foam may then be solidified while under this positive pressure. After partial or complete consolidation or solidification of the first resin component in the lower portion of the metal foam, the upper portion of the metal foam may be impregnated with a second resin component.

Aside from enhanced performance, components manufactured using composites according to the present invention may alter the noise properties of machinery, aerospace vehicles, domestic vehicles, military vehicles, commercial vehicles, marine vehicles and maritime vehicles. Also, composites according to the present invention are readily manufactured, for example, by resin transfer molding (RTM), resin infusion molding, or resin injection molding.

Having described the invention, the following examples are given to illustrate specific applications of the invention including the best mode now known to perform the invention. These specific examples are not intended to limit the scope of the invention described in this application.

EXAMPLES

Example 1: Preparation of phthalonitrile prepolymer

Phthalonitrile monomer, 4,4'-bis(3,4-dicyanophenoxy)biphenyl, was purchased from Daychem Laboratories. 10 g of the monomer was

placed in an aluminum planchet and melted on a hot plate at 250°C (monomer melts around 235°C). The monomer melt was degassed for about 2h to eliminate trace amounts of solvent present. The phthalonitrile prepolymer was synthesized by adding 0.15- 0.168 g (1.5-1.68 wt%) of 1,3-bis(3-aminophenoxy)benzene, obtained from National Starch Corporation, to the monomer melt. The melt was stirred for 15 min. and was used for fabrication of phthalonitrile/metal foam composite specimens.

Example 2: Fabrication of phthalonitrile/aluminum foam composite

An aluminum mold, 2"x0.6"x0.2", coated with a teflon mold release agent was used for fabrication of composite specimens. Two aluminum foam strips (1"x0.5", density 6-8 % of the solid material, pore size - 40 pores per inch (ppi)) separated by a teflon film, were placed in the mold and heated to 250°C. Approximately 2-3 g of the prepolymer melt synthesized as described above in Example 1 with 1.68 wt% curing additive was poured over the metal foam and degassed for about 15 min.with periodic venting to ensure a good flow of the resin throughout the metal foam. The mold was then heated in an air circulating oven for 9h at 280°C and cooled back to room temperature over a 3h span. The composite samples made with this prepolymer showed an incomplete penetration of the resin into the metal foam. Therefore, subsequent composite fabrications involved a slower curing prepolymer made with 1.5% curing additive. The prepolymer has an initial lower viscosity.

Example 3: Fabrication of phthalonitrile/aluminum foam composite

An aluminum mold, 2"x0.6"x0.2", coated with a teflon mold release agent was used for fabrication of composite specimens. Two aluminum foam strips (1"x0.5", density 6-8 % of the solid material, pore size - 40 ppi) separated by a teflon film, were placed in the mold and heated to 250°C. Approximately 2-3 g of the prepolymer melt synthesized with 1.5 wt% curing additive was poured over the metal foam and degassed for about 15 min. with periodic venting to ensure a good flow of the resin throughout the metal foam. The mold was then heated in an air circulating oven for 9h at 280°C and cooled back to room temperature over a 3h span. The composite samples made with this prepolymer showed a complete penetration of the resin through the metal foam. The mechanical and damping properties of the phthalonitrile/aluminum composite samples were evaluated after heat treatment at the following conditions: (A) 9h at 280°C (B) 18h at 280°C (C) 18h at 280, 4h at 325°C and (D) 18h at 280, 4h at 325,4h at 375°C. Conditions (C) and (D) employed an inert atmosphere purge of argon.

Example 4: Fabrication of phthalonitrile/copper foam composite

An aluminum mold, 2"x0.6"x0.2", coated with a teflon mold release agent was used for fabrication of composite specimens. Two copper foam strips (1"x0.5", density 6-8 % of the solid material, pore size - 10 ppi), separated by a teflon film, were placed in the mold and heated to 250°C. The prepolymer melt synthesized as

described above in Example 1 with 1.5 wt% curing additive was poured over the metal foam and degassed with periodic venting to ensure a good flow of the resin throughout the metal foam. The mold was then heated in an air circulating oven for 9h at 280°C and cooled back to room temperature over a 3h span. The mechanical and damping properties of the phthalonitrile/copper composite samples were evaluated after heat treatment at the following conditions: (A) 9h at 280°C (B) 18h at 280°C (C) 18h at 280, 4h at 325°C and (D) 18h at 280, 4h at 325,4h at 375°C. Conditions (C) and (D) employed an inert atmosphere purge of argon.

Example 5: Fabrication of phthalonitrile/titanium foam composite

An aluminum mold (2"x0.6"x0.2",density 6-8 % of the solid material, pore size - 10 ppi) coated with a teflon mold release agent was used for fabrication of composite specimens. Two titanium foam strips, 1"x0.5", separated by a teflon film, were placed in the mold and heated to 250°C. The prepolymer melt synthesized as described above in Example 1 was poured over the metal foam and degassed for about 15 min.with periodic venting to ensure a good flow of the resin throughout the metal foam. The mold was then heated in an air circulating oven for 9h at 280° C and cooled back to room temperature over a 3h span. The mechanical and damping properties of the phthalonitrile/titanium composite samples were evaluated after heat treatment at the following conditions: (A) 9h at 280°C (B) 18h at 280°C (C) 18h at 280, 4h at

325°C and (D) 18h at 280, 4h at 325,4h at 375°C. Conditions (C) and (D) employed an inert atmosphere purge of argon.

Example 6: Fabrication of phthalonitrile/zinc foam composite

An aluminum (mold, 2"x0.6"x0.2", density 6-8 % of the solid material, pore size - 10 ppi) coated with a teflon mold release agent was used for fabrication of composite specimens. Two zinc foam strips, 1"x0.5", separated by a teflon film, were placed in the mold and heated to 250°C. The prepolymer melt synthesized as described above in Example 1 with 1.5% curing additive was poured over the metal foam and degassed for about 15 min.with periodic venting to ensure a good flow of the resin throughout the metal foam. The mold was then heated in an air circulating oven for 9h at 280°C and cooled back to room temperature over a 3h span. The mechanical and damping properties of the phthalonitrile/zinc composite samples were evaluated after heat treatment at the following conditions : (A) 9h at 280°C (B) 18h at 280°C (C) 18h at 280, 4h at 325°C and (D) 18h at 280, 4h at 325, 4h at 375°C. Conditions (C) and (D) employed an inert atmosphere purge of argon.

Example 7. Fabrication of Aluminum Alloy Foam / Rubber (White) Composite.

An aluminum mold, 2"x0.6"x0.2", coated with a teflon mold release agent was used for fabrication of composite specimens. Two aluminum foam strips, 1"x0.5", separated by a teflon film, were

placed in the mold. The aluminum foam strips were submerged in the polymeric uncured natural rubber dissolved in an organic solvent and with a small amount of peroxide to thermally cure the rubber. The composite was subjected to pressure to remove the solvent and to consolidate the composite fabrication. The impregnated uncured rubber/aluminum foam composition was heated at about 160°C for 1-2 hours to crosslink the rubber.

Example 8. Fabrication of Aluminum Alloy Foam /Red Rubber Composite.

An aluminum mold, 2"x0.6"x0.2", coated with a teflon mold release agent was used for fabrication of composite specimens. Low viscosity uncured RTV silicone rubber was quickly placed in the mold and two aluminum foam strips, 1"x0.5", separated by a teflon film, were submerged in the uncured rubber. The mold was then placed in a vacuum oven at reduced pressure for 15 minutes. The rubber was then cured at room temperature for 24 hours affording a rubber/aluminum foam composite.

Example 9. Fabrication of Epoxy/Aluminum Alloy Foam Composite.

An aluminum mold, 2"x0.6"x0.2", coated with a teflon mold release agent was used for fabrication of composite specimens. Epon 828 and an aromatic diamine were mixed thoroughly and placed into the aluminum mold. Several aluminum foam strips, 1"x0.5", separated by a teflon film, were submerged in the epoxy/amine composition at

approximately 100°C in a vacuum oven. At this time, a vacuum was applied to consolidate the dispersion of the composition into the pores of the aluminum foam. The composition was cured by heating at 65°C for 5-6 hours. The epoxy/aluminum foam composite was used for evaluating damping and mechanical properties.

Example 10. Fabrication of Acrylic/Aluminum Alloy Foam Composite.

An aluminum mold, 3"x 2" was used for fabrication of composite specimens. 18 ml of catalyst B was added to 40 ml of resin A of the EPO-KWICK components and thoroughly mixed. The mixture was poured on top of several aluminum foam strips, 1"x0.5", contained in the aluminum mold. At this time, a vacuum was applied for 10 minutes to degas and consolidate the dispersion of the composition into the pores of the aluminum foam. The composition was cured by keeping at room temperature overnight. The acrylic/aluminum alloy foam composite was used for evaluating damping and mechanical properties.

Example 11. Preparation of Porous Metal/Organic Polymeric Composite Samples for Damping Measurements.

For the purpose of demonstration, we have used selected foams and filler materials. Many metals or even high strength alloys can be used as skeleton material and also wide variety of filler materials can be used to design the composite possessing required strength and damping capability. Other factors such as

environmental compatibility, temperature and chemical compatibility in addition to cost can dictate the choice of the materials to be used.

The composites produced in Examples 3-9 were used for damping measurements. The samples were prepared with dimensions having 4.5 mm thickness, 10 mm width, and 32 mm length. The damping capacity of the samples were measured with a dynamic mechanical thermal analyzer (DMTA). A small sinusoidal mechanical stress is applied to the sample and the resulting sinusoidal strain transduced. Comparison of the amplitude of the signals yields the complex dynamic modulus E^*. The phase lag (d) of strain behind stress is measured and the storage modulus and loss factor of the material are calculated.

Example 12. Damping Characteristics of Aluminum Alloy Foam/Phthalonitrile Composite.

The aluminum alloy foam/phthalonitrile composite prepared in Example 3 was evaluated for its damping characteristics under 1 Hz frequency. The results of the damping measurements were shown in Fig. 1. The figure shows the damping behavior of the composite under different heat treatment conditions as described in Example 3. The damping measurements are plotted with temperature. It is noted that damping peak locations at a given temperature can be adjusted based on heat treatment of composite. The room temperature

damping (flat portion of curve) is also higher than the best damping material such as Vacrosil™ as shown in Fig. 10.

Example 13. Damping Characteristics of Copper Foam/Phthalonitrile Composite.

The copper foam/phthalonitrile composite prepared in Example 4 was evaluated for its damping characteristics under 0.1 to 10 Hz frequency. The results of the damping measurements were shown in Fig. 2, Fig. 3, and Fig. 4. The figures show the damping behavior of the composite under different heat treatment conditions as described in Example 4. The damping measurements are plotted with temperature. It is noted that damping peak locations at a given temperature can be adjusted based on heat treatment of the composite. The room temperature damping (flat portion of curve) is also higher than the best damping material such as Vacrosil™ as shown in Fig. 10.

Example 14. Damping Characteristics of Titanium Foam/Phthalonitrile Composite.

The titanium foam/phthalonitrile composite prepared in Example 5 was evaluated for its damping characteristics under 0.1 to 10 Hz frequency. The results of the damping measurements were shown in Fig. 5, Fig. 6, and Fig 7. The figures show the damping behavior of the composite under different heat treatment conditions as described in Example 5. The damping measurements are plotted with

temperature. It is noted that damping peak locations at a given temperature can be adjusted based on heat treatment of the composite. The room temperature damping (flat portion of curve) is also higher than the best damping material such as Vacrosil™ as shown in Fig. 10.

Example 15. Damping Characteristics of Zinc Foam/Phthalonitrile Composite.

The zinc foam/phthalonitrile composite prepared in Example 6 was evaluated for its damping characteristics under 0.1 to 10 Hz frequency. The results of the damping measurements were shown in Fig. 8 and Fig. 9. The figures show the damping behavior of the composite under different heat treatment conditions as described in Example 5. The damping measurements are plotted with temperature. It is noted that damping peak locations at a given temperature can be adjusted based on heat treatment of the composite. The room temperature damping (flat portion of curve) is also higher than the best damping material such as Vacrosil™ as shown in Fig. 10.

Example 16. Damping Characteristics of Aluminum Alloy Foam/white rubber Composite.

The aluminum alloy foam/white composite prepared in Example 7 was evaluated for its damping characteristics under 0.1 to 10 Hz frequency. The results of the damping measurements were shown in Fig. 11. This figure shows the damping behavior of the composite.

The damping measurements are plotted with temperature. It is noted that damping characteristics are better than the best damping material such as Vacrosil™ as shown in Fig. 10.

Example 17. Damping Characteristics of Aluminum Alloy Foam/red rubber Composite.

The Aluminum Alloy Foam/red rubber composite prepared in Example 8 was evaluated for its damping characteristics under 0.1 to 10 Hz frequency. The results of the damping measurements were shown in Fig. 12. This figure shows the damping behavior of the composite. The damping measurements are plotted with temperature. It is noted that damping characteristics are better than the best damping material such as Vacrosil™ as shown in Fig. 10.

Example 18. Damping Characteristics of Aluminum Alloy Foam/Epoxy Composite.

The Aluminum Alloy Foam/epoxy composite prepared in Example 8 was evaluated for its damping characteristics under 0.1 to 10 Hz frequency. The results of the damping measurements were shown in Fig. 13. This figure shows the damping behavior of the composite. The damping measurements are plotted with temperature. It is noted that damping characteristics are better than the best damping material such as Vacrosil™ as shown in Fig. 10.

Example 19. Damping Characteristics of Aluminum Alloy Foam/Acrylic Composite.

The Aluminum Alloy Foam/Acrylic composite prepared in Example 10 was evaluated for its damping characteristics under 0.1 to 10 Hz frequency. The results of the damping measurements were shown in Fig. 14. The figure shows the damping behavior of the composite. The damping measurements are plotted with temperature. It is noted that damping characteristics are better than the best damping material such as Vacrosil™ as shown in Fig. 10.

Example 20. Mechanical Properties of Aluminum Alloy Foam/Phthalonitrile Composite.

The aluminum alloy foam/phthalonitrile composite prepared in Example 3 was evaluated for its room temperature compressive mechanical properties after various heat treatment exposures. For example, Fig. 15 shows the stress/strain diagram for the composite which was heat treated at 280°C for 18 hours, at 325°C for 4 hours, and at 375°C for 4 hours. The figure shows that the composite exhibit superior mechanical properties relative to the cured phthalonitrile resin.

Example 21. Mechanical Properties of Aluminum Foam/Acrylic Composite.

The aluminum alloy foam/Acrylic composite prepared in Example 10 was evaluated for its room temperature compressive mechanical

properties after various heat treatment exposures. For example, Fig. 16 shows the stress/strain diagram for the composite. The figure shows that the composite exhibit superior mechanical properties relative to the aluminum alloy foam.

Additional information concerning the present invention may be found in the copending United States Patent Application of Imam, Sastri and Keller, entitled LIGHTWEIGHT HIGH DAMPING POROUS METAL/PHTHALONITRILE COMPOSITES, filed on even date herewith, the entirety of which is incorporated herein by reference.

Obviously, many modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that

the invention may be practiced otherwise than as specifically described.

Docket No.: N.C. 77,897
Inventor's Name: Imam et al.

PATENT APPLICATION

ABSTRACT

Metal foams are impregnated with resins. The metal foam/polymer composite formed upon curing has excellent acoustic dampening and structural properties. Foams of various metals, such as aluminum, titanium, nickel, copper, iron, zinc, lead, silver, gold, platinum, tantalum, and alloys based on these metals, may be used. The polymer component may be any polymeric resin, for example, epoxy, natural rubber, acrylic, or phenolic.

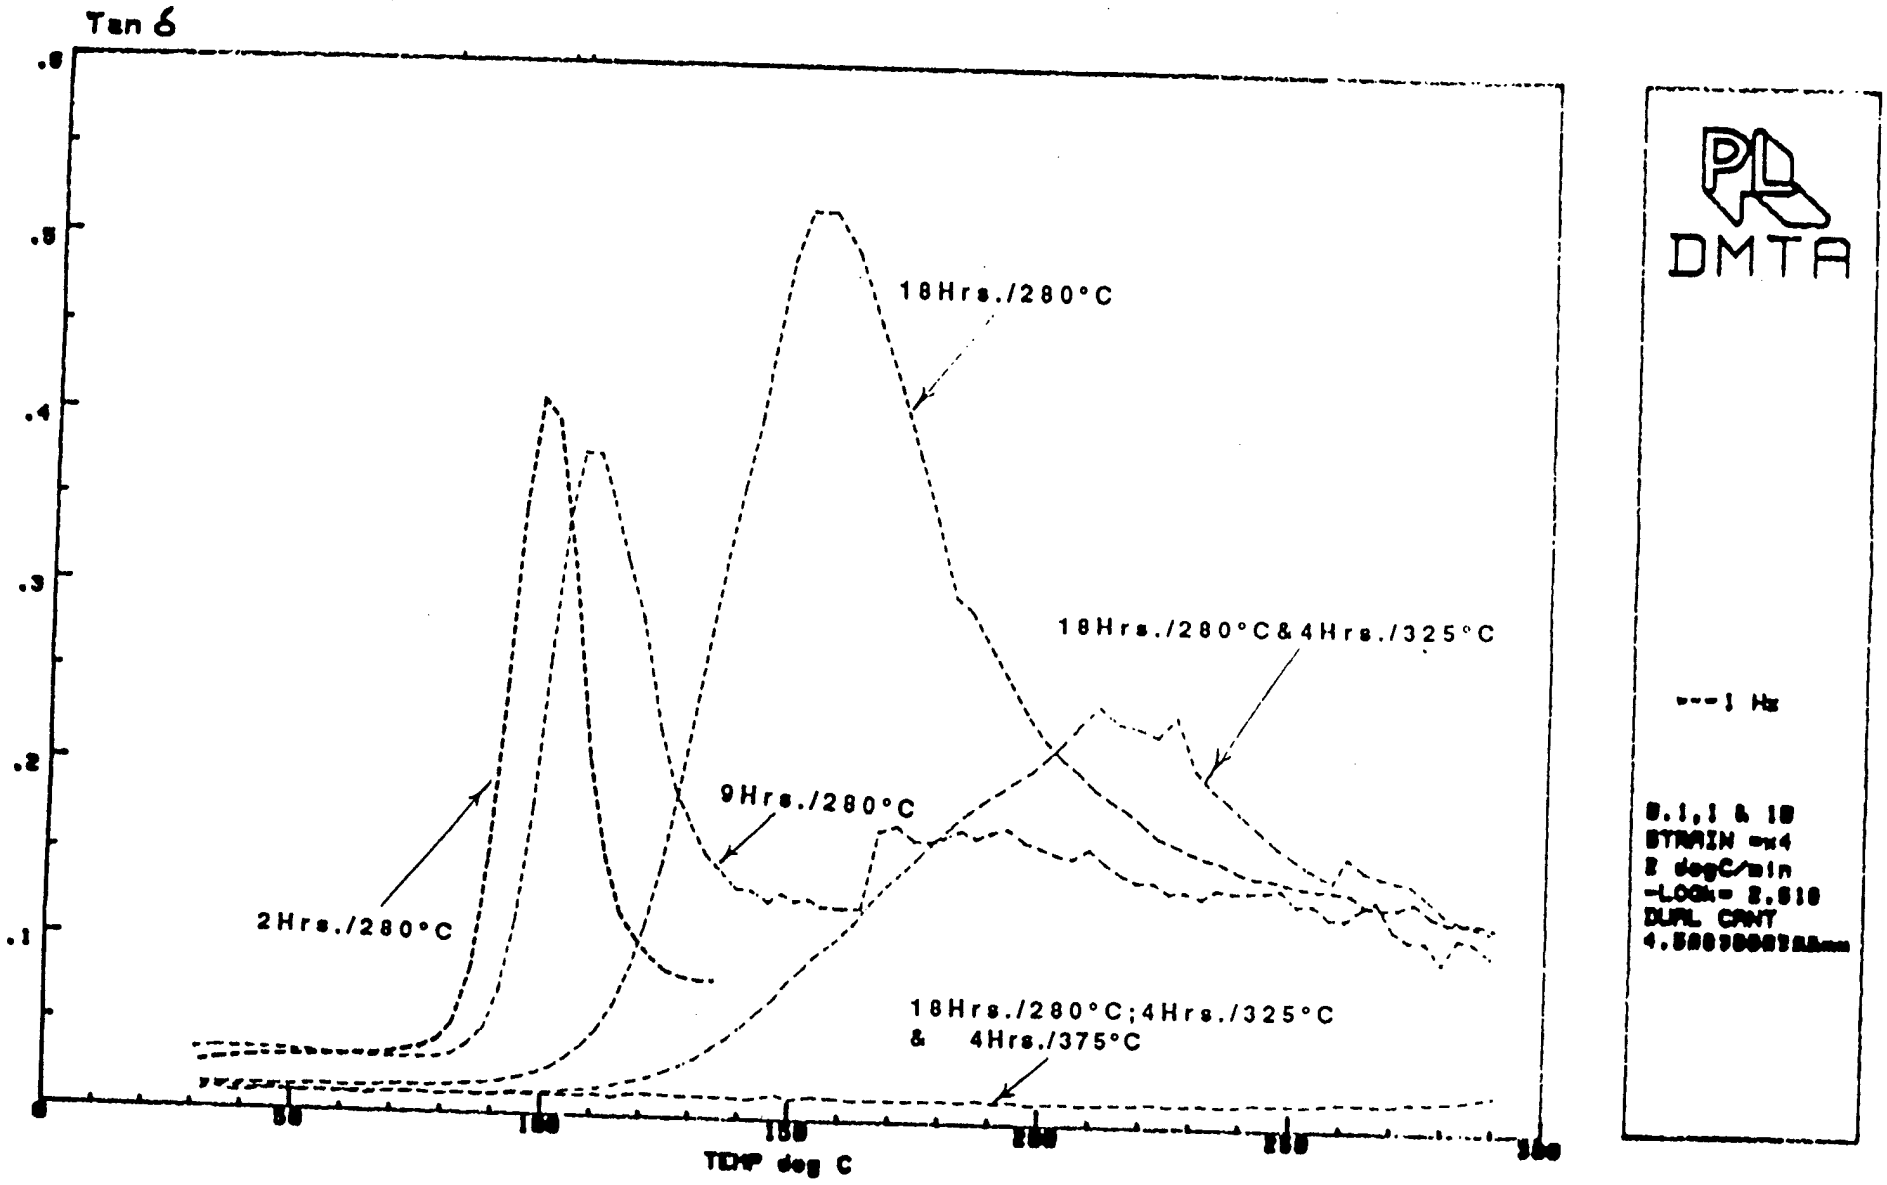
Tan δ
.6
.5
.4
.3
.2
.1
0
50
100
150
200
250
300
TEMP deg C
18Hrs./280°C
18Hrs./280°C&4Hrs./325°C
9Hrs./280°C
2Hrs./280°C
18Hrs./280°C;4Hrs./325°C
& 4Hrs./375°C
PL
DMTA
---1 Hz
0.1,1 & 10
STRAIN =x4
2 degC/min
-LOGk= 2.818
DUAL CANT

Fig 1

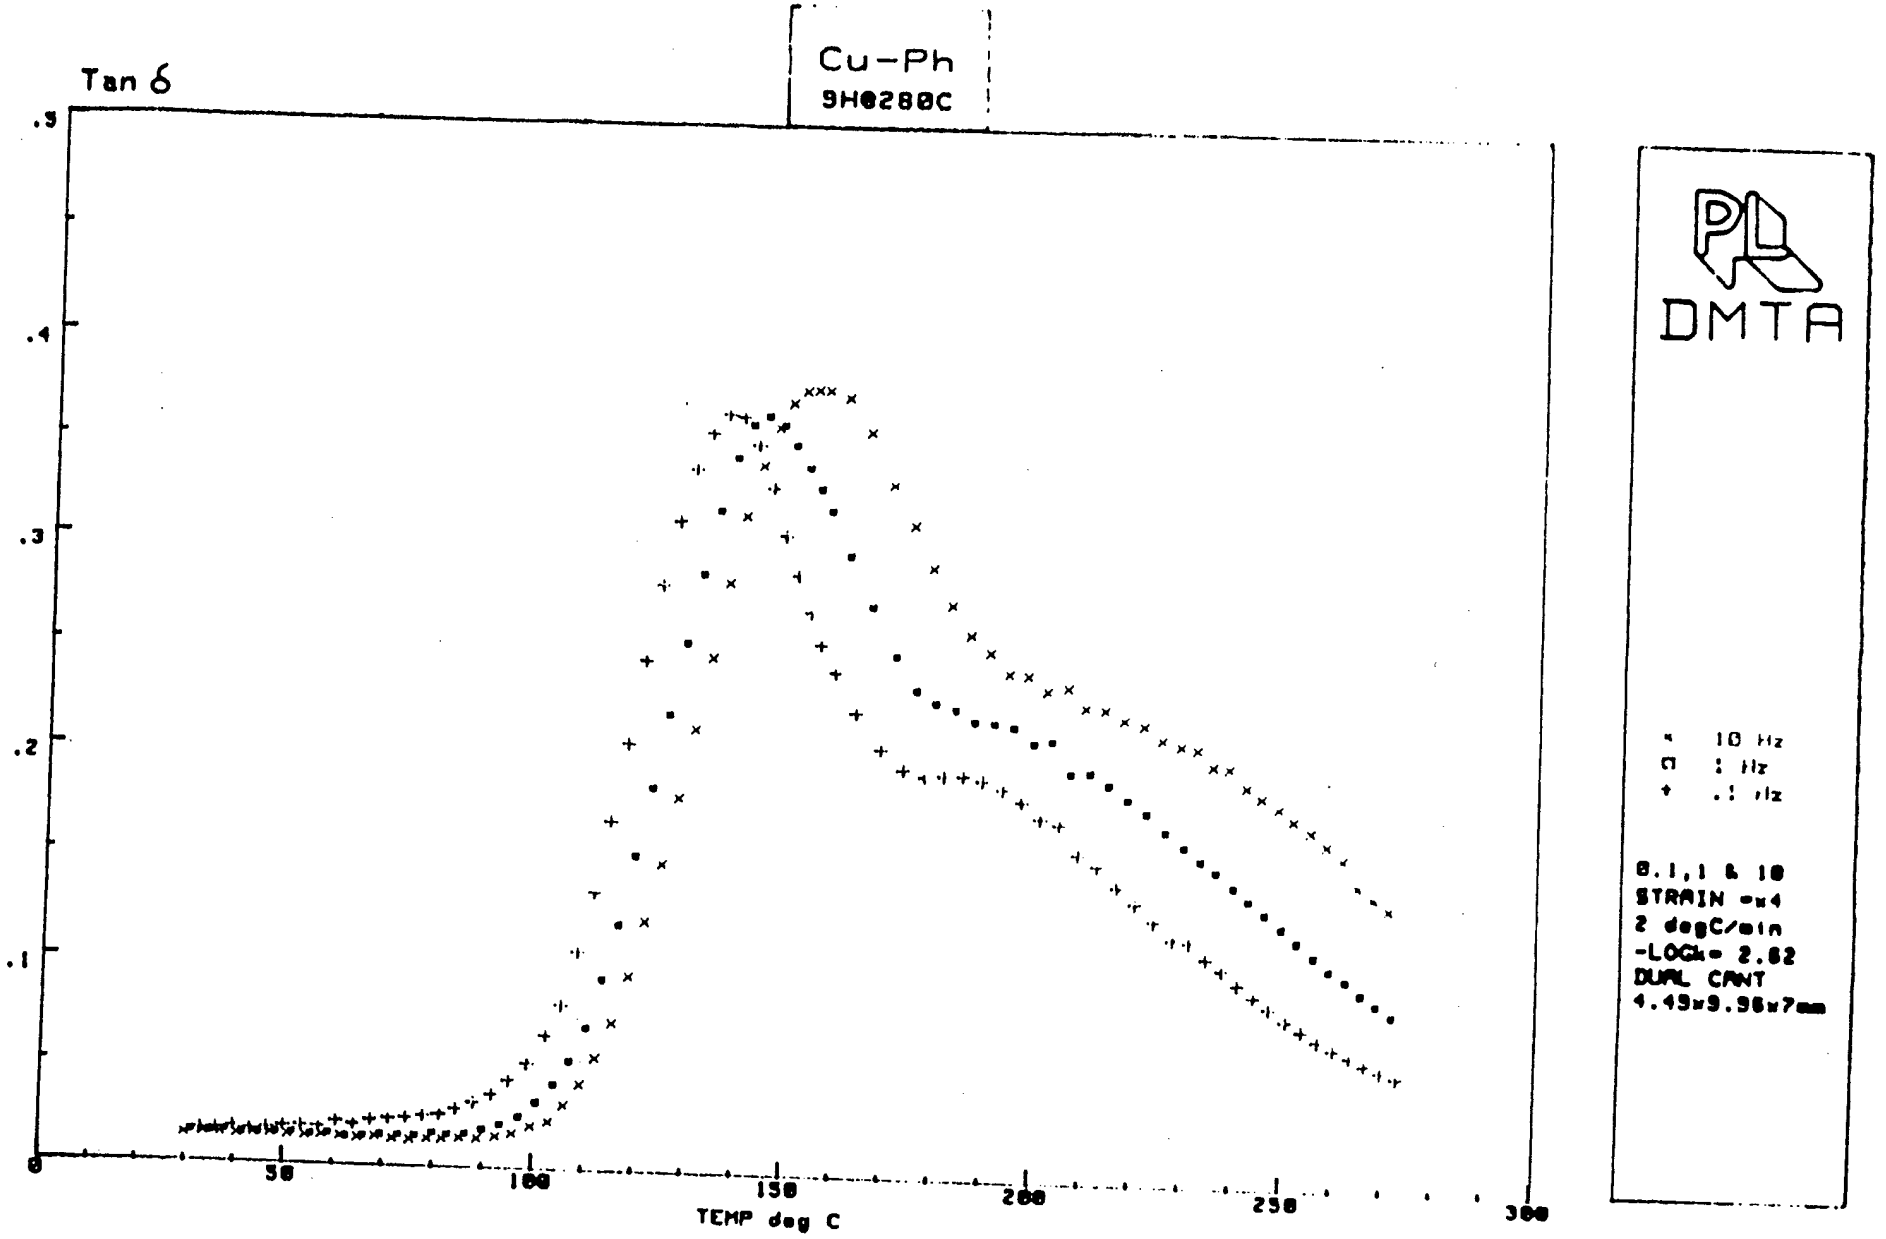
Cu-Ph
9H0280C
Tan δ
.5
.4
.3
.2
.1
0
50
100
150
200
250
300
TEMP deg C
DMTA
10 Hz
1 Hz
.1 Hz
0.1,1 & 10
STRAIN =x4
2 degC/min
-LOGk= 2.62
DUAL CANT
4.49x9.96x7mm

Fig. 2

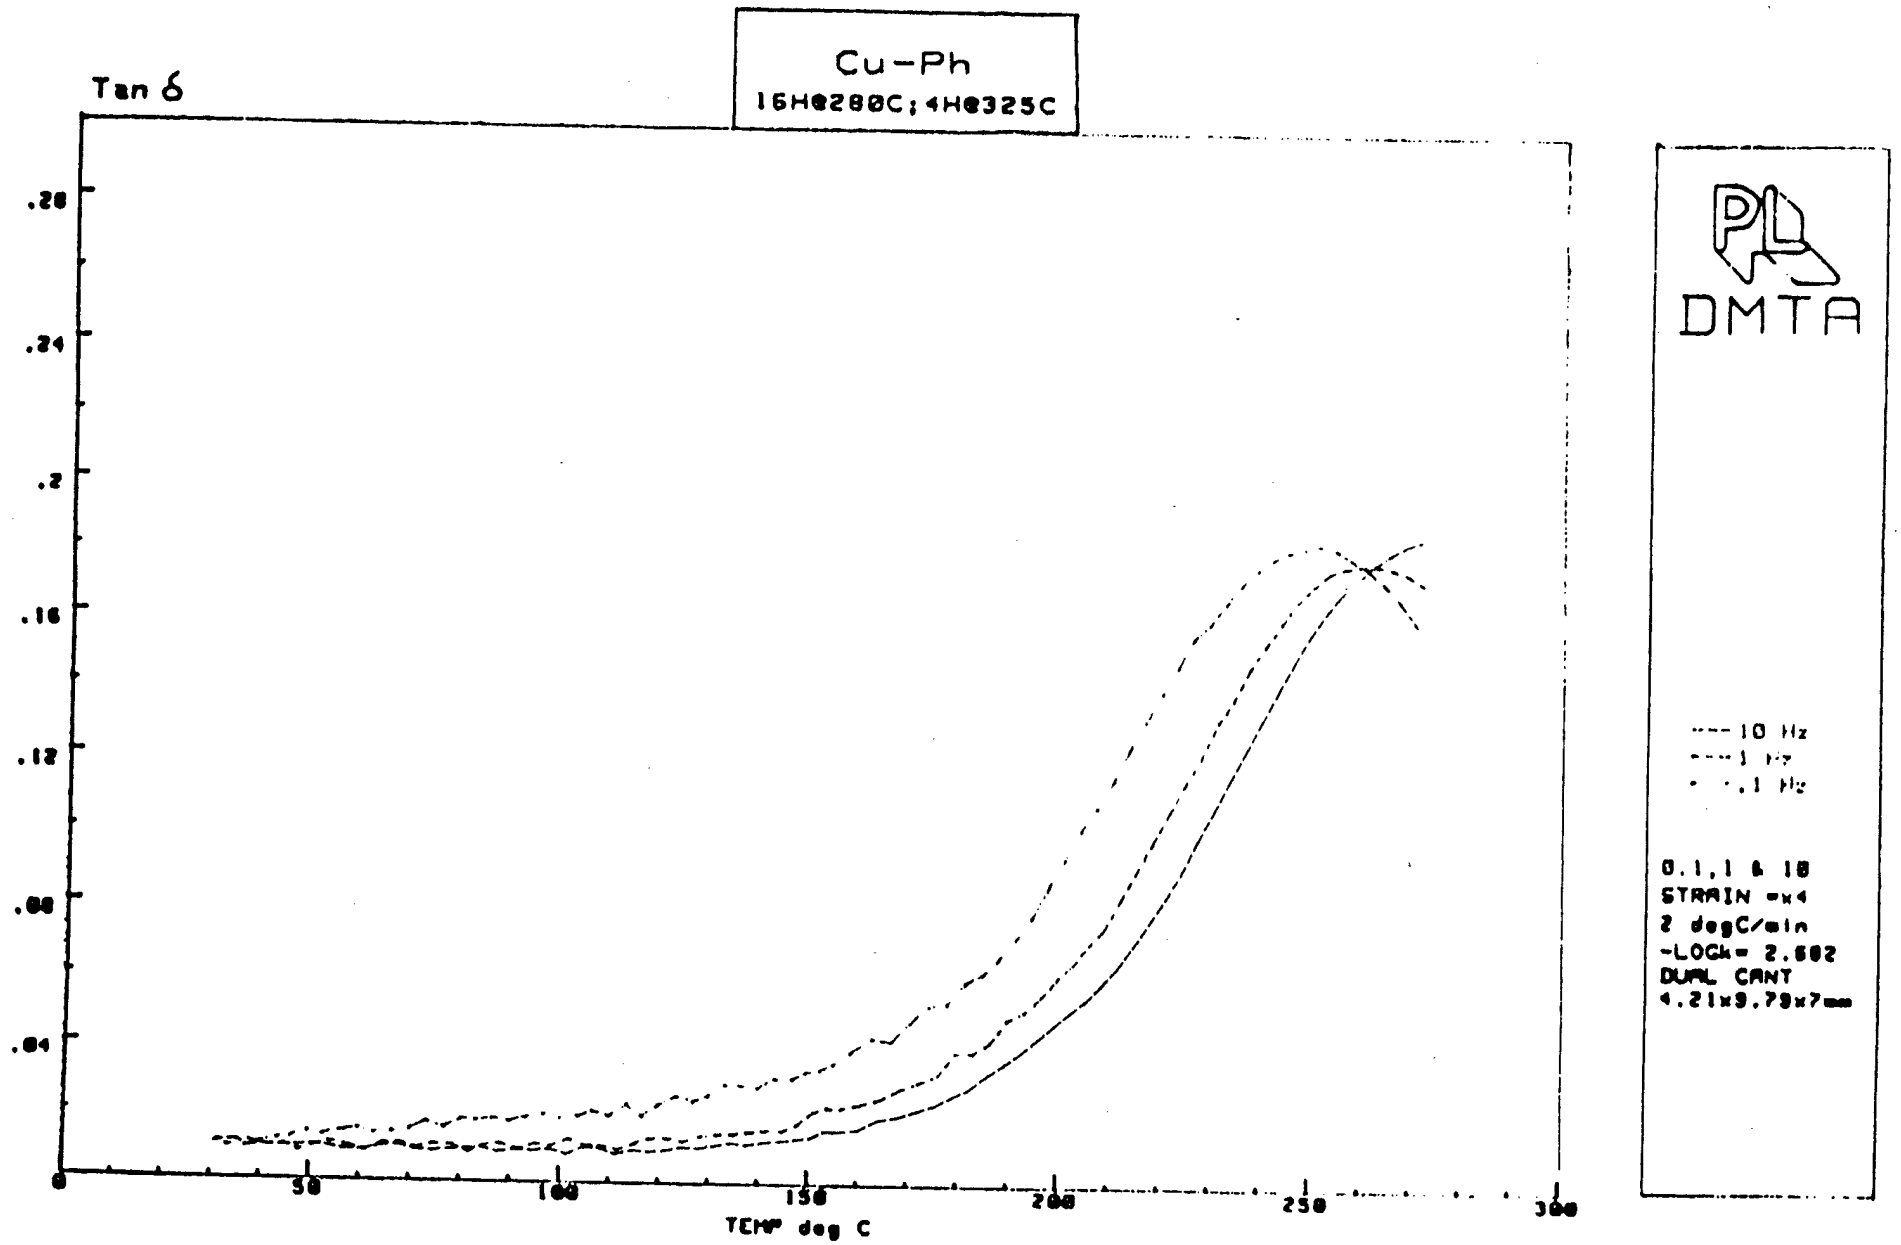
Cu-Ph
16H@280C;4H@325C
Tan δ
.28
.24
.2
.16
.12
.08
.04
0
50
100
150
200
250
300
TEMP deg C
DMTA
10 Hz
1 Hz
.1 Hz
0.1,1 & 10
STRAIN =x4
2 degC/min
-LOCK= 2.602
DUAL CANT
4.21x9.79x7mm

Fig. 3

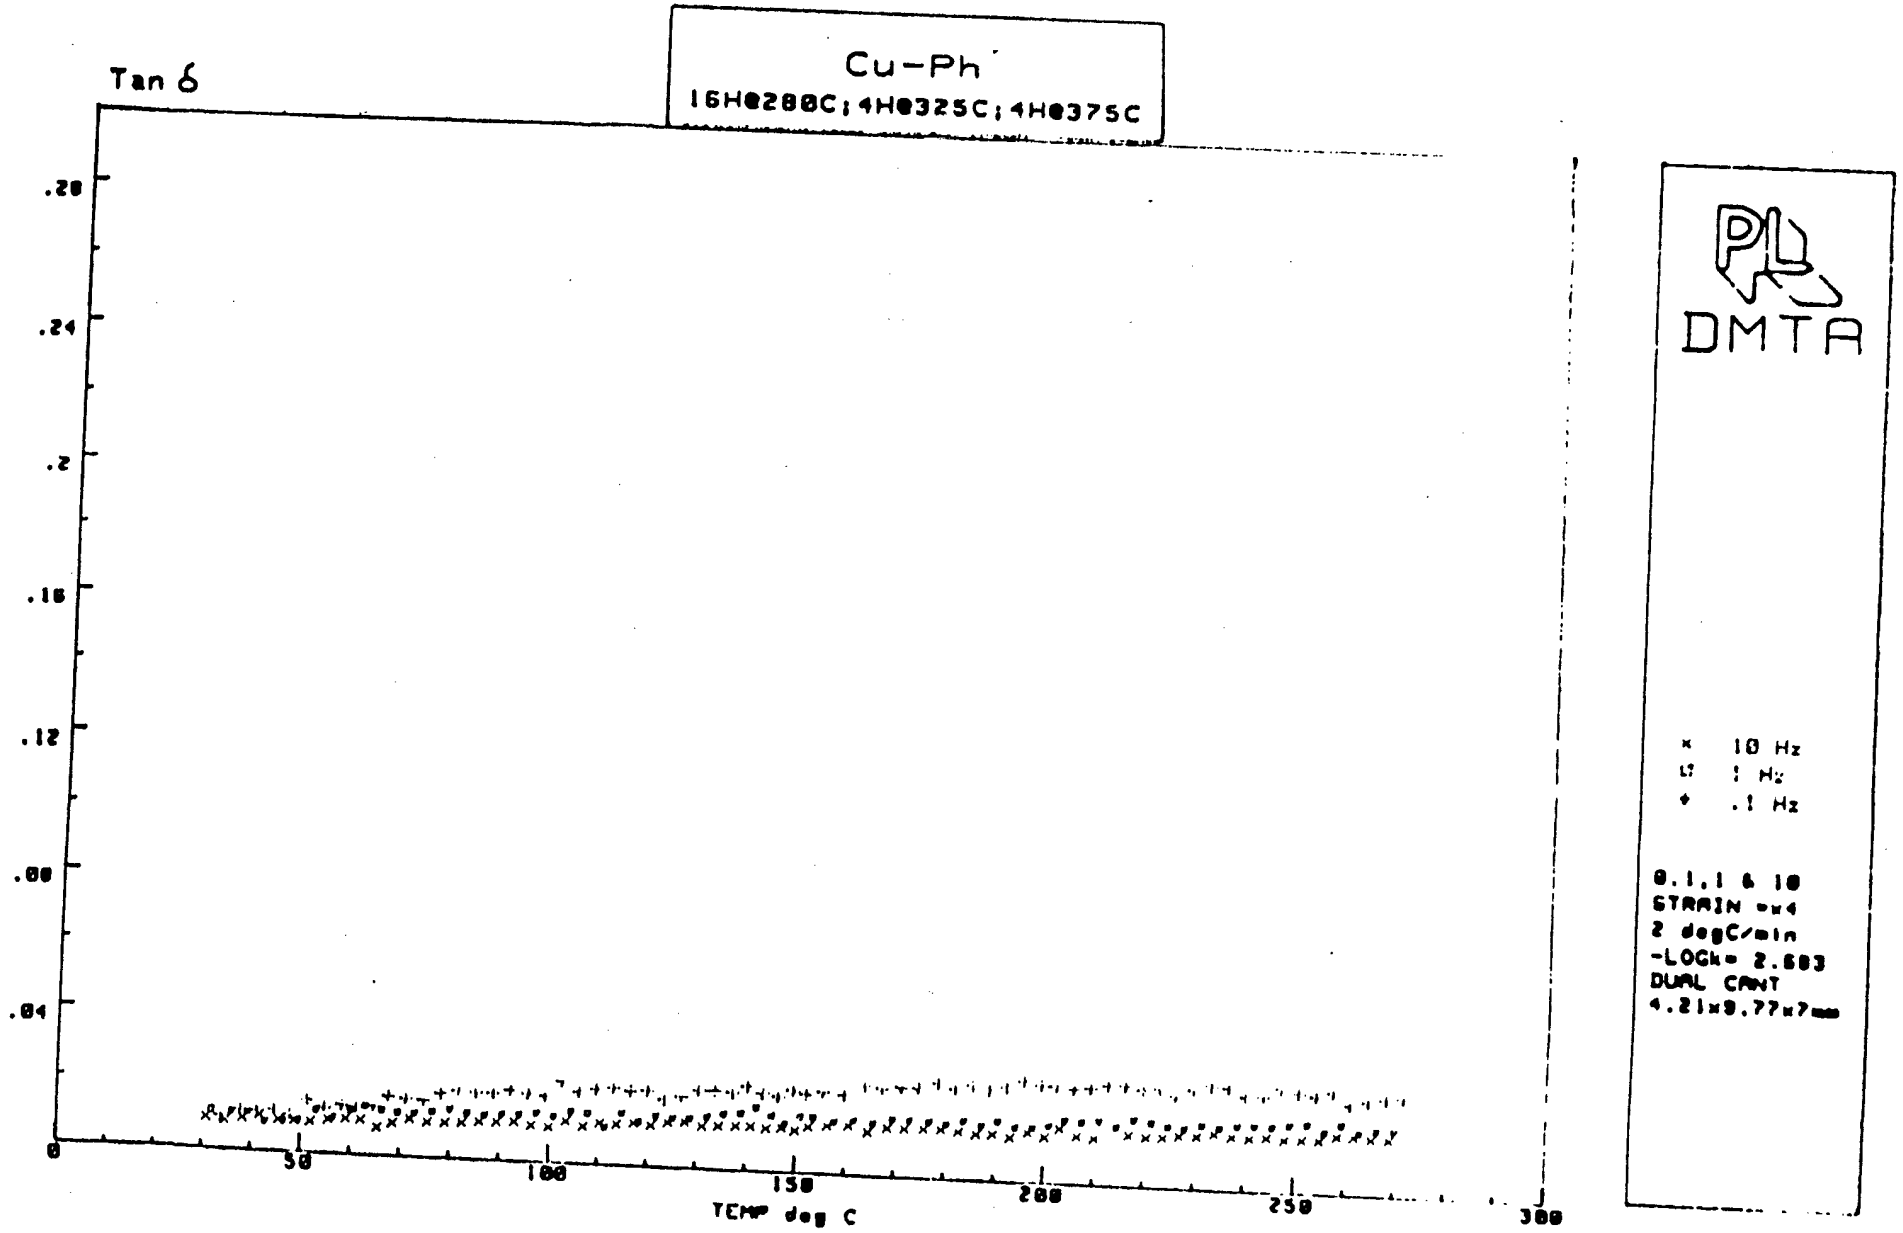
Cu-Ph
16H@280C;4H@325C;4H@375C
Tan δ
.28
.24
.2
.16
.12
.08
.04
0
50
100
150
200
250
300
TEMP deg C
PL
DMTA
10 Hz
1 Hz
.1 Hz
@.1,1 & 10
STRAIN =x4
2 degC/min
-LOGk= 2.683
DUAL CANT
4.21x9.77x7mm

Fig. 4

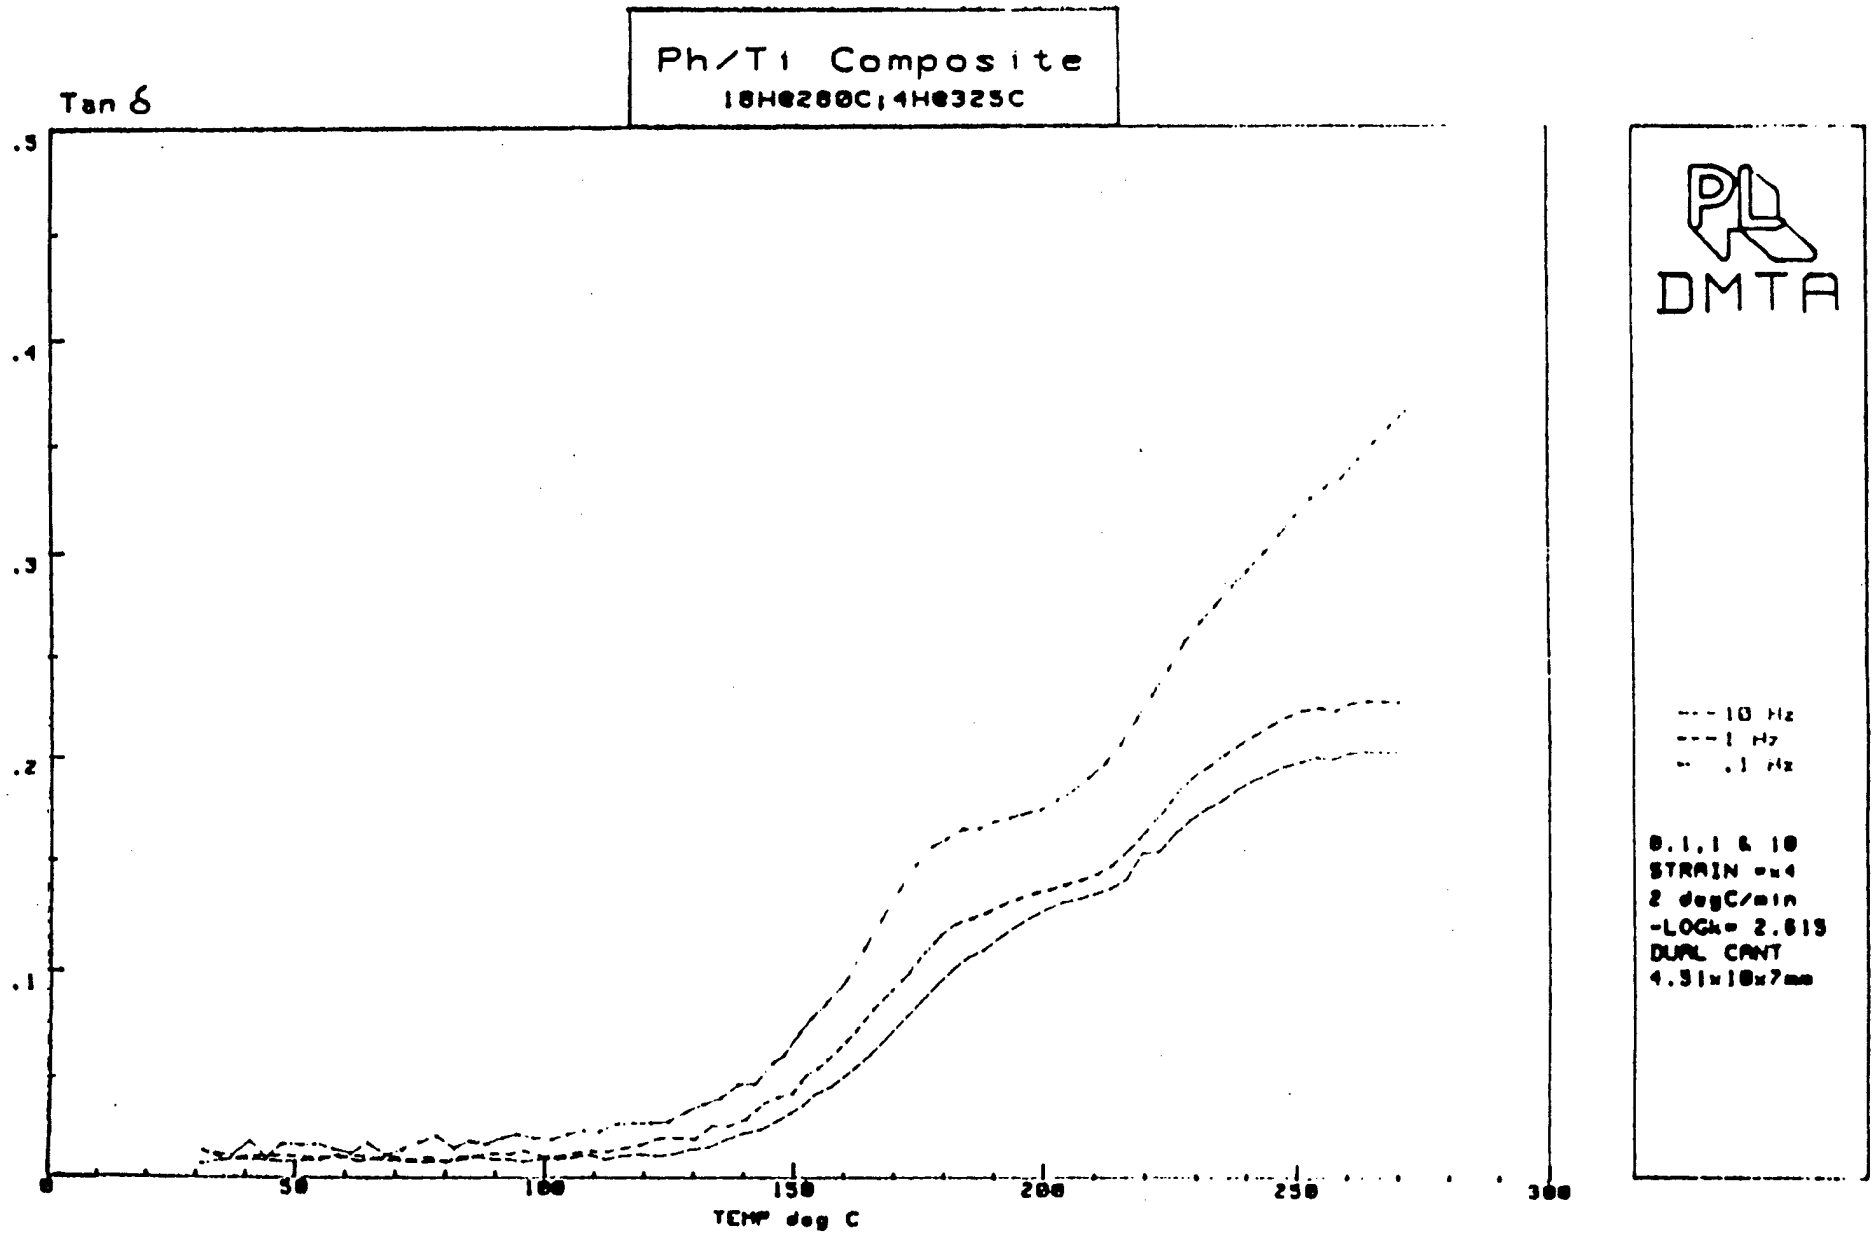
Ph/Ti Composite
18H@280C;4H@325C
Tan δ
.5
.4
.3
.2
.1
0
50
100
150
200
250
300
TEMP deg C
DMTA
10 Hz
1 Hz
.1 Hz
0.1,1 & 10
STRAIN =x4
2 degC/min
-LOGk= 2.613
DUAL CANT
4.31x10x7mm

Fig. 6

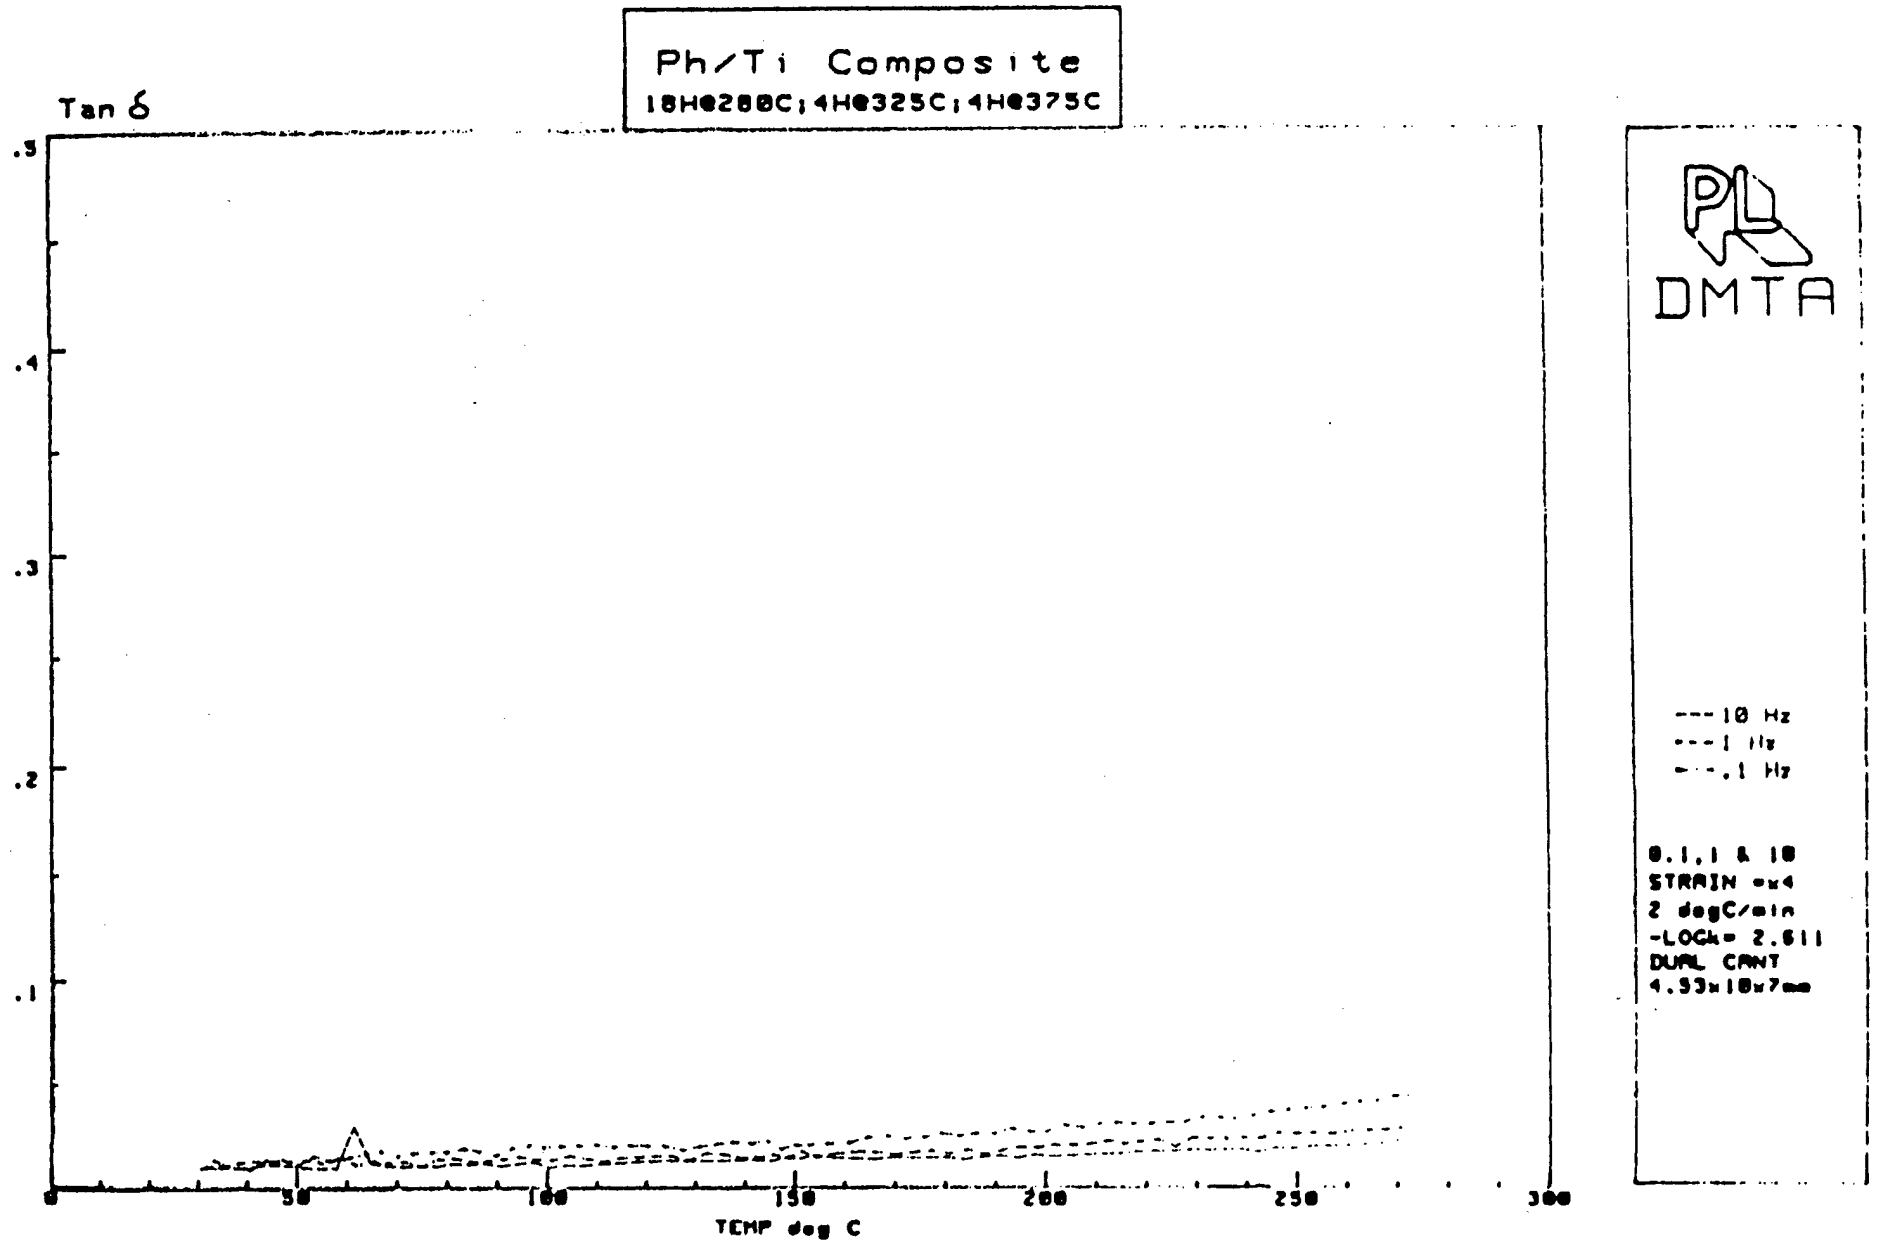
Ph/Ti Composite
18H@280C;4H@325C;4H@375C
Tan δ
.5
.4
.3
.2
.1
0
50
100
150
200
250
300
TEMP deg C
PL
DMTA
10 Hz
1 Hz
.1 Hz
0.1,1 & 10
STRAIN =x4
2 degC/min
-LOG= 2.611
DUAL CANT
4.53x10x7mm

Fig.7

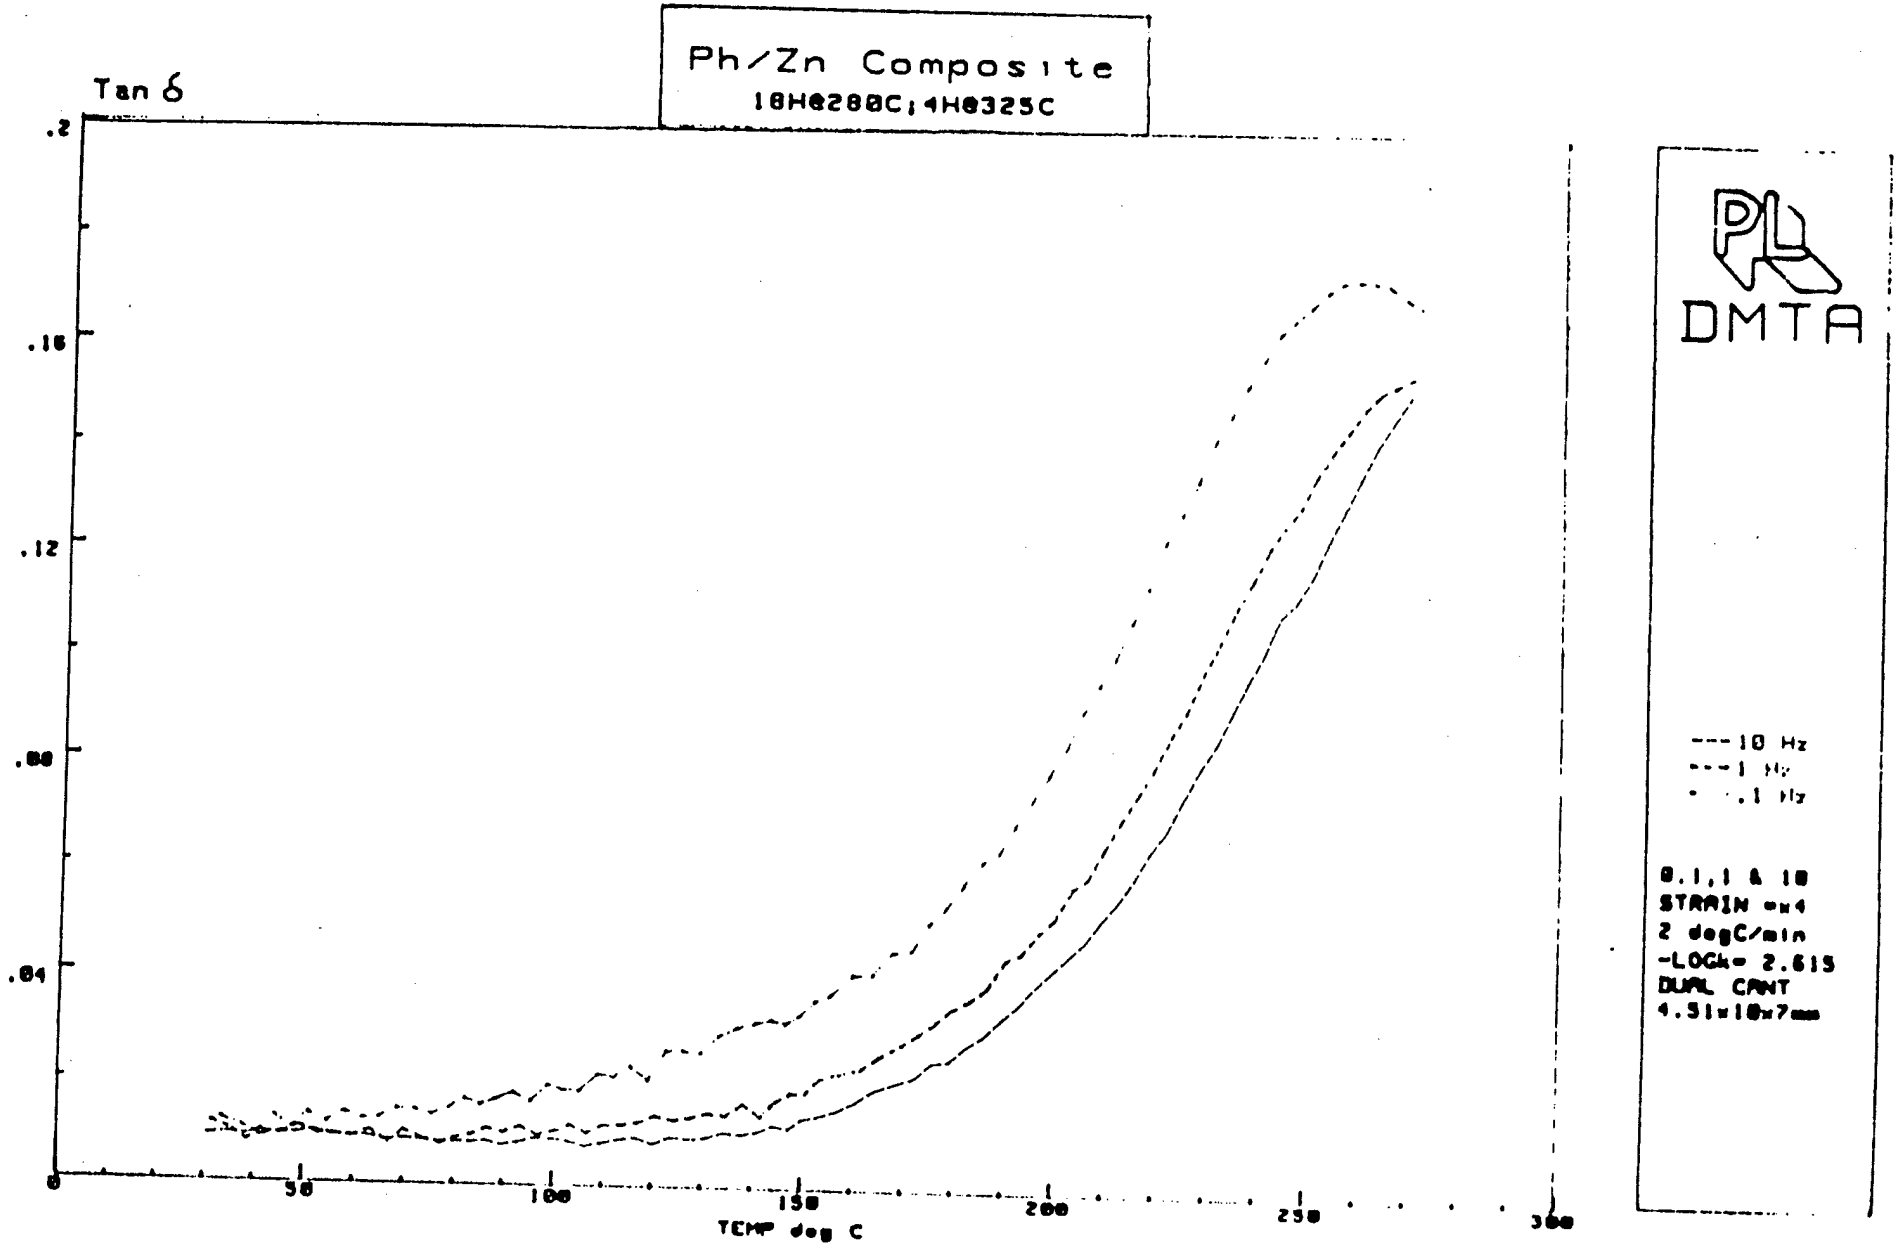
Ph/Zn Composite
18H@280C;4H@325C
Tan δ
.2
.16
.12
.08
.04
0
50
100
150
200
250
300
TEMP deg C
DMTA
10 Hz
1 Hz
.1 Hz
0.1,1 & 10
STRAIN =x4
2 degC/min
-LOGk= 2.615
DUAL CANT
4.51x18x7mm

Fig. 8

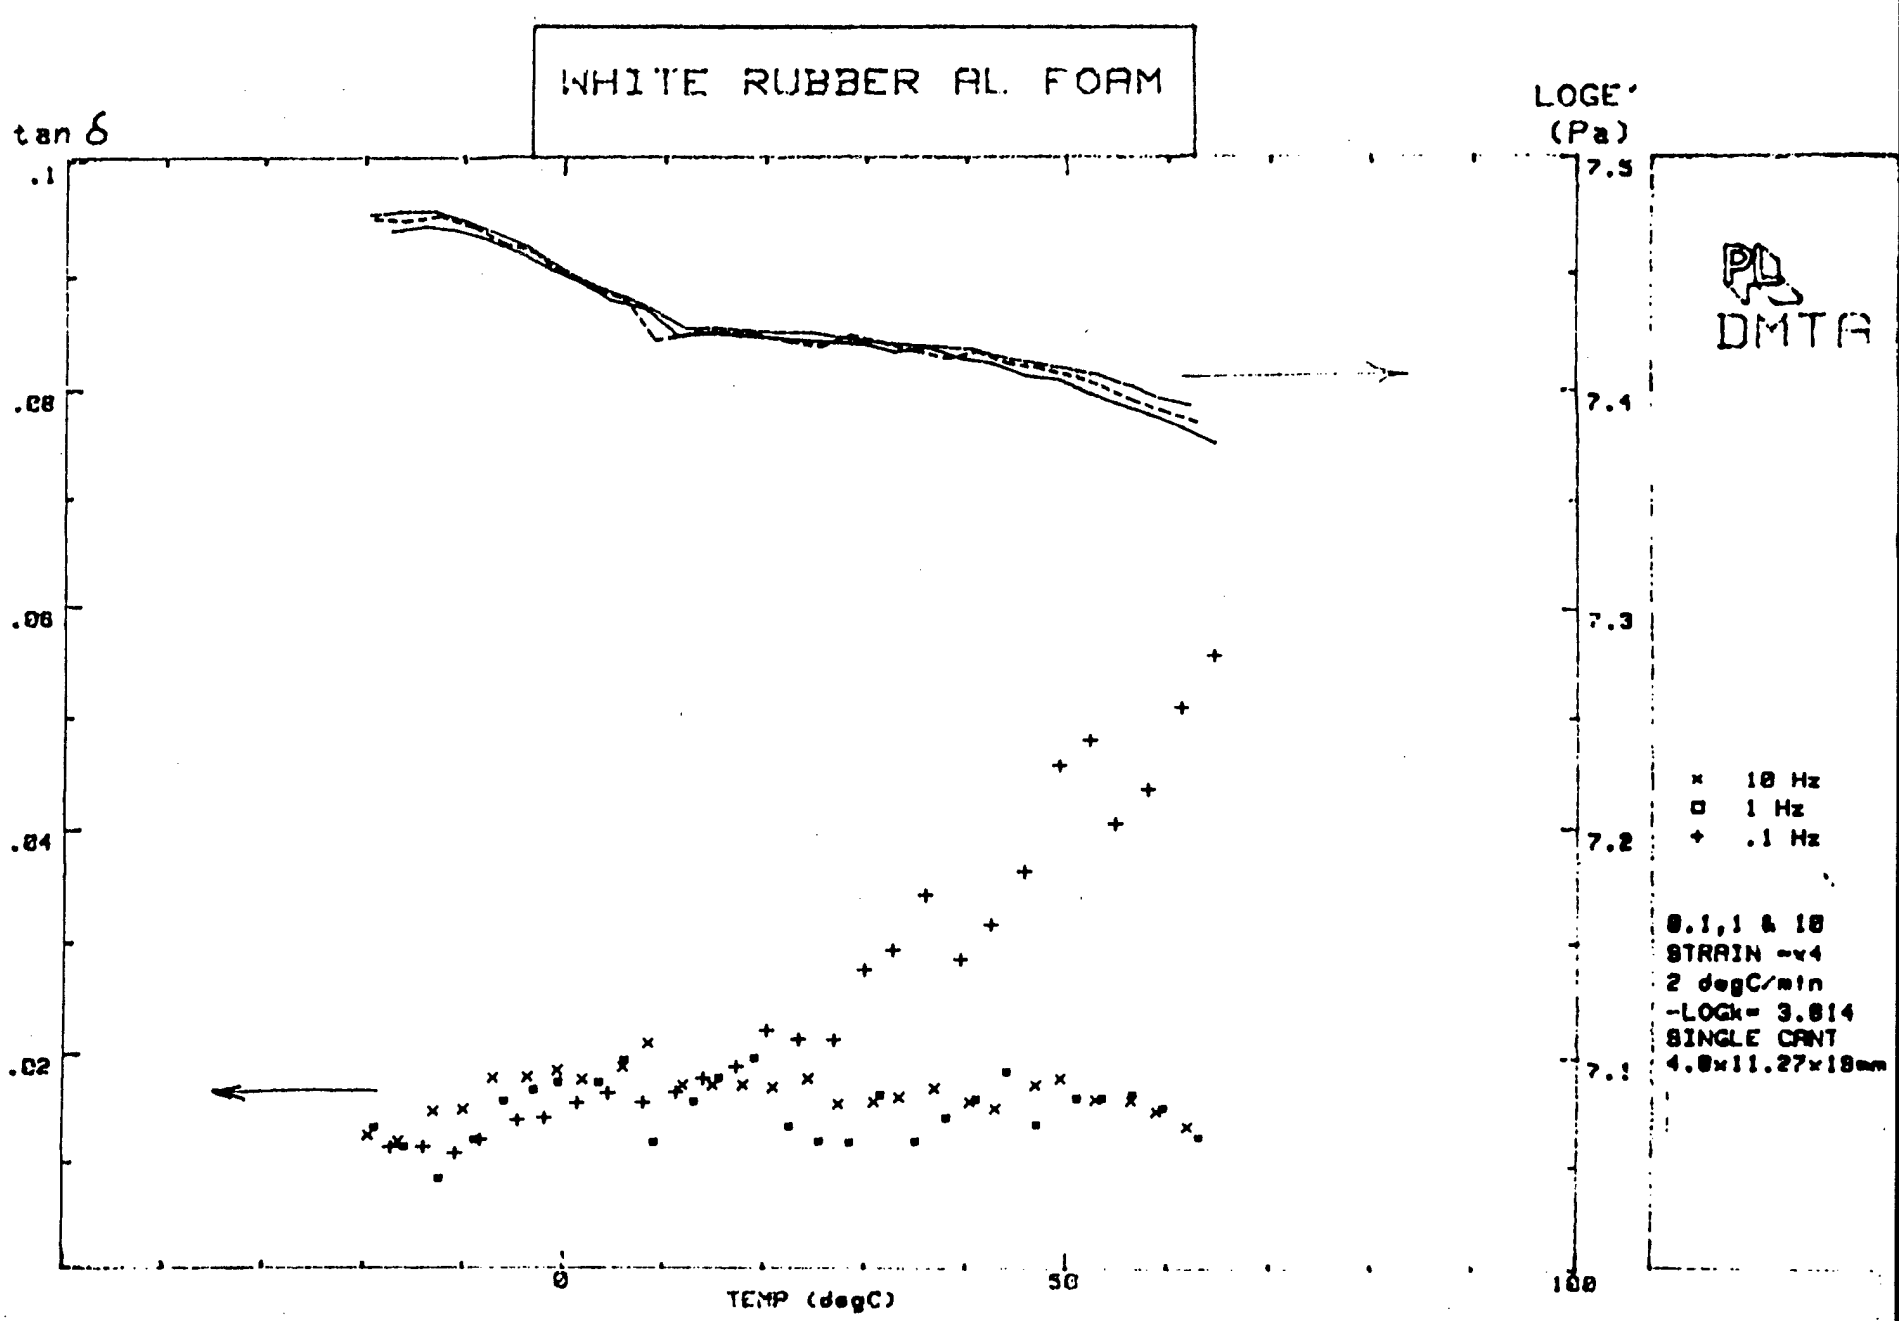
WHITE RUBBER AL. FOAM
tan δ
.1
.08
.06
.04
.02
LOGE'
(Pa)
7.5
7.4
7.3
7.2
7.1
0
50
100
TEMP (degC)
PL
DMTA
× 10 Hz
□ 1 Hz
+ .1 Hz
0.1,1 & 10
STRAIN ~x4
2 degC/min
-LOGk= 3.814
SINGLE CANT
4.0x11.27x18mm

Fig. 11

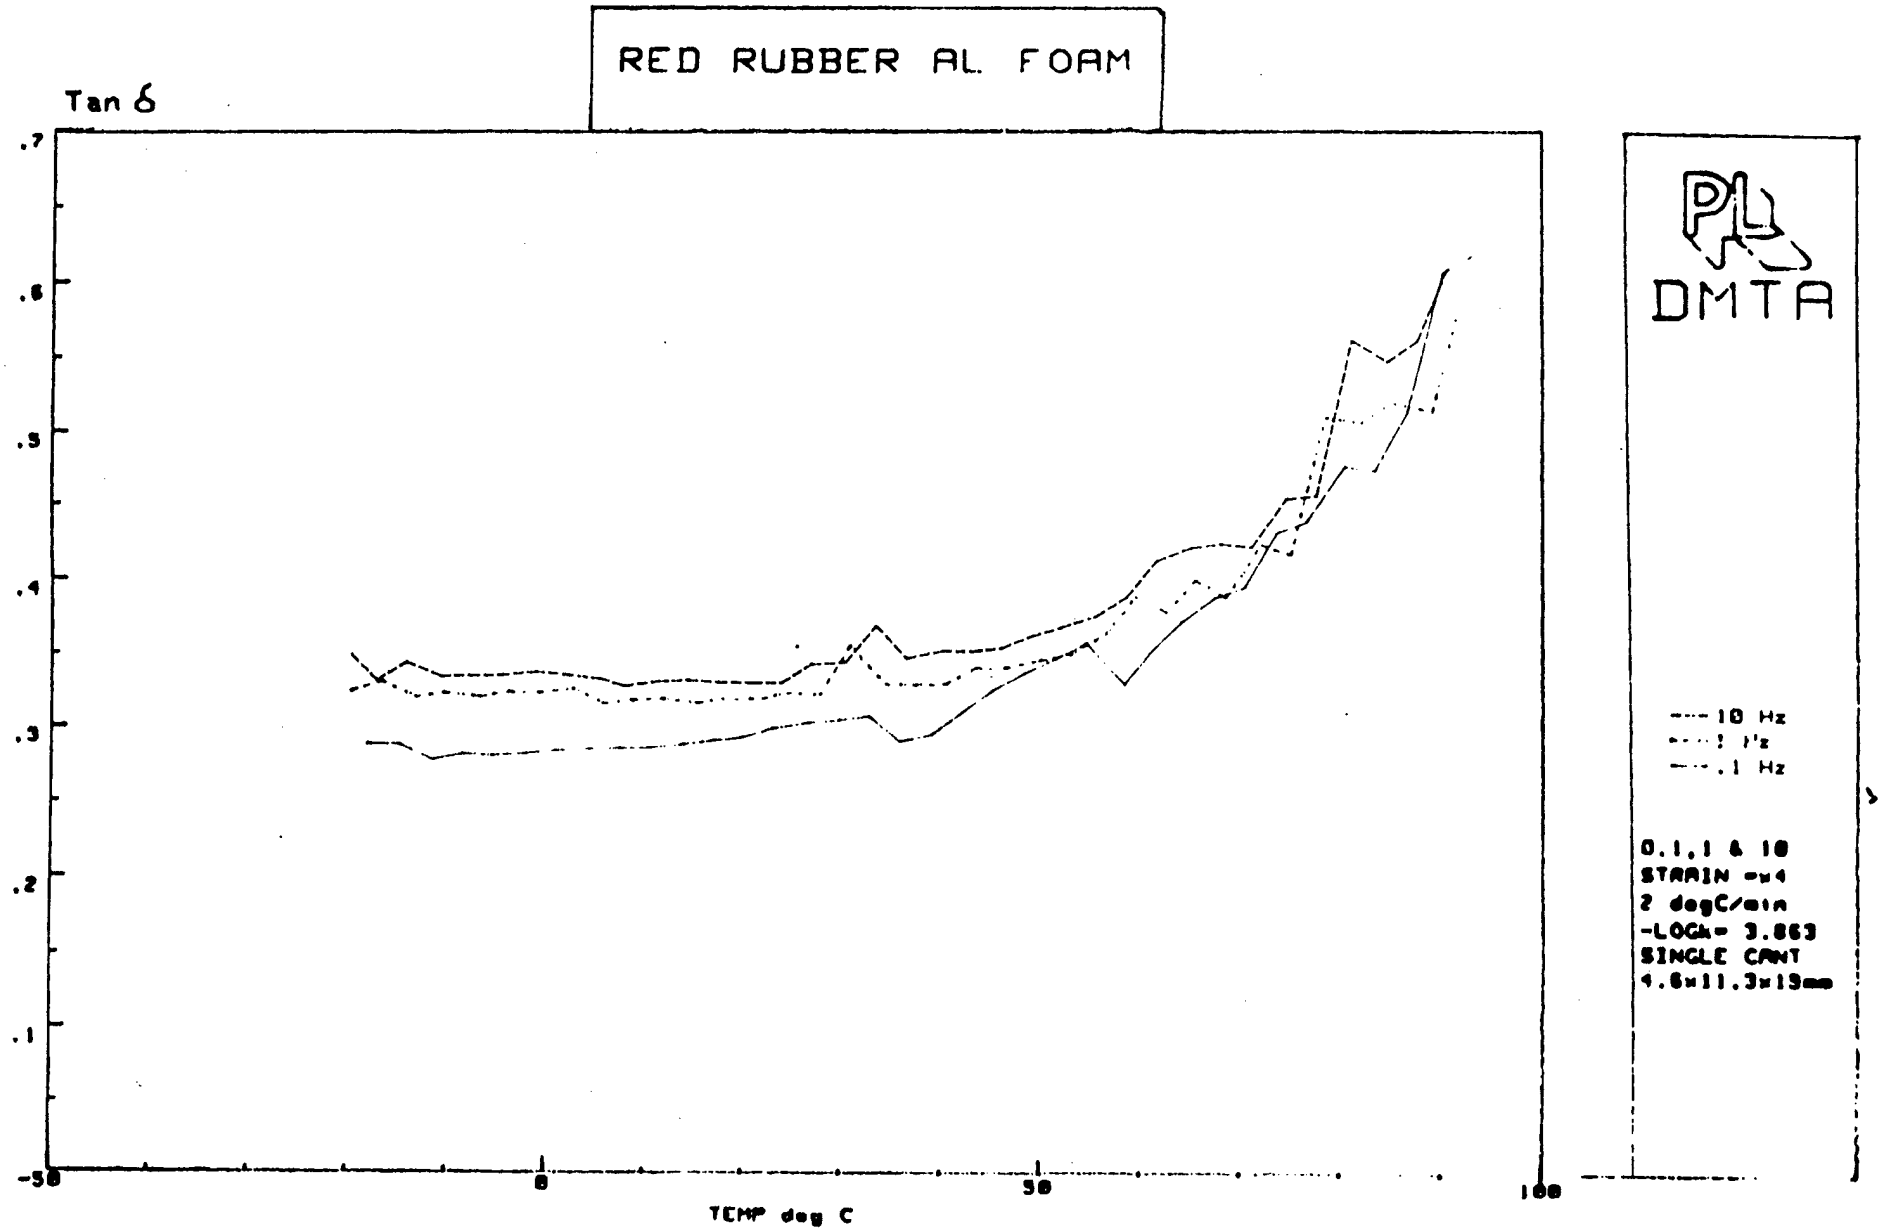
RED RUBBER AL FOAM
Tan δ
.7
.6
.5
.4
.3
.2
.1
-50
0
50
100
TEMP deg C
PL
DMTA
10 Hz
1 Hz
.1 Hz
0.1,1 & 10
STRAIN =μ4
2 degC/min
-LOGA= 3.863
SINGLE CANT
4.6x11.3x19mm

Fig. 12

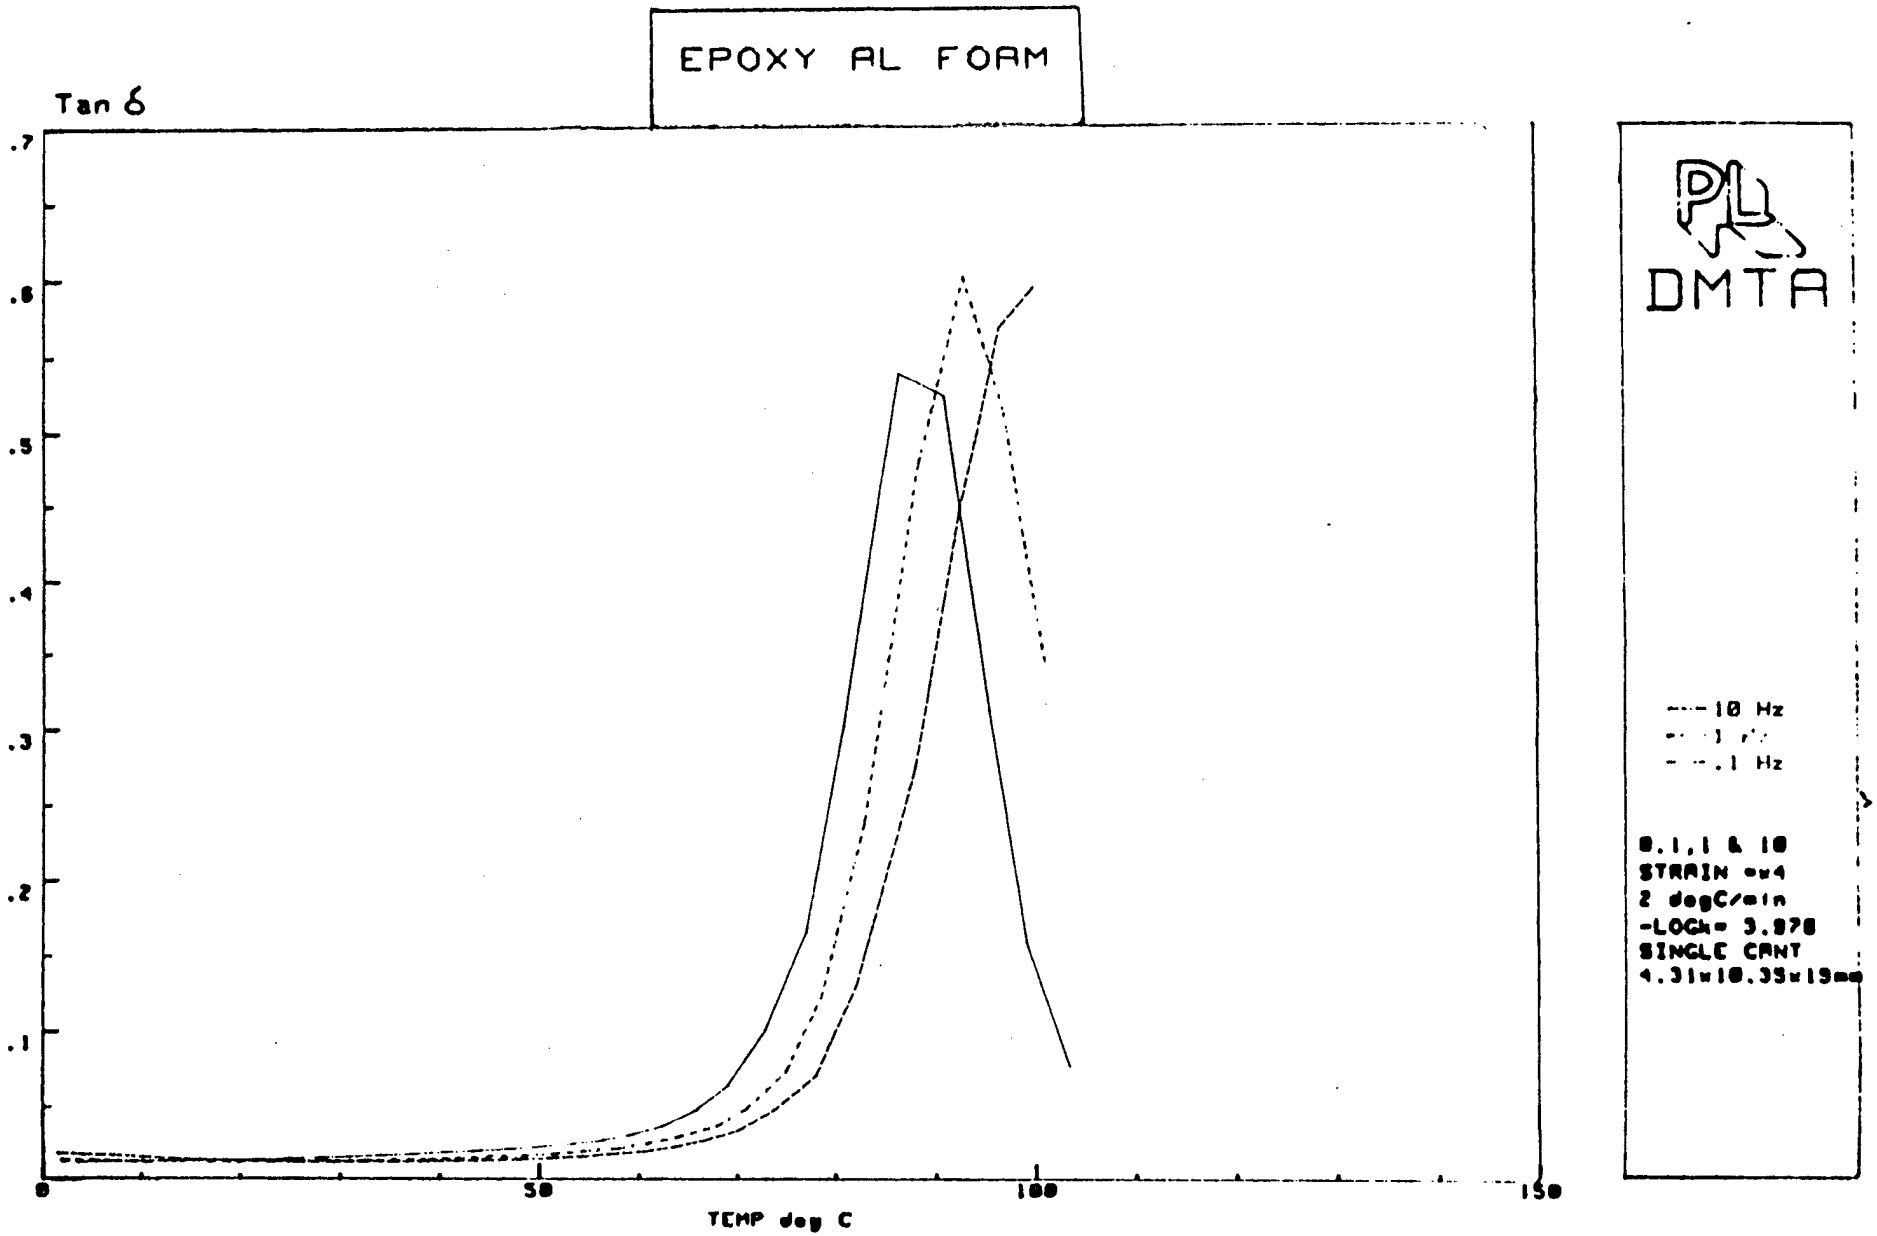
EPOXY AL FOAM
Tan δ
.7
.6
.5
.4
.3
.2
.1
0
50
100
150
TEMP deg C
PL
DMTA
10 Hz
1
.1 Hz
0.1,1 & 10
STRAIN =x4
2 degC/min
-LOGa= 3.978
SINGLE CANT
4.31x10.35x19mm

Fig. 13

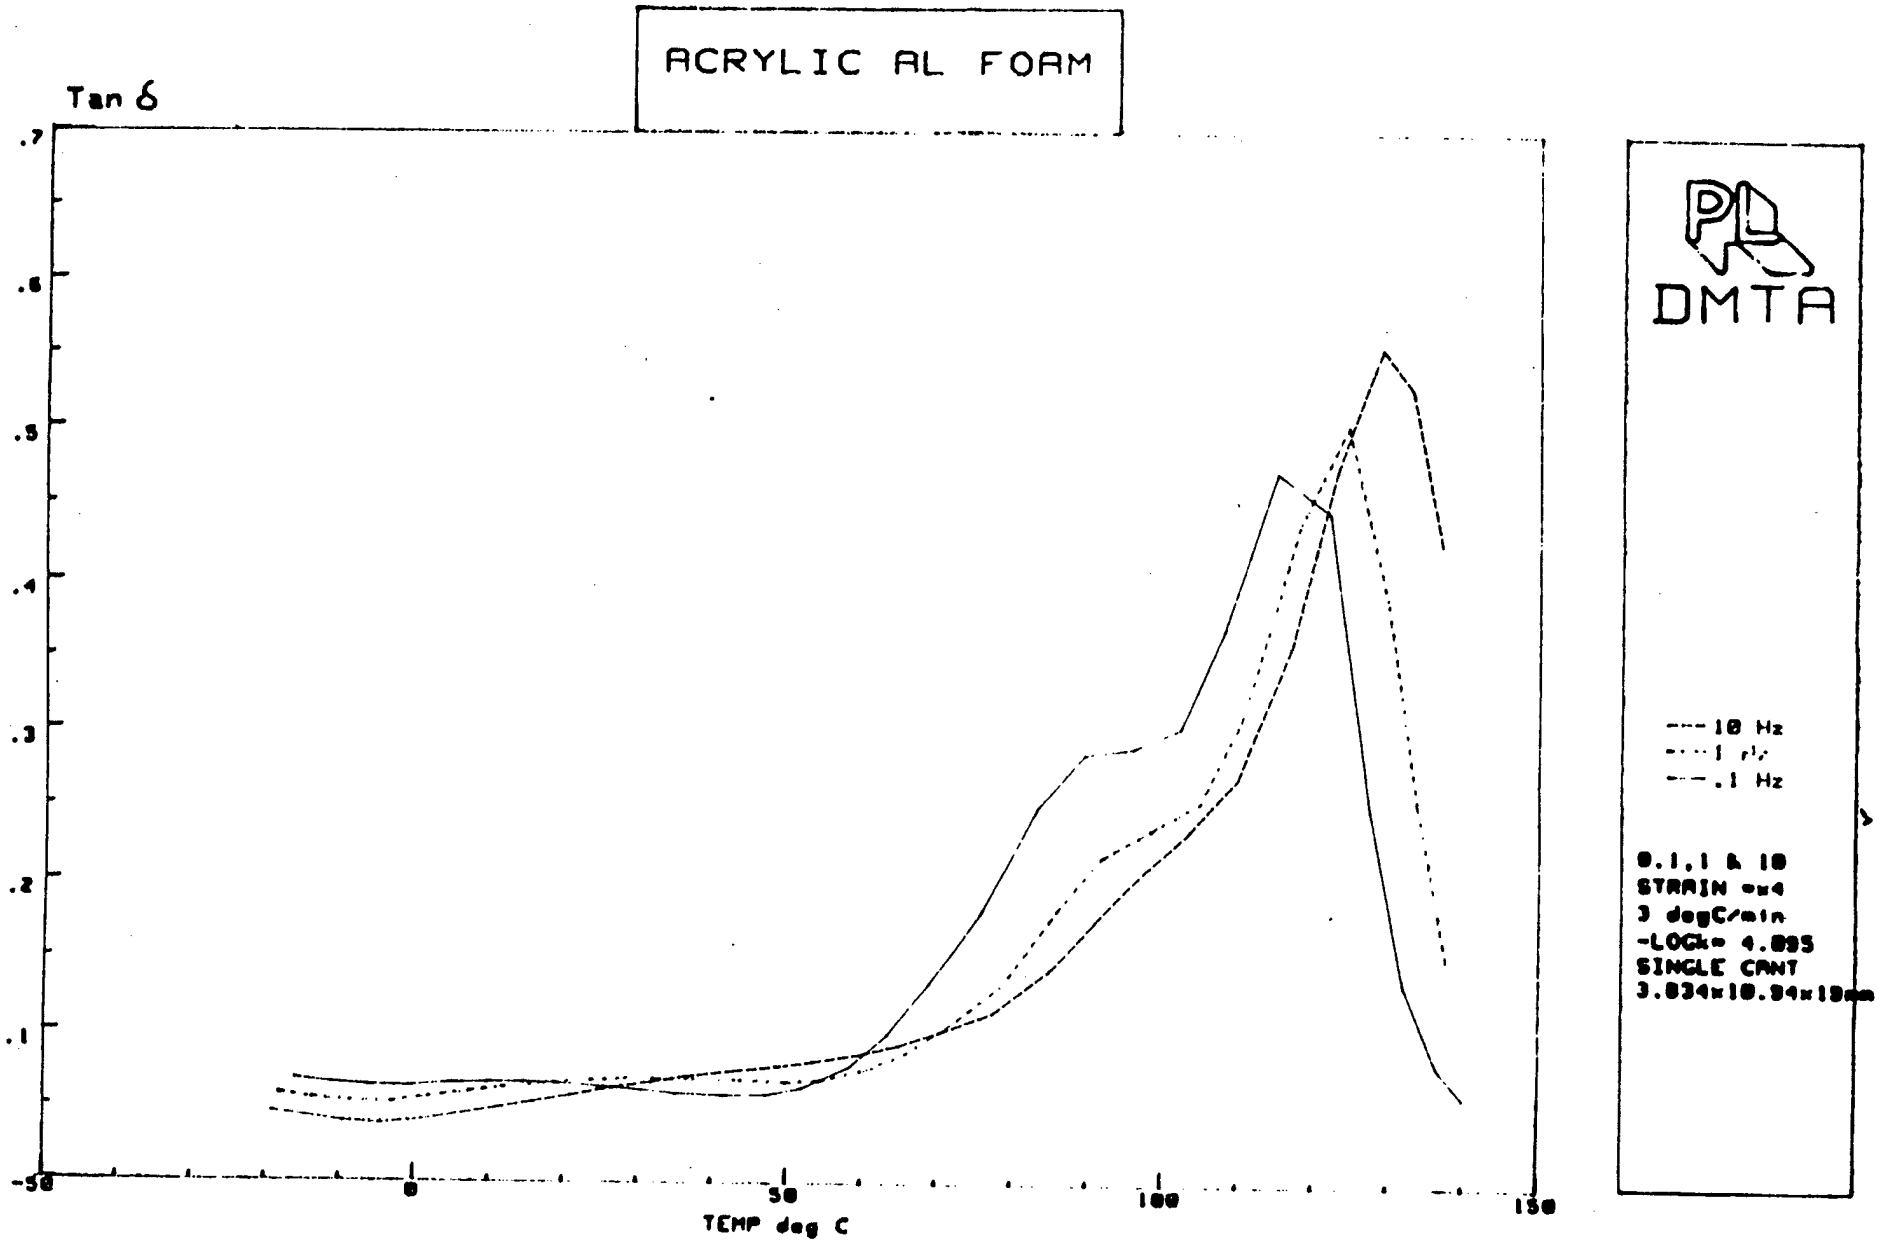
ACRYLIC AL FOAM
Tan δ
.7
.6
.5
.4
.3
.2
.1
-50
0
50
100
150
TEMP deg C
DMTA
10 Hz
1 Hz
.1 Hz
0.1,1 & 10
STRAIN =x4
3 degC/min
-LOGk= 4.895
SINGLE CANT

Fig. 14

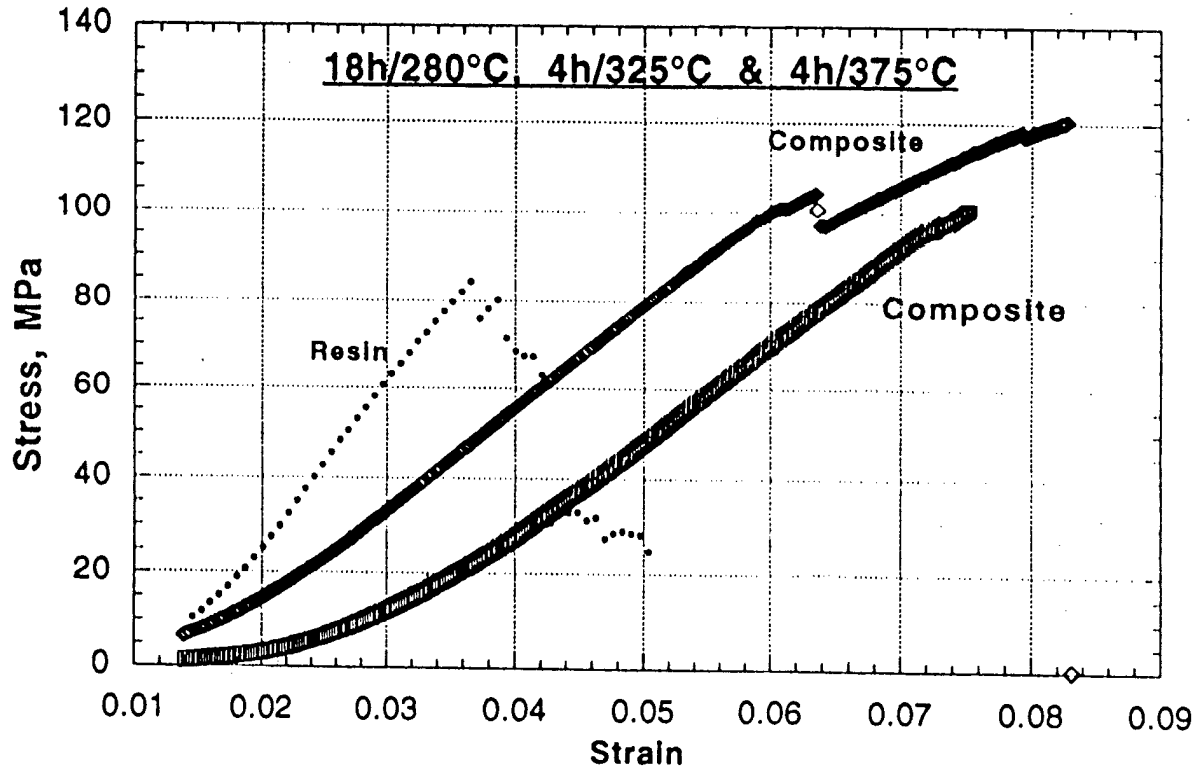
18h/280°C, 4h/325°C & 4h/375°C
Composite
Composite
Resin
Stress, MPa
Strain
140
120
100
80
60
40
20
0
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0.08
0.09

Fig.15
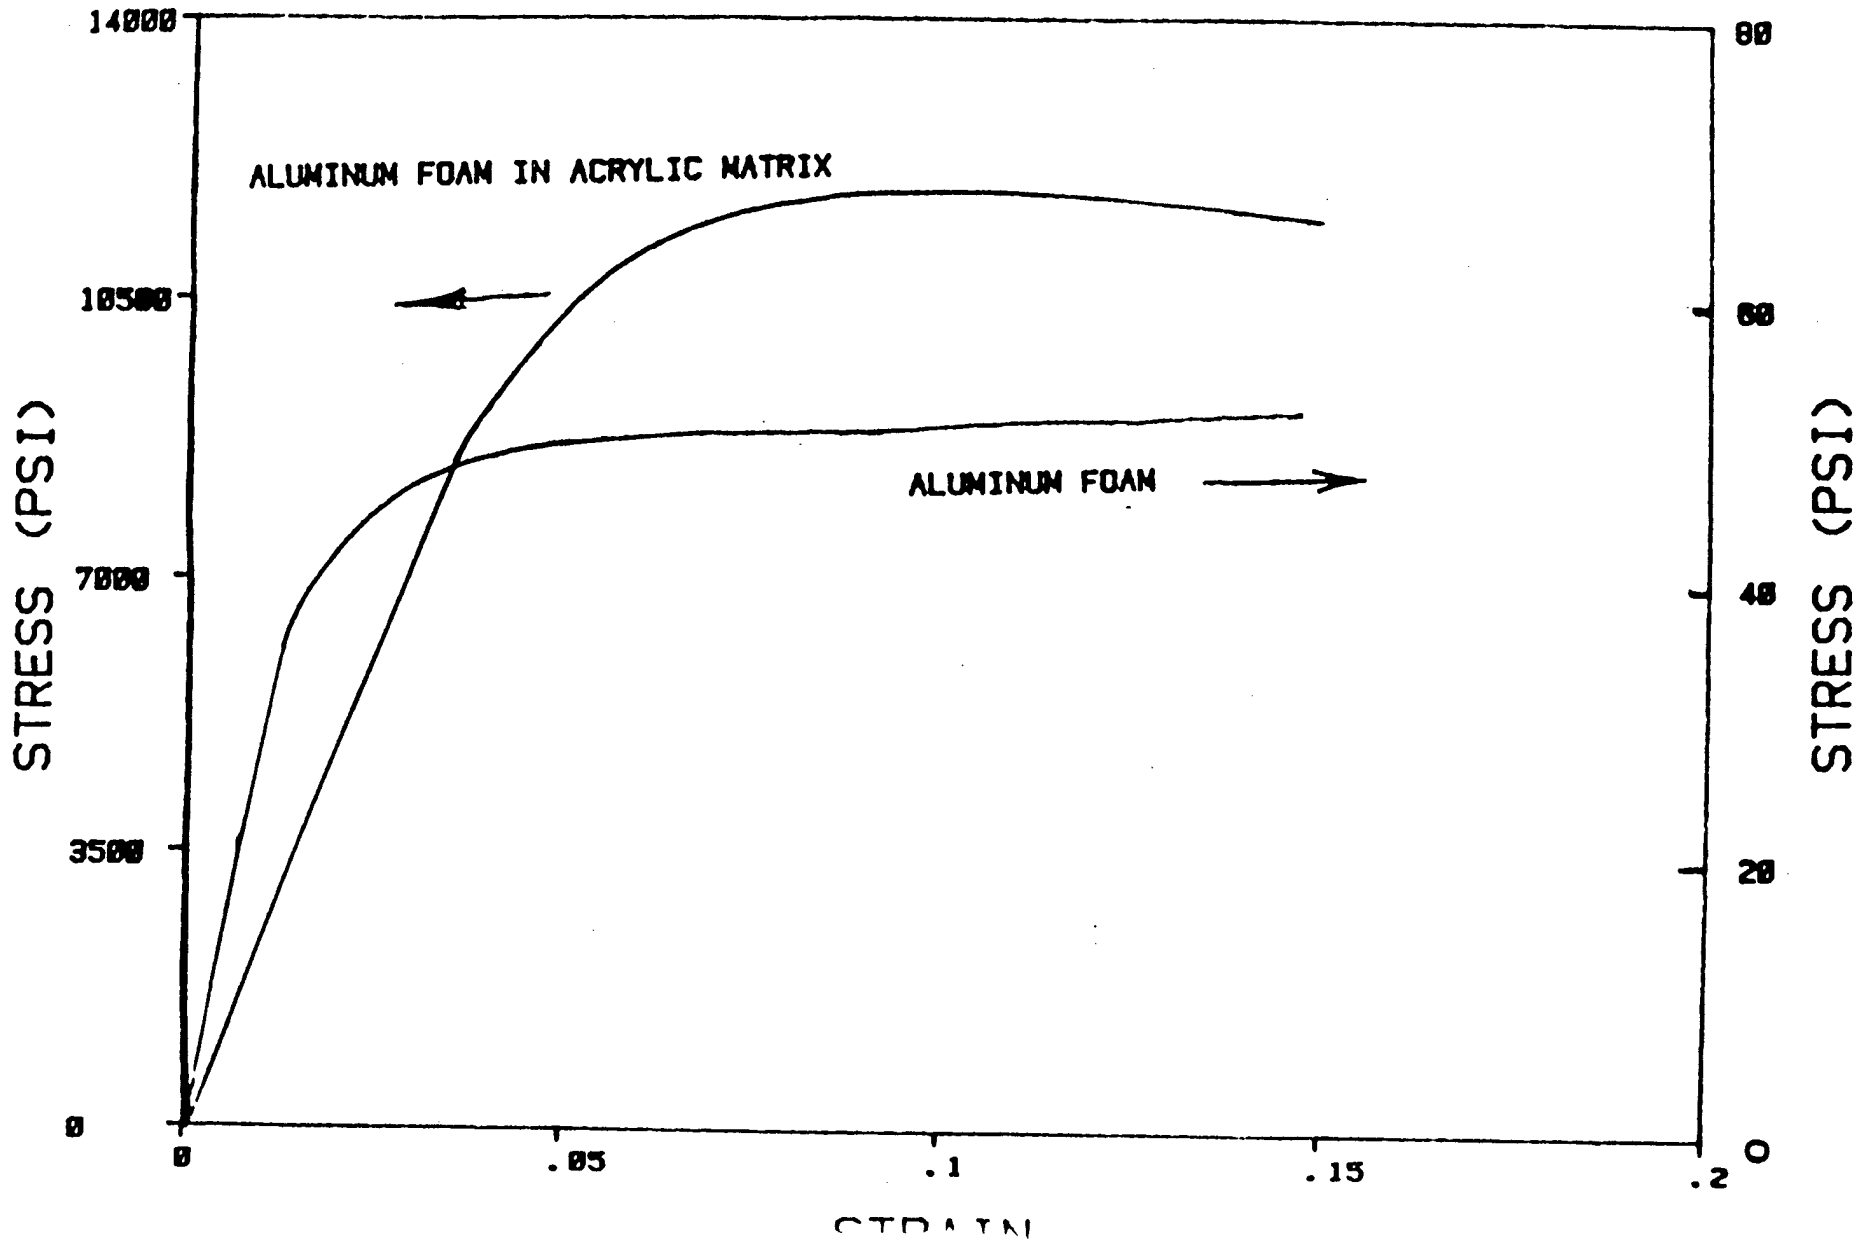
STRESS VS STRAIN