AD-A028 979

USADAC TECHNICAL LIBRARY
5 0712 01016673 3

TECHNICAL
LIBRARY

AD

R-TR-76-022

WEIGHT REDUCTION STUDY ON THE 20MM, M61A1, VULCAN GUN BARREL

PHILIP D. BENZKOFER

X67715

JUNE 1976

FINAL REPORT

RESEARCH DIRECTORATE

Approved for public release, distribution unlimited.

GENERAL THOMAS J. RODMAN LABORATORY
ROCK ISLAND ARSENAL
ROCK ISLAND, ILLINOIS 61201

DISPOSITION INSTRUCTIONS

DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED. DO NOT RETURN IT TO THE ORIGINATOR.

DISCLAIMER

THE FINDINGS OF THIS REPORT ARE NOT TO BE CONSTRUED AS AN OFFICIAL DEPARTMENT OF THE ARMY POSITION UNLESS SO DESIGNATED BY AUTHORIZED DOCUMENTS.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER R-TR-76-022	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) WEIGHT REDUCTION STUDY ON THE 20MM, M61A1, VULCAN GUN BARREL		5. TYPE OF REPORT & PERIOD COVERED Final 6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) PHILIP D. BENZKOFER		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Research Directorate, SARRI-LR GEN Thomas J. Rodman Laboratory Rock Island Arsenal, Rock Island, IL 61201		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMS 738017.C00Q1
11. CONTROLLING OFFICE NAME AND ADDRESS CMDR, Rock Island Arsenal GEN Thomas J. Rodman Laboratory, SARRI-LR Rock Island, IL 61201		12. REPORT DATE June 1976 13. NUMBER OF PAGES 36
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release, distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

1. M61A1 Vulcan Barrel
2. Thermal Analysis
3. Bore Boundary Conditions
4. Experimental Data
5. Wall Ratios

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

A thermal analysis of the M61A1 VULCAN gun barrel was performed. This analysis included the calculation of bore boundary conditions by methods previously developed by the Research Directorate and the application of these boundary conditions to an outer barrel profile analysis. Pressure stress analyses were also performed. The final results are proposed outer barrel profiles for particular performance requirements.

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

TABLE OF CONTENTS

	Page
DD Form 1473	i
Table of Contents	ii
List of Illustrations	iii
Introduction	1
Discussion and Analysis	1
Conclusions and Recommendations	5
Table I	7
Table II	8
Distribution	S1

LIST OF ILLUSTRATIONS

Figure	Description	Page
1	Experimental vs. Fitted at 5" From Breech	9
2	Experimental vs. Fitted at 10" From Breech	10
3	Experimental vs. Fitted at 18" From Breech	11
4	Experimental vs. Fitted at 35.5" From Breech	12
5	Experimental vs. Fitted at 48" From Breech	13
6	Transient Average Temperatures at 5" From Breech	14
7	Transient Bore Temperatures at 5" From Breech	15
8	Transient External Temperatures at 5" From Breech	16
9	Radial Temperature Distribution at 5" From Breech	17
10	Transient Average Temperatures at 10" From Breech	18
11	Transient Bore Temperatures at 10" From Breech	19
12	Transient External Temperatures at 10" From Breech	20
13	Radial Temperature Distribution at 10" From Breech	21
14	Transient Average Temperatures at 18" From Breech	22
15	Transient Bore Temperatures at 18" From Breech	23
16	Transient External Temperatures at 18" From Breech	24
17	Radial Temperature Distribution at 18" From Breech	25
18	Transient Average Temperatures at 35.5" From Breech	26
19	Transient Bore Temperatures at 35.5" From Breech	27
20	Transient External Temperatures at 35.5" From Breech	28
21	Radial Temperature Distribution at 35.5" From Breech	29
22	Transient Average Temperatures at 48" From Breech	30
23	Transient Bore Temperatures at 48" From Breech	31
24	Transient External Temperatures at 48" From Breech	32
25	Radial Temperature Distribution at 48" From Breech	33
26	M61 Barrel Thermocouple Stations	34
27	Yield Strength vs. Temperature for CR-MO-V Steel	35
28	Proposed 20mm Lightweight Barrel	36

INTRODUCTION

Determination of the feasibility of a reduced barrel weight on the basis of thermal considerations requires experimental data. As a minimum, the outer barrel temperatures at various axial locations and the pressure versus time and distance data are required for the particular gun. Outside wall temperatures and pressure data[2] for the 20mm M61A1 barrel were obtained.

DISCUSSION AND ANALYSIS

The transient temperature data given above included outside temperatures at 5 axial locations - 5, 10, 18, 35.5, and 48 inches (measured from the breech end). The firing rate was 4000 spm for all 6 barrels or 667 spm for each barrel, 1050 total rounds fired or 175 rounds fired for each barrel. As a result of the application of both the technique and the computer programs developed by the Research Directorate[3] to the experimental temperature data obtained, effective propellant gas temperatures $\overline{T}_g$ and effective gas convection coefficients $\overline{h}_g$ were calculated for each of the above-mentioned axial locations. Good correlation between these experimental temperature curves and those curves obtained by utilization of the effective values ($\overline{h}_g$ and $\overline{T}_g$) was obtained, as shown in Figures 1-5.

Once the effective gas temperature and gas convection coefficient are known, any combination of firing rate and rounds fired can be simulated by use of the available computer programs[3]. In this study, the firing schedule established to satisfy the design criteria specified 540 rounds at a rate of 6000 spm or, 90 rounds at a rate of 1000 spm for each barrel. Since this firing rate is different from that of the experimental rate, the effective convection coefficients for the 1000 spm rate were adjusted accordingly. Since experimental results have shown that the convection coefficient is approximately linearly dependent upon the firing rate, the following relationship holds:

$$\overline{h}_{simulated} = \frac{\text{simulated rate}}{\text{experimental rate}} \left(\overline{h}_{experimental}\right)$$

The effective gas temperature value remains fairly constant with change in firing rate for any particular axial location. Knowing the bore boundary values for the convection coefficient and for the gas temperature at all 5 axial locations provides the means to perform a parametric study of varying wall thickness at each axial location.

---

[1]Adams, D. E., et. al., "Design Studies of the XM-140 Barrel", Cornell Aeronautical Laboratory, Inc., Feb. 1967.

[2]"20mm Barrel Erosion", Contract F09603-73-C-3263, TASK I, General Electric Co., Armament Systems Department, Burlington, Vermont.

[3]Benzkofer, P., "A theoretical and Experimental Thermal Analysis to Determine Wall Ratios for a 30mm Tactical Barrel", Technical Report R-TR-75-023.

The results of such a study for the 20mm, M61A1 Vulcan barrel with various wall ratios are given in Figures 6-25. The firing schedule, axial locations, $\bar{h}_g$, $\bar{T}_g$, inner radius, and various outer radii considered are given on the curves. For those figures which show temperature in ^{o}F versus time in seconds, note that temperature values may be either external, average or bore. Also, several figures give temperature versus distance from the bore. These temperatures are the final values at the end of the firing cycle. The present configuration of the M61A1 barrel is given in Figure 26.

Another aspect to consider is that of the stresses to which the gun barrel will be subjected. These stresses are of two types, thermal and pressure. One method or approach is that of combining these two stresses into a total equivalent stress. In the initial firing of a gun barrel, a large temperature difference exists across the barrel wall that induces large, negative, tangential thermal stresses which counteract the pressure stresses. Also, the timing of the peak thermal pulse is out of phase with the peak pressure pulse. One could conclude then, that by reduction of the wall thickness, the total equivalent stresses would be lower. This argument, however, does not hold in the situation in which heating is followed by cooling by which the large, negative, tangential thermal stresses increase in a positive sense because of lowered temperature gradients across the wall. Since the breech is subjected to considerably higher pressure, a safe method is that of considering a total equivalent stress on the basis of pressure and axial stress only. The resulting stresses[4] for a thick-walled cylinder due to the internal pressure are given by Lamé's solution

$$\sigma_r = \frac{r_i^2 P_i}{r_o^2 - r_i^2} \left(1 - \frac{r_o^2}{r^2}\right) \qquad (1)$$

and

$$\sigma_t = \frac{r_i^2 P_i}{r_o^2 - r_i^2} \left(1 + \frac{r_o^2}{r^2}\right) \qquad (2)$$

---

[4] Popov, E. P., "Mechanics of Materials", Prentice Hall, Inc., New Jersey, 1952.

Since $r_o^2/r^2 \geq 1$, σ_r is always a compressive stress and is maximum at $r = r_i$. Similarly, σ_t is always a tensile stress, and its maximum value occurs at $r = r_i$. Using the maximum shear theory of failure[4],

$$\tau_{max} = \frac{\sigma_1 - \sigma_2}{2} \qquad (3)$$

Because σ_t and σ_r are maximum principal stresses at the inner cylinder surface,

$$\tau_{max} = \frac{(\sigma_t)_{max} - (\sigma_r)_{max}}{2} = \frac{P_i R_o^2}{r_o^2 - r_i^2} \qquad (4)$$

Since the yield stress $Y = 2\tau_{max}$, and if one uses Tresca's yield condition[4] $(Y = \sigma_t - \sigma_r)$, then

$$Y = 2 P_i / [1 - (r_i/r_o)^2] \qquad (5)$$

Now, the elastic yield stress at the bore surface can be calculated for any outer radius. A typical set of pressure data[5] for the M61A1 barrel is given in Table 1 and yield strength in KSI versus temperature in °F for CR-MO-V is given in Figure 27. Consider the 5 inch axial location as an example. This section is subjected to the maximum pressure of 55000 psi. Substituting this pressure value into Equation 5, one obtains:

$$Y = 2\,(55{,}000)/\left[1 - \left(\frac{.3937}{.78}\right)^2\right]$$

$$Y = 147{,}605 \text{ psi}$$

A comparison of this value against the dynamic yield strength values in Figure 27 shows that the elastic yield strength has been exceeded at the bore surface; that is, the bore region is acting in the plastic regime. With the use of a computer program[5] developed by the Research Directorate, total equivalent stresses for a radial cross-section of a gun barrel can be calculated, with a minor change to eliminate the thermal stress terms.

---

[4]Popov, E. P., "Mechanics of Materials", Prentice Hall, Incorporated New Jersey, 1952.

[5]Thomsen, D. M., et. al., "Gun Barrel Thermal Structural Model", Progress Report, X. O. 512211 - 5007.

Now the depth of the plastic deformation into the radial section can be determined. Sound design practice allows for a small amount of plastic deformation. Therefore, one can vary the outer radius until approximately 10 per cent of the wall thickness is plastic for any particular temperature level desired from Figure 27. This temperature level is that temperature calculated for the prescribed firing schedule and outer radius in the parametric variation study, the results of which are given in Figures 6-25.

In summary, one can select an axial location, then use Equation 5 to determine the yield strength for the present outer radius. On the basis of this yield value, one can then determine whether the temperature value from Figure 27 is within the temperature range for the required firing schedule. The results for all axial locations are tabulated in Table 2. Further discussion of this data is presented later in this report.

A series of failure tests on a special reinforced, M197, 3-barrel weapon were conducted[2] by General Electric in 1973. The actual barrel configuration was identical to that of the VULCAN barrel. Characteristically, the new barrels failed near the muzzle end, and the worn barrels, at the breech end. Since temperature data were not recorded during the tests, data on the temperature levels attained are unavailable. However, the firing rate and the number of rounds to failure are known. Since the barrel configuration is identical to the M61A1, values calculated for $\bar{T}_g$ and h_g in a previous section can be used to determine the temperature reached at failure.

Two tests that resulted in muzzle end failure were analyzed. The firing rates were 1333 spm per barrel and 2000 spm per barrel, and the rounds fired per barrel were 267 and 290, respectively. With the use of the computer programs referenced in an earlier section, the outside and average barrel temperatures were determined to be in the range of 1350° - 1400°F. These temperature levels reflect large thermal stresses and as a consequence, a weakening of the barrel occurs that causes muzzle end droop and subsequent projectile exit through the side of the barrel. Clearly, the firing schedule was too severe for the barrel to sustain. As for the breech end problems, a different type of failure or combination of types of failures occurred. With the same procedure to determine barrel temperatures as used at the muzzle end, average and outside temperatures were found to be in the 800°F - 1000°F range. Bore inspection of the barrels showed radial cracking in the grooves and erosion measurements of .060 inch. Since this is the high-pressure region, pressure stresses are distinctly significant, and are most likely the cause of failure.

---

[2] "20mm Barrel Erosion", Contract F09603-73-C-3263, Task I, General Electric Company, Armament Systems Department, Burlington, Vermont.

CONCLUSIONS AND RECOMMENDATIONS

An increase in material on the tapered down-section near the breech (Figure 26) would increase the factor of safety to avoid barrel rupture if the recommended firing schedule is exceeded. A rough estimate of plastic deformation for the 650°F - 1000°F operating temperatures is 10-16 per cent, as shown in Table 2. An increase of .2 to .4 inch to the diameter would substantially decrease the plastic penetration. This recommendation was also proposed by General Electric[2] in their erosion studies of the M61A1.

Generally, pressure stresses do not cause problems involving the middle-to-muzzle end of the barrel, but thermal stresses are significant. Since single-shot heat flux data are unavailable for the 20mm, M61A1 gun barrel, total equivalent stresses to include thermal stresses cannot be calculated. However, observing the temperature levels attained in the failure tests performed by General Electric, one notes that the firing schedule prescribed by SARRI-LW for this study is much less severe. On the basis of previous experience, one also notes that the temperature levels attained at the breech end for the present M61A1 barrel are within safe limits, if the firing schedule proposed is followed. Caution should be taken, however, when the barrel is designed for the middle-to-muzzle end on the basis of values from Table 2. This tabulation is only a pressure analysis and is meant to point out that pressure stresses are not of paramount importance in the middle-to-muzzle locations. Temperatures of 1300°F - 1400°F are within the elastic limit, as shown in Table 2. These temperature levels are high for CR-MO-V steel, as the failure tests previously discussed indicates.

Thus, several recommendations can be made. On the assumption that the firing schedule prescribed is realistic, then the present design can be changed to reduce barrel weight. A proposed barrel that reduces the existing weight by 14 per cent or by 2.5 pounds is shown in Figure 28. The temperature and pressure stress results for this design are still conservative; but, hardware requirements necessarily limit the reduction of wall ratios at certain points on the barrel. The tapered section at the 3.215 to the 6 inch region adds .4 pound to the barrel weight, but it provides a better margin of safety against breech rupture. The other changes in this barrel decrease barrel weight from the existing profile. The built-up section from 6 to 9.75 inches in the existing profile has been eliminated in this lightweight comcept. If the lightweight concept is not adopted, then the present built-up section in the 6 to 10 inch area could be retained, and the reduction in total barrel weight would still be 1.5 pounds.

---

[2] "20mm Barrel Erosion", Contract F09603-73-C-3263, Task I, General Electric Company, Armament Systems Dept., Burlington, Vermont.

Since the bore boundary conditions for the failure tests have been calculated for all 5 axial locations, upper limits for safe operating barrel temperatures can be calculated for more severe firing schedules. If complete redesign of the barrel is desired, then an optimum barrel profile could be defined prior to the design of the firing fixtures and hardware requirements. Additional constraints on design recommendations that include barrel material, propellant type, environmental conditions, and external loading (due to the motion of the aircraft) need to be considered prior to final design.

TABLE I

Time (ms)	Travel (in)	Pressure (psi)
0.00	0.0	0.
0.42	0.001	9100.
0.82	0.780	48000.
0.92	1.600	54500.
0.98	2.230	55000.
1.02	2.820	54180.
1.22	6.420	43200.
1.72	20.300	20100.
2.32	41.900	9650.
2.70	56.900	6760.

TABLE II

	Axial Locations (in)								
	5			10		18		35.5	48
r_o (in)	.78	.88	.98	.78	.694	.78	.694	.55	.55
P (psi)	55,000	55,000	55,000	43,200	43,200	30,156	30,156	10,000	9,000
Y (psi)	147,605	137,526	131,169	115,937	127,469	80,930	88,981	41,080	36,972
T (°F)	100	200	300	600	400	1300	1250	1400	1400
σ(psi) at bore	133,000	124,000	118,000	110,000	121,000	100% Elastic	100% Elastic	100% Elastic	100% Elastic
% plastic @650°F	10	6	2.5	100% Elastic	5	100% Elastic	100% Elastic	100% Elastic	100% Elastic
% plastic @ 1,000°F	16	8	3	100% Elastic	9	100% Elastic	100% Elastic	100% Elastic	100% Elastic

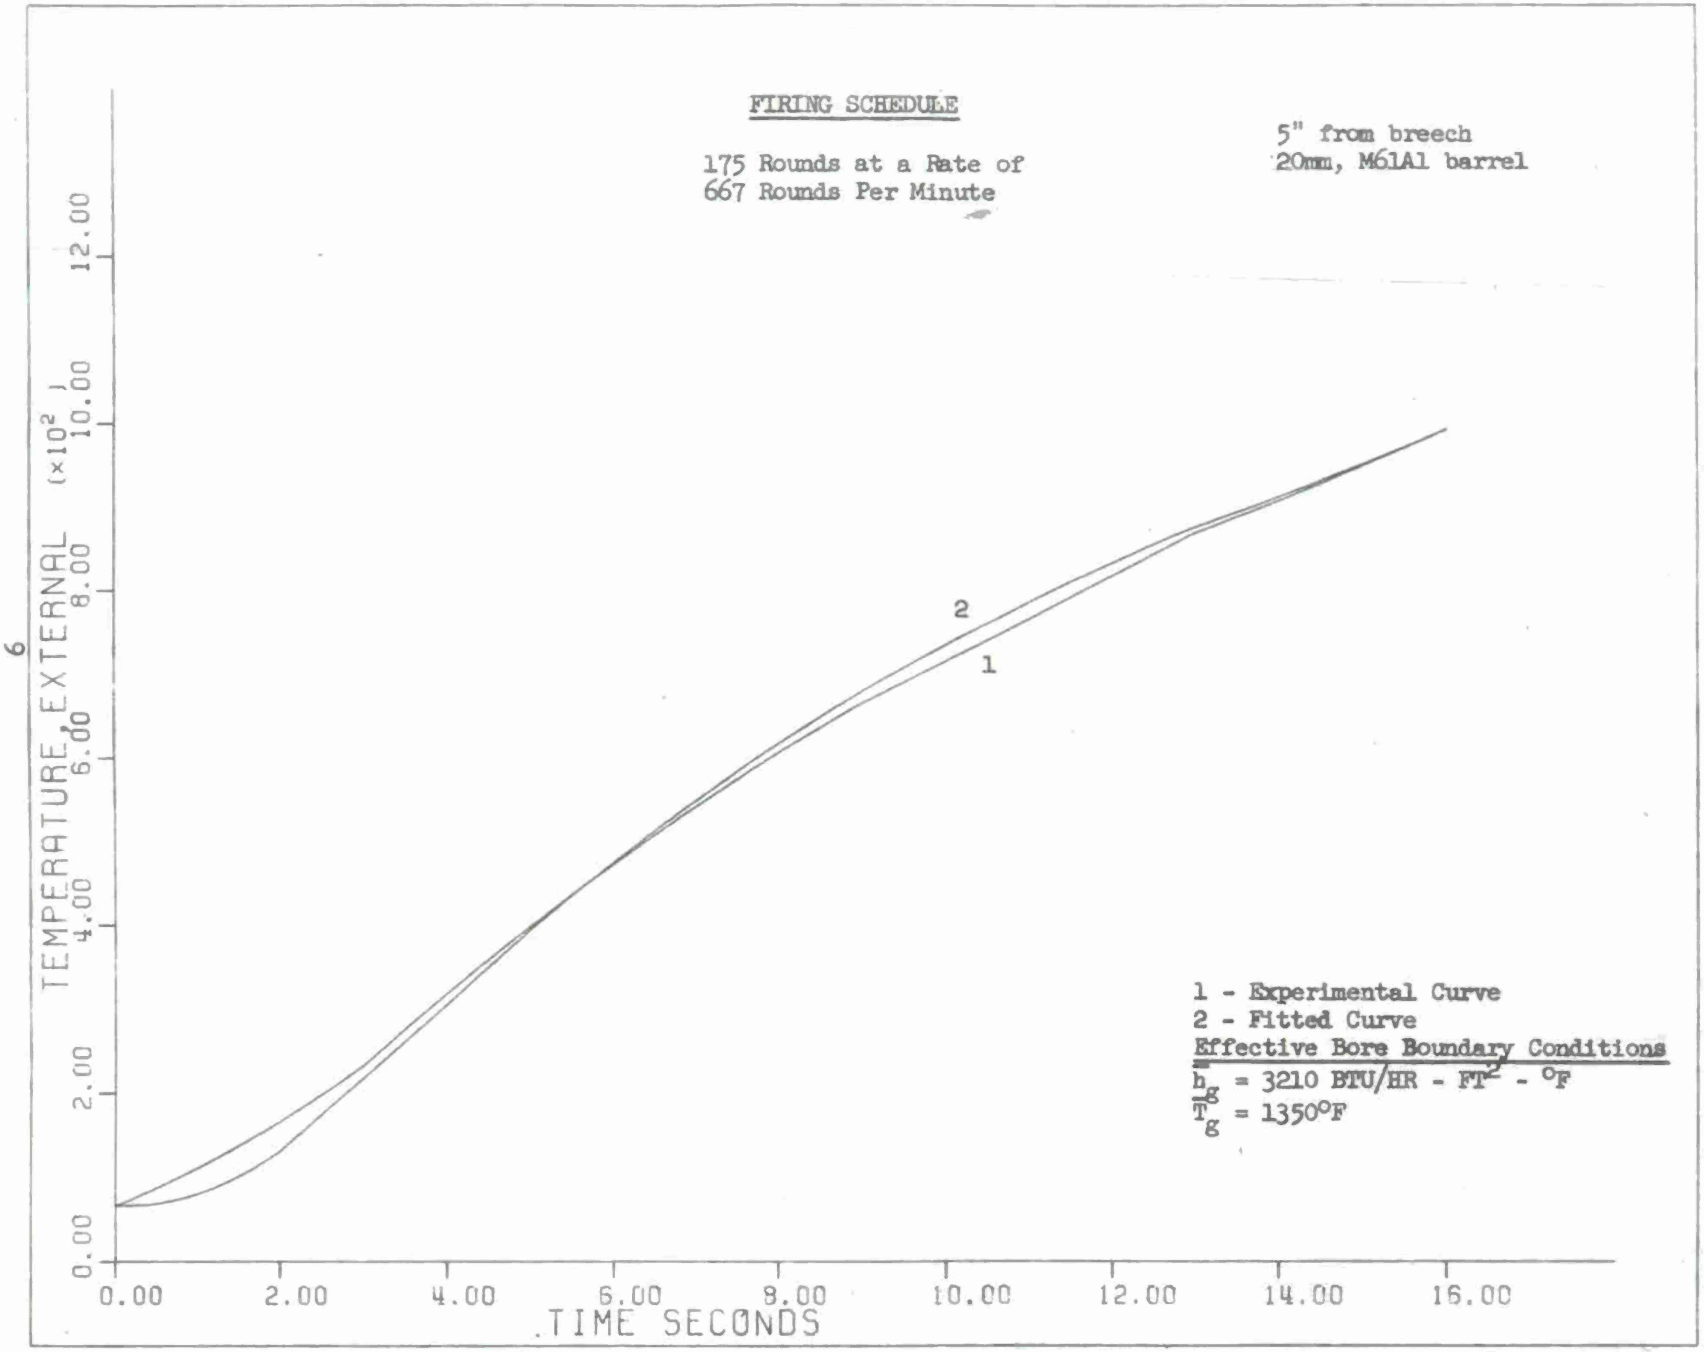
FIRING SCHEDULE
175 Rounds at a Rate of
667 Rounds Per Minute
5" from breech
20mm, M61A1 barrel
TEMPERATURE, EXTERNAL (×10²)
0.00
2.00
4.00
6.00
8.00
10.00
12.00
0.00
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
TIME SECONDS
2
1
1 - Experimental Curve
2 - Fitted Curve
Effective Bore Boundary Conditions
h_g = 3210 BTU/HR - FT² - °F
T_g = 1350°F

FIGURE 1

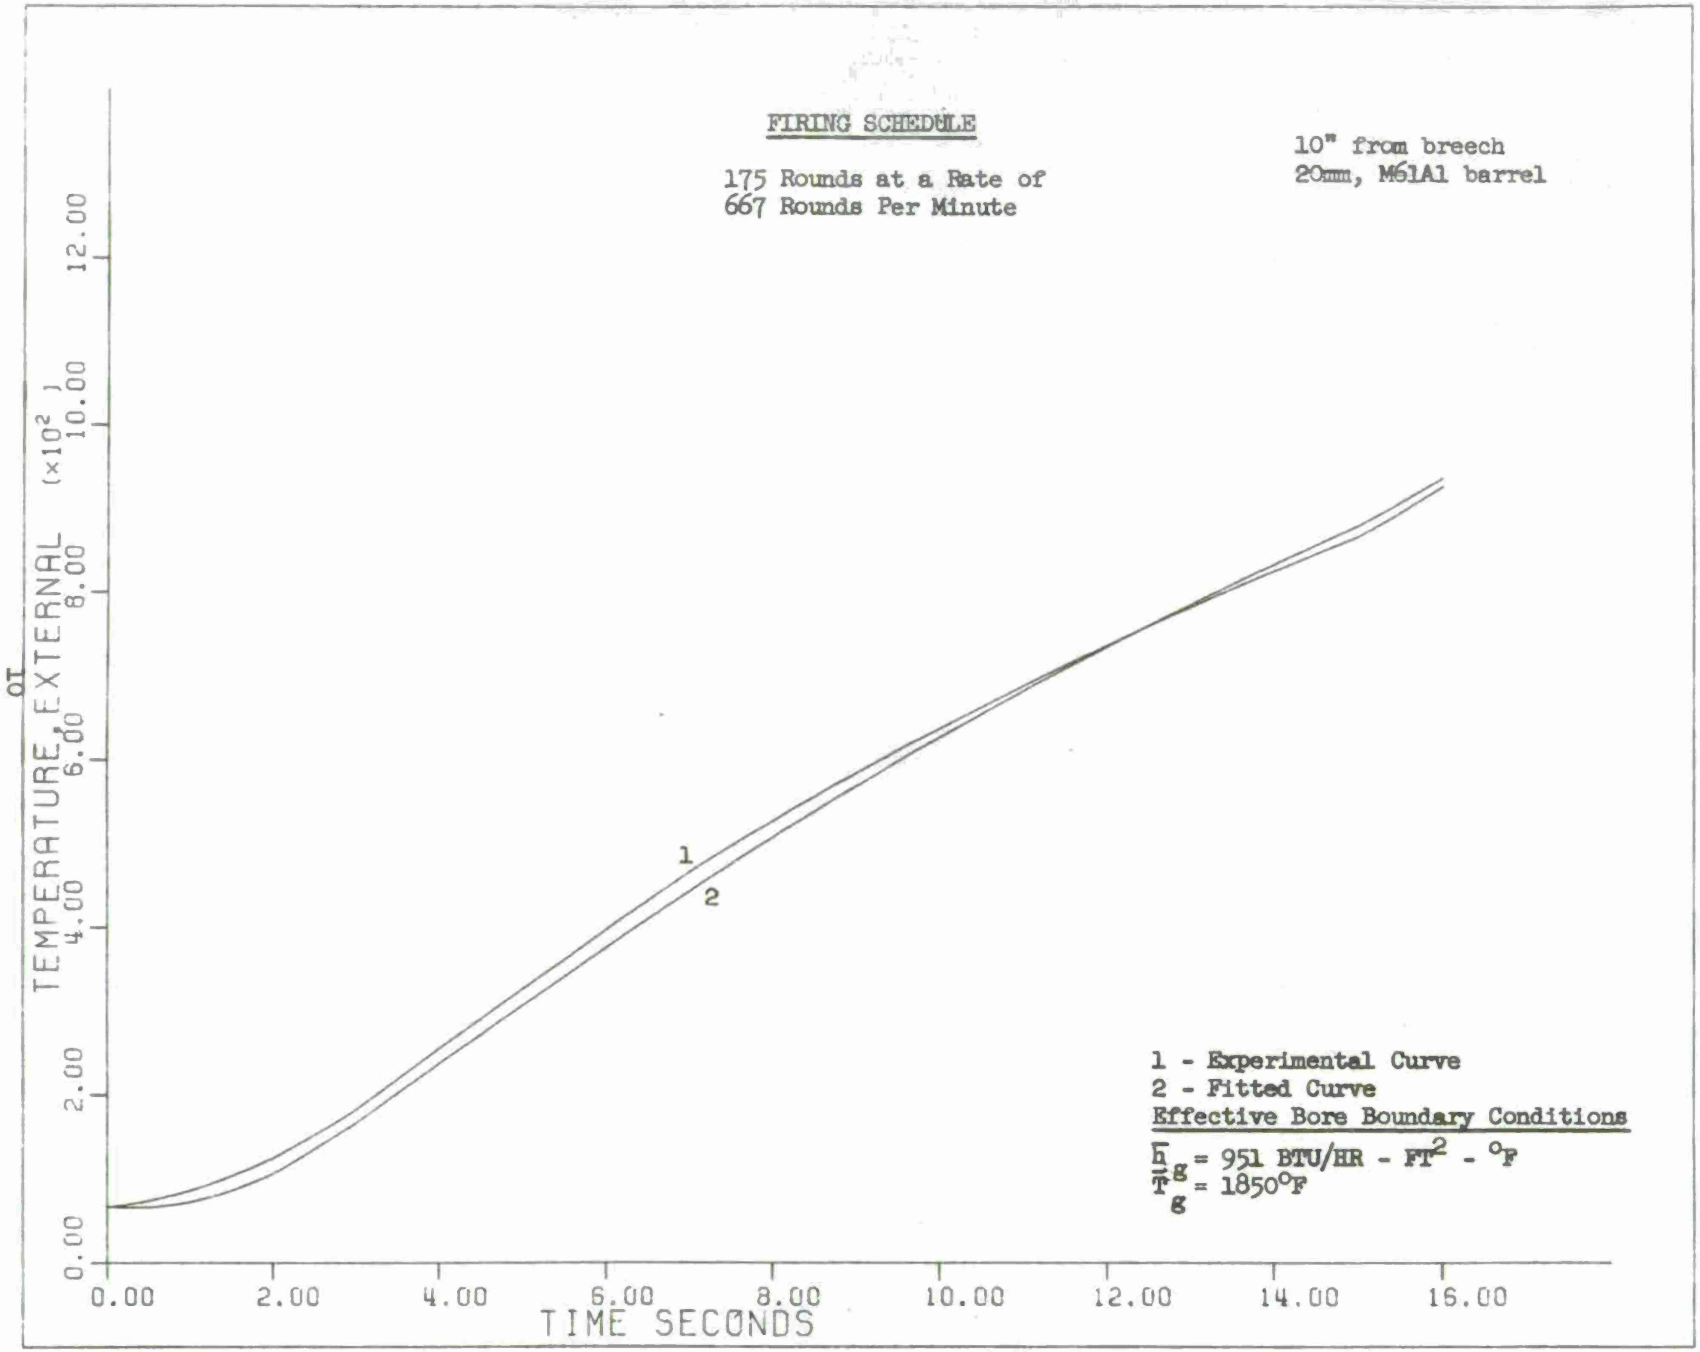
FIRING SCHEDULE
175 Rounds at a Rate of
667 Rounds Per Minute
10" from breech
20mm, M61A1 barrel
TEMPERATURE, EXTERNAL (×10²)
0.00
2.00
4.00
6.00
8.00
10.00
12.00
TIME SECONDS
0.00
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
1
2
1 - Experimental Curve
2 - Fitted Curve
Effective Bore Boundary Conditions
$\bar{h}_g$ = 951 BTU/HR - FT^2 - ^oF
$\bar{T}_g$ = 1850^oF

FIGURE 2

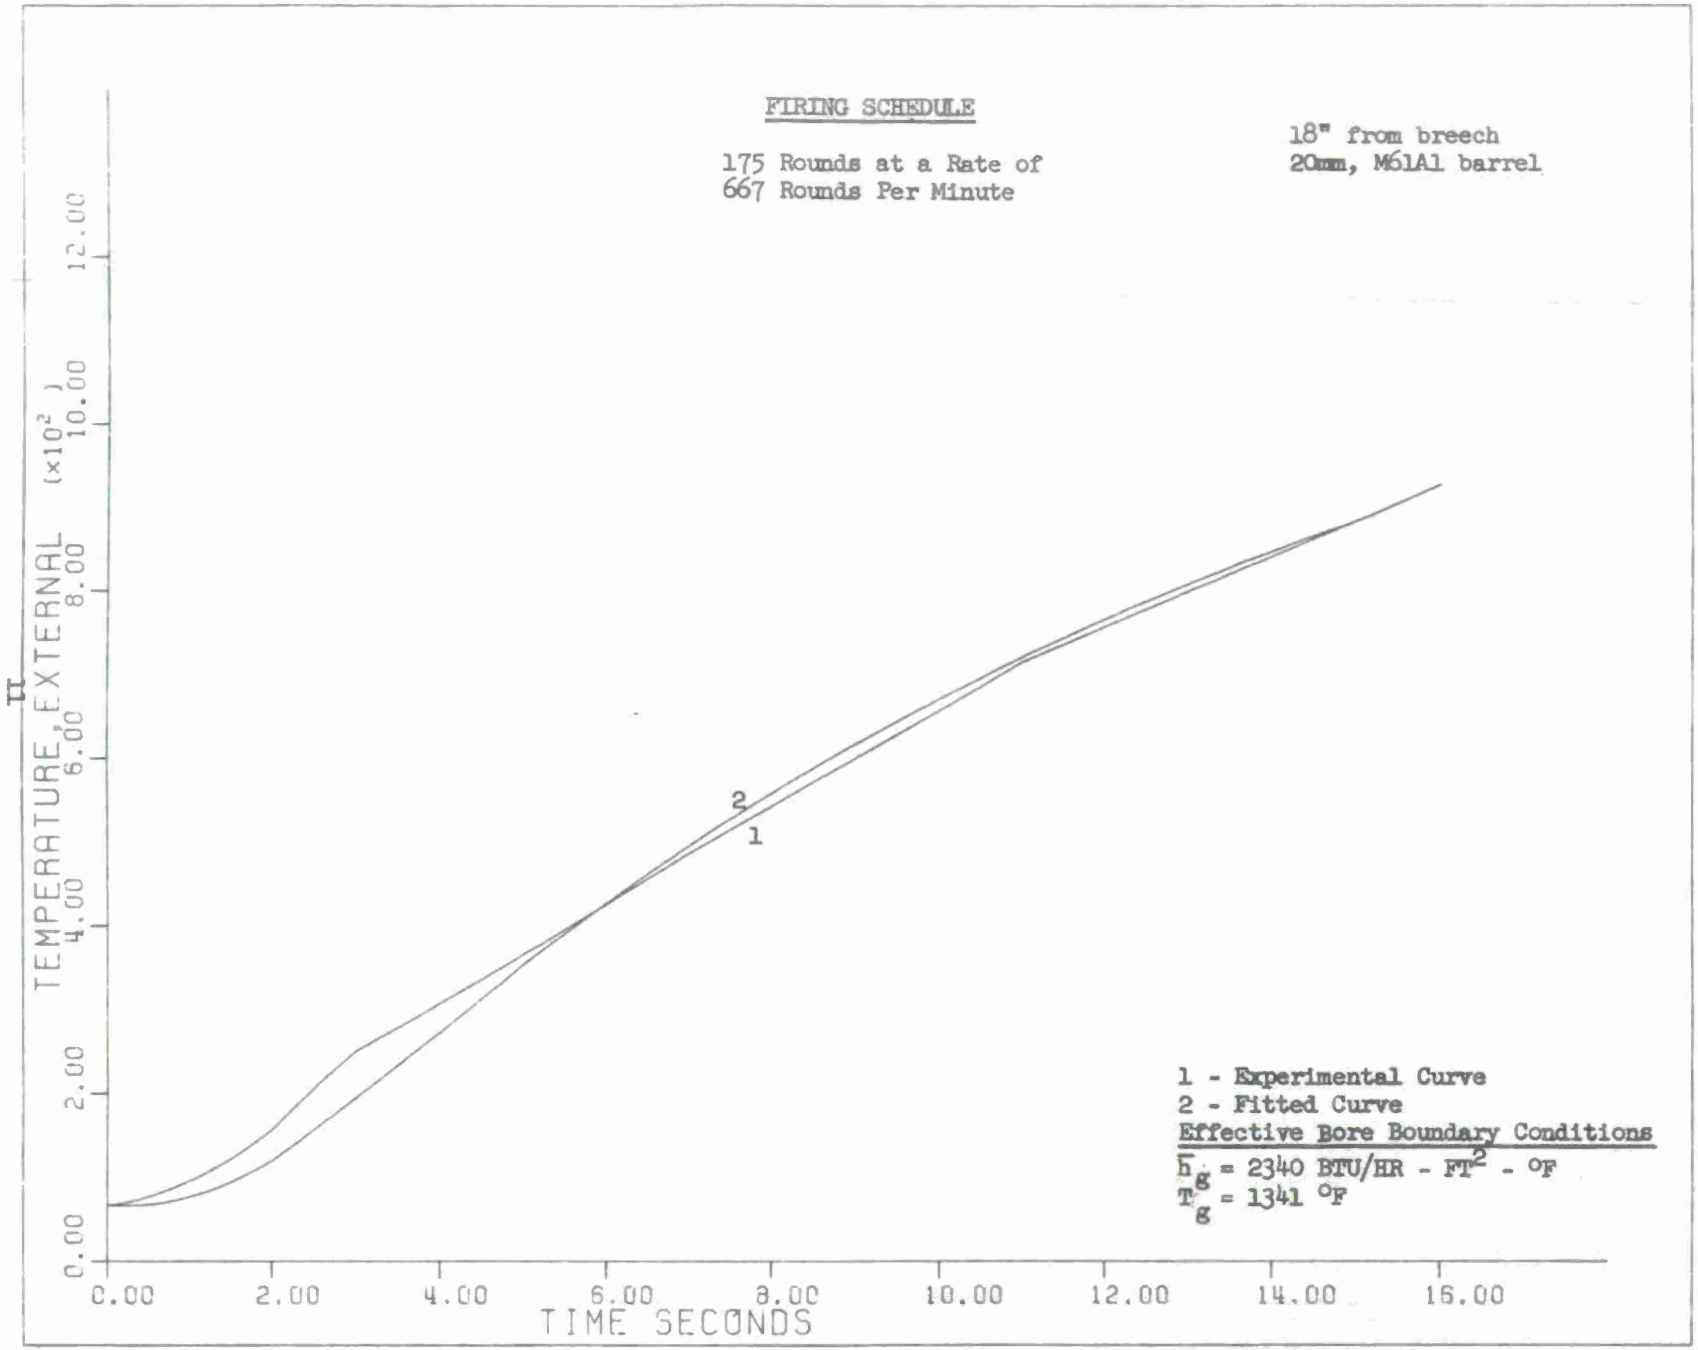
FIRING SCHEDULE
175 Rounds at a Rate of
667 Rounds Per Minute
18" from breech
20mm, M61A1 barrel
TEMPERATURE, EXTERNAL (×10²)
0.00
2.00
4.00
6.00
8.00
10.00
12.00
TIME SECONDS
0.00
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
2
1
1 - Experimental Curve
2 - Fitted Curve
Effective Bore Boundary Conditions
$\bar{h}_g$ = 2340 BTU/HR - FT^2 - °F
T_g = 1341 °F

FIGURE 3

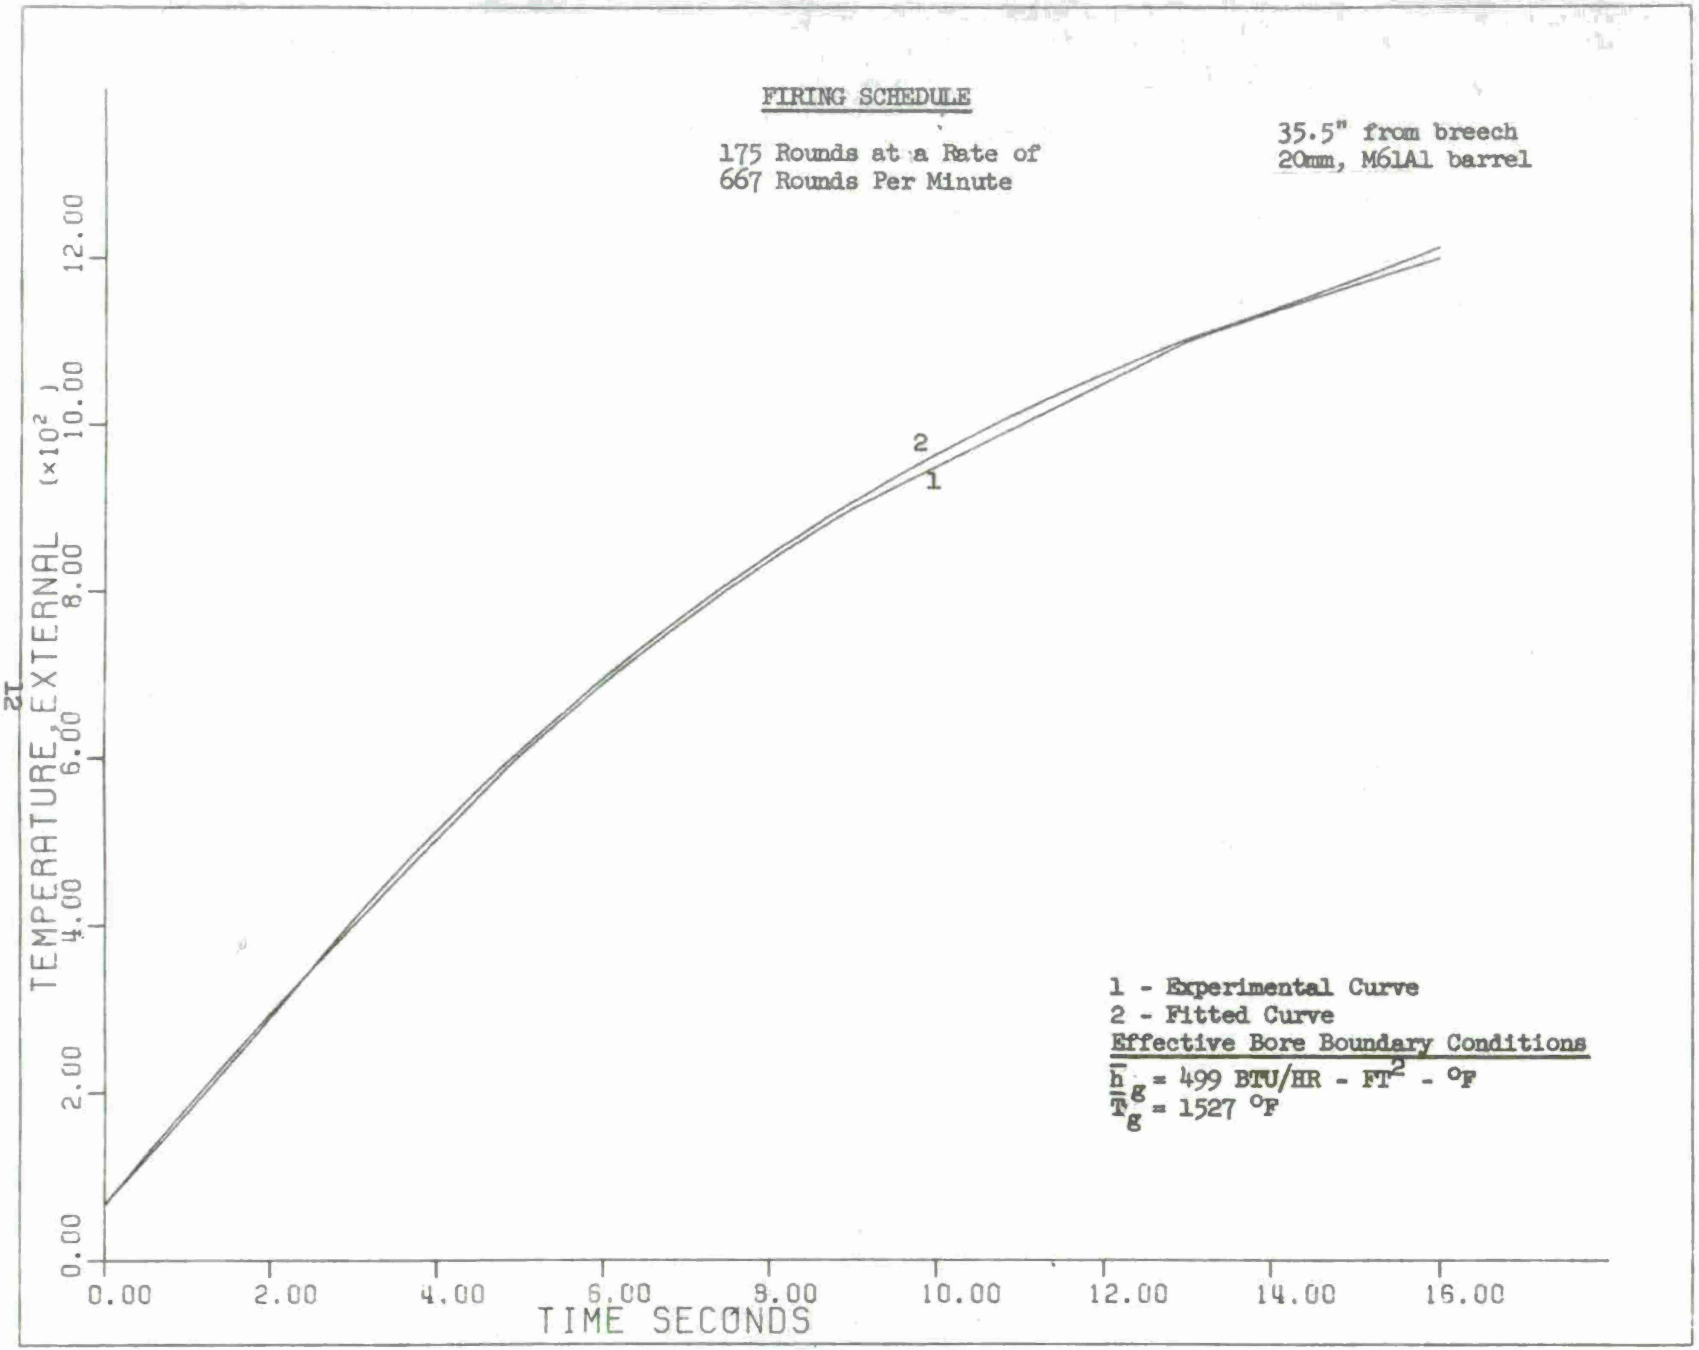
FIRING SCHEDULE
175 Rounds at a Rate of
667 Rounds Per Minute
35.5" from breech
20mm, M61A1 barrel
TEMPERATURE, EXTERNAL (×10²)
0.00
2.00
4.00
6.00
8.00
10.00
12.00
TIME SECONDS
0.00
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
2
1
1 - Experimental Curve
2 - Fitted Curve
Effective Bore Boundary Conditions
$\bar{h}_g$ = 499 BTU/HR - FT^2 - °F
$\bar{T}_g$ = 1527 °F

FIGURE 4

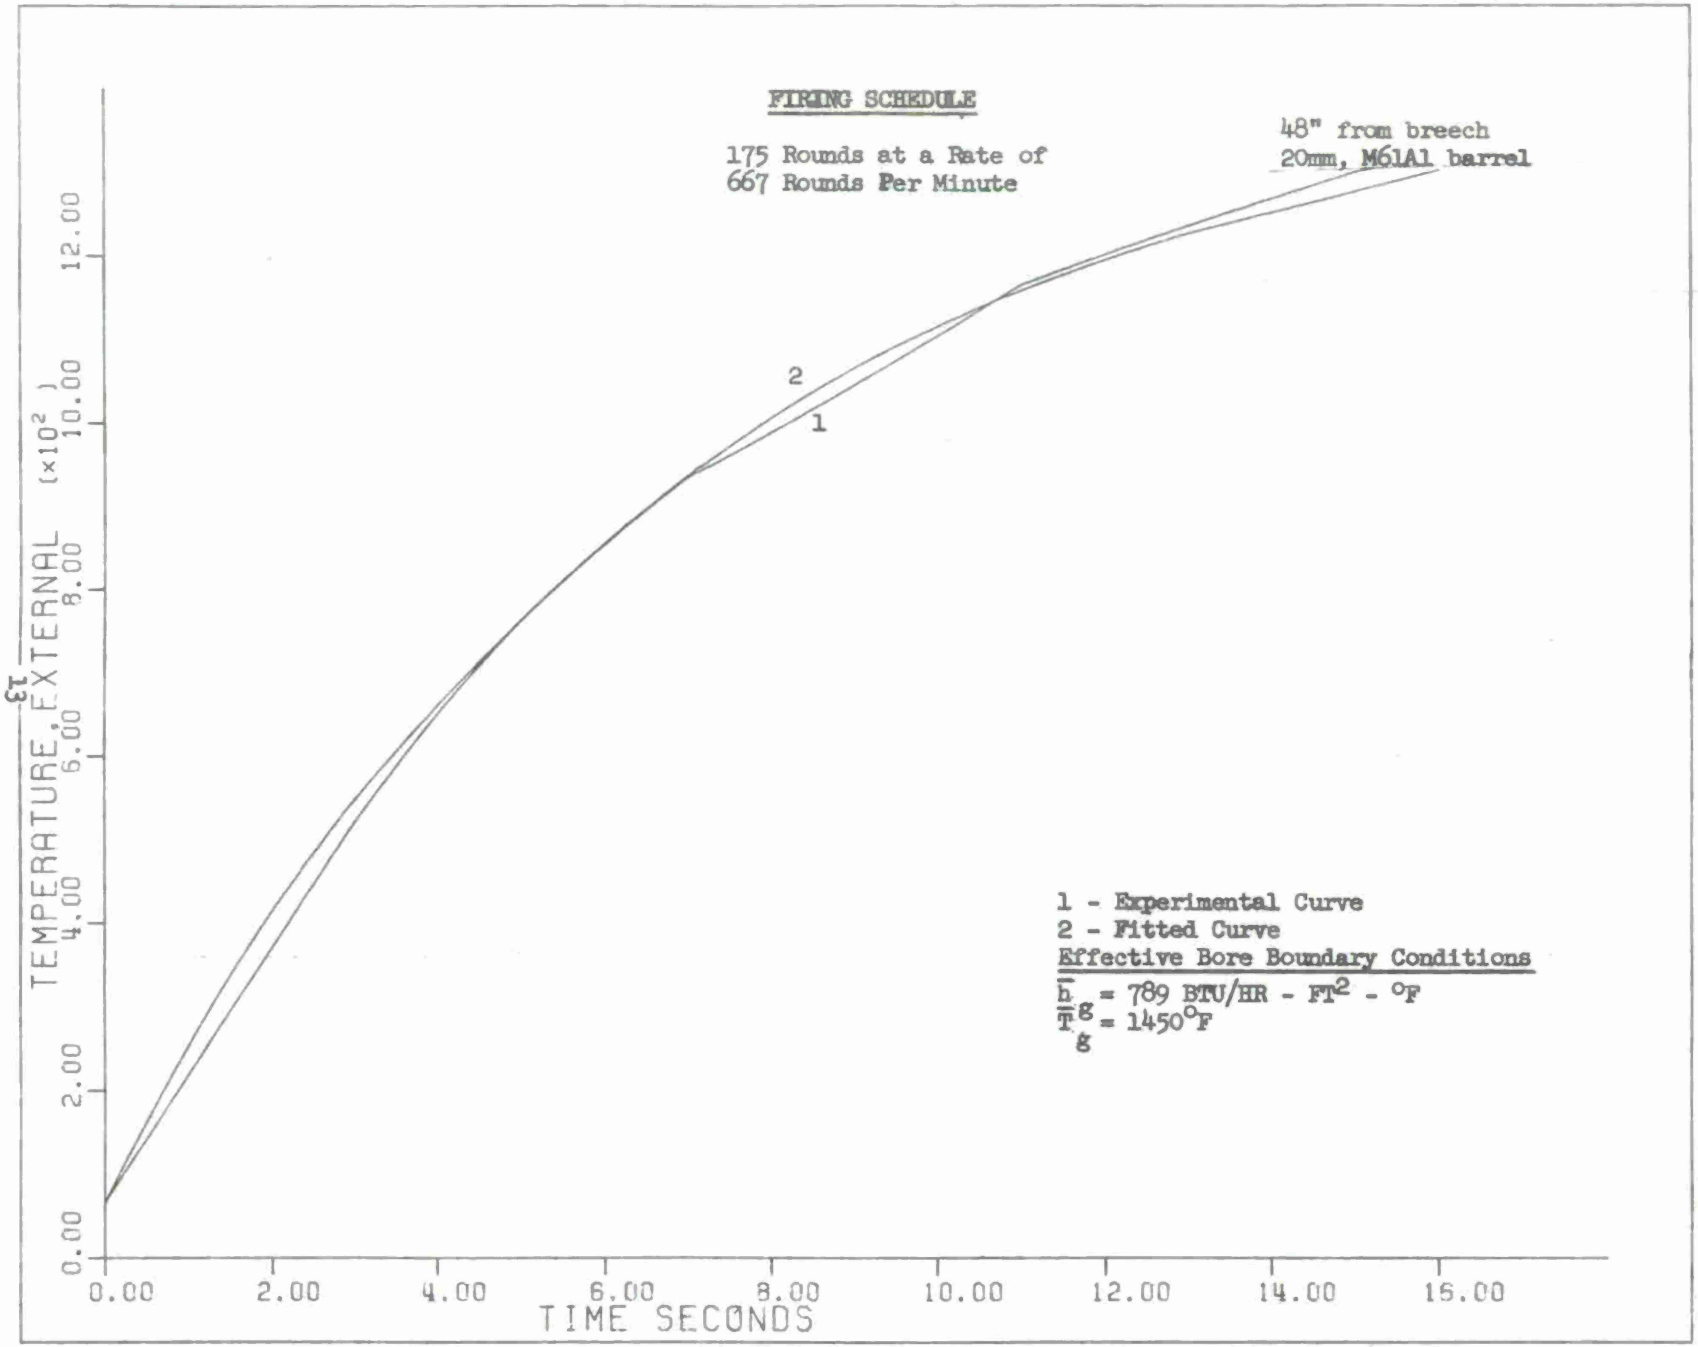
FIRING SCHEDULE
175 Rounds at a Rate of
667 Rounds Per Minute
48" from breech
20mm, M61A1 barrel
2
1
1 - Experimental Curve
2 - Fitted Curve
Effective Bore Boundary Conditions
$\bar{h}_g$ = 789 BTU/HR - FT^2 - ^oF
$\bar{T}_g$ = 1450^oF
TEMPERATURE, EXTERNAL (×10^2)
0.00
2.00
4.00
6.00
8.00
10.00
12.00
0.00
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
TIME SECONDS

FIGURE 5

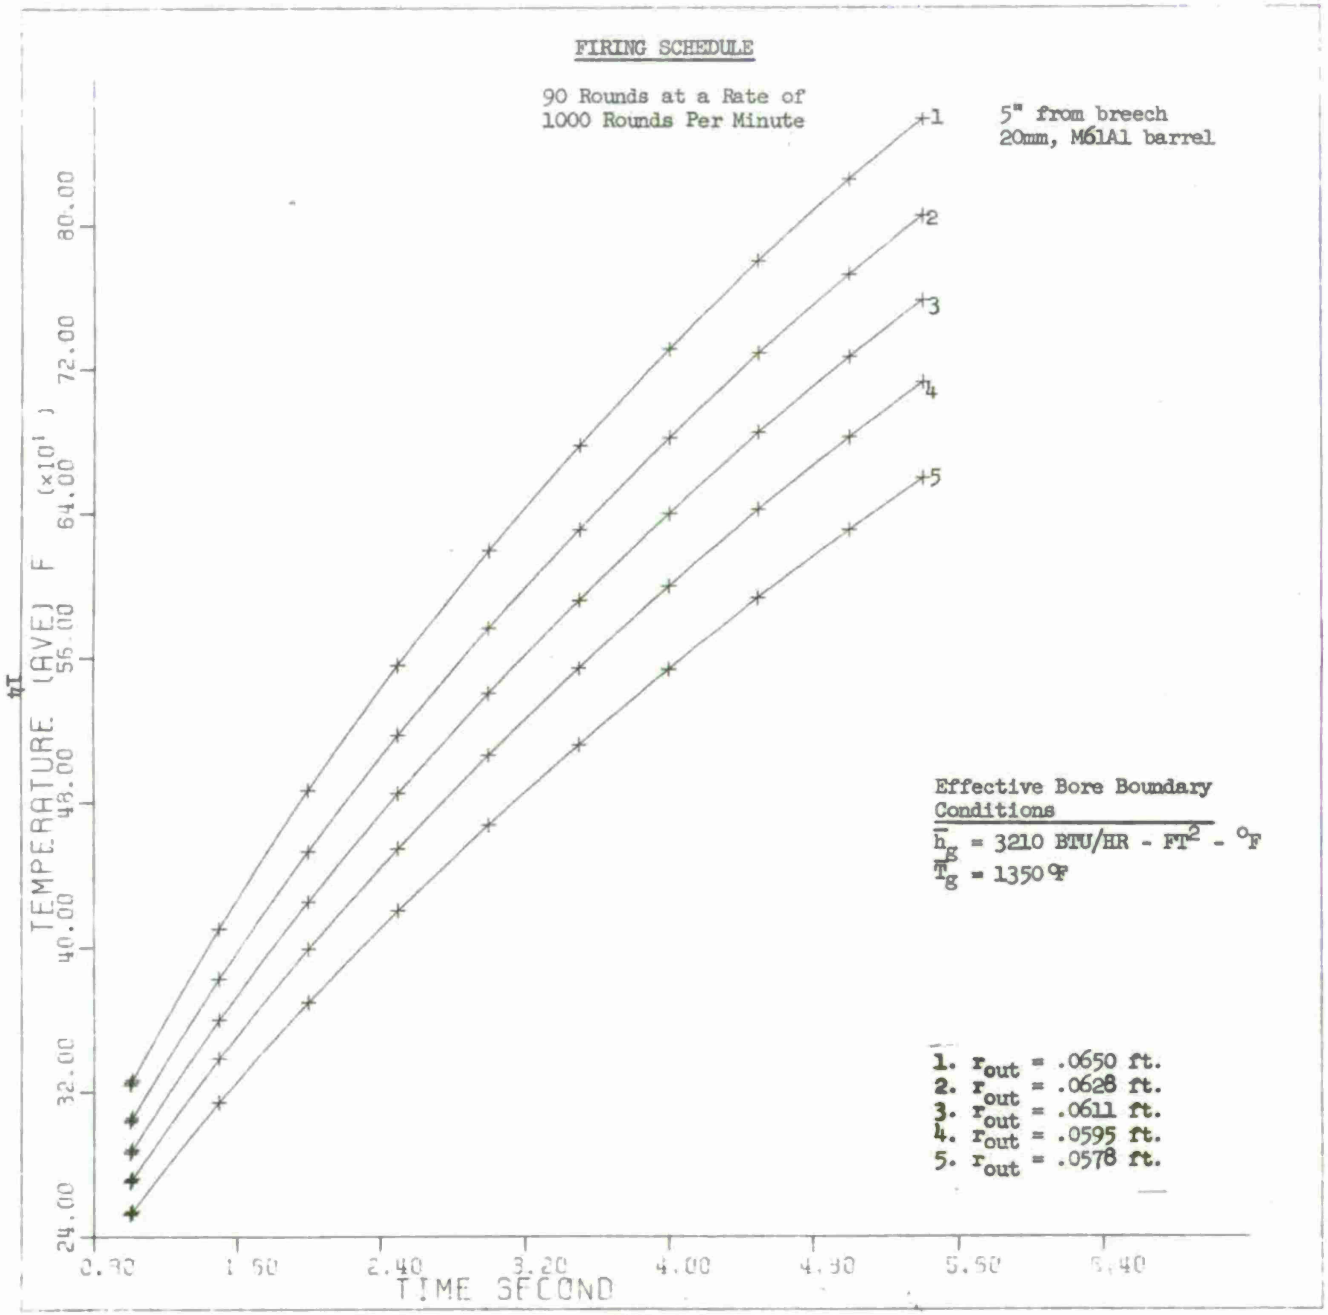
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
5" from breech
20mm, M61A1 barrel
Effective Bore Boundary
Conditions
$\bar{h}_g$ = 3210 BTU/HR - FT^2 - °F
$\bar{T}_g$ = 1350 °F
1. r_{out} = .0650 ft.
2. r_{out} = .0628 ft.
3. r_{out} = .0611 ft.
4. r_{out} = .0595 ft.
5. r_{out} = .0578 ft.
TEMPERATURE (AVE) F (×10¹)
24.00
32.00
40.00
48.00
56.00
64.00
72.00
80.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECOND

FIGURE 6

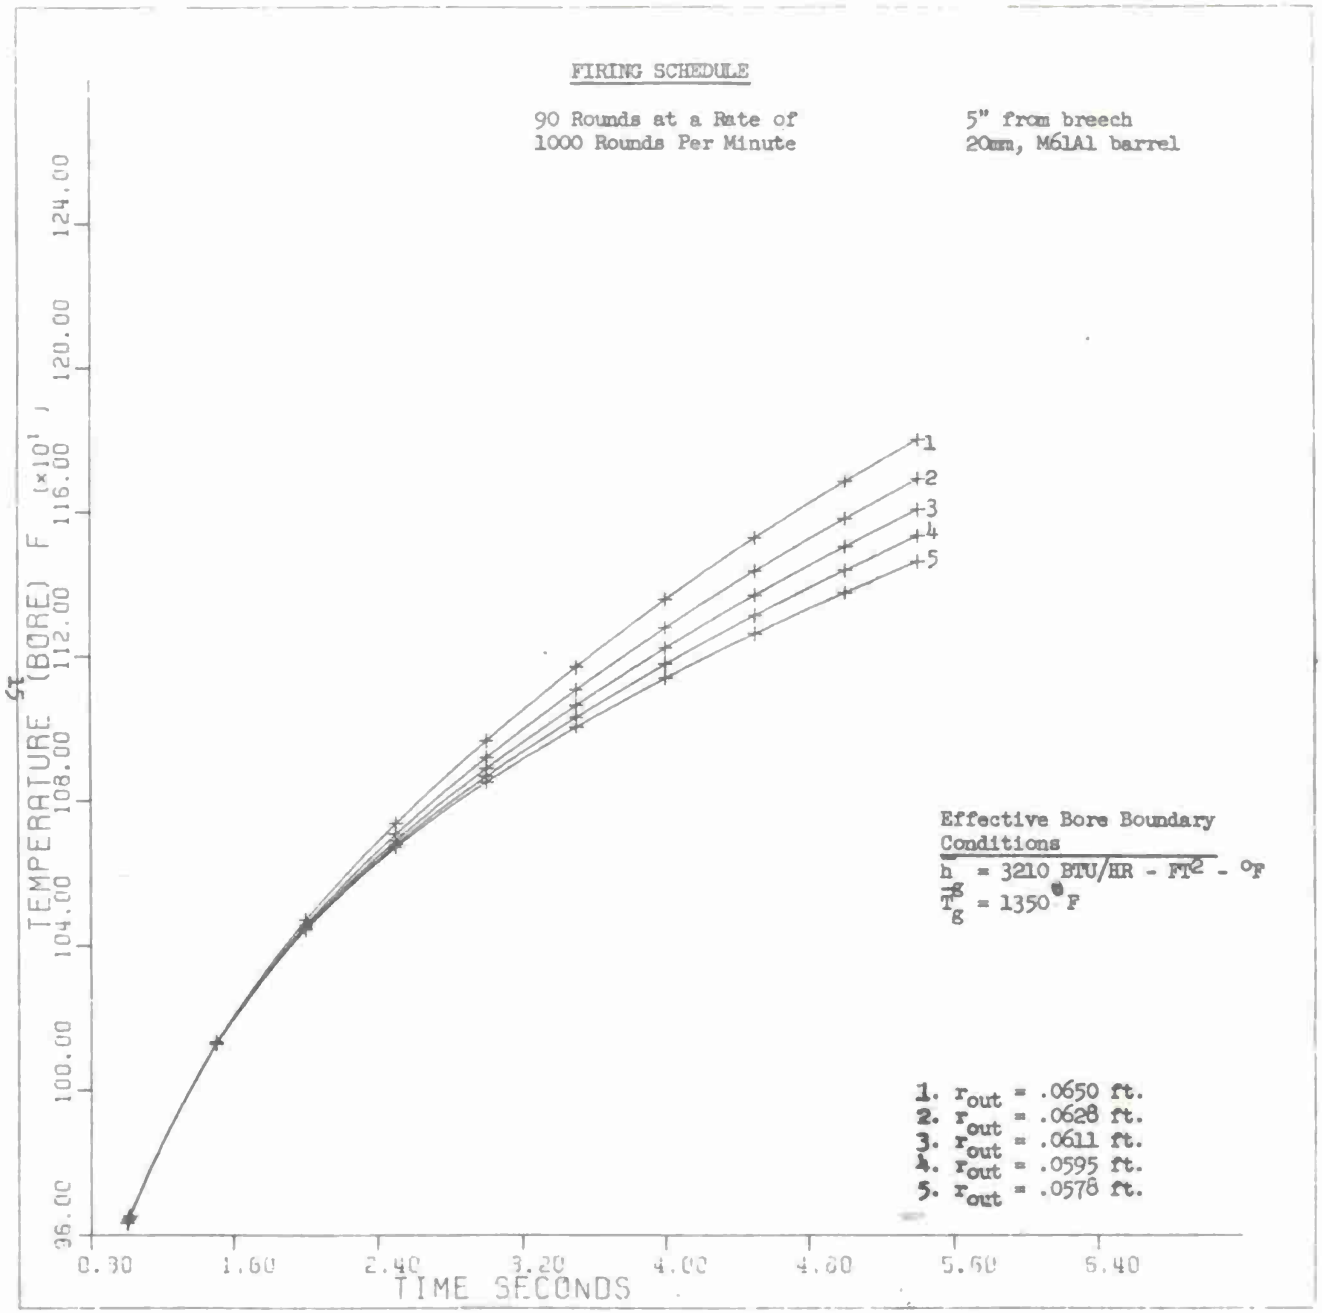
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
5" from breech
20mm, M61A1 barrel
TEMPERATURE (BORE) F (×10¹)
96.00
100.00
104.00
108.00
112.00
116.00
120.00
124.00
0.30
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECONDS
1
2
3
4
5
Effective Bore Boundary
Conditions
h = 3210 BTU/HR - FT² - °F
T_g = 1350 °F
1. r_out = .0650 ft.
2. r_out = .0628 ft.
3. r_out = .0611 ft.
4. r_out = .0595 ft.
5. r_out = .0578 ft.

FIGURE 7

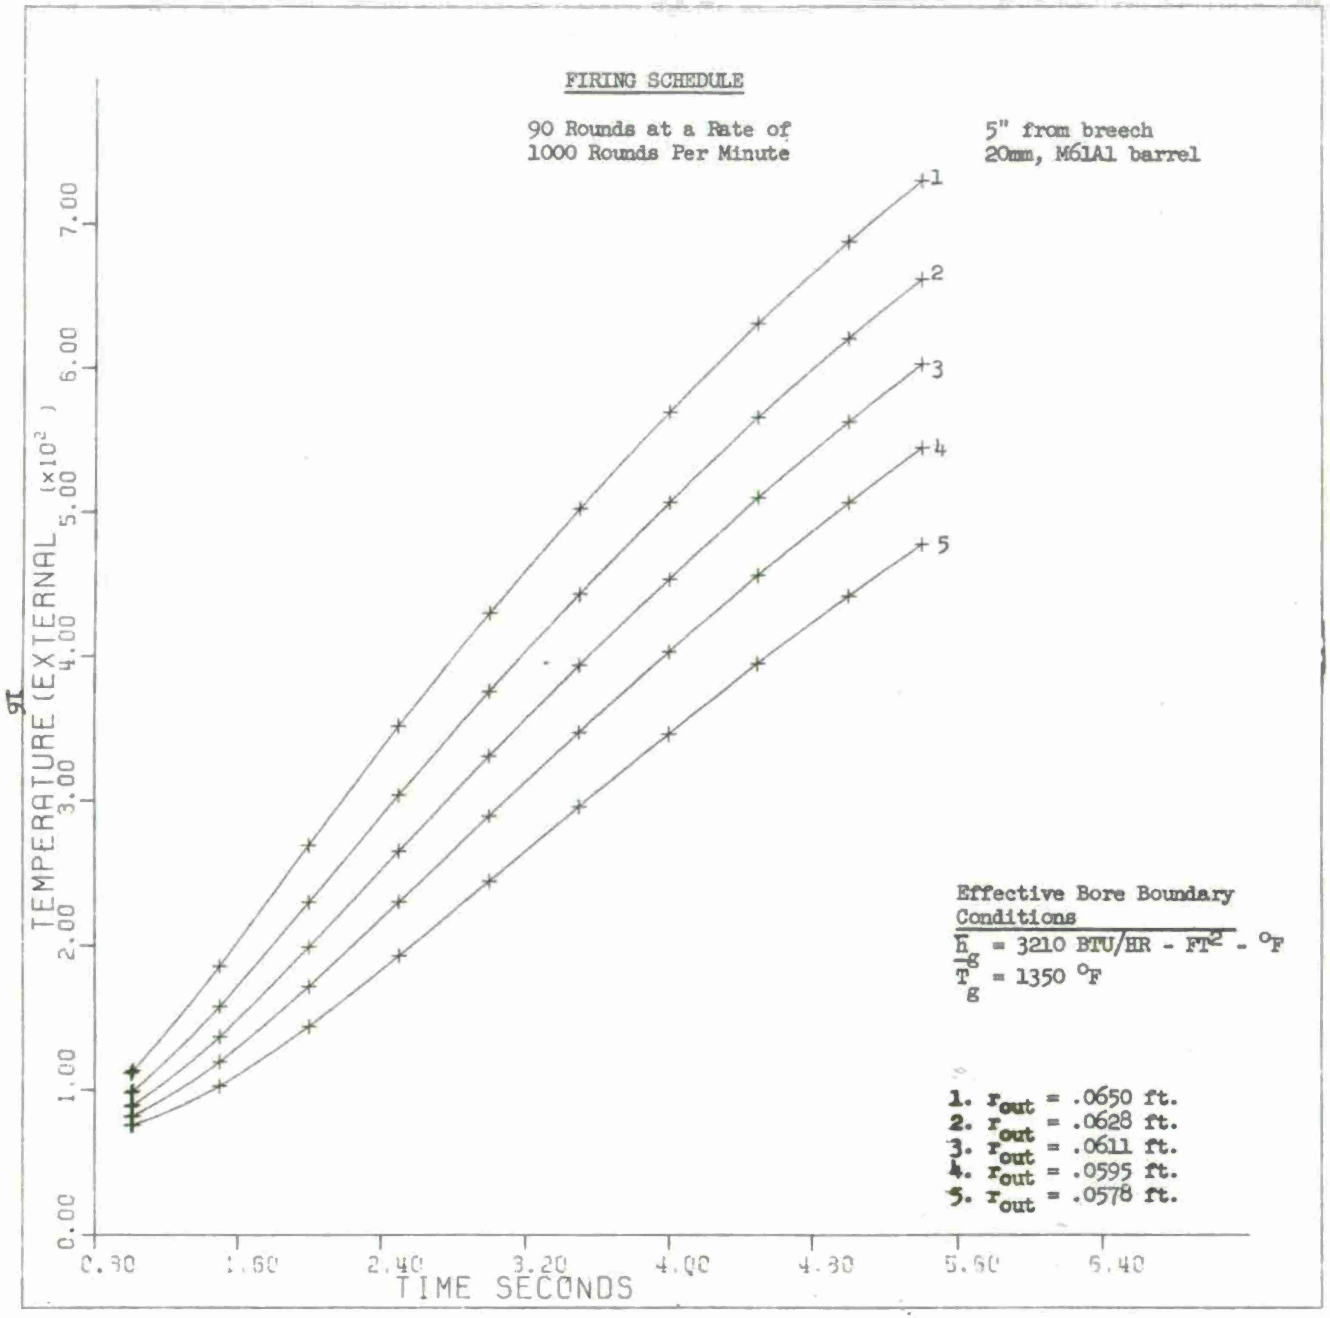
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
5" from breech
20mm, M61A1 barrel
TEMPERATURE (EXTERNAL (x10²)
0.00
1.00
2.00
3.00
4.00
5.00
6.00
7.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECONDS
1
2
3
4
5
Effective Bore Boundary Conditions
$\bar{h}_g$ = 3210 BTU/HR - FT² - °F
$\bar{T}_g$ = 1350 °F
1. r_{out} = .0650 ft.
2. r_{out} = .0628 ft.
3. r_{out} = .0611 ft.
4. r_{out} = .0595 ft.
5. r_{out} = .0578 ft.

FIGURE 8

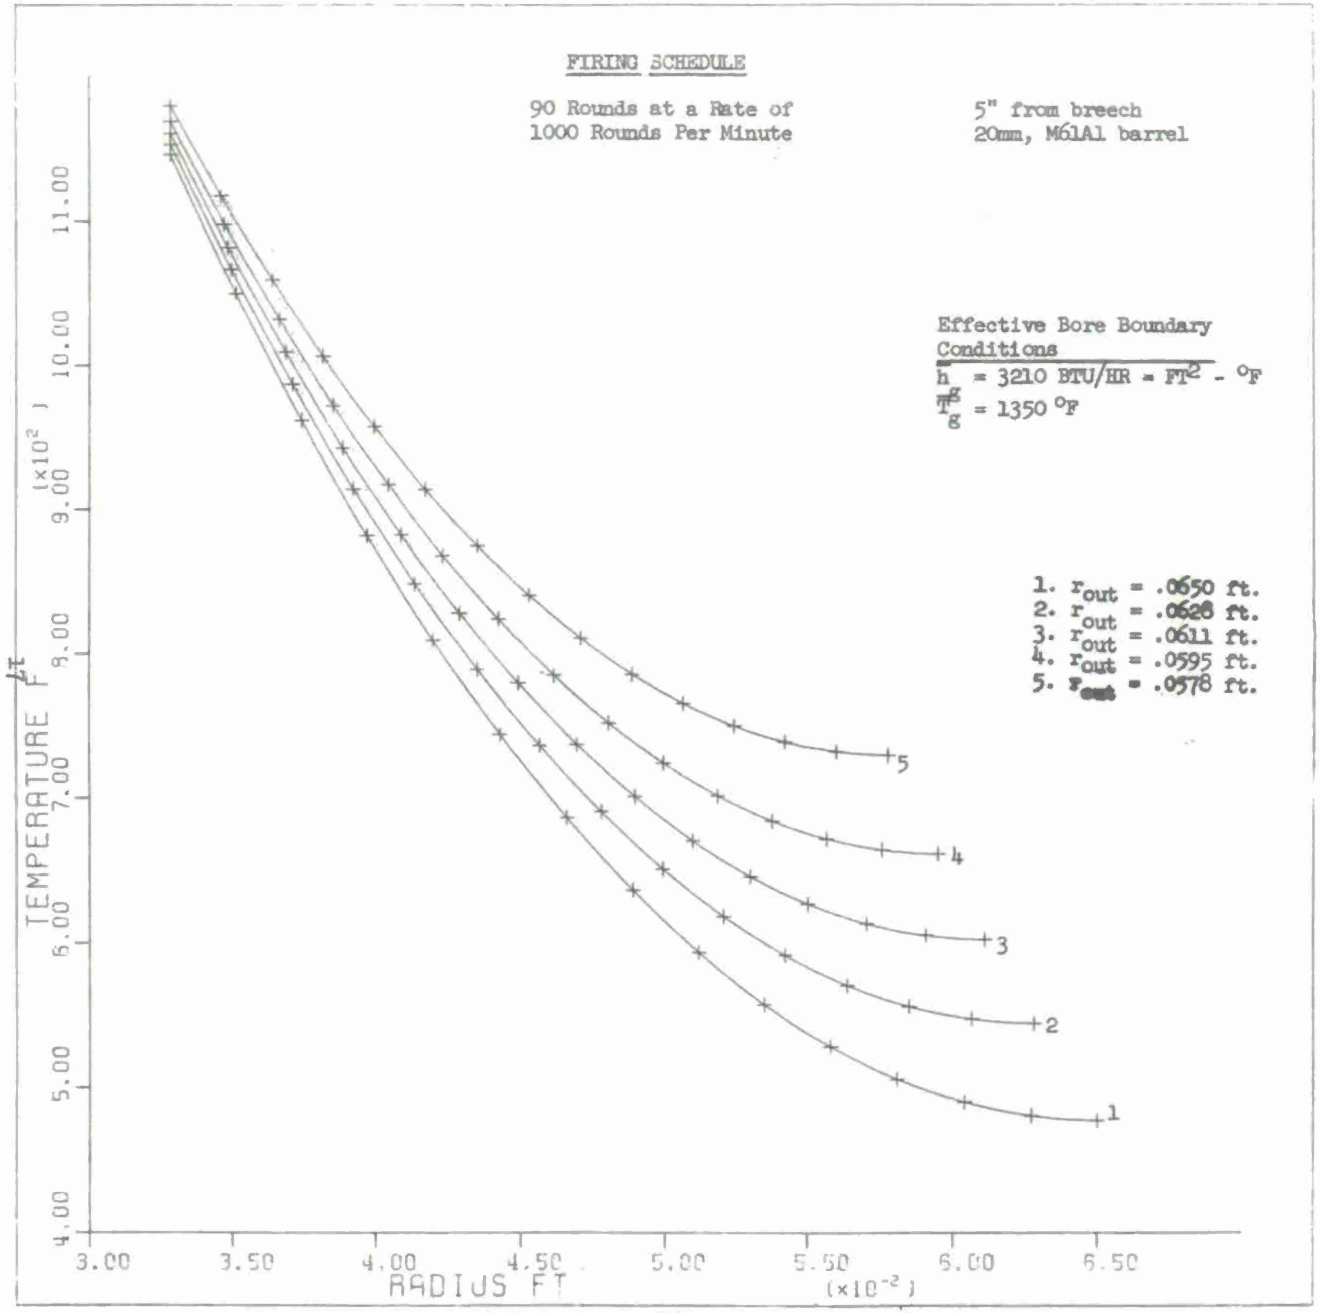
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
5" from breech
20mm, M61A1 barrel
Effective Bore Boundary
Conditions
h = 3210 BTU/HR - FT2 - °F
Tg = 1350 °F
1. rout = .0650 ft.
2. rout = .0628 ft.
3. rout = .0611 ft.
4. rout = .0595 ft.
5. rout = .0578 ft.
TEMPERATURE °F
(×10²)
11.00
10.00
9.00
8.00
7.00
6.00
5.00
4.00
3.00
3.50
4.00
4.50
5.00
5.50
6.00
6.50
RADIUS FT
(×10⁻²)
1
2
3
4
5

FIGURE 9

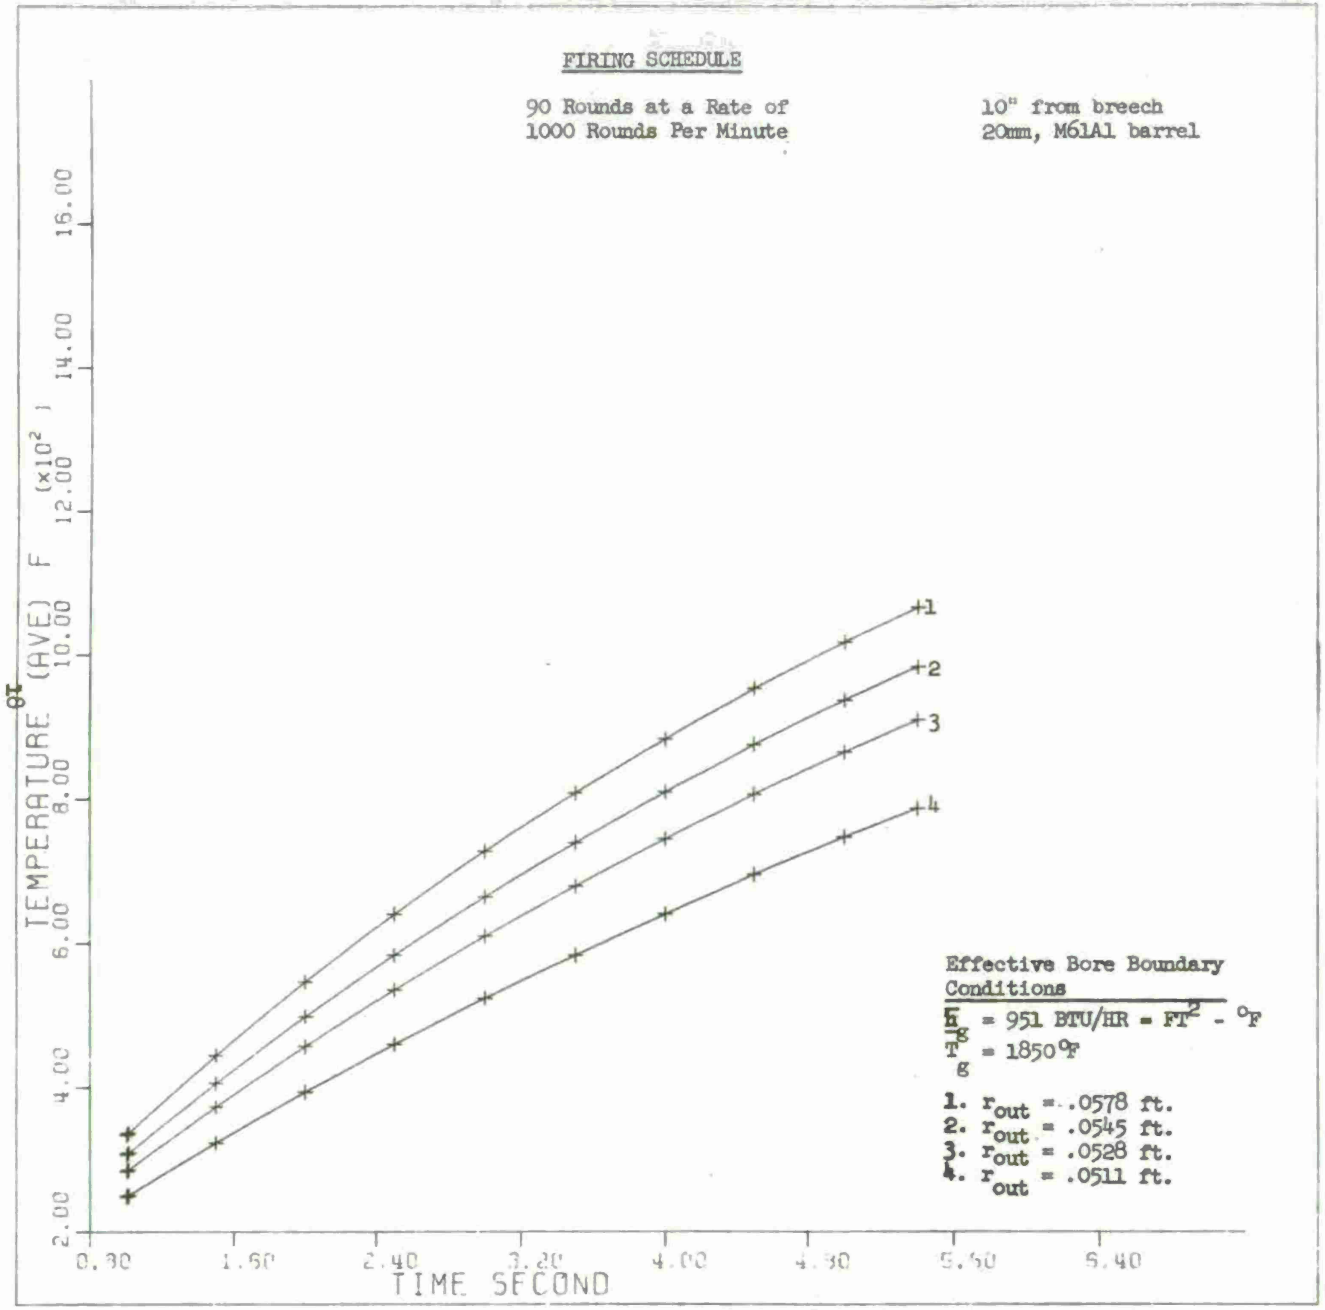
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
10" from breech
20mm, M61A1 barrel
TEMPERATURE (AVE) F (x10²)
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECOND
1
2
3
4
Effective Bore Boundary Conditions
$\bar{h}_g$ = 951 BTU/HR - FT² - °F
T_g = 1850°F
1. r_{out} = .0578 ft.
2. r_{out} = .0545 ft.
3. r_{out} = .0528 ft.
4. r_{out} = .0511 ft.

FIGURE 10

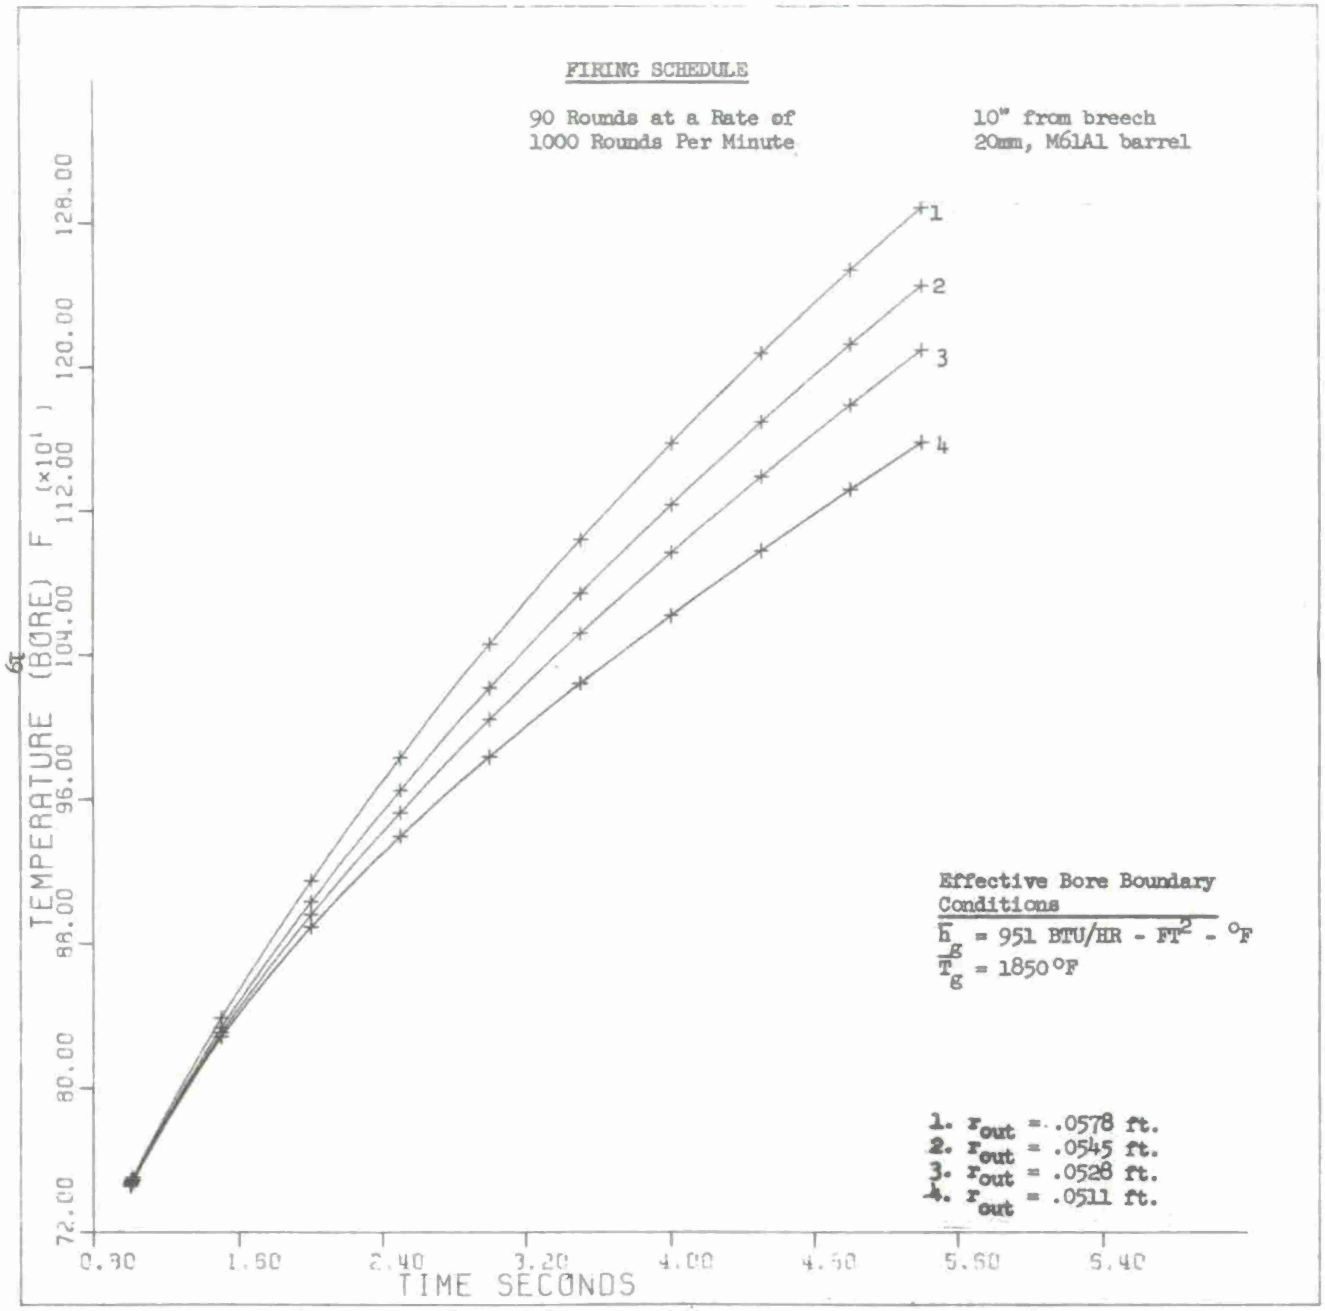
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
10" from breech
20mm, M61A1 barrel
TEMPERATURE (BORE) F (×10¹)
72.00
80.00
88.00
96.00
104.00
112.00
120.00
128.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECONDS
1
2
3
4
Effective Bore Boundary Conditions
$\bar{h}_g$ = 951 BTU/HR - FT² - °F
$\bar{T}_g$ = 1850 °F
1. r_{out} = .0578 ft.
2. r_{out} = .0545 ft.
3. r_{out} = .0528 ft.
4. r_{out} = .0511 ft.

FIGURE 11

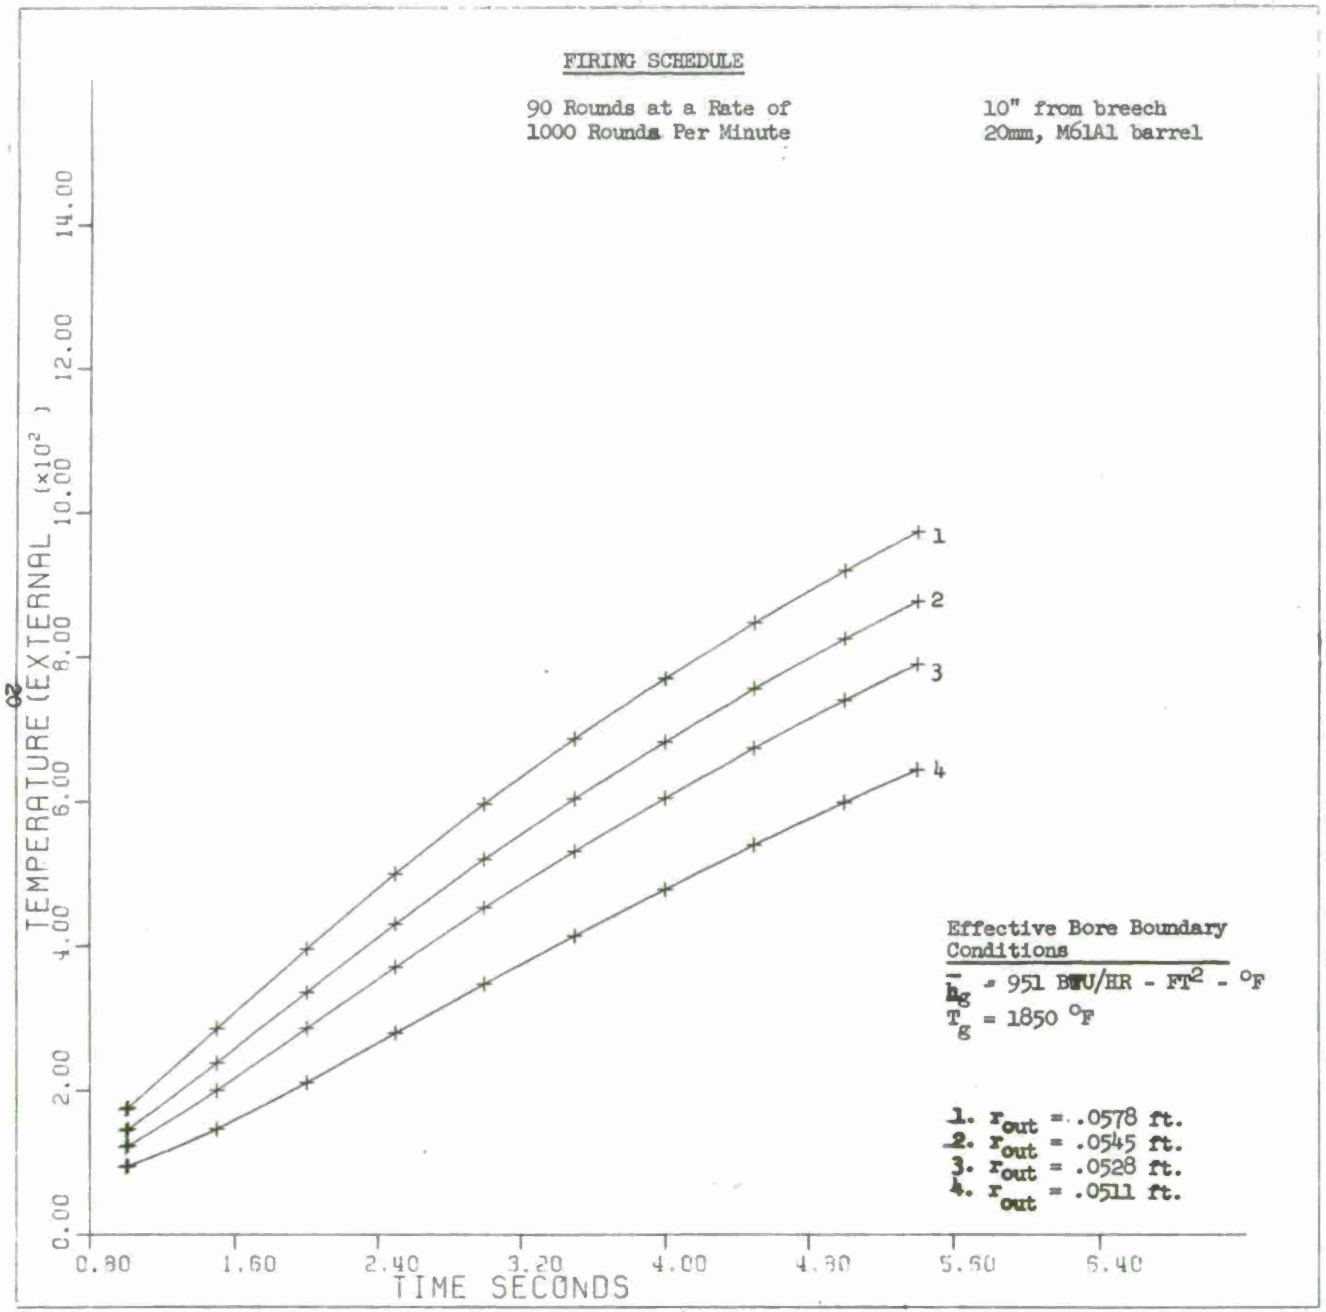
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
10" from breech
20mm, M61A1 barrel
TEMPERATURE (EXTERNAL (×10²)
0.00
2.00
4.00
6.00
8.00
10.00
12.00
14.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECONDS
1
2
3
4
Effective Bore Boundary Conditions
$\bar{h}_g$ = 951 BTU/HR - FT² - °F
T_g = 1850 °F
1. r_{out} = .0578 ft.
2. r_{out} = .0545 ft.
3. r_{out} = .0528 ft.
4. r_{out} = .0511 ft.

FIGURE 12

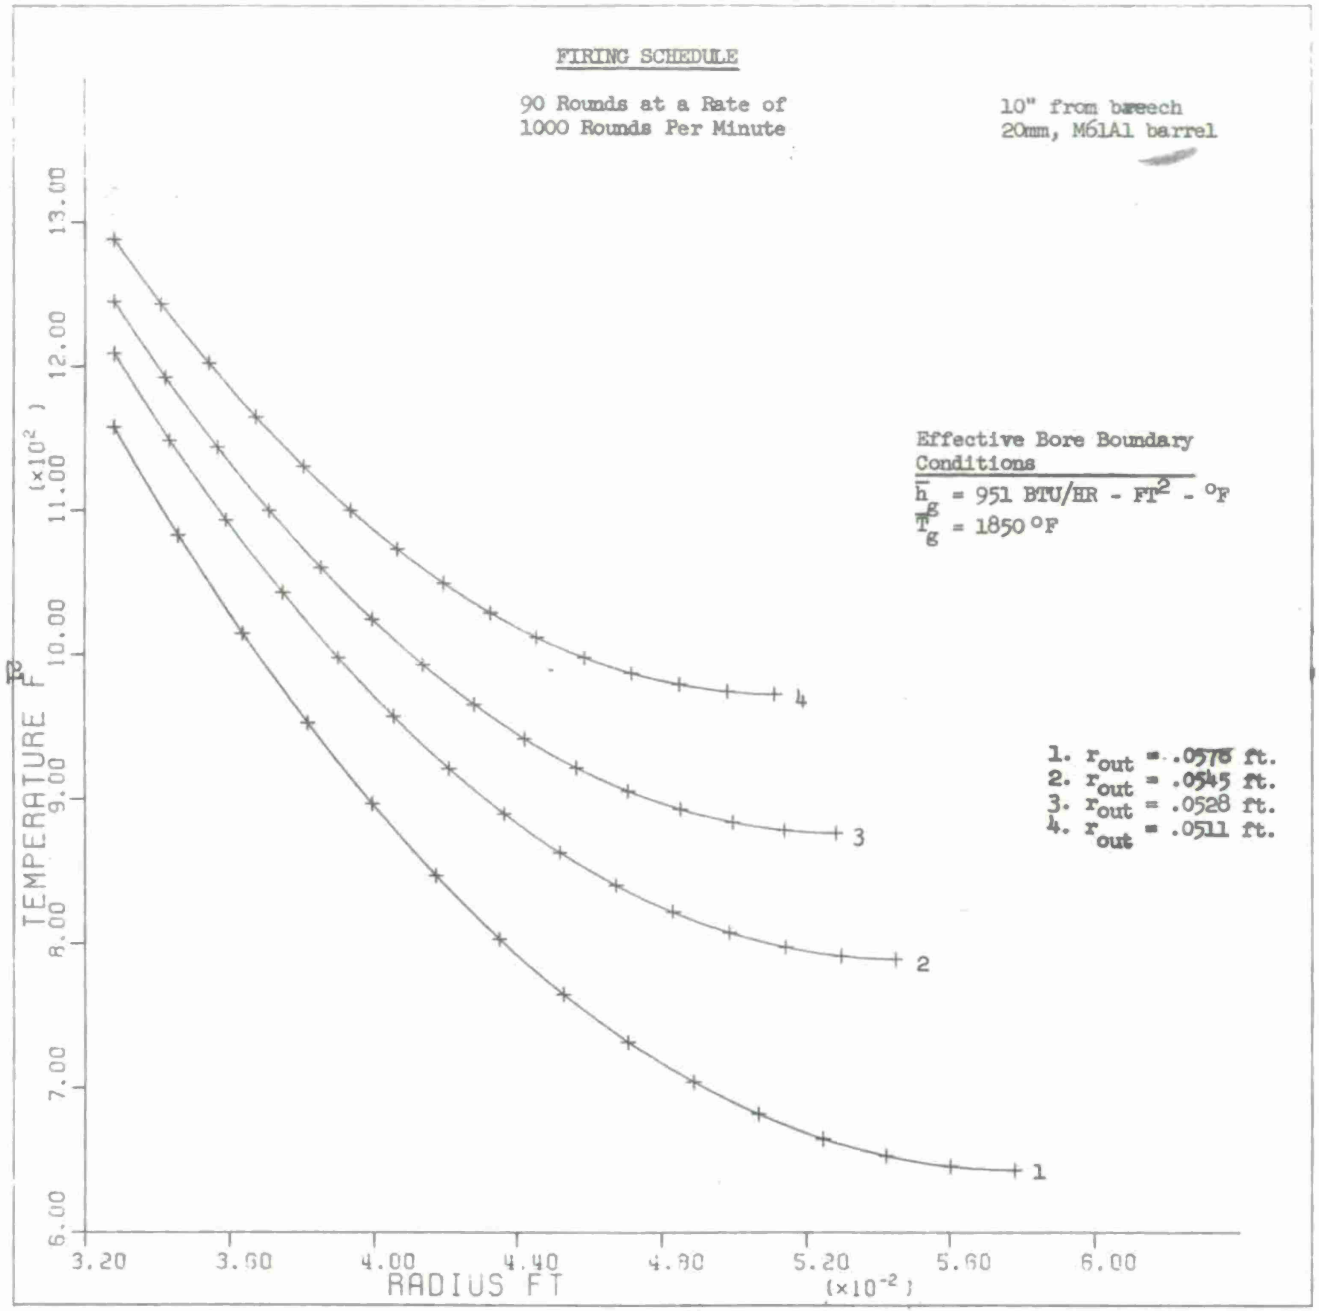
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
10" from breech
20mm, M61A1 barrel
Effective Bore Boundary
Conditions
$\bar{h}_g$ = 951 BTU/HR - FT^2 - °F
$\bar{T}_g$ = 1850 °F
1. r_{out} = .0576 ft.
2. r_{out} = .0545 ft.
3. r_{out} = .0528 ft.
4. r_{out} = .0511 ft.
TEMPERATURE F
(×10^2)
13.00
12.00
11.00
10.00
9.00
8.00
7.00
6.00
3.20
3.60
4.00
4.40
4.80
5.20
5.60
6.00
RADIUS FT
(×10^{-2})
1
2
3
4

FIGURE 13

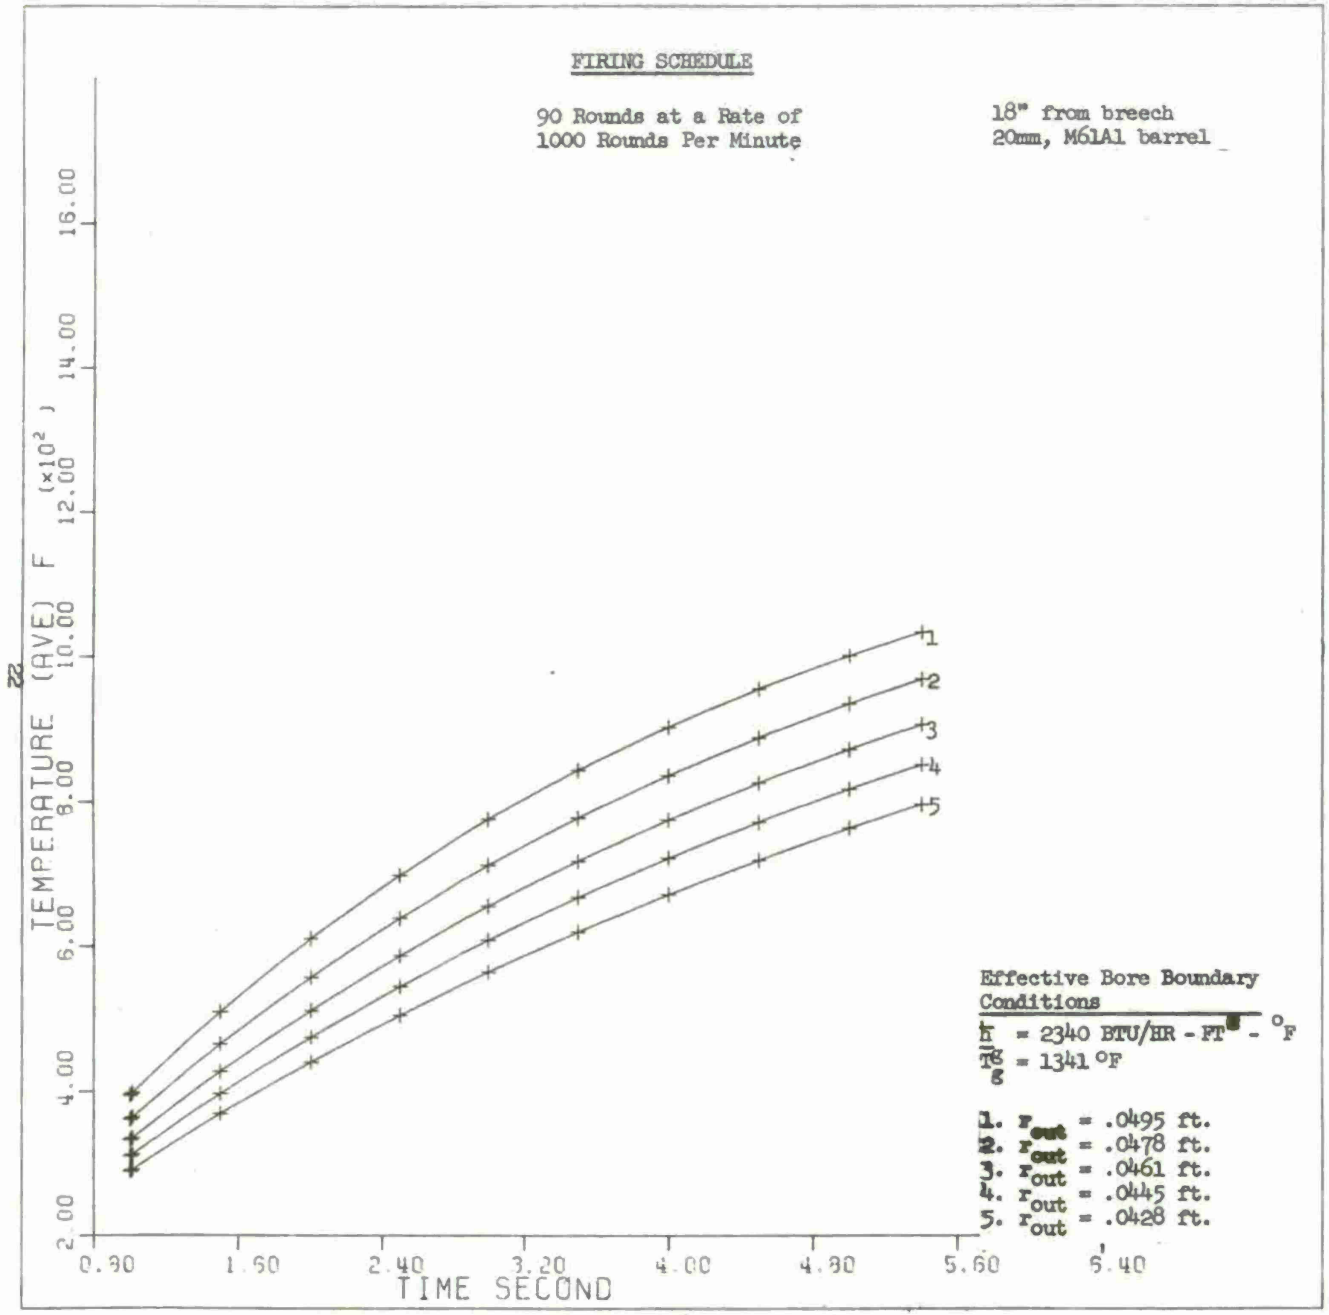
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
18" from breech
20mm, M61A1 barrel
TEMPERATURE (AVE) F (×10²)
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECOND
1
2
3
4
5
Effective Bore Boundary Conditions
h = 2340 BTU/HR - FT² - °F
Tg = 1341 °F
1. r_out = .0495 ft.
2. r_out = .0478 ft.
3. r_out = .0461 ft.
4. r_out = .0445 ft.
5. r_out = .0428 ft.

FIGURE 14

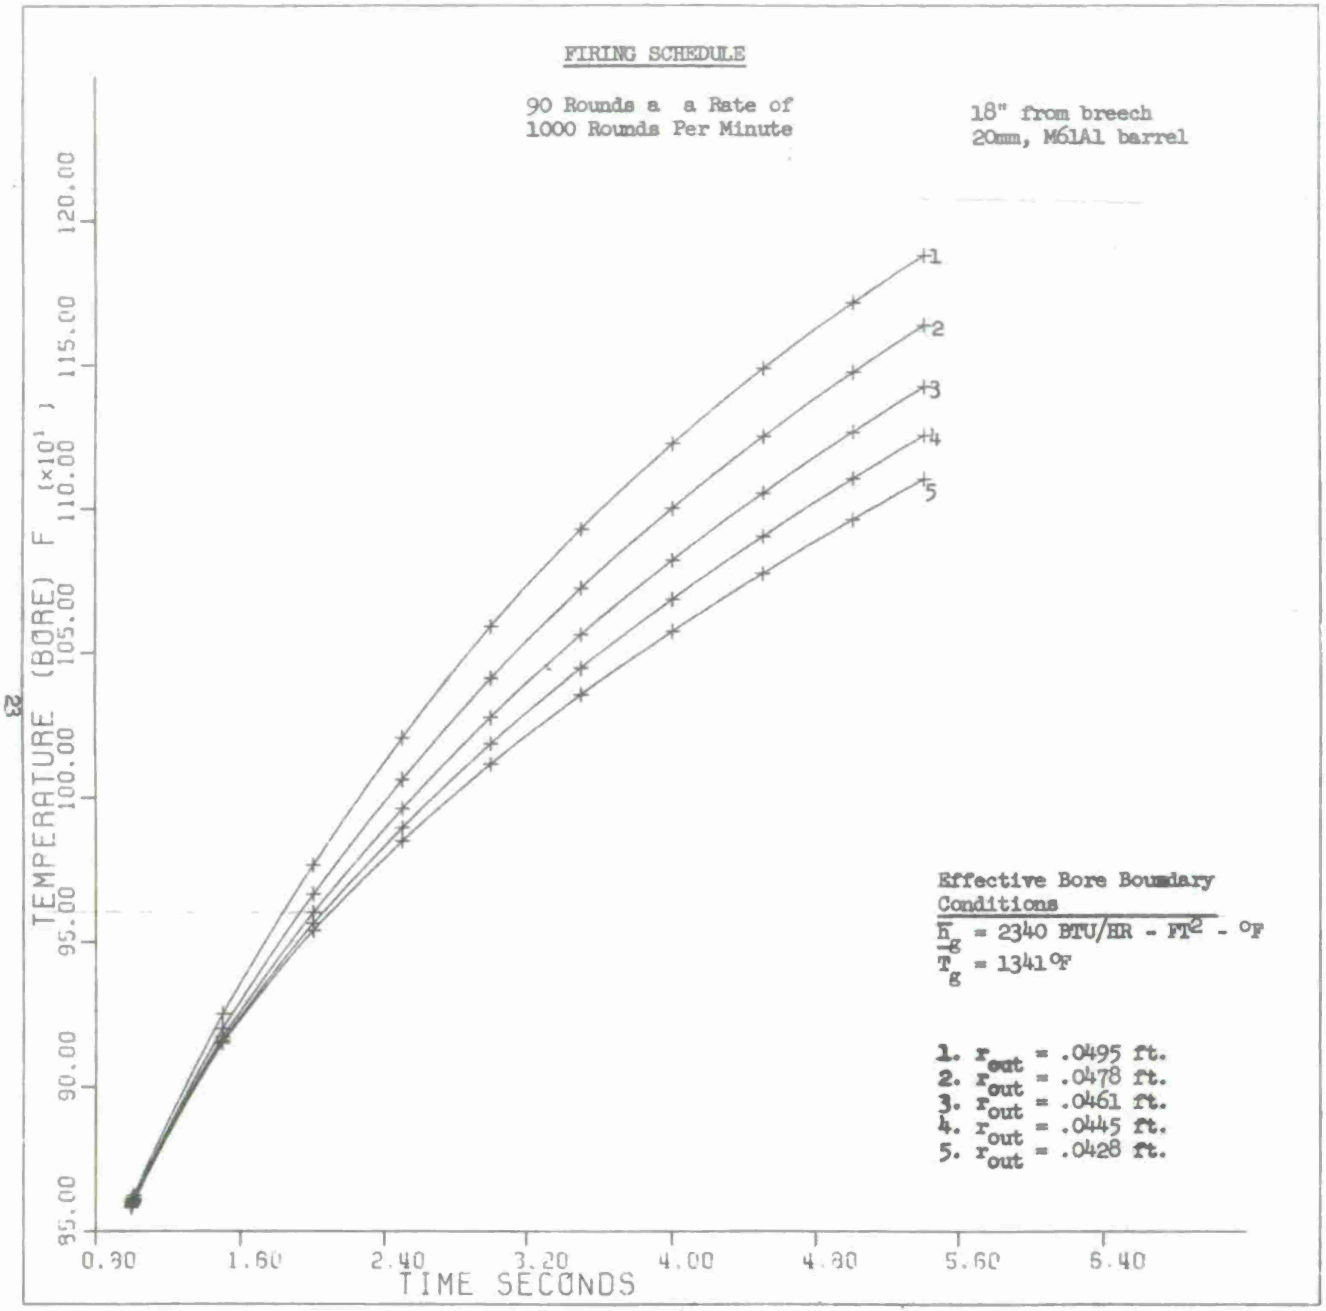
FIRING SCHEDULE
90 Rounds a a Rate of
1000 Rounds Per Minute
18" from breech
20mm, M61A1 barrel
TEMPERATURE (BORE) F (×10¹)
120.00
115.00
110.00
105.00
100.00
95.00
90.00
85.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECONDS
1
2
3
4
5
Effective Bore Boundary Conditions
$\bar{h}_g$ = 2340 BTU/HR - FT² - °F
T_g = 1341 °F
1. r_{out} = .0495 ft.
2. r_{out} = .0478 ft.
3. r_{out} = .0461 ft.
4. r_{out} = .0445 ft.
5. r_{out} = .0428 ft.

FIGURE 15

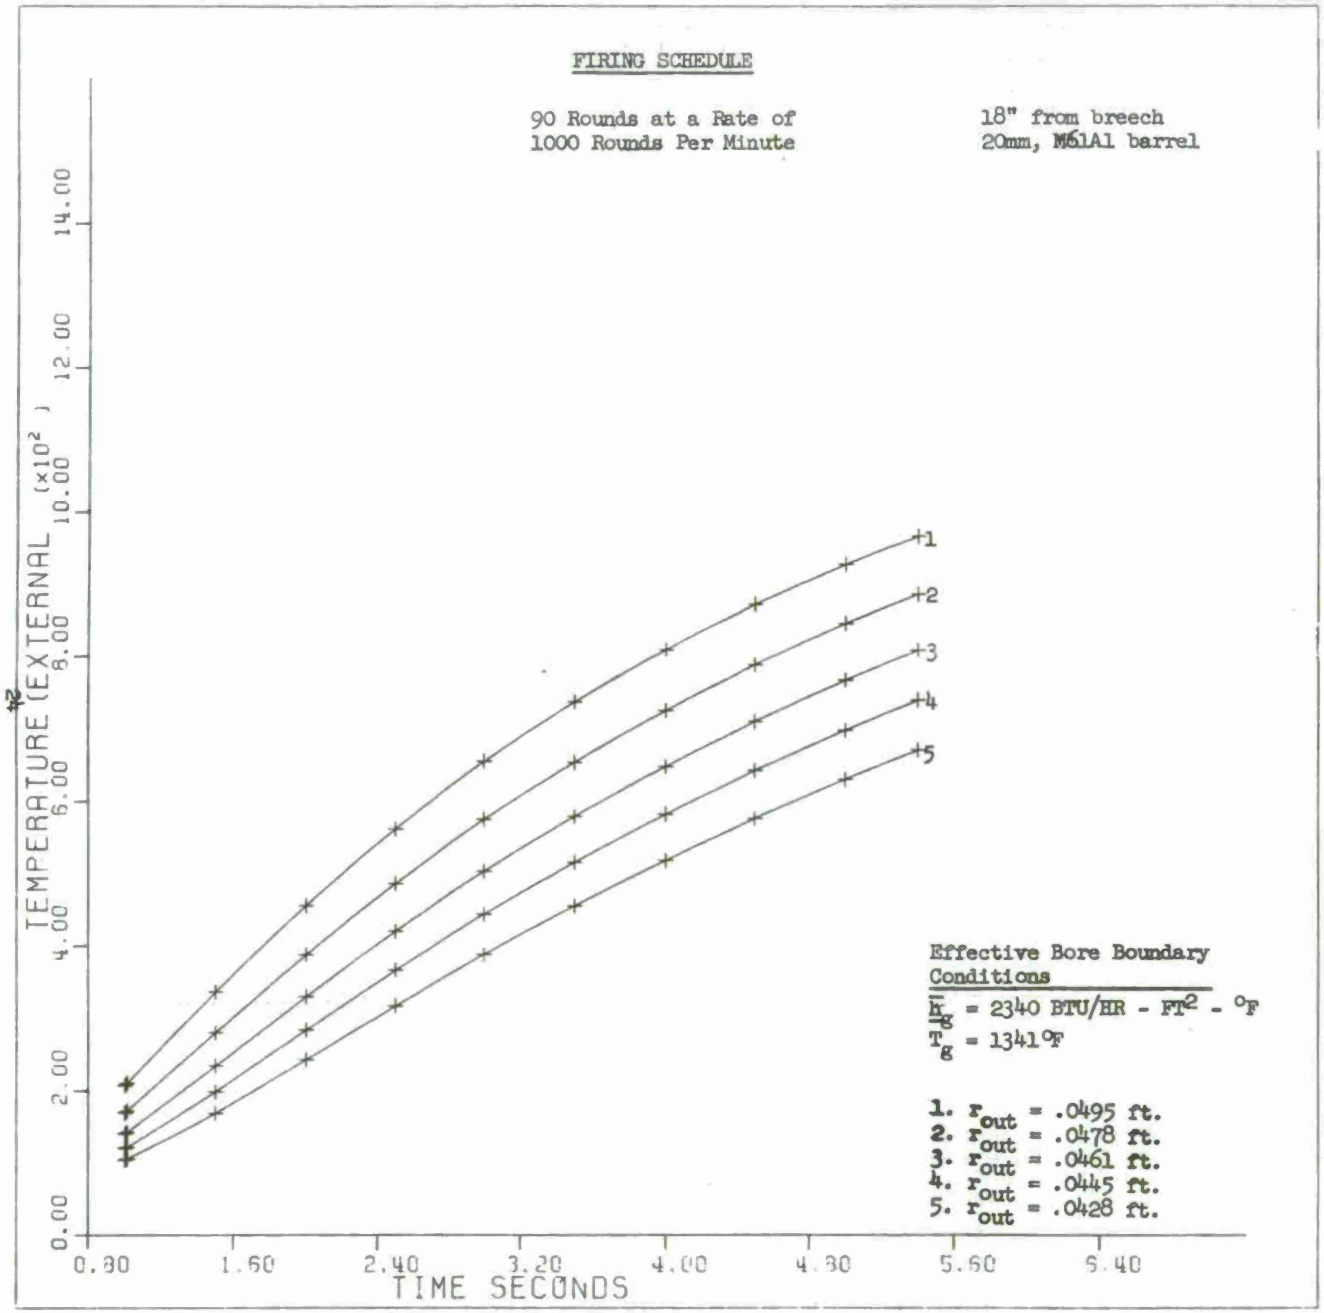
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
18" from breech
20mm, M61A1 barrel
TEMPERATURE (EXTERNAL (×10²)
0.00
2.00
4.00
6.00
8.00
10.00
12.00
14.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECONDS
1
2
3
4
5
Effective Bore Boundary Conditions
$\bar{h}_g$ = 2340 BTU/HR - FT² - °F
T_g = 1341°F
1. r_{out} = .0495 ft.
2. r_{out} = .0478 ft.
3. r_{out} = .0461 ft.
4. r_{out} = .0445 ft.
5. r_{out} = .0428 ft.

FIGURE 16

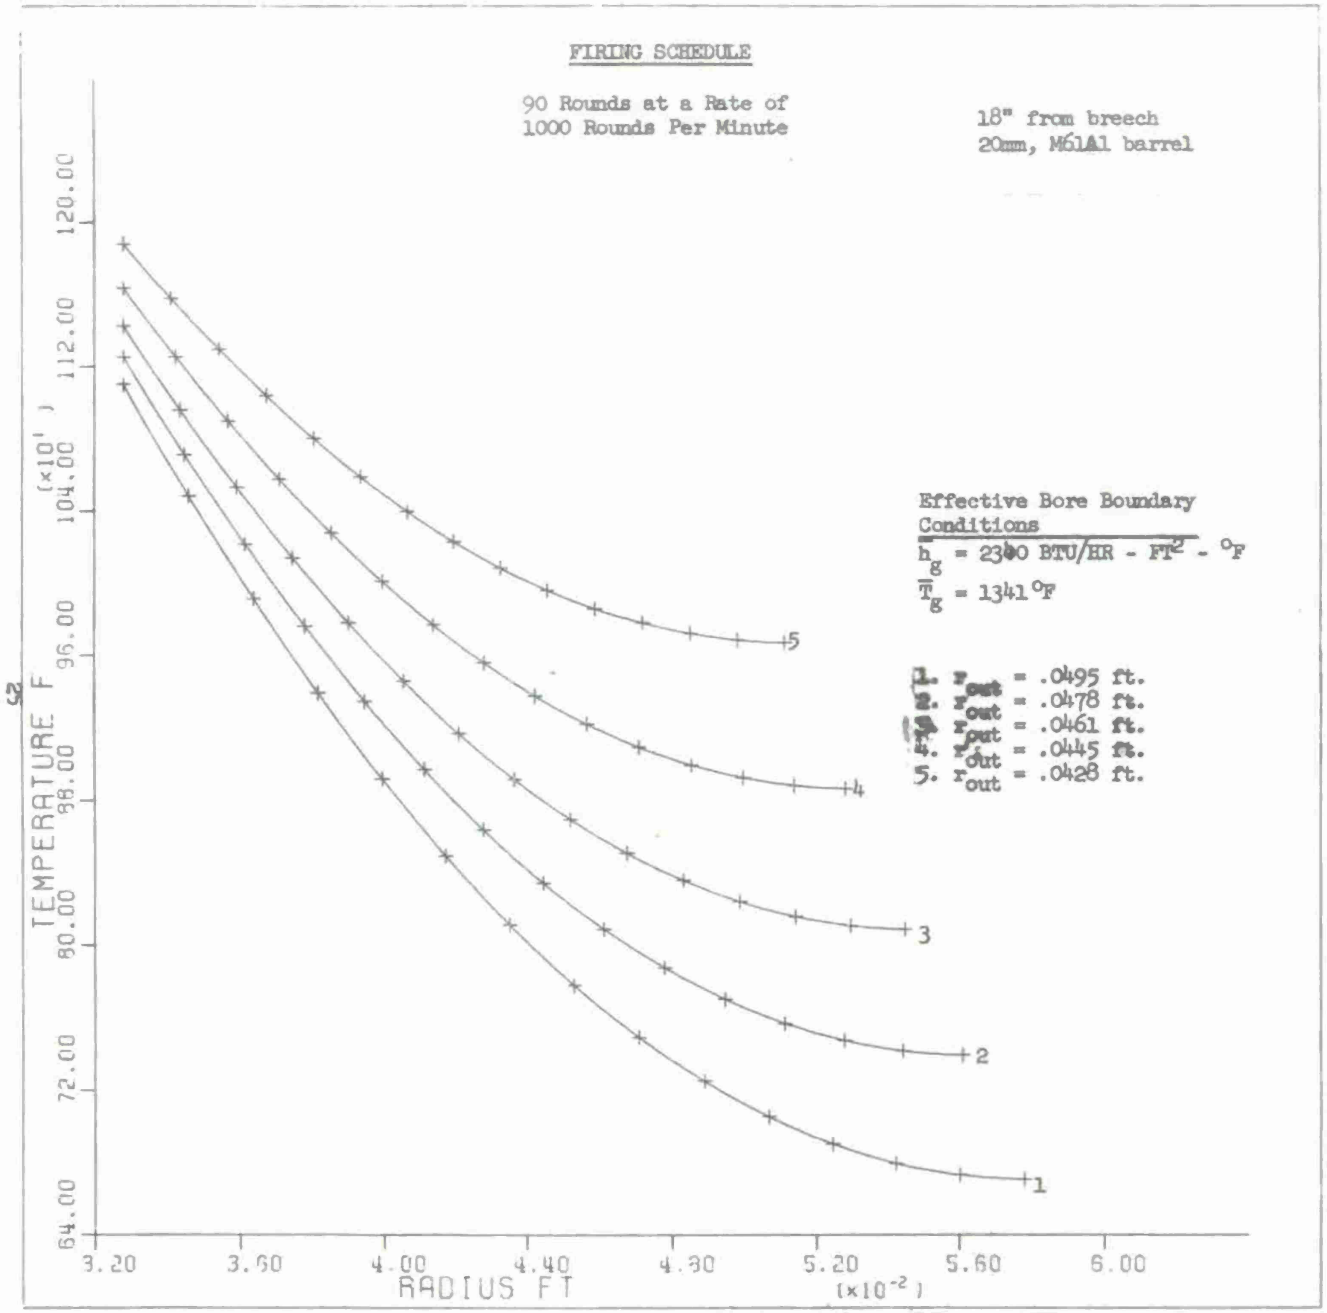
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
18" from breech
20mm, M61A1 barrel
Effective Bore Boundary
Conditions
$\bar{h}_g$ = 2300 BTU/HR - FT^2 - °F
$\bar{T}_g$ = 1341 °F
1. r_{out} = .0495 ft.
2. r_{out} = .0478 ft.
3. r_{out} = .0461 ft.
4. r_{out} = .0445 ft.
5. r_{out} = .0428 ft.
TEMPERATURE F
(×10¹)
64.00
72.00
80.00
88.00
96.00
104.00
112.00
120.00
3.20
3.60
4.00
4.40
4.80
5.20
5.60
6.00
RADIUS FT
(×10⁻²)
1
2
3
4
5

FIGURE 17

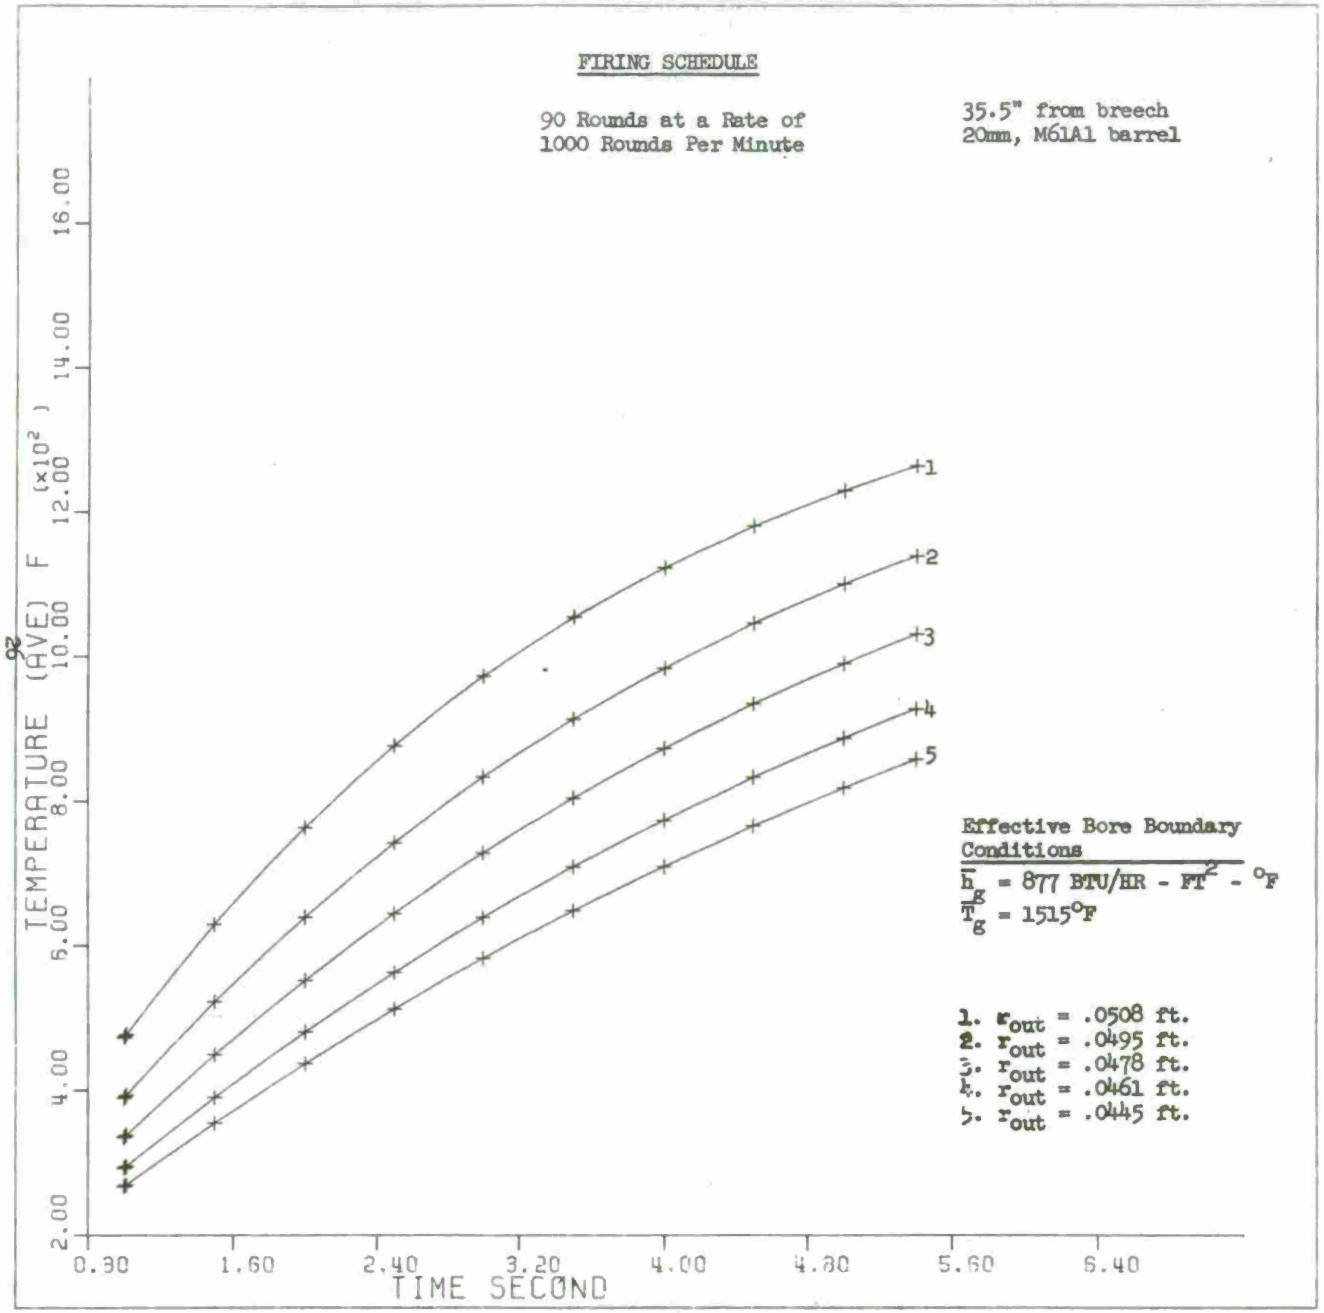
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
35.5" from breech
20mm, M61A1 barrel
TEMPERATURE (AVE) F (×10²)
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECOND
+1
+2
+3
+4
+5
Effective Bore Boundary Conditions
$\bar{h}_g$ = 877 BTU/HR - FT² - °F
$\bar{T}_g$ = 1515°F
1. r_{out} = .0508 ft.
2. r_{out} = .0495 ft.
3. r_{out} = .0478 ft.
4. r_{out} = .0461 ft.
5. r_{out} = .0445 ft.

FIGURE 18

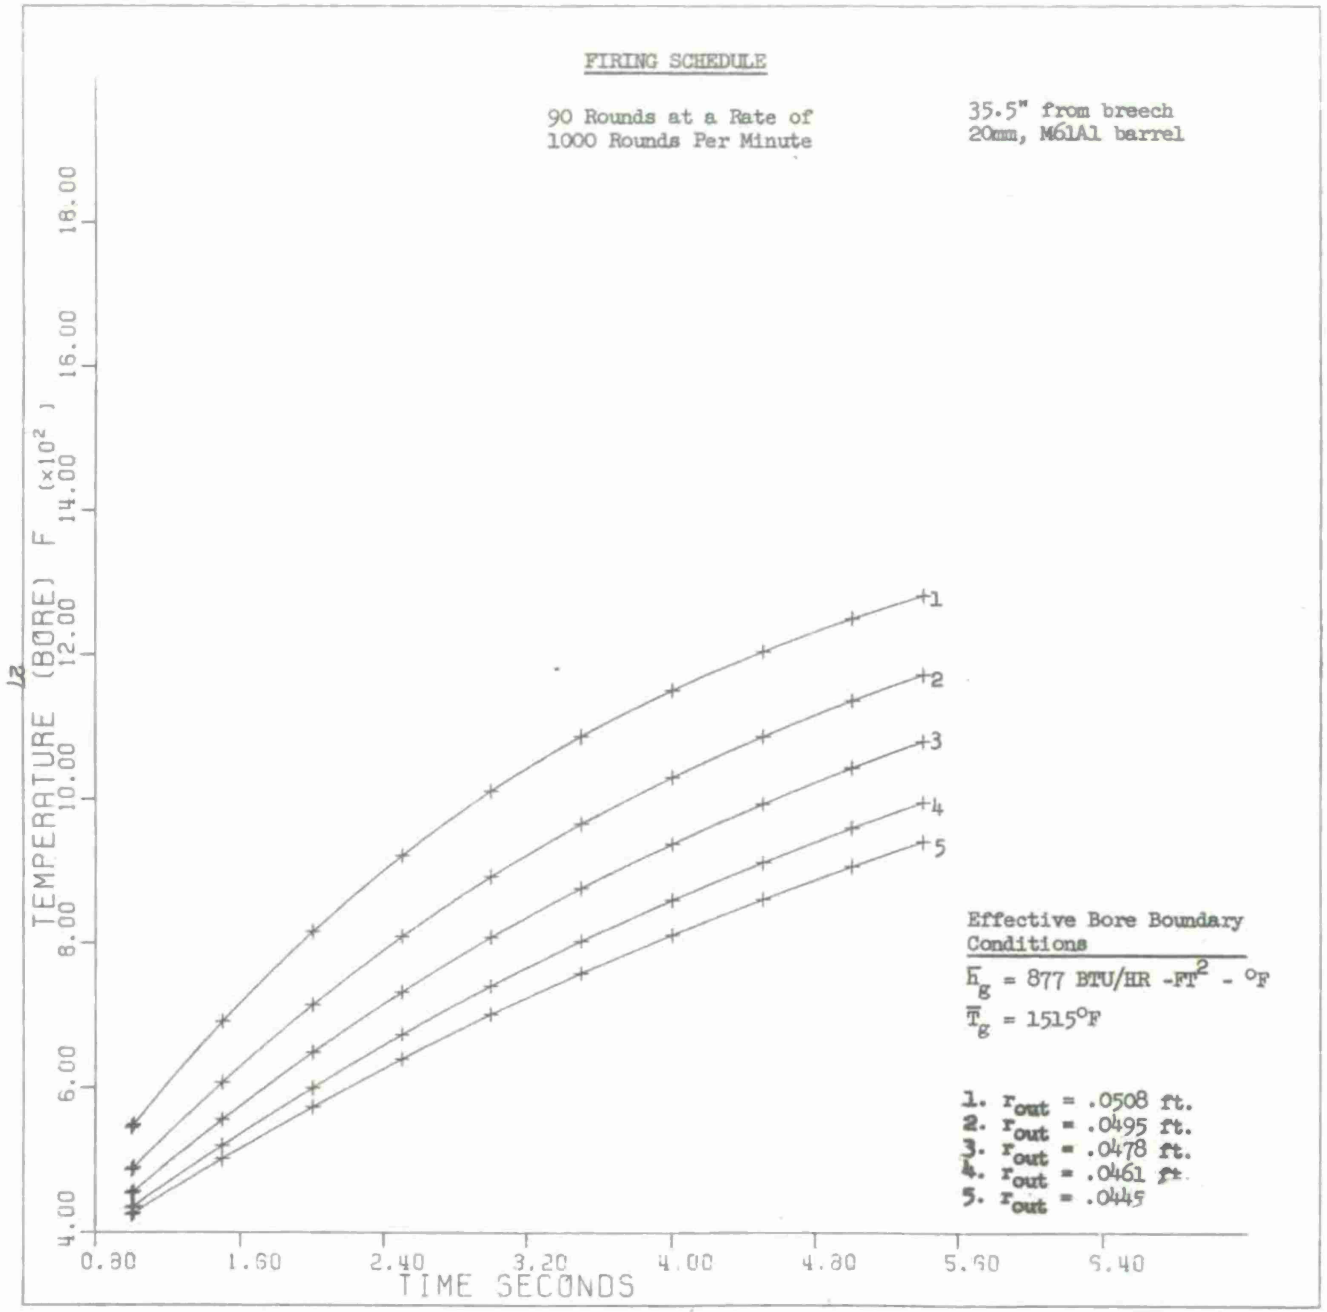
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
35.5" from breech
20mm, M61A1 barrel
TEMPERATURE (BORE) F (×10²)
4.00
6.00
8.00
10.00
12.00
14.00
16.00
18.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECONDS
1
2
3
4
5
Effective Bore Boundary
Conditions
$\bar{h}_g$ = 877 BTU/HR -FT^2 - °F
$\bar{T}_g$ = 1515°F
1. r_{out} = .0508 ft.
2. r_{out} = .0495 ft.
3. r_{out} = .0478 ft.
4. r_{out} = .0461 ft.
5. r_{out} = .0445

FIGURE 19

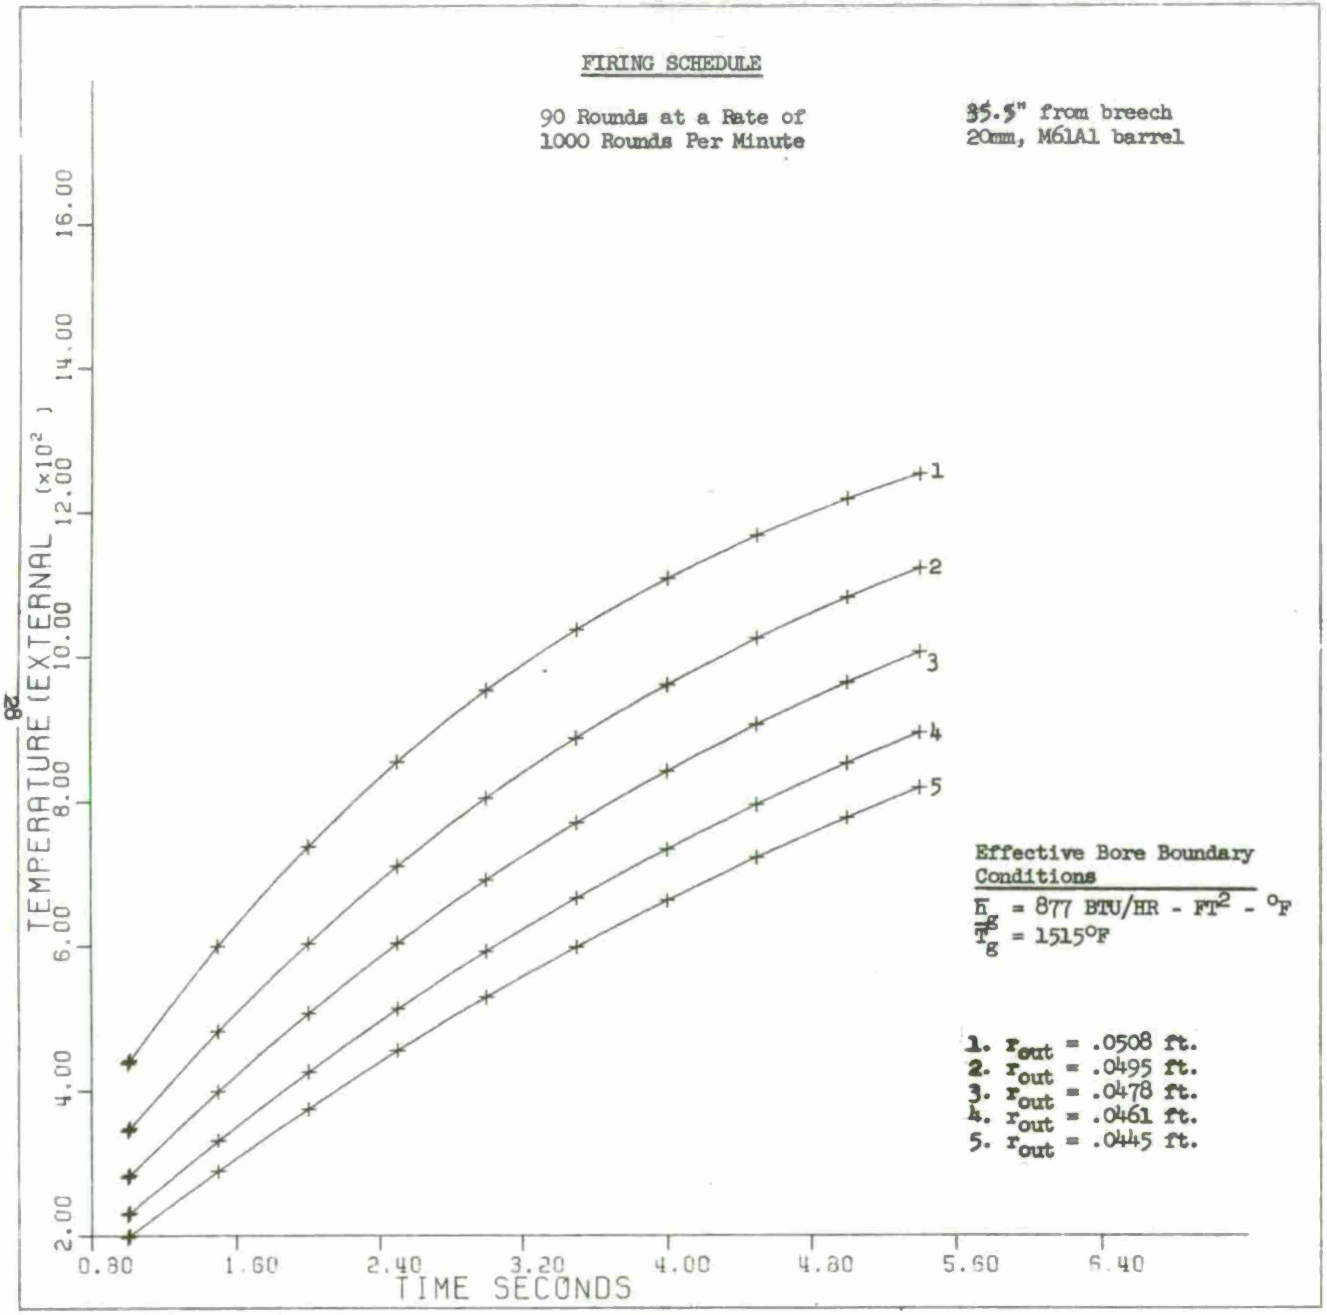
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
35.5" from breech
20mm, M61A1 barrel
TEMPERATURE (EXTERNAL (×10²)
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECONDS
1
2
3
4
5
Effective Bore Boundary Conditions
$\bar{h}_g$ = 877 BTU/HR - FT² - °F
$\bar{T}_g$ = 1515°F
1. r_{out} = .0508 ft.
2. r_{out} = .0495 ft.
3. r_{out} = .0478 ft.
4. r_{out} = .0461 ft.
5. r_{out} = .0445 ft.

FIGURE 20

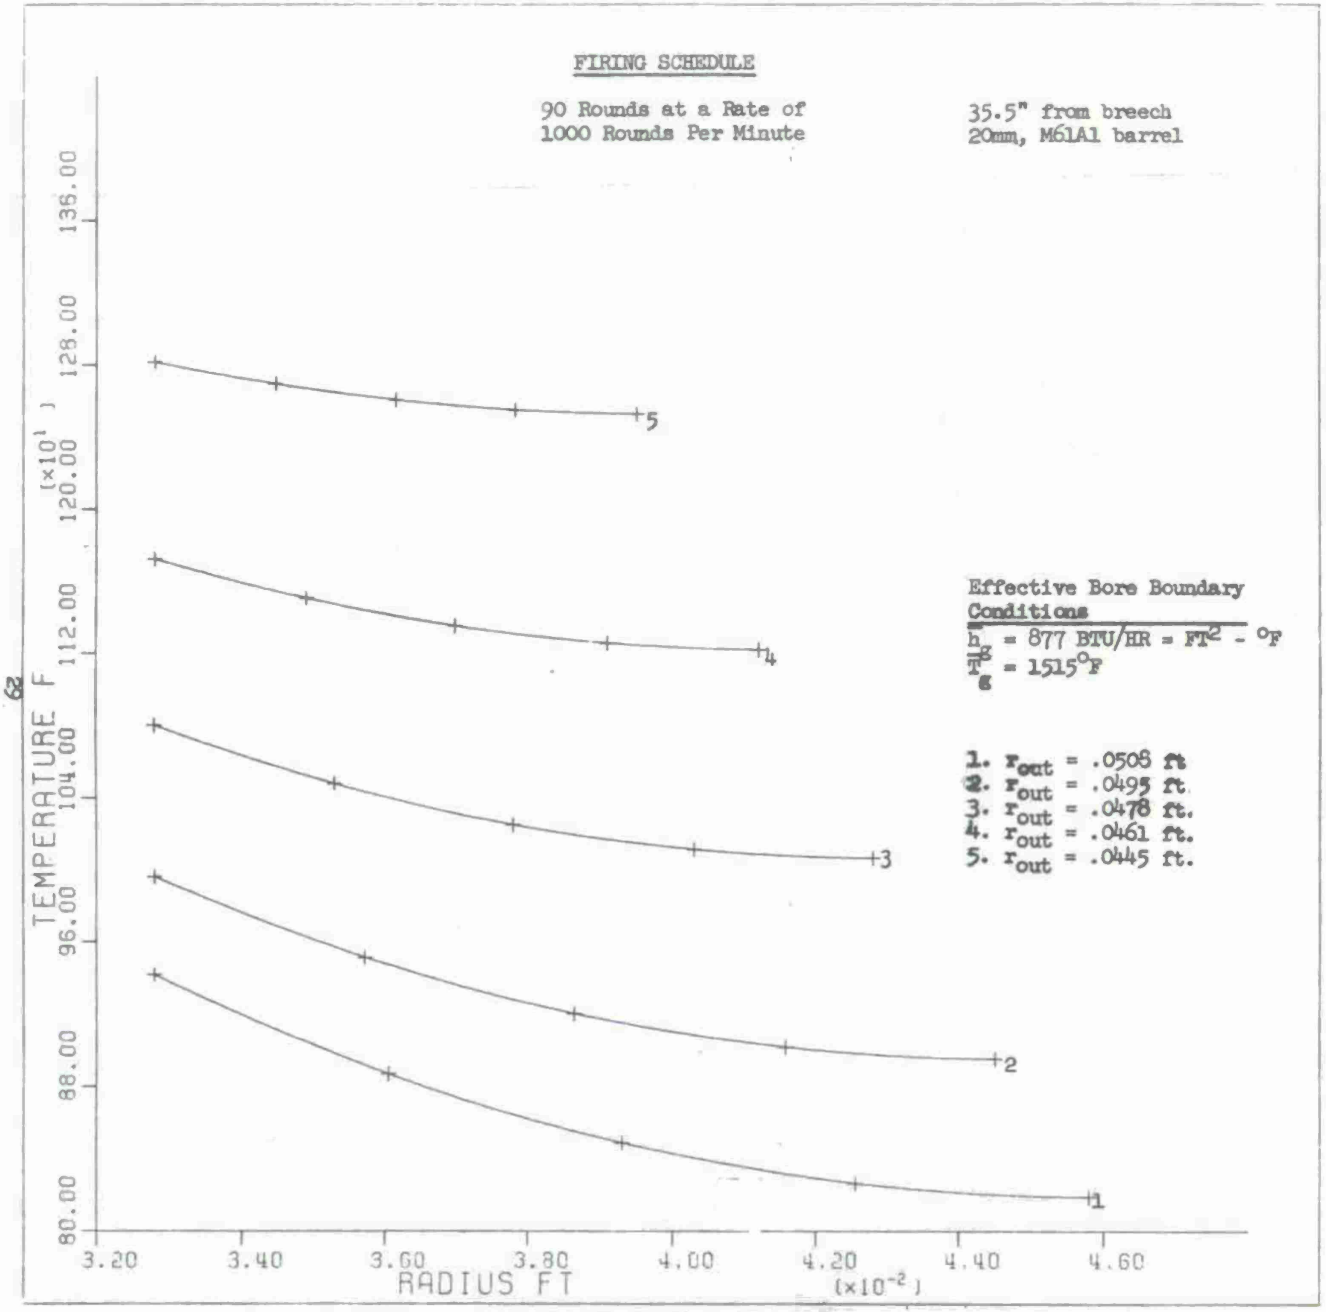
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
35.5" from breech
20mm, M61A1 barrel
Effective Bore Boundary
Conditions
$\bar{h}_g$ = 877 BTU/HR = FT^2 - ^oF
T_g = 1515^oF
1. r_{out} = .0508 ft
2. r_{out} = .0495 ft
3. r_{out} = .0478 ft.
4. r_{out} = .0461 ft.
5. r_{out} = .0445 ft.
TEMPERATURE F
(×10^1)
80.00
88.00
96.00
104.00
112.00
120.00
128.00
136.00
3.20
3.40
3.60
3.80
4.00
4.20
4.40
4.60
RADIUS FT
(×10^{-2})
1
2
3
4
5

FIGURE 21

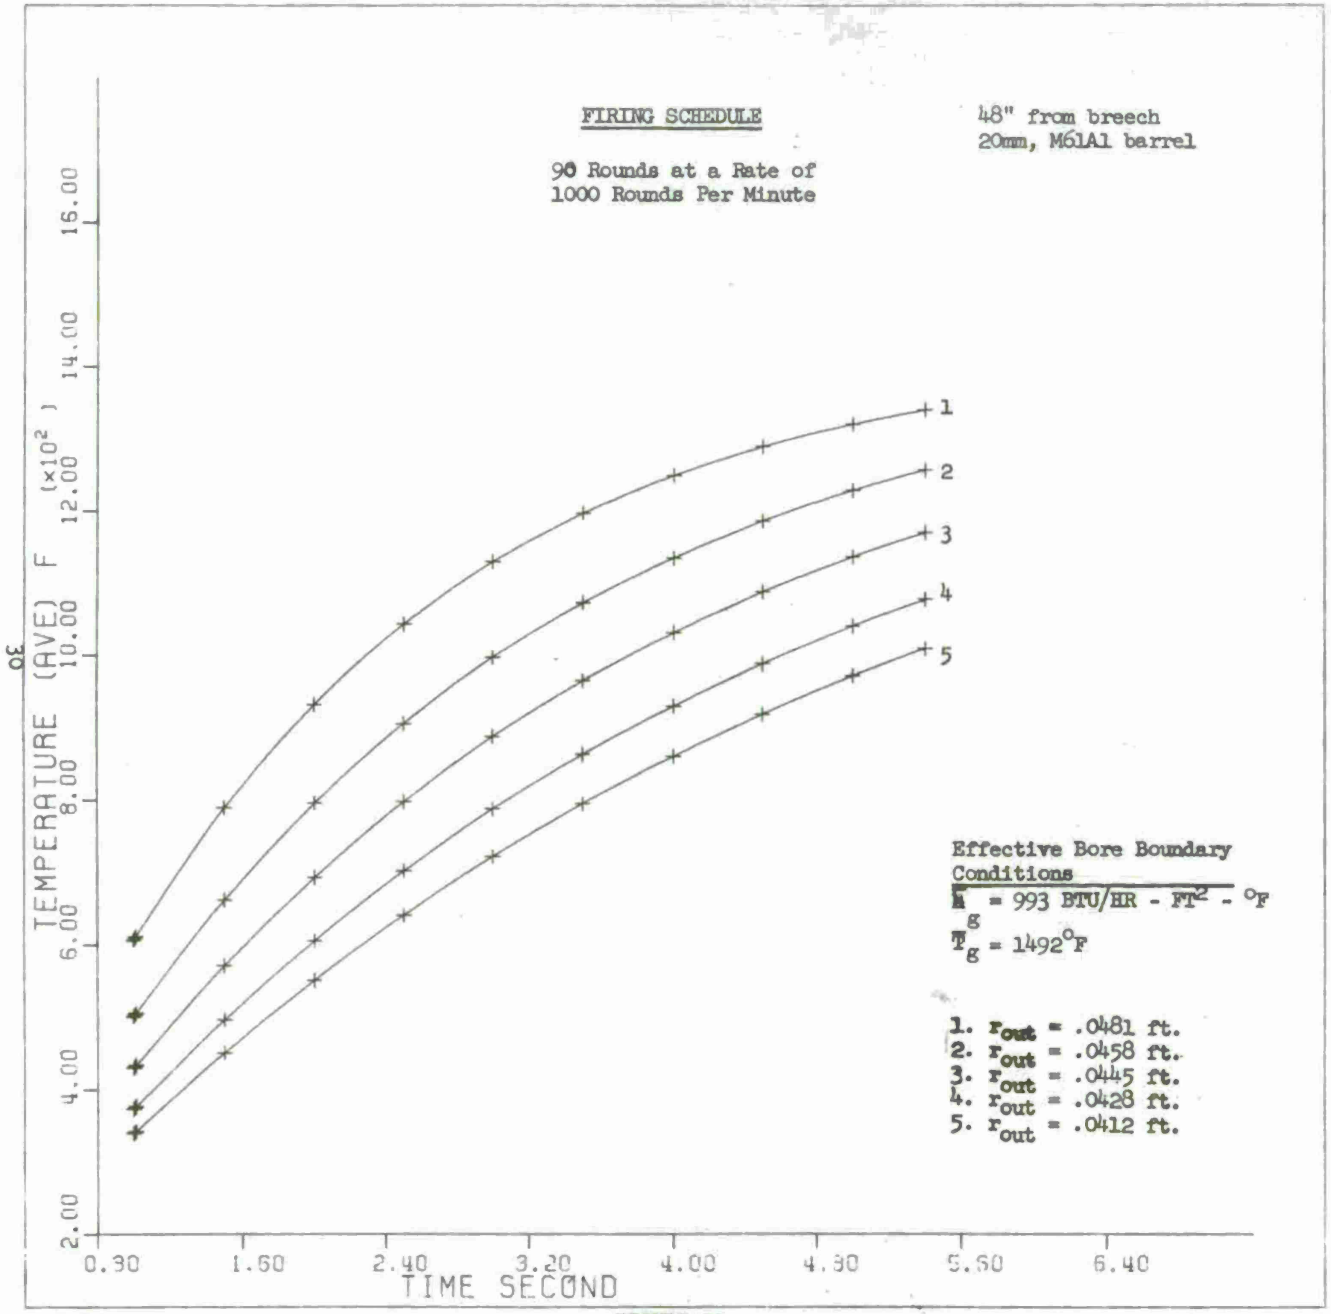
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
48" from breech
20mm, M61A1 barrel
TEMPERATURE (AVE) F (x10²)
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECOND
1
2
3
4
5
Effective Bore Boundary Conditions
$\bar{h}_g$ = 993 BTU/HR - FT² - °F
$\bar{T}_g$ = 1492°F
1. r_{out} = .0481 ft.
2. r_{out} = .0458 ft.
3. r_{out} = .0445 ft.
4. r_{out} = .0428 ft.
5. r_{out} = .0412 ft.

FIGURE 22

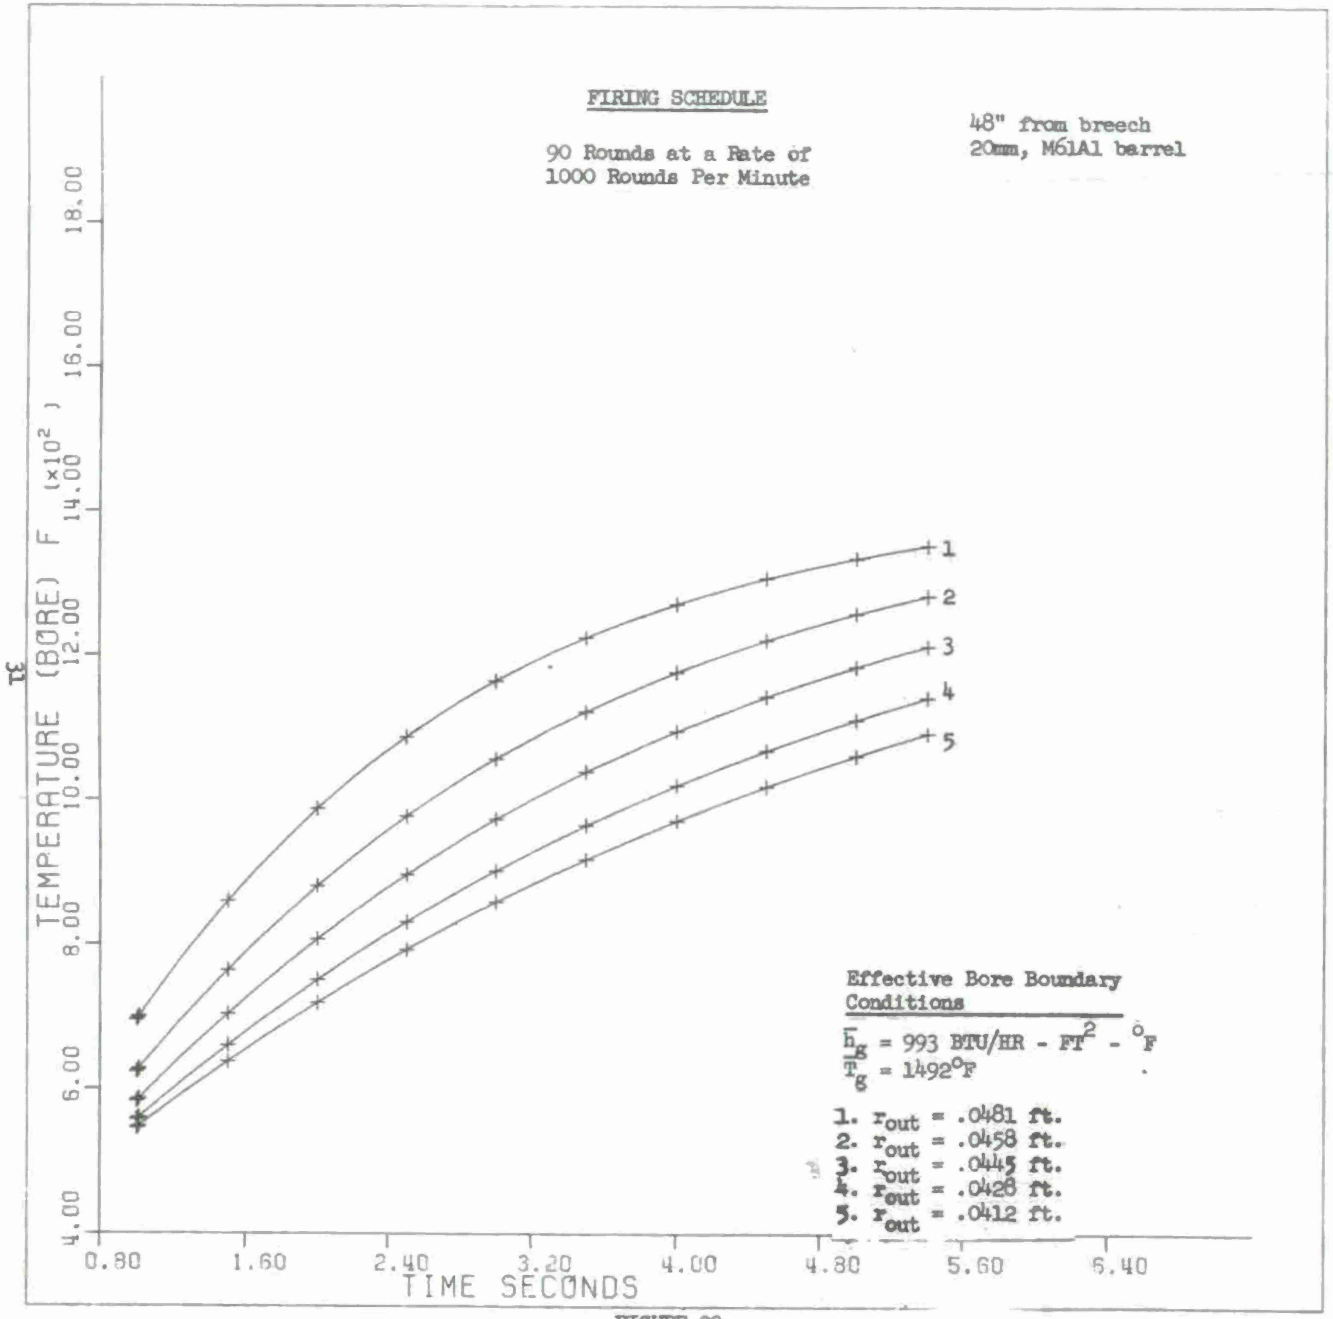
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
48" from breech
20mm, M61A1 barrel
TEMPERATURE (BORE) F (×10²)
4.00
6.00
8.00
10.00
12.00
14.00
16.00
18.00
0.80
1.60
2.40
3.20
4.00
4.80
5.60
6.40
TIME SECONDS
1
2
3
4
5
Effective Bore Boundary Conditions
$\bar{h}_g$ = 993 BTU/HR - FT² - °F
$\bar{T}_g$ = 1492°F
1. r_{out} = .0481 ft.
2. r_{out} = .0458 ft.
3. r_{out} = .0445 ft.
4. r_{out} = .0428 ft.
5. r_{out} = .0412 ft.

FIGURE 23

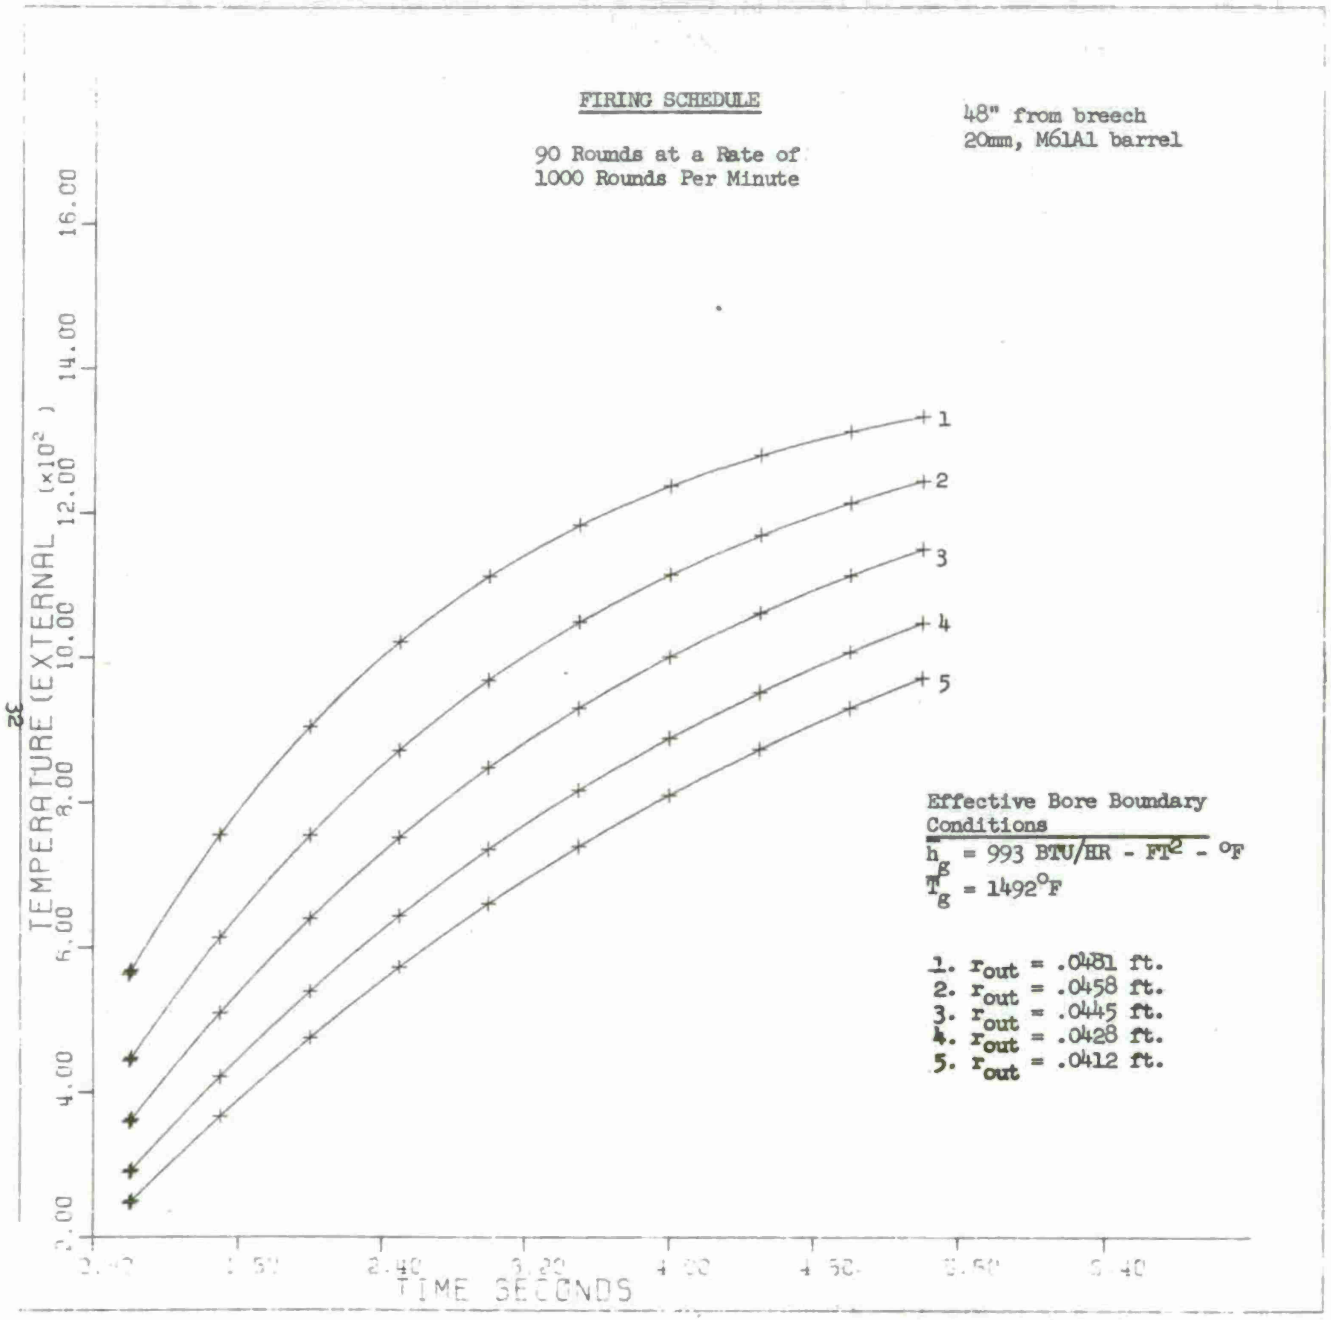
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
48" from breech
20mm, M61A1 barrel
TEMPERATURE (EXTERNAL (×10²)
2.00
4.00
6.00
8.00
10.00
12.00
14.00
16.00
TIME SECONDS
1
2
3
4
5
Effective Bore Boundary Conditions
h_g = 993 BTU/HR - FT² - °F
T_g = 1492°F
1. r_{out} = .0481 ft.
2. r_{out} = .0458 ft.
3. r_{out} = .0445 ft.
4. r_{out} = .0428 ft.
5. r_{out} = .0412 ft.

FIGURE 24

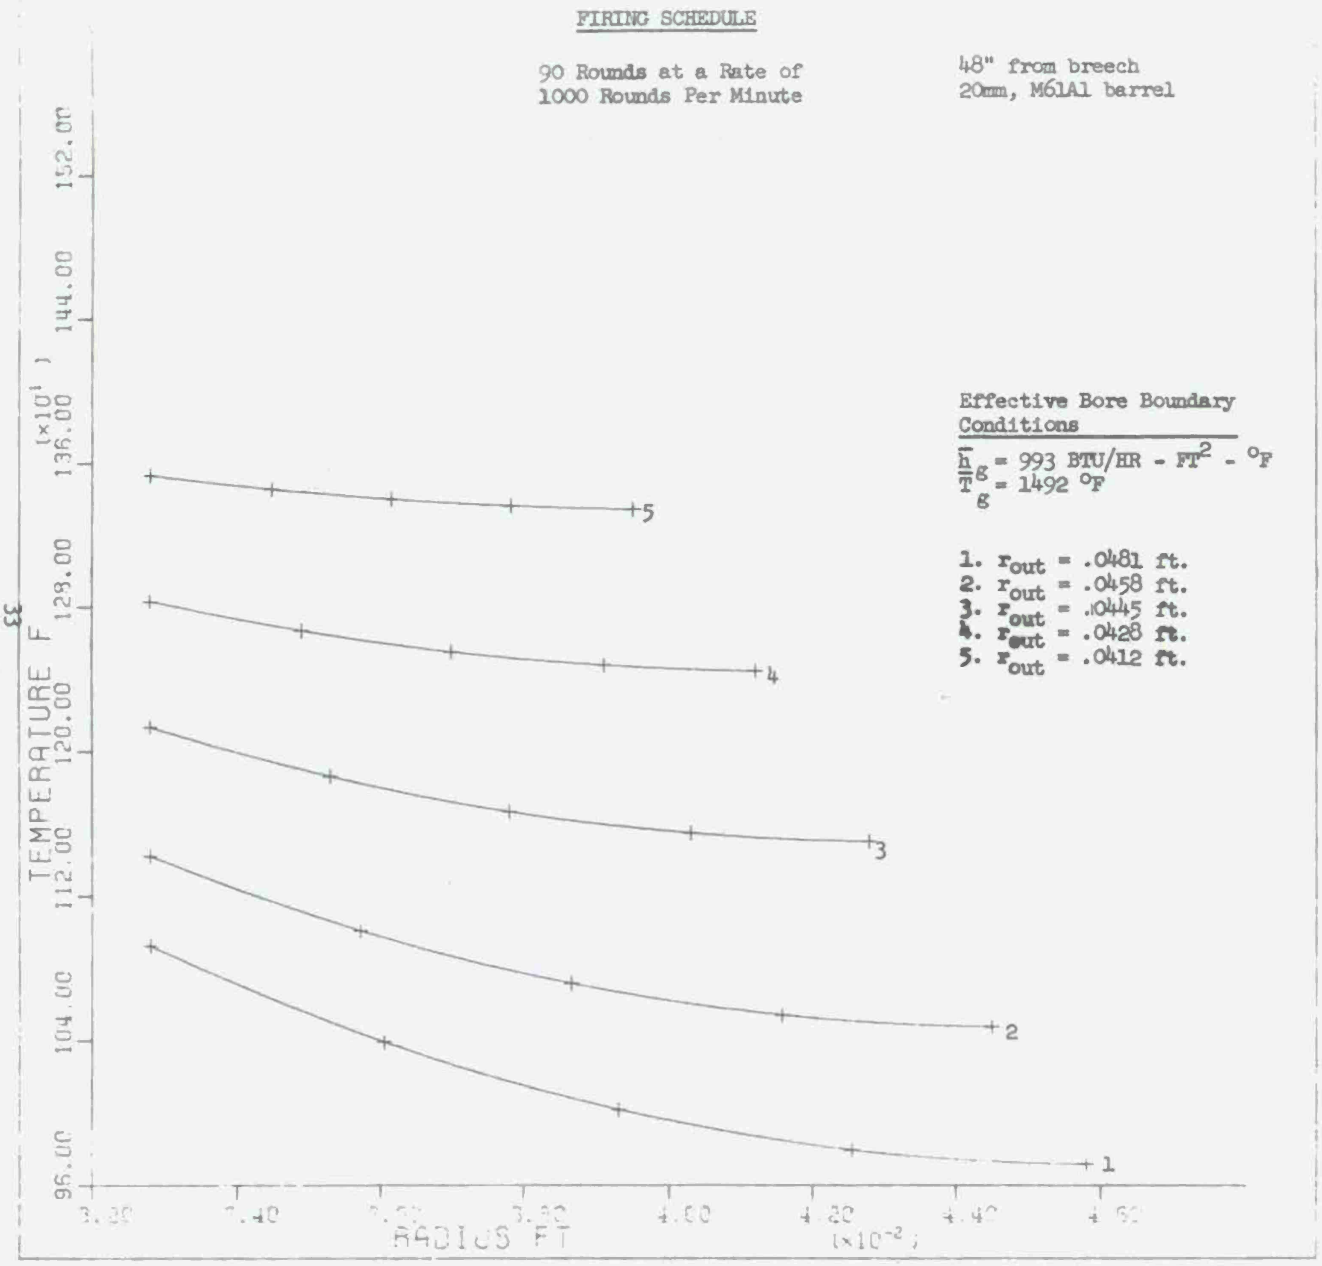
FIRING SCHEDULE
90 Rounds at a Rate of
1000 Rounds Per Minute
48" from breech
20mm, M61A1 barrel
Effective Bore Boundary
Conditions
$\bar{h}_g$ = 993 BTU/HR - FT^2 - °F
$\bar{T}_g$ = 1492 °F
1. r_{out} = .0481 ft.
2. r_{out} = .0458 ft.
3. r_{out} = .0445 ft.
4. r_{out} = .0428 ft.
5. r_{out} = .0412 ft.
TEMPERATURE F
(×10¹)
96.00
104.00
112.00
120.00
128.00
136.00
144.00
152.00
RADIUS FT
(×10⁻²)
4.00
1
2
3
4
5

FIGURE 25

M61 BARREL THERMOCOUPLE STATIONS



FIGURE 26


CR-MO-VA STEEL
RAPID HEATING
⊙ DYNAMIC ($\dot{\epsilon}$ = 5 SEC^{-1})
● STATIC
YIELD STRENGTH CR-MO-VA
YIELD STRENGTH, KSI
160
140
120
100
80
60
40
20
0
200
400
600
800
1000
1200
1400
TEMPERATURE, °F

FIGURE 27

PROPOSED 20mm LIGHTWEIGHT BARREL



FIGURE 28

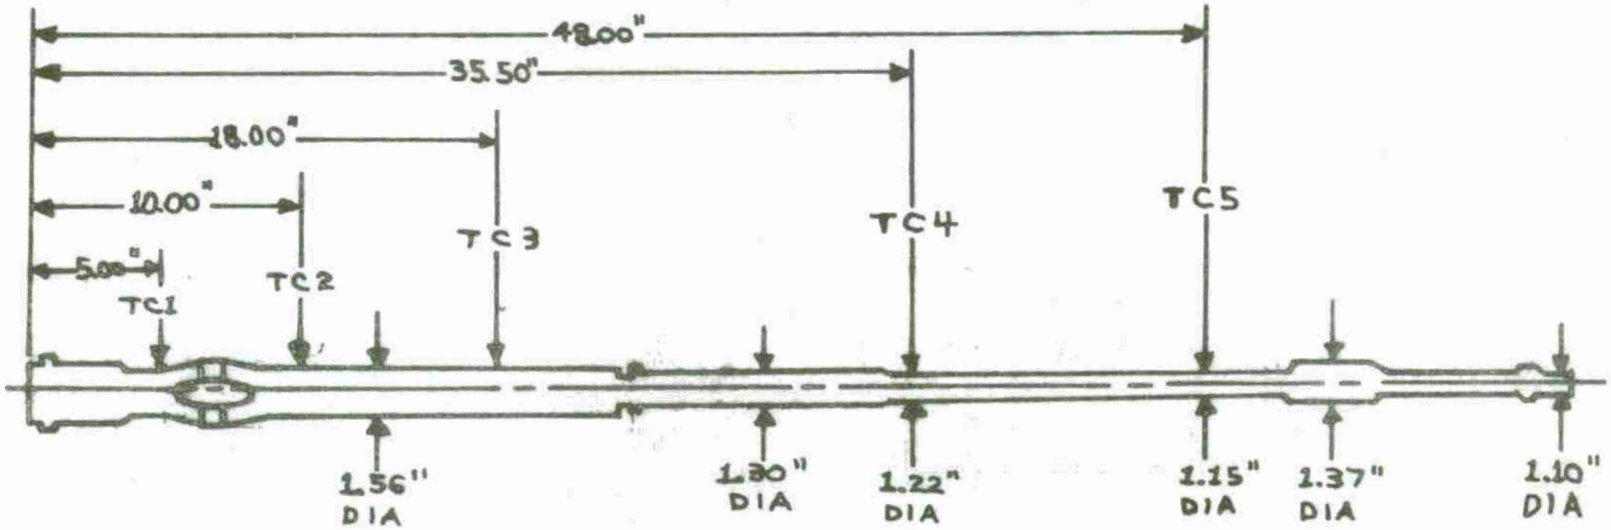8/23/76

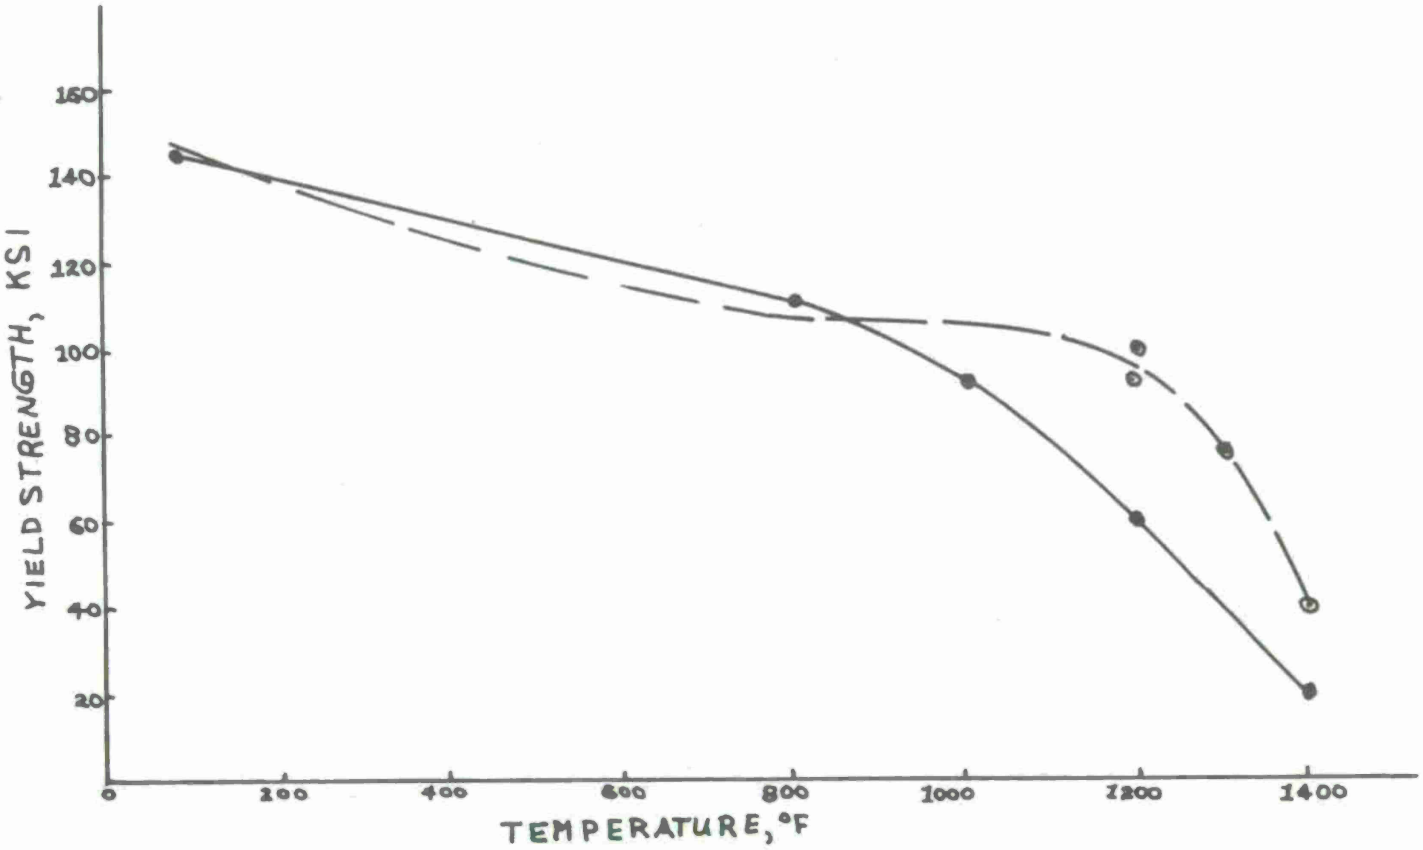DISTRIBUTION

	Copies
A. Department of Defense	
Office of the Director of Defense Research & Engineering ATTN: Mr. J. C. Barrett Room 3D-1085, The Pentagon Washington, DC 20301	1
Defense Documentation Center ATTN: TIPDR Cameron Station Alexandria, VA 22314	12
B. Department of the Army	
Commander U.S. Army Materiel Development & Readiness Command ATTN: DRCRD-TC 5001 Eisenhower Avenue Alexandria, VA 22333	1
Commander U.S. Army Armament Command ATTN: DRSAR-RDP	1
DRSAR-PP	1
DRSAR-PPI	1
DRSAR-TDC	2
Rock Island, IL 61201	
Commander U.S. Army Electronics Command ATTN: DRSEL-TL-ME Ft. Monmouth, NJ 07703	1
Commander Rock Island Arsenal ATTN: SARRI-LA	1
SARRI-LE	1
SARRI-LS	1
SARRI-LW	10
SARRI-LPL	2
SARRI-LR	20
SARRI-LT	1
Rock Island, IL 61201	

DISTRIBUTION

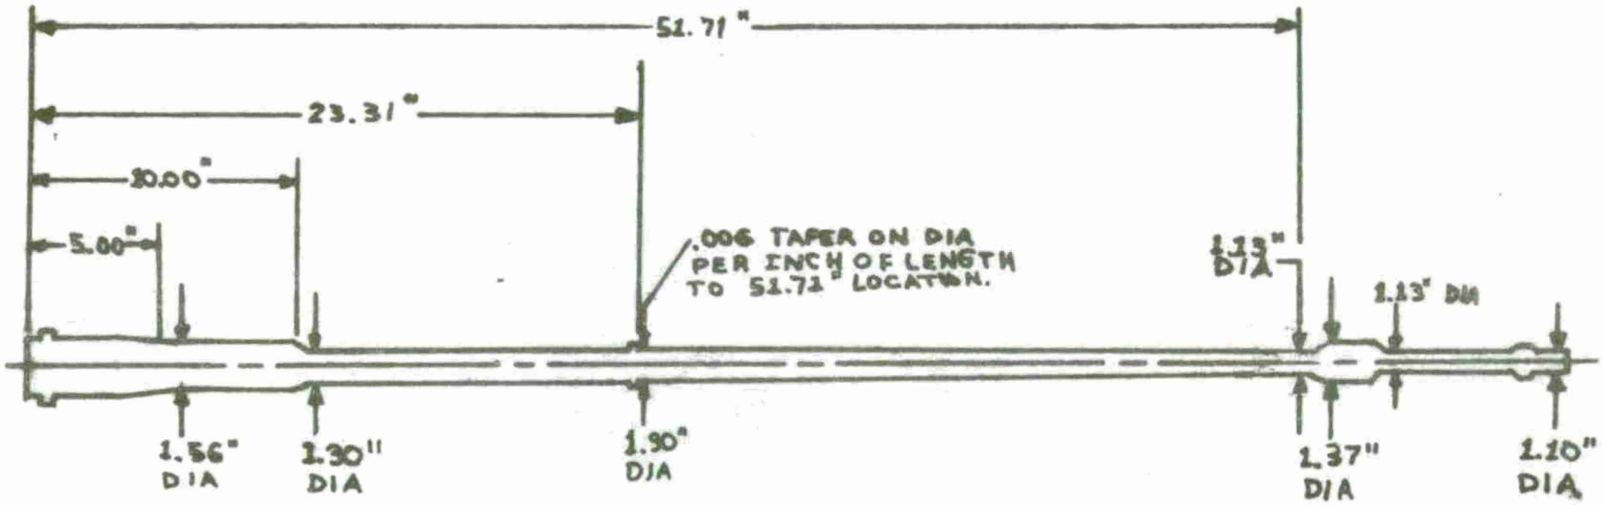	Copies
Commander U.S. Army Missile Command ATTN: DRSMI-RP	2
DRSMI-RRS, Mr. R. E. Ely	1
DRSMI-RSM, Mr. Whellahan Redstone Arsenal, AL 35809	1
Commander U.S. Army MERDC ATTN: STSFB-GL Ft. Belvoir, VA 22060	1
Commander U.S. Army Environmental Hygiene Agency Edgewood Arsenal, MD 21010	1
Commander U.S. Army Medical Biomechanical Research Laboratory ATTN: Library Ft. Detrick Bldg. 568 Frederick, MD 21701	1
Commander Natick Laboratories Natick, MA 01760	1
Commander U.S. Army Aviation School ATTN: Office of the Librarian Ft. Rucker, AL 36362	1
Director Joint Military Packaging Training Center ATTN: DRXPT-PT Aberdeen Proving Ground, MD 21005	1
Commander U.S. Army Tropic Test Center ATTN: STETC-MO-A Technical Library Drawer 942 Ft. Clayton, Canal Zone 09827	1
Commander Tobyhanna Army Depot ATTN: DRC Packaging, Storage & Containerization Center Tobyhanna, PA 18466	1

DISTRIBUTION

	Copies
Commander U.S. Army Production Equipment Agency ATTN: DRXPE Rock Island Arsenal Rock Island, IL 61201	2
Commander U.S. Army Tank-Automotive Command ATTN: DRSTA-RPL, Technical Library DRSTA-RK, Materials Laboratory Warren, MI 48090	 1 1
U.S. Army Research & Development Group (Europe) ATTN: Chief, Chemistry Branch FPO New York 09510	1
Commander U.S. Army Research Office P.O. Box 12211 Research Triangle Park, NC 27709	1
Commander Army Materials & Mechanics Research Center ATTN: DRXMR-PL Watertown, MA 02172	1
Commander Frankford Arsenal ATTN: SARFA-L1000 SARFA-C2500 Philadelphia, PA 19137	 1 1
Commander Picatinny Arsenal ATTN: Plastics & Packaging Lab PLASTEC Dover, NJ 07801	 1 1
Commander Edgewood Arsenal ATTN: SAREA-CL-A Edgewood, MD 21010	1
Commander Watervliet Arsenal ATTN: SARWV-RDR SARWV-RDT, Library Watervliet, NY 12189	 1 1

DISTRIBUTION

	Copies
C. Department of Navy	
Office of Naval Research ATTN: ONR-471 Room 928, Ballston Tower No. 1 Arlington, VA 22217	1
Commander Naval Sea Systems Command ATTN: SEA-03	1
RRMA-54	1
SP-271 Washington, DC 20362	1
Commander Naval Supply Systems Command ATTN: NSUP-048 Washington, DC 20376	1
Commander U.S. Naval Surface Weapons Center ATTN: NDL-211 Silver Springs, MD 20910	1
Commander U.S. Naval Research Laboratory ATTN: NRL-2600 Washington, DC 20375	1
Commander U.S. Naval Ordnance Test Station ATTN: Code 753 Technical Library China Lake, CA 93555	1
Commander Mare Island Naval Shipyard ATTN: Rubber Laboratory Vallejo, CA 94592	1

DISTRIBUTION

	Copies
D. Department of the Air Force	
HQ USAF RDP Room 4D-313, The Pentagon Washington, DC 20330	1
AFML/LTM Wright-Patterson AFB, OH 45433	2
AFML/MB Wright-Patterson AFB, OH 45433	1
AFFTC Edwards AFB, CA 93523	1
E. Other Government Agencies	
Energy Research and Development Agency Division of Reactor Development & Technology Washington, DC 20545	1
George C. Marshall Space Flight Center, NASA ATTN: M-S&E M-A&PS Huntsville, AL 35812	 1 1

DISTRIBUTION LIST UPDATE

- - - FOR YOUR CONVENIENCE - - -

Government regulations require the maintenance of up-to-date distribution lists for technical reports. This form is provided for your convenience to indicate necessary changes or corrections.

If a change in our mailing lists should be made, please check the appropriate boxes below. For changes or corrections, show old address *exactly* as it appeared on the mailing label. Fold on dotted lines, tape or staple the lower edge together, and mail.

☐ Remove Name From List

Old Address:

☐ Change or Correct Address

Corrected or New Address:

COMMENTS

_____

_____

_____

_____

_____

Date: _____ Signature: _____

Technical Report #

SARRI Form 900-643 (One-Time) (1 Feb 75)

FOLD HERE

Return Address:

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

U.S.MAIL

OFFICIAL BUSINESS
Penalty for Private Use $300

Commander
Rock Island Arsenal
Attn: SARRI-LR
Rock Island, Illinois 61201

FOLD HERE

AD_____ ACCESSION NO._____

Research Directorate
GEN Thomas J. Rodman Laboratory
Rock Island Arsenal, Rock Island, IL 61201

WEIGHT REDUCTION STUDY ON THE 20MM, M61A1, VULCAN GUN BARREL

Prepared by: Philip D. Benzkofer

Technical Report No. R-TR-76-022

36 pages, Incl Figures & Tables

A thermal analysis of the M61A1 VULCAN gun barrel was performed. This analysis included the calculation of bore boundary conditions by methods previously developed by the Research Directorate and the application of these boundary conditions to an outer barrel profile analysis. Pressure stress analyses were also performed. The final results are proposed outer barrel profiles for particular performance requirements.

UNCLASSIFIED

1. M61A1 Vulcan Barrel
2. Thermal Analysis
3. Bore Boundary Conditions
4. Experimental Data
5. Wall Ratios

AD_____ ACCESSION NO._____

Research Directorate
GEN Thomas J. Rodman Laboratory
Rock Island Arsenal, Rock Island, IL 61201

WEIGHT REDUCTION STUDY ON THE 20MM, M61A1, VULCAN GUN BARREL

Prepared by: Philip D. Benzkofer

Technical Report No. R-TR-76-022

36 pages, Incl Figures & Tables

A thermal analysis of the M61A1 VULCAN gun barrel was performed. This analysis included the calculation of bore boundary conditions by methods previously developed by the Research Directorate and the application of these boundary conditions to an outer barrel profile analysis. Pressure stress analyses were also performed. The final results are proposed outer barrel profiles for particular performance requirements.

UNCLASSIFIED

1. M61A1 Vulcan Barrel
2. Thermal Analysis
3. Bore Boundary Conditions
4. Experimental Data
5. Wall Ratios

AD_____ ACCESSION NO._____

Research Directorate
GEN Thomas J. Rodman Laboratory
Rock Island Arsenal, Rock Island, IL 61201

WEIGHT REDUCTION STUDY ON THE 20MM, M61A1, VULCAN GUN BARREL

Prepared by: Philip D. Benzkofer

Technical Report No. R-TR-76-022

36 pages, Incl Figures & Tables

A thermal analysis of the M61A1 VULCAN gun barrel was performed. This analysis included the calculation of bore boundary conditions by methods previously developed by the Research Directorate and the application of these boundary conditions to an outer barrel profile analysis. Pressure stress analyses were also performed. The final results are proposed outer barrel profiles for particular performance requirements.

UNCLASSIFIED

1. M61A1 Vulcan Barrel
2. Thermal Analysis
3. Bore Boundary Conditions
4. Experimental Data
5. Wall Ratios

AD_____ ACCESSION NO._____

Research Directorate
GEN Thomas J. Rodman Laboratory
Rock Island Arsenal, Rock Island, IL 61201

WEIGHT REDUCTION STUDY ON THE 20MM, M61A1, VULCAN GUN BARREL

Prepared by: Philip D. Benzkofer

Technical Report No. R-TR-76-022

36 pages, Incl Figures & Tables

A thermal analysis of the M61A1 VULCAN gun barrel was performed. This analysis included the calculation of bore boundary conditions by methods previously developed by the Research Directorate and the application of these boundary conditions to an outer barrel profile analysis. Pressure stress analyses were also performed. The final results are proposed outer barrel profiles for particular performance requirements.

UNCLASSIFIED

1. M61A1 Vulcan Barrel
2. Thermal Analysis
3. Bore Boundary Conditions
4. Experimental Data
5. Wall Ratios