



AFRL-ML-WP-TP-2007-531

**BIOMIMETICS AND THE APPLICATION TO
DEVICES (Preprint)**

Morley O. Stone, Ph.D.

**Biotechnology, Exploratory Development
Hardened Materials Branch
Survivability and Sensor Materials Division**

SEPTEMBER 2006

Approved for public release; distribution unlimited.

See additional restrictions described on inside pages

STINFO COPY

**AIR FORCE RESEARCH LABORATORY
MATERIALS AND MANUFACTURING DIRECTORATE
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7750
AIR FORCE MATERIEL COMMAND
UNITED STATES AIR FORCE**

NOTICE

Using Government drawings, specifications, or other data included in this document for any purpose other than Government procurement does not in any way obligate the U.S. Government. The fact that the Government formulated or supplied the drawings, specifications, or other data does not license the holder or any other person or corporation; or convey any rights or permission to manufacture, use, or sell any patented invention that may relate to them.

This report was cleared for public release by the Air Force Research Laboratory Wright Site (AFRL/WS) Public Affairs Office (PAO) and is releasable to the National Technical Information Service (NTIS). It will be available to the general public, including foreign nationals.

THIS TECHNICAL REPORT IS APPROVED FOR PUBLICATION.

**//signature//*

MORLEY O. STONE, Ph.D.
Biotechnology
Exploratory Development
Hardened Materials Branch

//signature//

MARK S. FORTE, Acting Chief
Hardened Materials Branch
Survivability and Sensor Materials Division

//signature//

TIM J. SCHUMACHER, Chief
Survivability and Sensor Materials Division
Materials and Manufacturing Directorate

This report is published in the interest of scientific and technical information exchange and its publication does not constitute the Government's approval or disapproval of its ideas or findings.

Disseminated copies will show "//signature//*" stamped or typed above the signature blocks.

REPORT DOCUMENTATION PAGE				<i>Form Approved OMB No. 0704-0188</i>	
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</p>					
1. REPORT DATE (DD-MM-YY) September 2006		2. REPORT TYPE Conference Paper Preprint		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE BIOMIMETICS AND THE APPLICATION TO DEVICES (Preprint)				5a. CONTRACT NUMBER IN-HOUSE	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 62102F	
6. AUTHOR(S) Morley O. Stone, Ph.D. (Biotechnology, Exploratory Development)				5d. PROJECT NUMBER 4348	
				5e. TASK NUMBER RG	
				5f. WORK UNIT NUMBER M03R1000	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Biotechnology, Exploratory Development Hardened Materials Branch, Survivability and Sensor Materials Division Materials and Manufacturing Directorate, Air Force Research Laboratory Wright-Patterson Air Force Base, OH 45433-7750 Air Force Materiel Command, United States Air Force				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-ML-WP-TP-2007-531	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory Materials and Manufacturing Directorate Wright-Patterson Air Force Base, OH 45433-7750 Air Force Materiel Command United States Air Force				10. SPONSORING/MONITORING AGENCY ACRONYM(S) AFRL/MLPJ	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S) AFRL-ML-WP-TP-2007-531	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES The U.S. Government is joint author of this work and has the right to use, modify, reproduce, release, perform, display, or disclose the work. PAO case number AFRL/WS 06-2035, 21 August 2006. Submitted to the Proceedings of the National Academy of Engineering, Frontiers of Engineering Conference. This is the best quality available.					
14. ABSTRACT At first glance, imitating nature via biomimetics seems to be a straightforward proposition. For example, if one is a roboticist, just add legs to the platform instead of wheels. Unfortunately, and as often the case, the devil is in the details. This short synopsis will cover biomimetic examples of material synthesis, sensing and robotics. This overview will attempt to capture some lessons learned, some surprising and unanticipated insights, and some of the potential pitfalls encountered along the way. For a more complete review, recent perspectives on combining biology with other disciplines have recently been published.					
15. SUBJECT TERMS Poly(vinyl alcohol)(PVA), Light Emitting Diode(LED), Single-walled Carbon Nanotubes (SWNTs)					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT: SAR	18. NUMBER OF PAGES 12	19a. NAME OF RESPONSIBLE PERSON (Monitor) Morley O. Stone, Ph.D. 19b. TELEPHONE NUMBER (Include Area Code) (937) 255-4588
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			

Biomimetics and the Application to Devices

Morley Stone

Air Force Research Laboratory, Materials and Manufacturing Directorate, Wright-Patterson Air Force Base, Ohio 45433-7702

1. Biology and Engineering – Introduction to Biomimetics

At first glance, imitating nature via biomimetics seems to be a straightforward proposition. For example, if one is a roboticist, just add legs to the platform instead of wheels. Unfortunately, and as often the case, the devil is in the details. This short synopsis will cover biomimetic examples of material synthesis, sensing and robotics. This overview will attempt to capture some lessons learned, some surprising and unanticipated insights, and some of the potential pitfalls encountered along the way. For a more complete review, recent perspectives on combining biology with other disciplines have recently been published¹.

“Just DON’T add water”

Often, biologists and engineers speak two completely different languages. This is perhaps no more graphically illustrated than comparing the world of electrical engineers and sensor designers with the world of biology. Manipulation of biological macromolecules, i.e., nucleic acids and/or proteins, means the use of buffered solutions (usually pH ~ 7), controlled salinity, and regulated temperatures. Incorporating these biological salt solutions with electronics and sensor architectures seems to be an oxymoron. Thus, the conversion or push of biological materials away from solution to solid-state processing has been a key technology driver within our lab.

The key to overcoming this seemingly insurmountable incompatibility is the use of “bridging” materials systems. From our work, this has been the use of polymer host materials to capture and maintain the biological functionality². Many polymer systems qualify as hydrogels because they incorporate and maintain an enormous amount of water, e.g., poly(vinyl alcohol) (PVA). While the biological side of this equation is

¹ Naik R R., Stone M O. (2005) *Materials Today* 8:18-26.

satisfied via the incorporation of water, polymer systems can be spin-coated, lithographically patterned, made conductive, and a host of other treatments that electrical engineers routinely use. Thus, polymers represent a truly bridging material system in making biological macromolecules mesh with synthetic technology.

Another recent example highlights the potential biological materials can have when integrated into a common electrical construct like a light emitting diode (LED). However, this work requires a paradigm shift in materials thinking — namely what would happen if DNA were no longer processed on traditional microgram quantities, but processed in gram and kilogram quantities. The fishing industry in Japan processes tons of seafood yearly. In conjunction, they also throw away tons of DNA from fish gametes every year. Researchers at the Chitose Institute of Science and Technology in Japan, in partnership with our laboratory, have processed this discarded DNA into a surfactant complex and have scaled the process up on a multi-gram scale³. At this scale and in this form, the DNA can now be spin-coated into traditional electronics architectures. As recently published⁴, a DNA electron blocking layer spin deposited on the hole injection side of the electron-hole recombination layer greatly enhanced LED efficiency and performance (Figure 1).

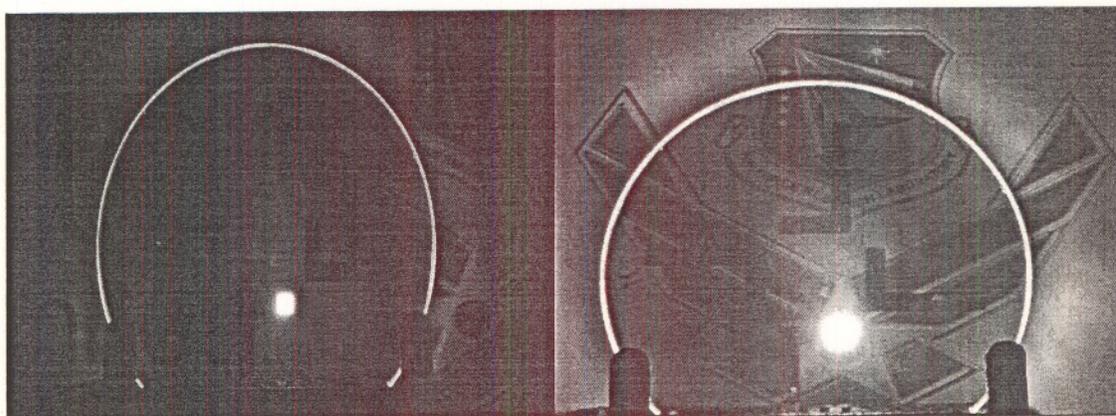


Figure 1: Photographs of Alq₃ green emitting BioLED and baseline OLED devices in operation.

² Brott L L, Rozenzhak S M, Naik R R, Davidson S R, Perrin R E, Stone M O. (2004) *Advanced Materials* **16**: 592-596.

³ Wang L, Yoshida J, Ogata N. (2001) *Chem. Mater.* **13**: 1273-1281.

⁴ Hagen J A, Li W, Steckl A J, Grote J G. (2006) *Appl. Phys. Lett.* **88**: 171109-171111.

“One Step Removed”

In the previous section, the direct incorporation of biological macromolecules was presented. In another approaches, we have attempted to use biology indirectly in advanced material synthesis and devices. Like the refrain from a popular chemical company commercial — biology isn't in the final material, it makes the final material better.

Labs around the world have raced to harness the incredible electronic, thermal, and mechanical properties inherent in single-walled carbon nanotubes (SWNTs). One impediment to harnessing SWNTs is the wide variety of carbon nanotubes produced after a synthesis run. After a typical run, there is a large dispersion of sizes (both in length and diameter) contributing to a variety of chiralities (which dictate the metallic or semiconducting nature of the SWNT). Much of this size heterogeneity arises from the heterogeneity of the starting metallic nanoparticles used to catalyze the growth of SWNTs.

Ferritins and ferritin-like proteins sequester iron (in the form of iron oxide) in precisely defined cavities ranging from 8 nm to 4 nm for human and bacterial forms, respectively. We recently engineered a bacterial form called DPS to produce uniform, monodisperse iron oxide particles⁵. We reasoned that this monodisperse starting pool of nanoparticles would lead to a more monodisperse population of SWNTs. Indeed, after the bacterial protein was used to produce the iron oxide particles, the biological shell was removed via scintering in a reduced atmosphere and subjected to gas-phase carbon nanotube growth. The resulting SWNTs adopted the monodisperse character of the starting catalyst particles; thus, biology wasn't in the final product, it was used to make a technologically promising material better.

2. Materials Science and Engineering Overlapping with Biology

From a materials science and engineering perspective, favorable properties, i.e., electronic and structural, usually emerge when one has control over the synthesis process

⁵ Kramer R M, Sowards L A, Pender M J, Stone M O, Naik R R. (2005) *Langmuir* **21**: 8466-8470.

at finer and finer levels, hence the frenzy and hype over nanotechnology. As illustrated above in the carbon nanotube example, biology can give us tools to control and/or synthesize materials with molecular-level control.

A powerful illustrative example of this control comes from unicellular algae, called diatoms, which make exquisite cellular structures out of silica. Thousands of species of diatoms exist in salt and fresh water. Each diatom species makes unique silica structures and patterns – from hinges to intricate arrays of holes and spines. This intricate and precise silica synthesis occurs at ambient temperature and pH and possesses a complexity greater than anything we can make synthetically using sol-gel techniques.

The work of Kröger and colleagues provided molecular insight into the silica deposition process of diatoms⁶. This insight has allowed us to ask questions about the molecular evolution of this activity *de novo*⁷, and how to apply this activity to accomplish practical applications, i.e., enzymatic encapsulation⁸.

From this activity, and the work of others, the field of biomineralization has been able to greatly broaden the scope of materials synthesized via a biological route to encompass not only oxides, but also metals and semiconductors⁹. When one considers the fact that peptides specific for inorganic binding and nucleation can be combined, i.e., genetically fused, with peptides that bind another moiety, endless possibilities begin to emerge. This opens the possibility of directly incorporating biological macromolecules directly into electronic structures/devices. For example, one could imagine literally growing a field effect transistor (FET) metal-oxide-metal architecture via a biological route rather than relying upon standard top-down photolithographic processes. Additionally, this route does not just possess electronic possibilities but new approaches in optics and catalysis.

⁶ Kröger N, Deutzmann R, Sumper M. (1999) *Science* **286**: 1129-1132.

⁷ Naik R R, Brott L L, Clarson S J, Stone M O. (2002) *J of Nanoscience and Nanotechnology* **2**: 1-6.

⁸ Luckarift H R, Spain J C, Naik R R, Stone M O. (2004) *Nature Biotechnology* **22**: 211-213.

⁹ Slocik J M, Stone M O, Naik R R. (2005) *Small* **1**: 1048-1052.

Recently, we have shown that by growing bi-metallic systems using a bio-based approach, enhanced catalytic activity of such bi-metallic materials can be demonstrated¹⁰.

3. Bio-Inspired Robotics: Applied Biology and Engineering

The combination of biological principles with mechanical engineering and robotics has opened entirely new areas and possibilities¹¹. Starting with the premise “Why do legs matter?” the field is exploding to encompass why materials properties matter, why mechanics and architecture matter and how biological insight can give us completely new capabilities. Entirely new lessons and robotic capabilities have emerged – dynamic compliance, molecular adhesion, conformal grasping, and dynamic stability – to name just a few of the concepts implemented into robotic platforms.

The first contributions of biology to robotics came from the insight and advantages afforded by a sprawled posture and the ability to utilize opposing forces to achieve self-stabilization^{12,13}. Much of this early work focused on understanding the proper mechanics involved in legged locomotion. The spring-loaded inverted pendulum (SLIP) model has been accepted as an accurate model of biological locomotion independent of the number of legs or the biological platform, i.e., horse or human or cockroach.

Recently, the Cutkosky lab at Stanford, who developed pneumatically-driven hexapod running robots, has been challenged to build a wall-climbing platform capable of emulating gecko-like behavior¹⁴. From a materials science perspective, the challenge has centered on the ability to produce synthetic hair arrays with a diameter of 200 nm, at a density of $1-2 \times 10^9$ hairs/cm², and be self-cleaning.

Aside from this challenge, the robotics field could benefit immensely from having tunable (dynamic) modulus materials. Today, compliance is usually tuned mechanically.

¹⁰ Slocik J M, Naik R R. (2006) *Advanced Materials* **18**: 1988-1992.

¹¹ Biodynamics Program, Defense Sciences Office, Defense Advanced Research Projects Agency

¹² Full R J and Tu M S. (1991) *J. Exp. Biol.* **156**: 215-231.

¹³ Dickenson M H, Farley C T, Full R J, Koehl M A R, Kram R, Lehman S. (2000) *Science* **288**: 100-106.

¹⁴ Clark J E, Cham J G, Bailey S A, Froehlich E M, Nahata P K, Full R J, Cutkosky M R. (2001) Proceedings of IEEE International Conference on Robotics and Automation, 3643-3649.

The cost in weight in power is expensive; in addition, the capability afforded by this tuning is lacking compared to the desired performance. Biology possesses numerous models of tunable modulus materials, e.g., the sea cucumber, and extrapolating these lessons to robotics could have a huge impact.

4. Concluding Remarks

Within our research labs, we are framing our future investments in an area we term biotronics. We use this term to encompass both bio-electronics and bio-photonics. As can be seen from the LED and FET examples above, this area is ripe for revolutionary breakthroughs afforded by biological material incorporation. New capabilities, like tunable dielectrics, could revolutionize how we perform sensing and electronic readout. It is our vision that a new integrated package of sensing and readout will emerge.

Also highlighted is the ability that biology gives us to fabricate materials, structures, and devices from the bottom-up. Many believe that if we are truly going to harness commercially viable nano-manufacturing, bio-inspiration is going to play a key role in making this a reality. Catalysis and self-assembly have been mastered by biological systems like enzymes and viruses, respectively. Lessons are coming from these areas and being applied to traditional solid-state electronics fields. The engineering fields are beginning to realize the possibilities and it is of paramount importance that we begin to institutionalize this in our undergraduate and graduate training programs. Numerous countries are awaking to this realization and the future technical base of the country is dependent upon the science and engineering departments of this country fostering this interdisciplinary training.