AD630697

R 442

Technical Report

DOSE-ATTENUATION VARIATION WITH INCIDENT GAMMA-RAY ENERGY IN TWO-LEGGED CONCRETE AND STEEL DUCTS

April 1966

CLEARINGHOUSE
FOR FEDERAL SCIENTIFIC AND
TECHNICAL INFORMATION

Hardcopy	Microfiche		
$2.00	$0.50	20 pp	as

ARCHIVE COPY

Code 1

U. S. NAVAL CIVIL ENGINEERING LABORATORY

Port Hueneme, California

Distribution of this document is unlimited.

DOSE-ATTENUATION VARIATION WITH INCIDENT GAMMA-RAY ENERGY IN TWO-LEGGED CONCRETE AND STEEL DUCTS

Technical Report

Y-F008-08-05-201, DASA-11.058

by

J. M. Chapman

ABSTRACT

Gamma-ray dose-attenuation factors were measured in concrete and steel ducts. For concrete, 3-foot-square and 11-inch-square ducts were used with Au^{198} (0.412 Mev), Cs^{137} (0.662 Mev), and Co^{60} (1.25 Mev) gamma-ray sources. For steel, an 11-inch-square duct was used with Cs^{137} and Co^{60} sources. Attenuation factors for given geometries were compared as a function of incident gamma-ray energy. The relative effectiveness of steel and concrete ducts of a given geometry was determined.

It was found that the attenuation factor decreases monotonically with increasing energy in concrete ducts. However, in the 11-inch steel duct the attenuation factor for the high-energy source (Co^{60}) was greater than for the low-energy source (Cs^{137}). In comparing the 11-inch concrete and 11-inch steel ducts, it was found that dose rates in the concrete duct were higher by a factor of about 2. Measured attenuation factors were compared with values obtained using a computer code based on the albedo concept. It was found that calculated attenuation factors agree to within ±30% of the measured attenuation factors.

Distribution of this document is unlimited.

Copies available at the Clearinghouse (CFSTI) $2.00.
The Laboratory invites comment on this report, particularly on the results obtained by those who have applied the information.
This work sponsored by the Defense Atomic Support Agency.

INTRODUCTION

Dose rates were measured in 3-foot-square and 11-inch-square concrete ducts, using Au^{198} (0.412 Mev), Cs^{137} (0.662 Mev), and Co^{60} (1.25 Mev) gamma-ray sources and in an 11-inch-square steel duct, using Cs^{137} and Co^{60} gamma-ray sources. These dose rates were converted to attenuation factors so that the relative shielding effectiveness of concrete and steel ducts against gamma rays of different energies could be determined.

The attenuation factor, A_f, at some point in a duct is defined as the ratio between the dose rate at that point, D, and the dose rate in air at unit distance from the source, D_o, or $A_f = D/D_o$.

Measured attenuation factors can also be compared with values calculated with a computer program.[1] This program calculates attenuation factors in two-legged ducts using the albedo concept. Results from this program were compared with measurements performed in concrete ducts by several different experimenters. These experiments covered a wide range of duct sizes and incident gamma-ray energies. Values of attenuation factors calculated with the computer program were normally within ±30% of the experimental values. The only exception was in comparison with Terrell's[2] concrete-duct studies using an Au^{198} source, for which calculated values were high by a factor of 2.2.

Terrell's were the only data in which a relationship could be found between the attenuation effectiveness of ducts and gamma-ray energy. Figure 1 was constructed from Terrell's data and shows a peculiar behavior. Instead of the experimental attenuation factors decreasing monotonically with increasing gamma-ray energy, as do the calculated values, the experimental attenuation factor for Au^{198} is less than that for Cs^{137}. This anomalous behavior is not shown by the concrete-duct measurements discussed in this report under Results.

The anomalous behavior of the attenuation factor versus gamma-ray energy curve, and the need for more low-energy data for comparison with the computer program, prompted the present experiments with the concrete ducts. The measurements in the steel duct constitute this Laboratory's first step in extending the knowledge of duct streaming to materials other than concrete. Albedo values for iron were generated by the Monte Carlo method, and the computer programs of Reference 1 were used to calculate A_f for the 11-inch steel duct for comparison with experimental results.

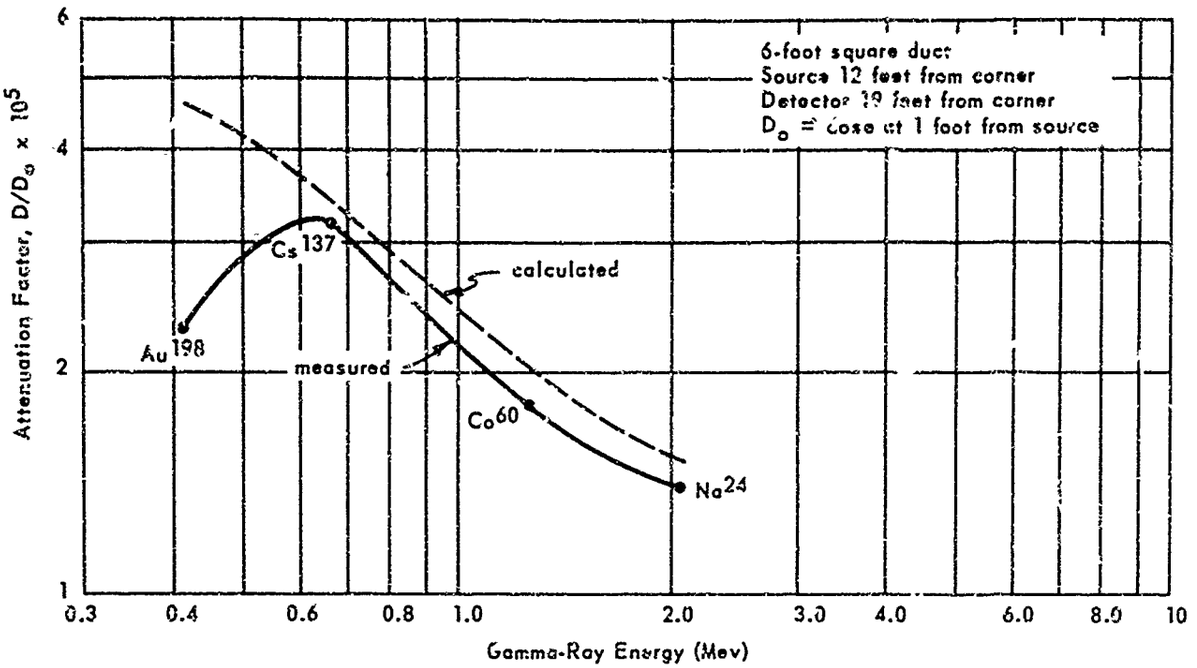

Figure 1. Variation of dose attenuation with energy for a given geometry in a 6-foot concrete duct.

ALBEDO VALUES FOR IRON AND CONCRETE

The computer calculations are based on the albedo concept. The dose rate, D, from a scattering area, A (Figure 2), is given by

$$D = \frac{D_o \alpha(E_o, \theta_o, \theta, \varphi) A \cos\theta_o}{r_1^2 r_2^2}$$

where $\alpha(E_o, \theta_o, \theta, \varphi)$ = the differential dose albedo

A = the area of the scattering surface

D_o = the dose rate at one unit length from the source

E_o = the initial energy of the gamma rays

Values for $\alpha(E_o, \theta_o, \theta, \varphi)$ have been calculated for various energies and entrance and exit angles by the Monte Carlo method. Technical Operations, Incorporated[3] performed calculations for concrete using 5,000 case histories for each energy and entrance angle, and NCEL performed calculations for both concrete and iron using 30,000 case histories.[4]

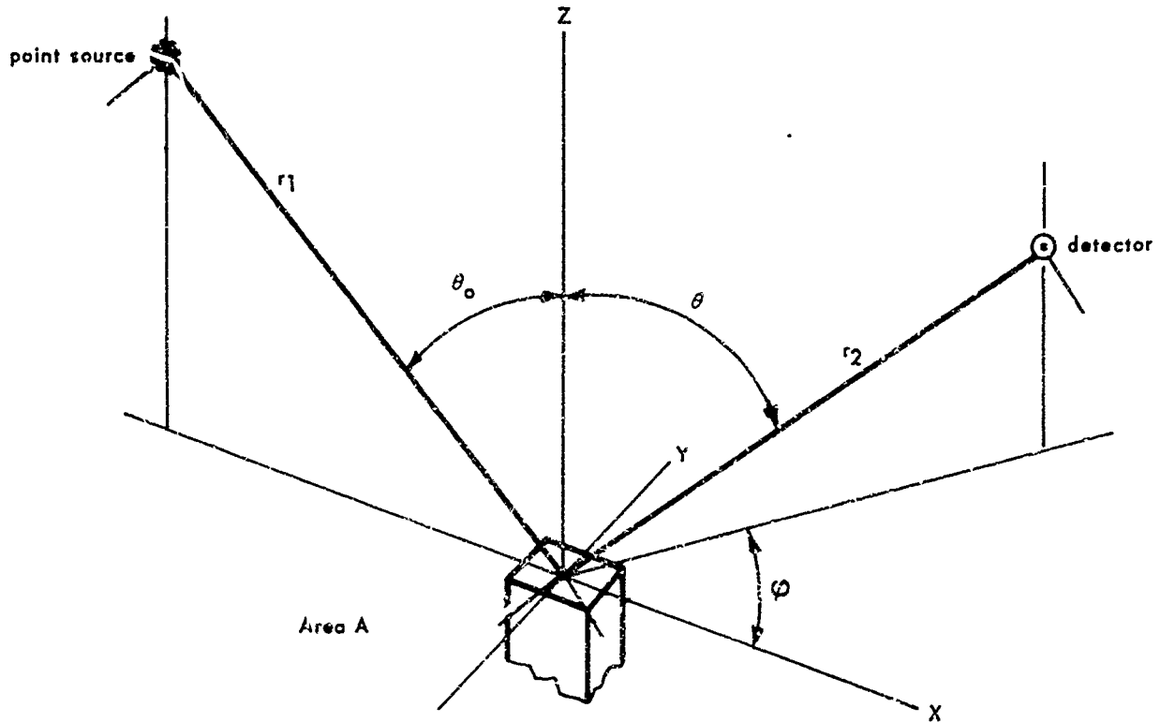

Figure 2. Scattering of gamma-rays from surface.

The equation developed by Chilton and Huddleston[5] to express the albedo for a given energy is

$$\alpha(E_o, \theta_o, \theta, \varphi) = \frac{C(E_o)\,K(\theta_s)\,10^{26} + C'(E_o)}{1 + \dfrac{\cos\theta_o}{\cos\theta}}$$

where $C(E_o)$ and $C'(E_o)$ are constants for a given energy, $K(\theta_s)$ is the Klein-Nishina differential energy-scattering coefficient for the angle, θ_s, through which the radiation is scattered. $\cos\theta_s$ is given by

$$\cos\theta_s = \sin\theta_o \sin\theta \cos\varphi - \cos\theta_o \cos\theta$$

The values of $C(E_o)$ and $C'(E_o)$ were found by a least-squares fit of the Monte Carlo data from the 30,000 case histories and are given in Table I for concrete and iron. These values are plotted in Figure 3 for concrete and Figure 4 for iron. For computation on the computer, the curves of Figures 3 and 4 were fitted by the equations:

Concrete

$$C = 0.0561\,E_o^{0.574} \qquad 0.2 \le E_o \le 4.0 \text{ Mev}$$

$$C = 0.0785\,E_o^{0.327} \qquad 4.0 < E_o \le 10.0 \text{ Mev}$$

$$C' = 0.0122\,E_o^{-0.683} \qquad 0.2 \le E_o \le 1.76 \text{ Mev}$$

$$C' = 0.00862\,E_o^{-0.0795} \qquad 1.76 < E_o \le 10.0 \text{ Mev}$$

Iron

$$C = 0.590\,E_o^{0.586} \qquad 0.175 \le E_o \le 2.0 \text{ Mev}$$

$$C' = \exp[-5.32 - 1.39 \ln E_o - 1.06 (\ln E_o)^2] \qquad 0.175 \le E_o \le 0.412$$

$$C' = 0.073 \qquad 0.412 < E_o \le 4.0 \text{ Mev}$$

The energy-absorption coefficients for iron are also necessary for use in the computer code. Values used are from Reference 6. These values are plotted as relaxation lengths (R_L) in Figure 5. For the computer, the points of Figure 5 were fit by the equations:

$$R_L = \exp[-0.676 - 2.25 \ln E - 1.13 (\ln E)^2] \qquad 0.1 \le E \le 0.336 \text{ Mev}$$

$$R_L = 1.95\,E^{0.205} \qquad 0.336 < E \le 4.0 \text{ Mev}$$

EXPERIMENTAL MEASUREMENTS

Dosimeter measurements were made in a 3-foot-square concrete duct (Figures 6 and 7), an 11-inch concrete duct (Figure 8), and an 11-inch steel duct (Figure 9). The 3-foot concrete duct had 4-inch-thick walls and was covered with approximately 2 feet of sand. The legs were each 15 feet long. The 11-inch concrete duct was made of concrete blocks and had walls from 6 to 15 inches thick. The legs were 51 inches long. The 11-inch steel duct was made of ASTM standard A7 steel, about 0.25% carbon, 0.5% manganese, 0.04% phosphorous, and 0.05% sulfur. The walls were 3 inches thick, and the legs were 50 inches long. The duct was covered with at least 3 feet of sand on each side.

Table I. The Parameters C and C' for Concrete and Iron

E (Mev)	Concrete		Iron	
	C	C'	C	C'
0.175	—	—	0.0190 ± 0.0007	0.0022 ± 0.0013
0.200	0.0224 ± 0.0010	0.0366 ± 0.0017	0.0226 ± 0.0007	0.0030 ± 0.0012
0.279	—	—	0.0280 ± 0.0007	0.0051 ± 0.0009
0.412	0.0344 ± 0.0009	0.0218 ± 0.0008	0.0358 ± 0.0008	0.0073 ± 0.0007
0.500	0.0364 ± 0.0009	0.0200 ± 0.0007	—	—
0.662	0.0435 ± 0.0010	0.0161 ± 0.0006	0.0469 ± 0.0009	0.0073 ± 0.0005
1.00	0.0557 ± 0.0011	0.0117 ± 0.0004	0.0597 ± 0.0011	0.0061 ± 0.0004
1.25	0.0665 ± 0.0013	0.0107 ± 0.0004	0.0664 ± 0.0013	0.0090 ± 0.0004
2.00	0.0846 ± 0.0016	0.00814 ± 0.00026	0.0883 ± 0.0016	0.0066 ± 0.0002
4.00	0.1222 ± 0.0029	0.00761 ± 0.00020	0.0880 ± 0.0023	0.0079 ± 0.0002
6.00	0.1439 ± 0.0041	0.00767 ± 0.00018	—	—
10.00	0.1653 ± 0.0056	0.00708 ± 0.00014	—	—

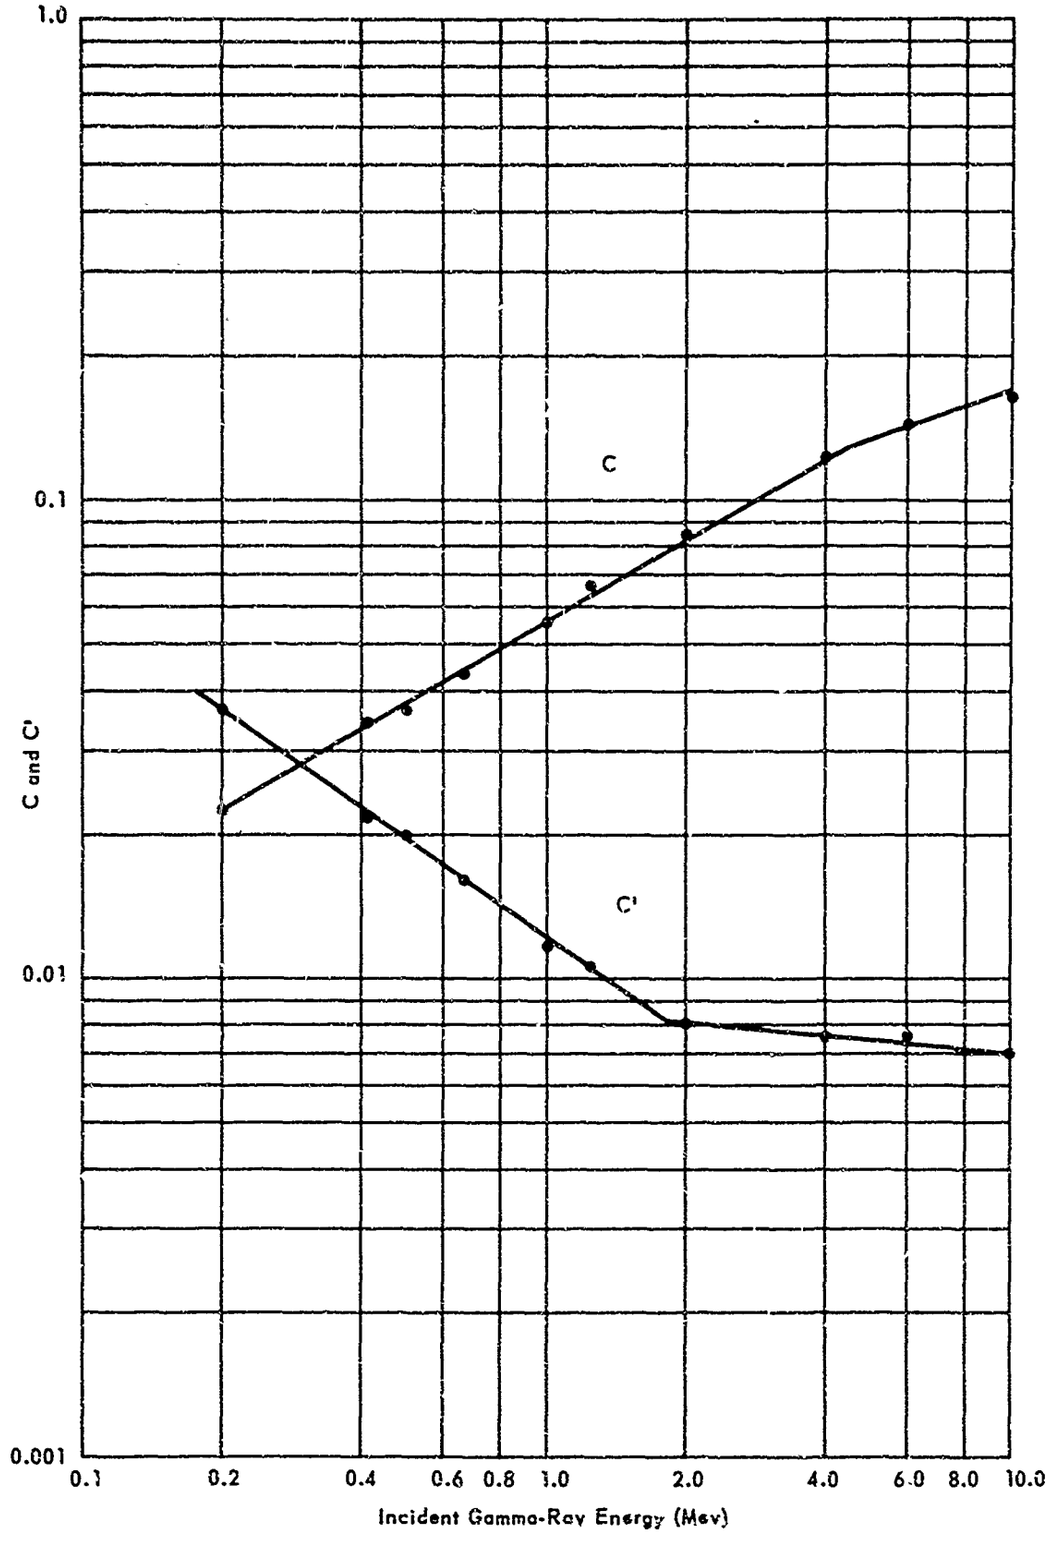

Figure 3. Parameters C and C' versus energy for concrete.

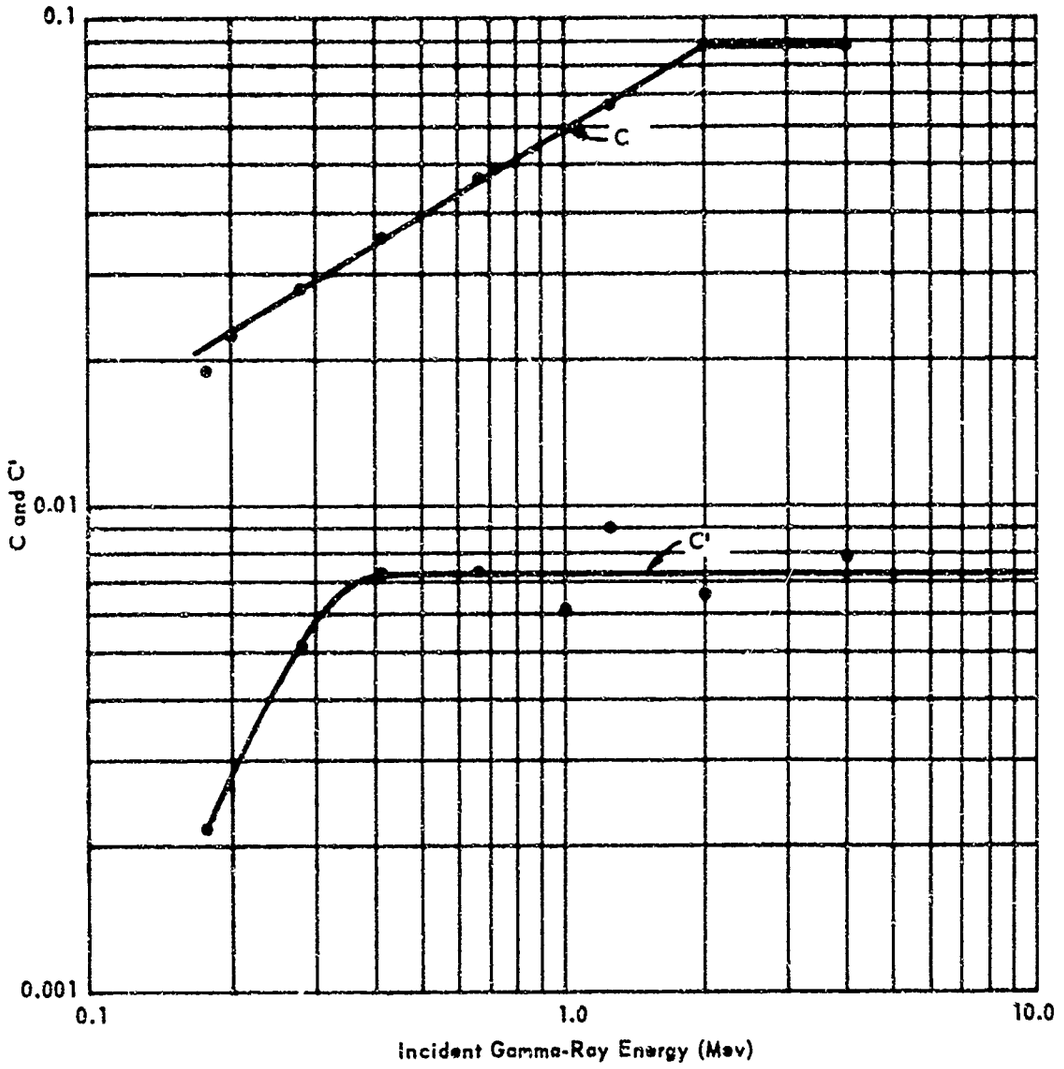

Figure 4. Parameters C and C' versus energy for iron.

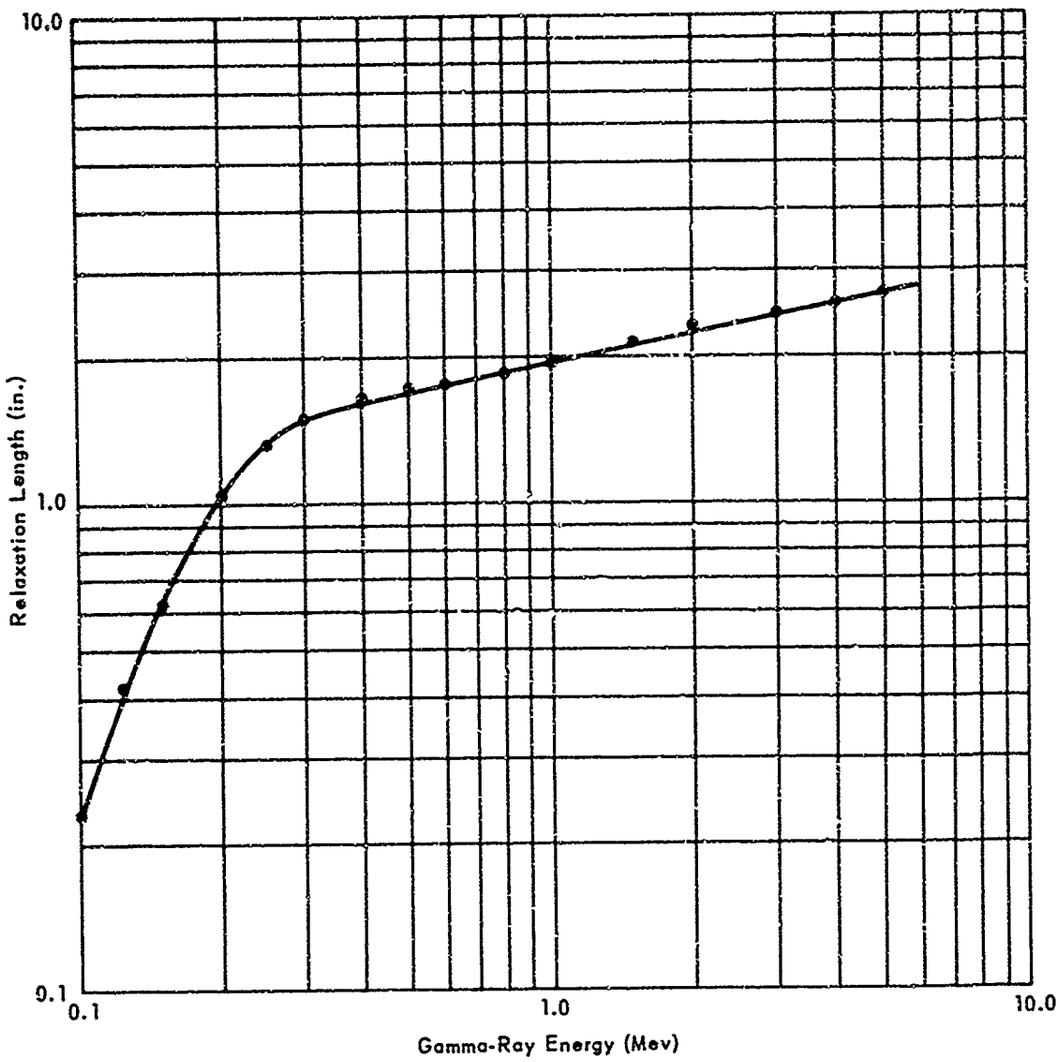

Figure 5. Relaxation length versus gamma-ray energy for iron.

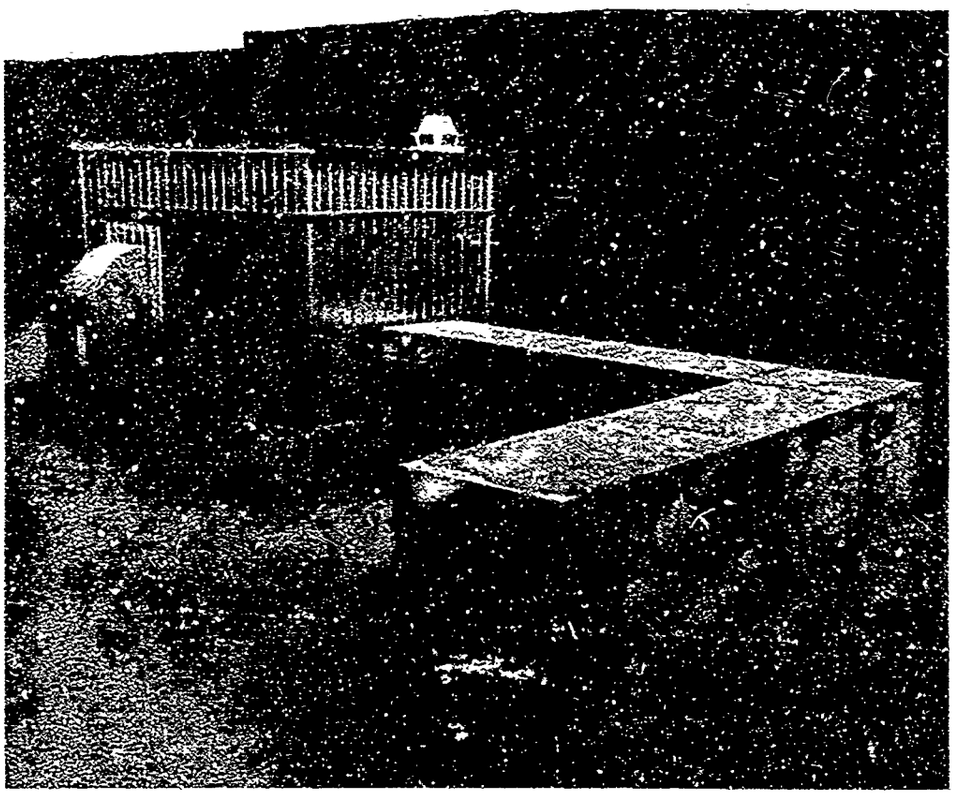

Figure 6. The 3-foot duct, adjacent to the neutron-generator room, shown without shielding.

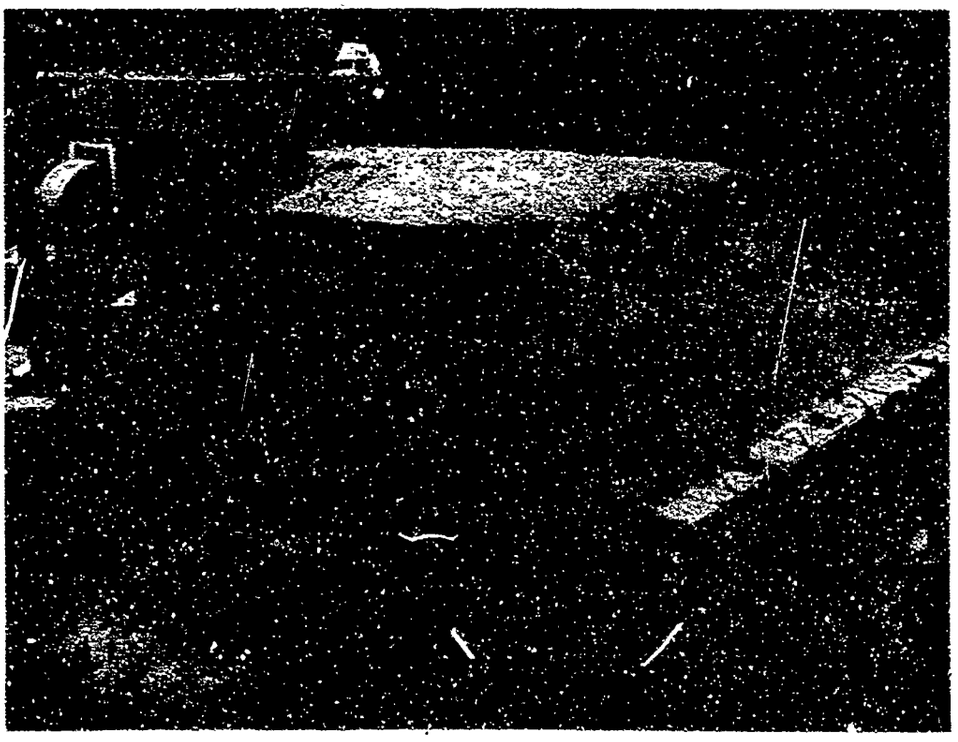

Figure 7. The 3-foot duct shielded with sand.

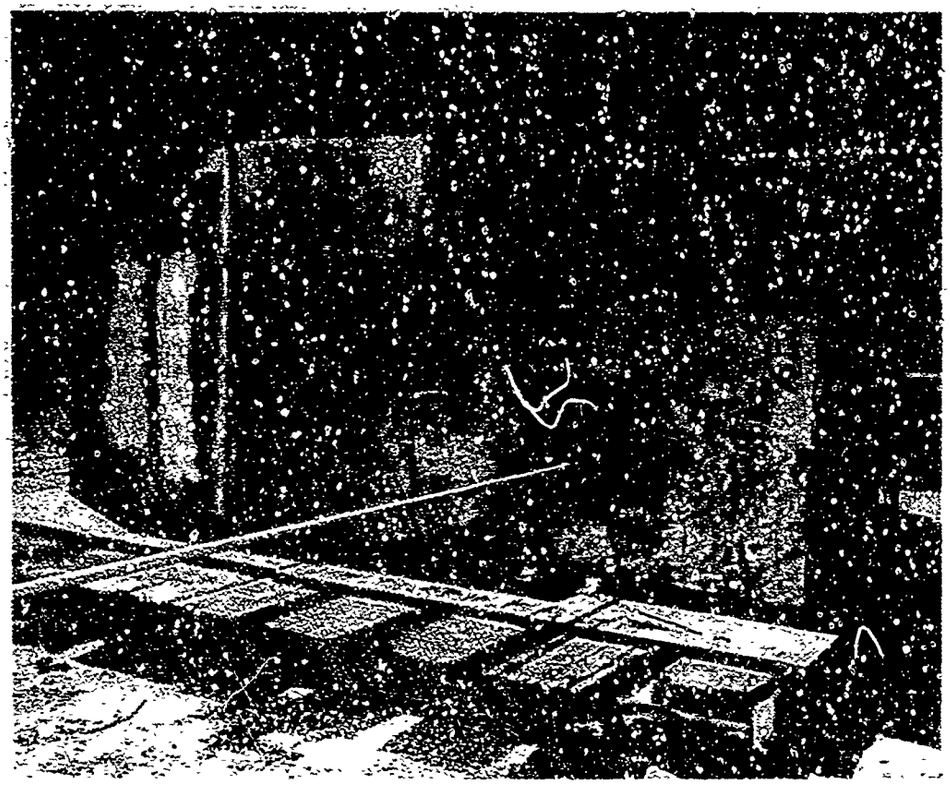

Figure 8. The 11-inch duct. The source is held in the wooden cup attached to the end of the aluminum tube.

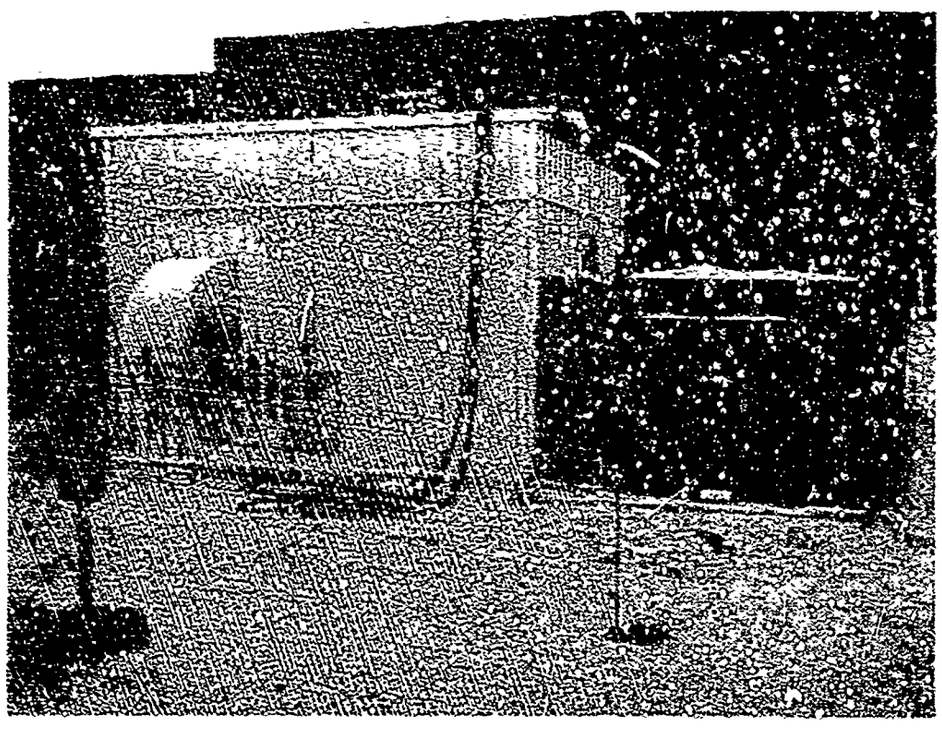

Figure 9. The 11-inch steel duct, covered with approximately 3 feet of sand.

The dosimeters used were the 1-r, 100-mr, and 10-mr chambers from a Landsverk L-64 dosimeter set. Those readings for which the dosimeter was in direct view of the source were taken with a 3/8-inch bakelite sleeve around the dosimeter, as recommended by the manufacturer. The variation observed for an individual dosimeter was about 2%, but the variation from dosimeter to dosimeter was about 10%. The measurements were therefore considered accurate to within ±10%.

Source strengths were determined by measuring the dose rates from 3 feet to 8 feet from the source. For these measurements, the source and dosimeter were 6-1/2 feet from the ground, so build-up was expected to be small. Dose rate to source strength conversions were made, using the point source gamma-ray dose-rate constant Γ (r/hr from 1 millicurie at 1 centimeter), given in Table 1B of Reference 7. These are 12.8 for Co^{60}, 3.2 for Cs^{137}, and 2.35 for Au^{198}.

Gamma-ray spectra of the sources were measured with a collimated 3 x 3-inch NaI(Tl) crystal and a multichannel analyzer. These spectra showed no extraneous gamma rays. Source strengths calculated from the spectra agreed with those measured by dosimeters to within ±10%.

The Co^{60} and Cs^{137} measurements for the 3-foot concrete duct were taken from previous work.[8] At the time of that work, the source strengths were 2.4 curies for Co^{60} and 0.79 curies for Cs^{137} (erroneously reported as 0.60 curies). In the measurements of the 11-inch concrete duct discussed here, the source strengths were 2.1 curies for Co^{60} and 0.78 curies for Cs^{137}. The length of time required to perform the present experiments necessitated having two Au^{198} sources. The first was 11.0 curies, and the second was 15.5 curies. All readings taken with the two Au^{198} sources were normalized to their original strengths, using a half-life of 2.7 days.

During the measurements of the 11-inch steel duct, the source strengths were 2.00 curies for Co^{60} and 0.77 curies for Cs^{137}.

All duct dosimeter measurements were taken with the source and dosimeter on the centerline of the duct. For the 3-foot duct, the source was placed in a lucite cup and suspended from a thin metal stand. The dosimeters were hung from the ceiling of the duct with string and tape. Placement of the source and dosimeter was accurate to within 1/2 inch. For the 11-inch duct, the source was placed in a thin wooden cup on the end of a thin aluminum tube, and the tube was inserted into the duct. Dosimeters were held on a thin wood grid which could be accurately placed in the duct. Placement of source and dosimeter in the 11-inch duct was accurate to within 1/10 inch.

RESULTS

Measured dose rates, D, versus centerline distance, C_L, are listed in Tables II-IV for the 3-foot concrete duct with L_1 = 6 feet,* the 3-foot concrete duct with L_1 = 7-1/2 feet, and the 11-inch concrete duct with L_1 = 45.4 inches. Measured dose rates for the 11-inch steel duct with L_1 = 45.4 inches are listed in Table V. In these tables, the dose rates are converted to attenuation factors and compared to calculated attenuation factors.

As can be seen from Tables II-IV, the attenuation factors show a monotonic decrease with increasing energy for concrete. This is seen better in Figure 10, which shows measured and calculated attenuation factors versus energy for three given duct geometries. However, in the 11-inch steel duct the experimental attenuation factors for the higher energy (Co^{60}) are greater than those for the lower energy (Cs^{137}). This is a surprising result that is believed to be a true representation, as the 10 to 40% difference between these attenuation factors is well outside the experimental error.

From Table V it can be seen that the computer program, which gave good results for concrete ducts (normally within ±30% of experimental values), also gives good results for steel ducts. The computer values of attenuation factors, however, are monotonically decreasing with increasing energy. This indicates that if the oddity in the experimental results is real, it is due to some effect not considered in the calculations.

The attenuation effectiveness of steel and concrete ducts can be compared from Tables IV and V. Dose rates are higher in the concrete duct by a factor of about 2.1 for Cs^{137} and about 1.6 for Co^{60}. Higher dose rates for concrete ducts would be expected. This is because for iron there would be less backscattering, due to the higher-photoelectric-effect cross section of iron and less corner-lip penetration and inscatter, due to the larger energy-absorption coefficient of iron.

FINDINGS

A computer program[1] for calculating gamma-ray dose-attenuation factors in two-legged concrete ducts has generally given good agreement with experiment. An exception was the experimental results obtained with gamma rays from Au^{198},[2] which were in poor agreement with predictions from the computer code. The present measurements in concrete ducts using Au^{198}, Cs^{137}, and Co^{60} gamma-ray sources in three different duct configurations show good agreement between experiment and theory and no anomalous behavior for Au^{198}.

---

* L_1 is the distance from the source to the center of the corner.

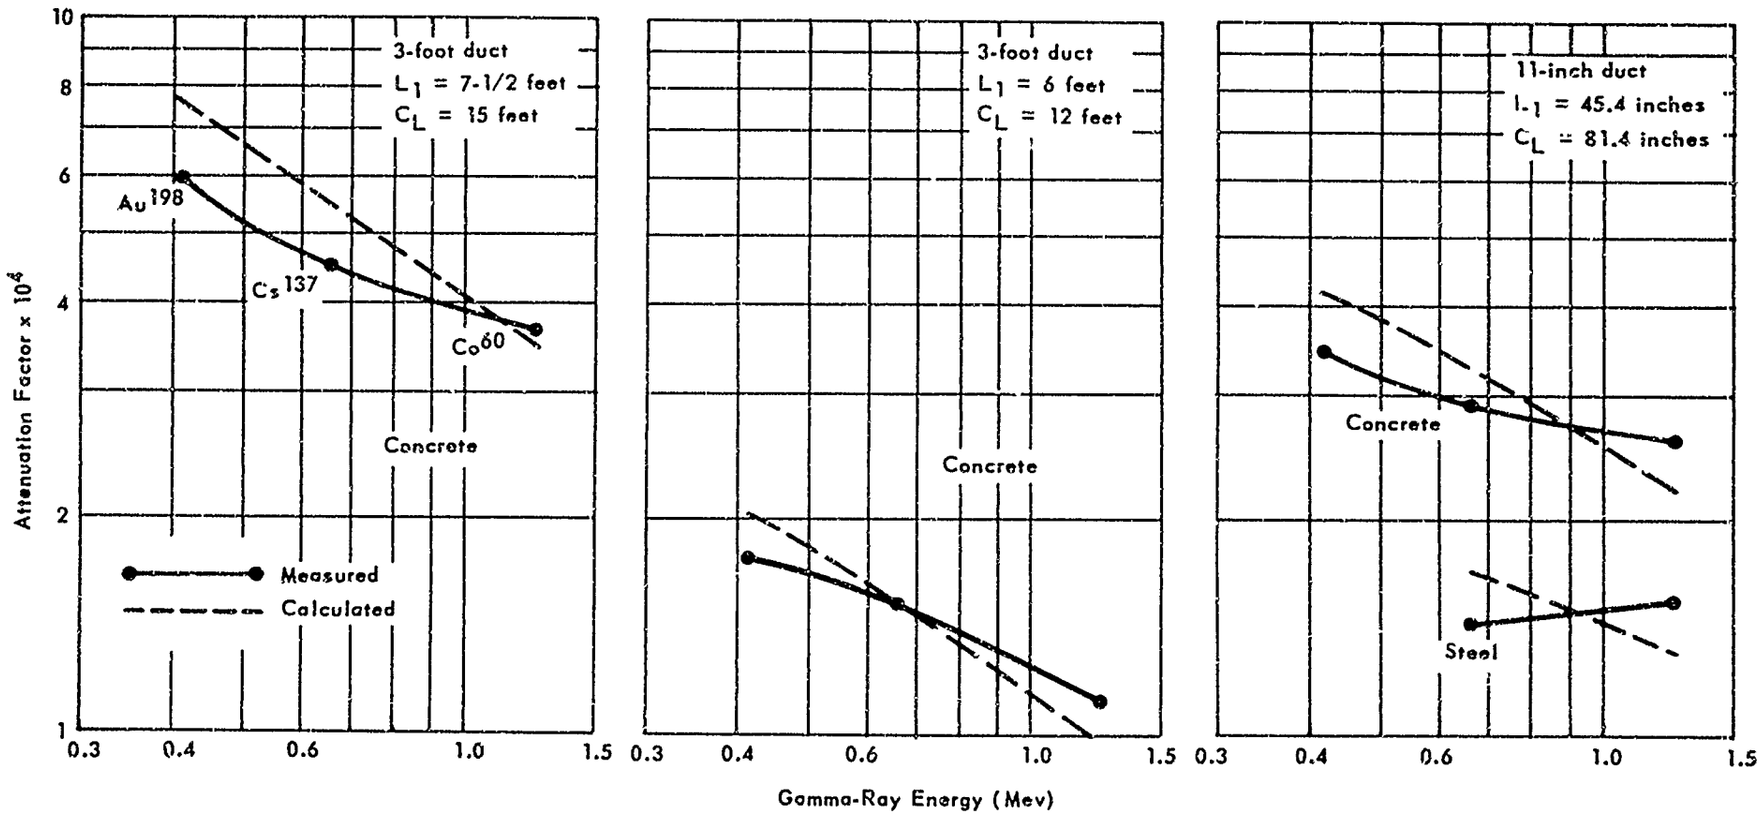

Figure 10. Variation of measured and calculated attenuation coefficients with energy for three given duct geometries.

Table II. Measured Dose Rates and Attenuation Factors, and Calculated Attenuation Factors in the 3-Foot Concrete Duct (L_1 = 6 Feet)1/

C_L (ft)	2.4-Curie Co^{60} ($D_o = 3.31 \times 10^4$ mr/hr)				0.79-Curie Cs^{137} (D_o = 2,725 mr/hr)				15.5-Curie Au^{198} ($D_o = 3.93 \times 10^4$ mr/hr)			
	D (mr/hr)	$A_f \times 10^4$		Diff. (%)	D (mr/hr)	$A_f \times 10^4$		Diff. (%)	D (mr/hr)	$A_f \times 10^4$		Diff. (%)
		Meas.	Calc.			Meas.	Calc.			Meas.	Calc.	
2	9,600	—	—	—	—	—	—	—	—	—	—	—
3	—	—	—	—	347	—	—	—	—	—	—	—
4	2,670	—	—	—	213	—	—	—	3,450	—	—	—
5	—	—	—	—	138	—	—	—	—	—	—	—
6	1,250	—	—	—	100	—	—	—	1,532	—	—	—
9	95.0	—	—	—	7.60	—	—	—	139	—	—	—
10	37.8	—	—	—	3.68	—	—	—	—	—	—	—
11	20.0	6.04	5.95	-1	2.03	7.45	9.36	+26	37.6	9.57	12.7	+33
12	12.1	3.66	3.43	-6	1.22	4.48	5.41	+21	23.3	5.93	7.37	+24
13	7.82	2.36	2.19	-7	0.841	3.09	3.46	+12	15.6	3.97	4.69	+18
14	—	—	—	—	0.601	2.21	—	—	11.1	2.83	3.24	+14
15	3.94	1.19	1.08	-9	0.450	1.65	1.70	+3	—	—	—	—

1/ $A_f = D/D_o$; D_o is the dose rate at 1 foot from the source; percentage of difference = (calculated - measured/measured) 100

Table III. Measured Dose Rates and Attenuation Factors, and Calculated Attenuation Factors in the 3-Foot Concrete Duct (L_1 = 7-1/2 Feet)

(See footnote on Table II)

C_L (ft)	2.4-Curie Co^{60} ($D_o = 3.31 \times 10^4$ mr/hr)				0.79-Curie Cs^{137} (D_o = 2,725 mr/hr)				11.0-Curie Au^{198} ($D_o = 2.79 \times 10^4$ mr/hr)			
	D (mr/hr)	$A_f \times 10^4$		Diff. (%)	D (mr/hr)	$A_f \times 10^4$		Diff. (%)	D (mr/hr)	$A_f \times 10^4$		Diff. (%)
		Meas.	Calc.			Meas.	Calc.			Meas.	Calc.	
3-1/2	3,555	—	—	—	276	—	—	—	3,250	—	—	—
4-1/2	—	—	—	—	—	—	—	—	1,950	—	—	—
5-1/2	1,508	—	—	—	122	—	—	—	1,350	—	—	—
7-1/2	835	—	—	—	68.5	—	—	—	725	—	—	—
9-1/2	—	—	—	—	—	—	—	—	183	—	—	—
10-1/2	50.6	—	—	—	4.05	—	—	—	52.4	—	—	—
11-1/2	20.8	—	—	—	1.97	—	—	—	25.5	—	—	—
12-1/2	11.4	3.44	3.05	-11	1.10	4.04	4.79	+19	14.5	5.20	6.47	+24
13-1/2	6.93	2.09	1.79	-14	0.690	2.53	2.83	+12	8.96	3.21	3.81	+19
15	3.68	1.11	0.962	-13	0.412	1.51	1.51	0	4.93	1.77	2.03	+15
16	—	—	—	—	—	—	—	—	3.59	1.29	1.45	+12

Table IV. Measured Dose Rates and Attenuation Factors, and Calculated Attenuation Factors in the 11-Inch Concrete Duct (L_1 = 45.4 Inches)

(See footnote on Table II)

C_L (in.)	2.1-Curie Co^{60} ($D_o = 2.90 \times 10^4$ mr/hr)				0.78-Curie Cs^{137} (D_o = 2,690 mr/hr)				15.5-Curie Au^{198} ($D_o = 3.93 \times 10^4$ mr/hr)			
	D (mr/hr)	$A_f \times 10^4$		Diff. (%)	D (mr/hr)	$A_f \times 10^4$		Diff. (%)	D (mr/hr)	$A_f \times 10^4$		Diff. (%)
		Meas.	Calc.			Meas.	Calc.			Meas.	Calc.	
36.4	—	—	—	—	435	—	—	—	6,600	—	—	—
40.9	—	—	—	—	349	—	—	—	—	—	—	—
45.4	3,160	—	—	—	279	—	—	—	3,900	—	—	—
58.9	—	—	—	—	—	—	—	—	170	—	—	—
63.4	56.5	—	—	—	4.90	—	—	—	85.2	—	—	—
67.9	29.7	10.2	8.68	-15	2.73	10.1	12.9	+28	46.7	11.9	16.7	+40
72.4	17.0	5.86	4.99	-15	1.66	6.17	7.44	+21	29.3	7.46	9.62	+29
76.9	10.6	3.65	3.19	-13	1.13	4.20	4.75	+13	19.0	4.84	6.10	+26
81.4	7.50	2.59	2.18	-16	0.782	2.90	3.23	1	13.5	3.44	4.13	+20

Table V. Measured Dose Rates and Attenuation Factors, and Calculated Attenuation Factors in the 11-Inch Steel Duct (L_1 = 45.4 Inches)

(See footnote on Table II)

C_L (in.)	2.00-Curie Co^{60} ($D_o = 2.76 \times 10^4$ mr/hr)				0.77-Curie Cs^{137} (D_o = 2,656 mr/hr)			
	D (mr/hr)	$A_f \times 10^4$		Diff. (%)	D (mr/hr)	$A_f \times 10^4$		Diff. (%)
		Meas.	Calc.			Meas.	Calc.	
22.9	9,988	—	—	—	943	—	—	—
27.4	6,800	—	—	—	676	—	—	—
31.9	—	—	—	—	508	—	—	—
40.9	3,230	—	—	—	309	—	—	—
45.4	2,767	—	—	—	250	—	—	—
58.9	—	—	—	—	4.62	—	—	—
63.4	30.5	—	—	—	2.19	—	—	—
67.9	17.3	6.27	4.19	-33	1.22	4.59	5.49	+20
72.4	10.2	3.70	2.65	-18	0.778	2.93	3.46	+18
76.9	6.33	2.29	1.80	-21	0.513	1.93	2.35	+22
81.4	4.25	1.54	1.29	-16	0.376	1.42	1.68	+18
86.9	2.86	1.04	0.959	-8	—	—	—	—

Measurements were also made in a steel duct using Cs^{137} and Co^{60} gamma-ray sources, and the computer program, using the backscattering and attenuation parameters for iron, was used to obtain calculated values of attenuation factors. Good agreement between calculated and experimental values was obtained for the steel duct. An oddity in the measurements in the steel duct, however, was that the experimental attenuation factors for Cs^{137} are less than those for Co^{60}. This oddity is unexplained and does not appear in the calculated attenuation factors.

In comparing the effectiveness of concrete and steel ducts in attenuating gamma radiation, it was found that dose rates in the second leg of a concrete duct were higher than in a steel duct by a factor of 2.1 for Cs^{137} and a factor of 1.6 for Co^{60}.

REFERENCES

1. U. S. Naval Civil Engineering Laboratory Technical Report R-264: Computer calculation of dose rates in two-legged ducts using the albedo concept, by J. M. Chapman. Port Hueneme, Calif., Oct. 1963.

2. Armour Research Foundation Report ARF 1158-A01-5, Final report on Contract NBy-3185: Radiation streaming in shelter entranceways, by C. W. Terrell, et al. Chicago, Ill., July 1961.

3. Technical Operations, Inc. Report TO-B61-39 on Contract NBy-32190: Monte Carlo calculations on the reflection and transmission of scattered gamma radiation (revised), by D. J. Raso. Burlington, Mass., May 1962.

4. U. S. Naval Civil Engineering Laboratory Technical Note N-764: Monte Carlo calculations of gamma-ray albedo, by C. M. Huddleston and N. F. Shoemaker. Port Hueneme, Calif., Sept. 1965.

5. A. B. Chilton and C. M. Huddleston, "A semiempirical formula for differential dose albedo for gamma rays on concrete," Nuclear Science and Engineering, vol. 17, pp. 419-424.

6. U. S. National Bureau of Standards Report 8681: Photon attenuation and energy transfer coefficients. Tabulations and discussion, by J. H. Hubbell and M. J. Berger. Washington, D. C., May 1965.

7. Gerald J. Hine. "Tables of data useful for dose calculations," Radiation Dosimetry (Appendix), edited by Gerald J. Hine and Gordon L. Brownell. Academic Press Inc., New York, 1956.

8. U. S. Naval Civil Engineering Laboratory Technical Report R-325: Gamma-ray dose rates and energy spectra in a 3-foot square duct, by J. M. Chapman, Port Hueneme, Calif., Oct. 1964.

Unclassified
Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) U. S. Naval Civil Engineering Laboratory Port Hueneme, California 93041	2a. REPORT SECURITY CLASSIFICATION Unclassified 2b. GROUP

3. REPORT TITLE

Dose-Attenuation Variation With Incident Gamma-Ray Energy in Two-Legged Concrete and Steel Ducts

4. DESCRIPTIVE NOTES (Type of report and inclusive dates)

Not final; December 1964 - October 1965

5. AUTHOR(S) (Last name, first name, initial)

Chapman, J. M.

6. REPORT DATE April 1966	7a. TOTAL NO. OF PAGES 29	7b. NO. OF REFS 8
8a. CONTRACT OR GRANT NO. DASA-11.058 b. PROJECT NO. Y-F008-08-05-201 c. d.	9a. ORIGINATOR'S REPORT NUMBER(S) TR-442 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	

10. AVAILABILITY/LIMITATION NOTICES

Distribution of this document is unlimited.

11. SUPPLEMENTARY NOTES Copies available at the Clearinghouse (CFSTI) $2.00	12. SPONSORING MILITARY ACTIVITY DASA-BUDOCKS

13. ABSTRACT

Gamma-ray dose-attenuation factors were measured in concrete and steel ducts. For concrete, 3-foot-square and 11-inch-square ducts were used with Au^{198} (0.412 Mev), Cs^{137} (0.662 Mev), and Co^{60} (1.25 Mev) gamma-ray sources. Attenuation factors for given geometries were compared as a function of incident gamma-ray energy. The relative effectiveness of steel and concrete ducts of a given geometry was determined.

It was found that the attenuation factor decreases monotonically with increasing energy in concrete ducts. However, in the 11-inch steel duct the attenuation factor for the high-energy source (Co^{60}) was greater than for the low-energy source (Cs^{137}). In comparing the 11-inch concrete and 11-inch steel ducts, it was found that dose rates in the concrete duct were higher by a factor of about 2. Measured attenuation factors were compared with values obtained using a computer code based on the albedo concept. It was found that calculated attenuation factors agree to within ±30% of the measured attenuation factors.

DD FORM 1 JAN 64 1473 0101-807-6800

Unclassified
Security Classification

Unclassified
Security Classification

14. KEY WORDS	LINK A ROLE	LINK A WT	LINK B ROLE	LINK B WT	LINK C ROLE	LINK C WT
Dose-attenuation						
Variation						
Gamma-rays						
Concrete ducts						
Steel ducts						
Two-legged						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization *(corporate author)* issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers *(either by the originator or by the sponsor)*, also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

(1) "Qualified requesters may obtain copies of this report from DDC."

(2) "Foreign announcement and dissemination of this report by DDC is not authorized."

(3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."

(4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."

(5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring *(paying for)* the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as *(TS)*, *(S)*, *(C)*, or *(U)*.

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

Unclassified
Security Classification