AEDC-TR-66-82

FLOW QUALITY IMPROVEMENT AT MACH 8 IN THE VKF 50-INCH HYPERSONIC WIND TUNNEL B

C. R. Fitch

ARO, Inc.

May 1966

PROPERTY OF U. S. AIR FORCE
AEDC LIBRARY
AF 40(600)1200

Distribution of this document is unlimited.

VON KÁRMÁN GAS DYNAMICS FACILITY
ARNOLD ENGINEERING DEVELOPMENT CENTER
AIR FORCE SYSTEMS COMMAND
ARNOLD AIR FORCE STATION, TENNESSEE

TECHNICAL REPORTS
FILE COPY

PROPERTY OF U.S. AIR FORCE
AEDC TECHNICAL LIBRARY

NOTICES

When U. S. Government drawings specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified users may obtain copies of this report from the Defense Documentation Center.

References to named commercial products in this report are not to be considered in any sense as an endorsement of the product by the United States Air Force or the Government.

FLOW QUALITY IMPROVEMENT AT MACH 8 IN THE VKF 50-INCH HYPERSONIC WIND TUNNEL B

C. R. Fitch
ARO, Inc.

Distribution of this document is unlimited.

AF - AEDC
Arnold AFS Tenn

FOREWORD

The work reported herein was sponsored by the Arnold Engineering Development Center (AEDC), Air Force Systems Command (AFSC) under Program Element 65402234.

The results of research presented herein were obtained by ARO, Inc. (a subsidiary of Sverdrup & Parcel and Associates, Inc.), contract operator of AEDC, AFSC, Arnold Air Force Station, Tennessee, under Contract AF40(600)-1200. The research was conducted from March 1965 to February 1966 under ARO Project No. VT3116, and the manuscript was submitted for publication on March 23, 1966.

The author wishes to acknowledge the suggestions and assistance received from Messrs. W. C. Moger, Scientific Computing Services, and J. G. Gale, Engineering Support Facility.

This technical report has been reviewed and is approved.

Donald E. Beitsch
Major, USAF
AF Representative, VKF
DCS/Test

Jean A. Jack
Colonel, USAF
DCS/Test

ABSTRACT

Flow quality within the 50-in. hypersonic tunnel at a nominal Mach number of 8 is discussed. The nozzle and throat were recently remachined to closer tolerances which resulted in improved test section flow quality. Measurements of the contoured nozzle ordinates and Mach number distributions are presented along with results from method of characteristics solutions of design and actual measured wall contours.

CONTENTS

		Page
	ABSTRACT	iii
	NOMENCLATURE	vi
I.	INTRODUCTION	1
II.	WIND TUNNEL	1
III.	RESULTS AND DISCUSSION	2
IV.	CONCLUSIONS	5
	REFERENCES	5

ILLUSTRATIONS

Figure		
1.	Tunnel B	
	a. Tunnel Assembly	7
	b. Tunnel Test Section	7
2.	Test Section Centerline Calibration with Old and New Throat Sections	8
3.	Test Section Centerline Calibration with an Artificial Disturbance	9
4.	Relative Smoothness of Nozzle before and after Remachining	10
5.	Test Section Centerline Calibration before and after Remachining	11
6.	Computer-Analysis of Centerline Focusing	
	a. Longitudinal Distribution	12
	b. Lateral Distribution	13

TABLE

I. Coordinates of Tunnel B (M = 8) 14

NOMENCLATURE

M	Mach number
$M_{\mathbb{C}}$	Mach number on axial centerline of tunnel
p_o	Stilling chamber pressure, psia
p_o'	Total pressure behind normal shock wave, psia
T_o	Stilling chamber temperature, °R
y	Ordinate perpendicular to axial centerline of tunnel, in.
Δy	Ordinate measured minus design ordinate, in.
Z	Measure of curvature defined in Fig. 4, in.
γ	Specific heat ratio
δ	Boundary-layer thickness, in.
δ^*	Boundary-layer displacement thickness, in.

SECTION I
INTRODUCTION

The initial calibration of the 50-in. hypersonic Mach 8 tunnel (Gas Dynamic Wind Tunnel, Hypersonic (B)) in 1959 showed that the flow was nearly uniform everywhere excluding a small core in proximity to the axial centerline. At that location a sine-wave-shaped distribution in Mach number with an amplitude several times the off-center deviation was evidenced. This flow situation was quite common to axisymmetric supersonic wind tunnels and was more or less accepted until 1963 when the initial calibration of the Mach 10 tunnel (Gas Dynamic Wind Tunnel, Hypersonic (C)) showed negligible centerline focusing. Of course, Tunnel C had a much thicker boundary layer because of its higher Mach number, lower expansion angle, and increased length. The thicker boundary layer was thought to perhaps absorb any machining errors more readily.. With the use of the AEDC high-speed digital computer (IBM 7074), after the formation of Scientific Computing Services, and with the advent of increased precision requirements of wind tunnel testing, it was decided to investigate the disturbance focusing problem in Tunnel B. The problem has been solved to the extent that the flow quality in Tunnel B is as good or better than that of Tunnel C and is discussed herein.

SECTION II
WIND TUNNEL

Tunnel B is an axisymmetric, continuous, variable-density, hypersonic wind tunnel with a 50-in. -diam test section. Interchangeable throats provide nominal test Mach numbers of 6 and 8. At Mach 6, the stilling chamber pressure can be varied from 10 to 300 psia. Stagnation temperatures up to 1260°R are available. At Mach 8, the stilling chamber pressure can be varied from 50 to 900 psia at a stagnation temperature up to 1360°R.

Details of Tunnel B and associated equipment are shown in Fig. 1. As illustrated, the tunnel is equipped with a mechanism which can inject a model into the test section for a test run and then retract it into a chamber where model cooling or changes can be accomplished while the tunnel is running.

The aerodynamic design and operation of the tunnel is discussed in Ref. 1. The coordinates of the nozzle were obtained by adding a boundary-layer displacement thickness (δ^*) to an inviscid expansion

determined by the method of characteristics. The inviscid design is basically that of Cresci (Ref. 2) where an initial expansion section is required to produce radial flow (that of a spherical source). The downstream portion of the nozzle accepts the radial flow and produces uniform parallel flow at the exit as shown in Refs. 1 and 2. The boundary-layer displacement thickness was determined by the Sivells-Payne method of Ref. 3. Both the Cresci and the Sivells-Payne schemes have been programmed on the AEDC high-speed digital computer (IBM 7074). Table I contains an abbreviated listing of coordinates applicable to the new throat and the remachined downstream contour of Tunnel B.

The test section Mach number distribution was measured using a top-window-mounted, cantilevered rake containing 17 impact pressure probes, 3/32-in. in diameter, spaced 1 in. apart. The rake was carefully aligned so that the center probe was on the geometrical longitudinal tunnel centerline when traversed fore and aft. This was considered important because of the inherent focusing of flow in axisymmetric wind tunnels.

Mach number was calculated from

$$\frac{p_o'}{p_o} = \left[\frac{(\gamma + 1) M^2}{(\gamma - 1) M^2 + 2}\right]^{\frac{\gamma}{\gamma-1}} \left[\frac{\gamma + 1}{2\gamma M^2 - (\gamma - 1)}\right]^{\frac{1}{\gamma-1}}$$

The specific heat ratio, γ, was taken to be 1.4. The precision of p_o' and p_o measurements was estimated to be within 1 percent of the reading.

SECTION III
RESULTS AND DISCUSSION

The aerodynamic design and the flow quality associated with the 50-in. hypersonic tunnel is discussed in Ref. 1. The reference indicates that along the axial centerline of the tunnel in an area of frequent model testing, there was a nonuniformity in Mach number of approximately 0.3. Figure 2 illustrates the centerline Mach number distribution near the midpoint of the 54-in.-long test section (p_o = 600 psia). This nonuniformity was confined to the tunnel centerline and was shown (Ref. 1) to be somewhat detrimental to local measurements on some wind tunnel models.

The axisymmetric Tunnel B nozzle is fabricated in several sections (Fig. 2): a throat section, five contoured sections, and a cone-frustum

test section. The centerline focused nonuniformity of concern occurs at station 270. Characteristics associated with the disturbance (obtained from the design inviscid flow field) are illustrated in Fig. 2. If a contour error were to exist, it would have to be either near station 120 or in the throat section as shown in the figure.

The first step in seeking flow improvement was to build a new throat section as part of a general maintenance and modernization program as indicated in Ref. 1. The old throat had a radius of curvature to throat radius ratio of 5, and was defined by an analytical expression (a cubic for the entrance and a semicubic for the supersonic portion, Ref. 1). The new throat section was designed to have a radius of curvature to throat radius ratio of 20 and was defined by (1) the method of characteristics (Ref. 4) where the flow was supersonic, (2) transonic theory (Ref. 5) at the throat, and (3) a cubic for the entrance region. These changes in aerodynamic design of the throat region were believed to give better assurance that radial flow would be achieved at the inflection point, and the improved flow experienced at Mach 10 (Ref. 1) was partly attributed to the larger radius of curvature.

As shown in Fig. 2, however, the replacement of throat sections did not improve the flow uniformity. A slight over-all level shift was caused by a small change in throat diameter. The conclusion then was that an axisymmetric error existed in the contour near station 120. Figure 3 shows the results of a simple experiment where an axisymmetric disturbance, consisting of three layers of stairstep-fashioned pressure-sensitive tape (Scotch® No. 33), was affixed to the wall at station 117 (a fabrication joint). Centerline Mach number disturbance with an amplitude of five times that obtained with no tape resulted (Fig. 3), indicating that a contour error of a few thousandths of an inch was probably present in this vicinity.

Since absolute ordinate measurements of the nozzle near station 120 would be difficult to obtain without tunnel disassembly, a simple curvature gage was used to inspect the contour. The gage was 24 in. in length, with a dial indicator at the midpoint. Two legs at each end (1 in. apart) insured that the gage was always aligned with the tunnel centerline. The results of these measurements along with the calculated desired curvature are shown in the lower curve in Fig. 4. The measurements were repeatable to 0.001 in.

Although Fig. 4 shows only relative changes along the nozzle, it does imply that the contour, when assembled, was not within the specified ±0.002 tolerance. Based on these measurements along with some diametrical measurements, it was decided to remachine the contour (excepting the throat section) to as close a tolerance as possible with the available equipment. Curvature measurements after machining,

given in the upper curve in Fig. 4, indicated a much better contour than before. Also, additional absolute ordinate measurements from station 60 to 160 showed that the contour was now within the ±0.002-in. tolerance.

Figure 5 shows the final centerline calibration with a total deviation of 0.09 in Mach number, whereas the deviation before machining was 0.24. The off-center Mach number is within 0.02 compared to 0.04 prior to remachining. Over-all axial and lateral gradients proved to be essentially nonexistent in the test region.

The method of characteristics using the AEDC digital computer was the basic tool for obtaining the inviscid outermost streamline onto which the turbulent boundary-layer displacement thickness was added. Given this inviscid streamline and an initial line of known flow (from transonic theory), the computer can generate a characteristics network, thereby defining the downstream flow. The results of two solutions of this type are presented in Fig. 6a. The first computation was applied to the inviscid design contour to serve as a basis of comparison for the second. As expected, the computed flow is shown to be very close to that desired. The second computation retained the identical inviscid boundary from the throat to station 109. From station 109 to 146, however, deviations of the measured wall from the design wall were applied to the inviscid outermost streamline, just as if the boundary layer conformed to the wavy wall but provided no cushioning. The top curve in Fig. 6a shows the streamline perturbation Δy in a region AB which has a direct effect on $M_{\mathbb{C}}$ in region A′B′. The points presented on the two curves between AB and A′B′ are in correspondence with respect to characteristics. The computed centerline Mach number distribution based on the perturbed streamline is in fair agreement with the measured Mach number, thereby indicating that small contour deviations can produce centerline nonuniformities on the order of those measured.

Thus far only test section centerline flow has been discussed. As mentioned previously, off-centerline flow is highly uniform. Figure 6b shows a lateral distribution at station 270 where, according to Fig. 6a, the centerline Mach number deviates most from that desired. The agreement between calculated and measured Mach numbers is considered excellent within the 32-in.-diam usable core. Of course, outside of the 32-in. test core a real boundary layer of thickness δ cannot be compared to the ficticious, but useful, concept of divorcing viscous and nonviscous flows. The reason for the drop in Mach number near the wall in the computed curve is the fore-shortened nozzle. Lateral distributions at all stations are typically the same except for less severe centerline focusing.

All measurements and calculations in this report are based on a design condition of a fixed stilling chamber pressure and temperature at Mach 8, namely 600 psia and 1310°R, respectively. The tunnel is being operated successfully over a stilling chamber pressure range of 50 to 900 psia. The quality of flow within this range is essentially the same as that presented, except for an over-all level change in Mach number. The average Mach number is 7.85 at 50 psia, 8.00 at 600 psia, and 8.02 at 900 psia.

SECTION IV
CONCLUSIONS

Based on this investigation of the flow in Tunnel B, the following results were obtained:

1. The semicubic throat discussed in Ref. 1 produced flow of equal quality to that of a more exotic aerodynamically designed throat with a larger radius of curvature.
2. Close tolerance machining is important, at least to point B (Fig. 6a), to keep centerline focusing to a minimum.
3. Masking or cushioning of the turbulent boundary layer is apparently small, with regard to machining errors of the type illustrated, even though the boundary layer is thick compared to the error.
4. The turbulent boundary layer scheme of Ref. 3 apparently predicted δ^* extremely well at all stations as evidenced by the level and lack of gradients in Mach number at design conditions.

REFERENCES

1. Sivells, James C. "Aerodynamic Design and Calibration of the VKF 50-Inch Hypersonic Wind Tunnels." AEDC-TDR-62-230, February 1963.

2. Cresci, Robert J. "Tabulation of Coordinates for Hypersonic Axisymmetric Nozzles Part 1 - Analysis and Coordinates for Test Section Mach Numbers of 8, 12, and 20." WADC Technical Note 58-300 Part 1, October 1958.

3. Sivells, James C. and Payne, Robert G. "A Method of Calculating Turbulent-Boundary-Layer Growth at Hypersonic Mach Numbers." AEDC-TR-59-3, March 1959.

4. Moger, W. C. and Ramsay, D. B. "Supersonic Axisymmetric Nozzle Design by Mass Flow Techniques Utilizing a Digital Computer." AEDC-TDR-64-110, June 1964.

5. Hall, I. M. "Transonic Flow in Two-Dimensional and Axially-Symmetric Nozzles." A.R.C. 23, 347, December 1961.

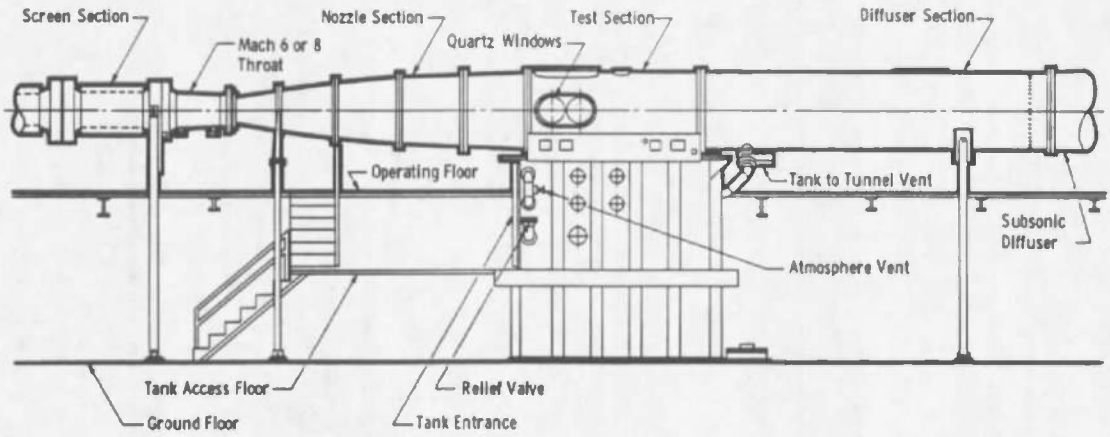

a. Tunnel Assembly

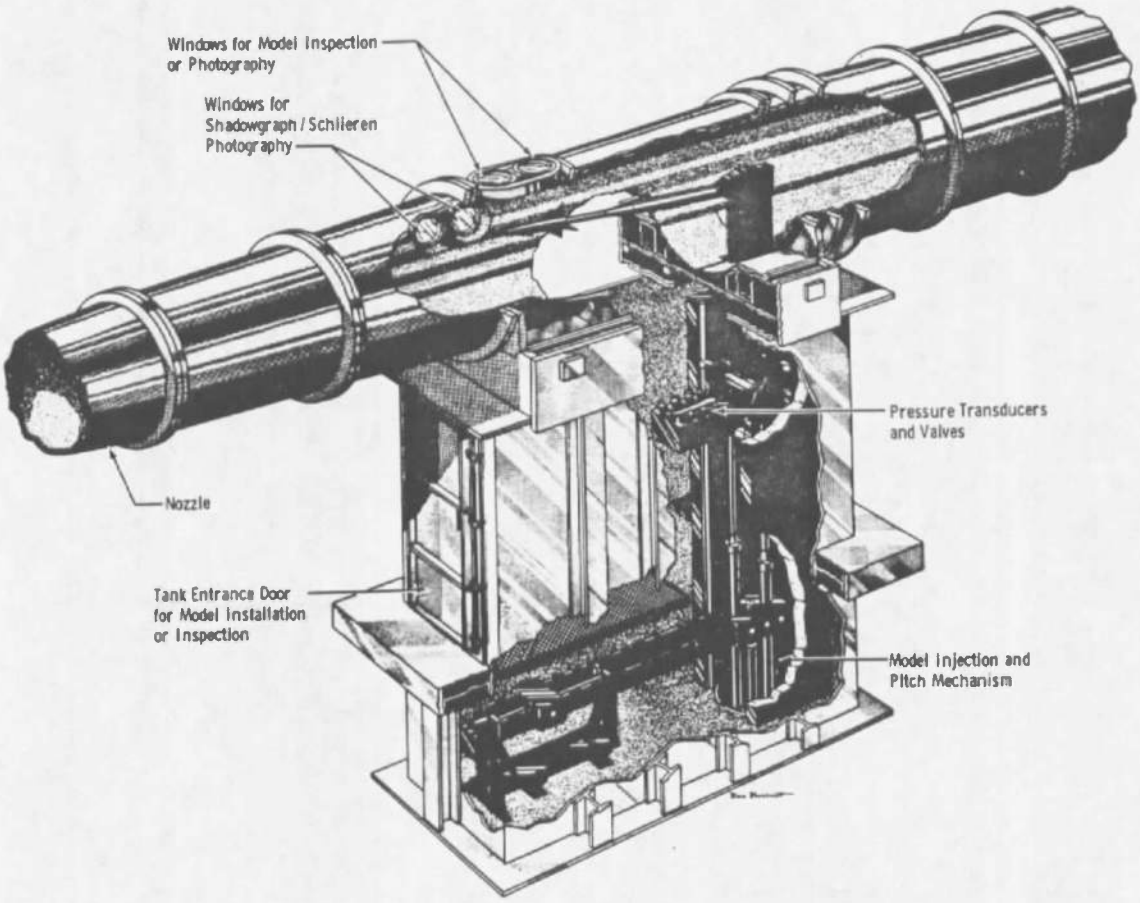

b. Tunnel Test Section

Fig. 1 Tunnel B

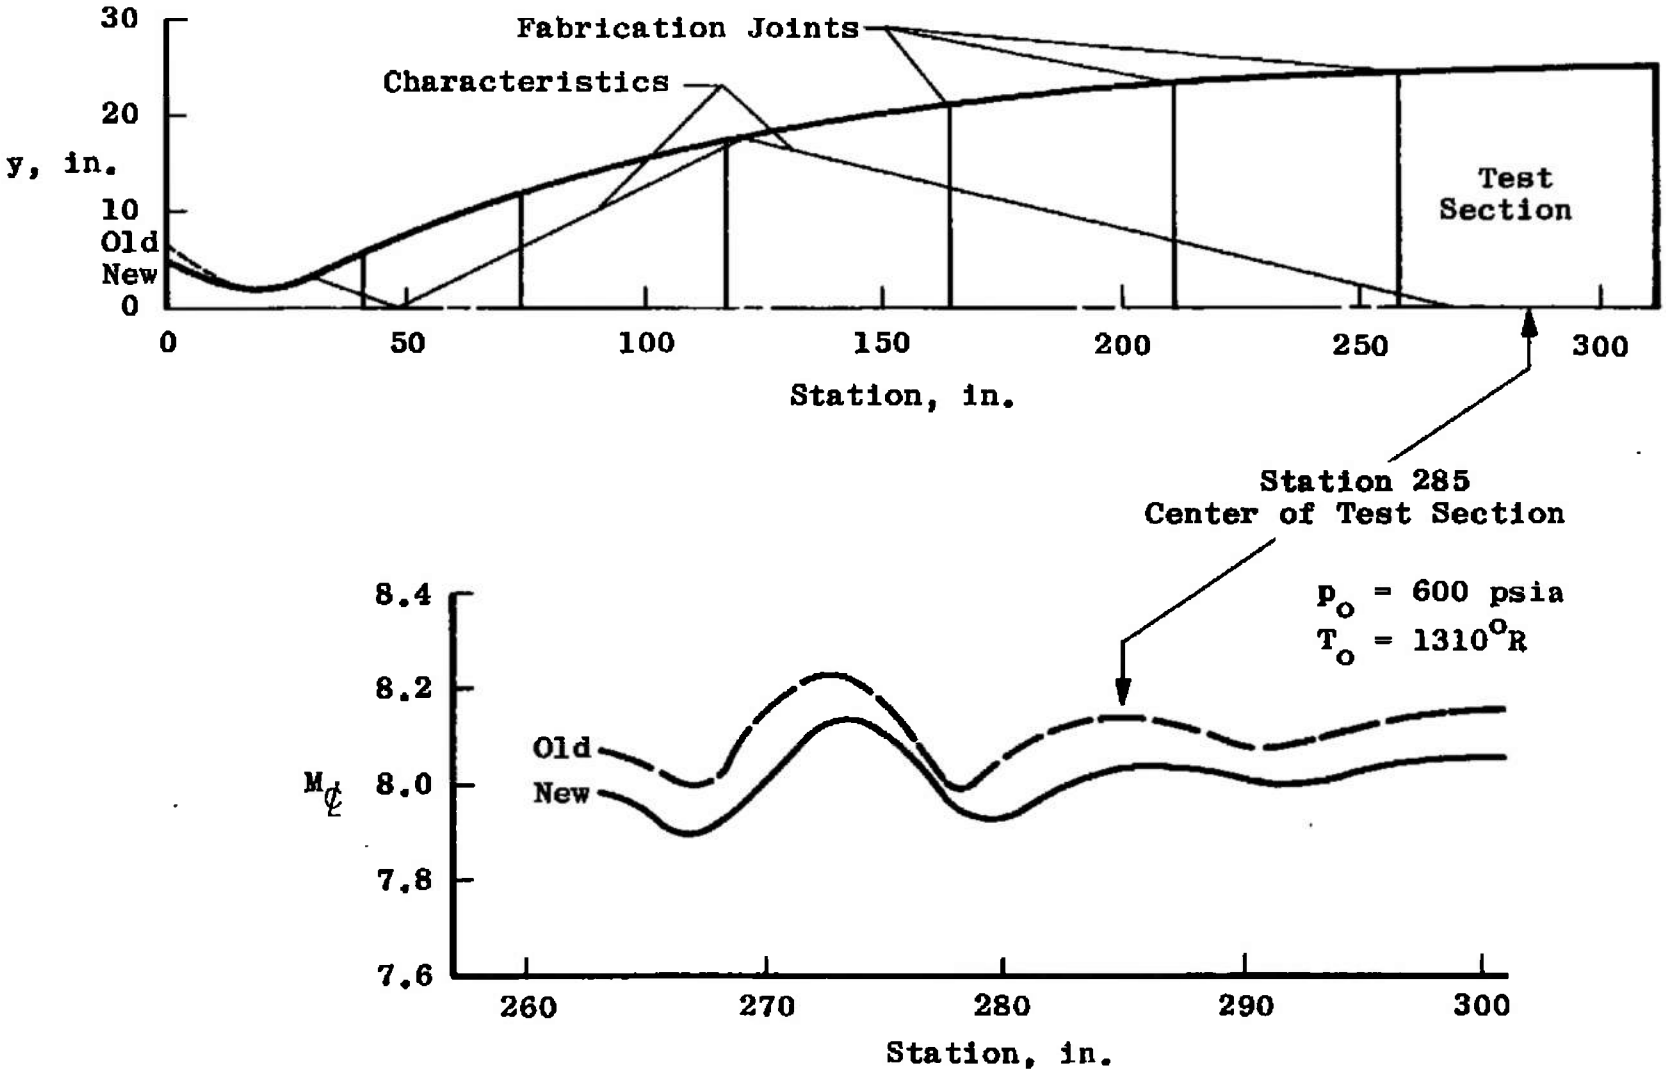

Fig. 2 Test Section Centerline Calibration with Old and New Throat Sections

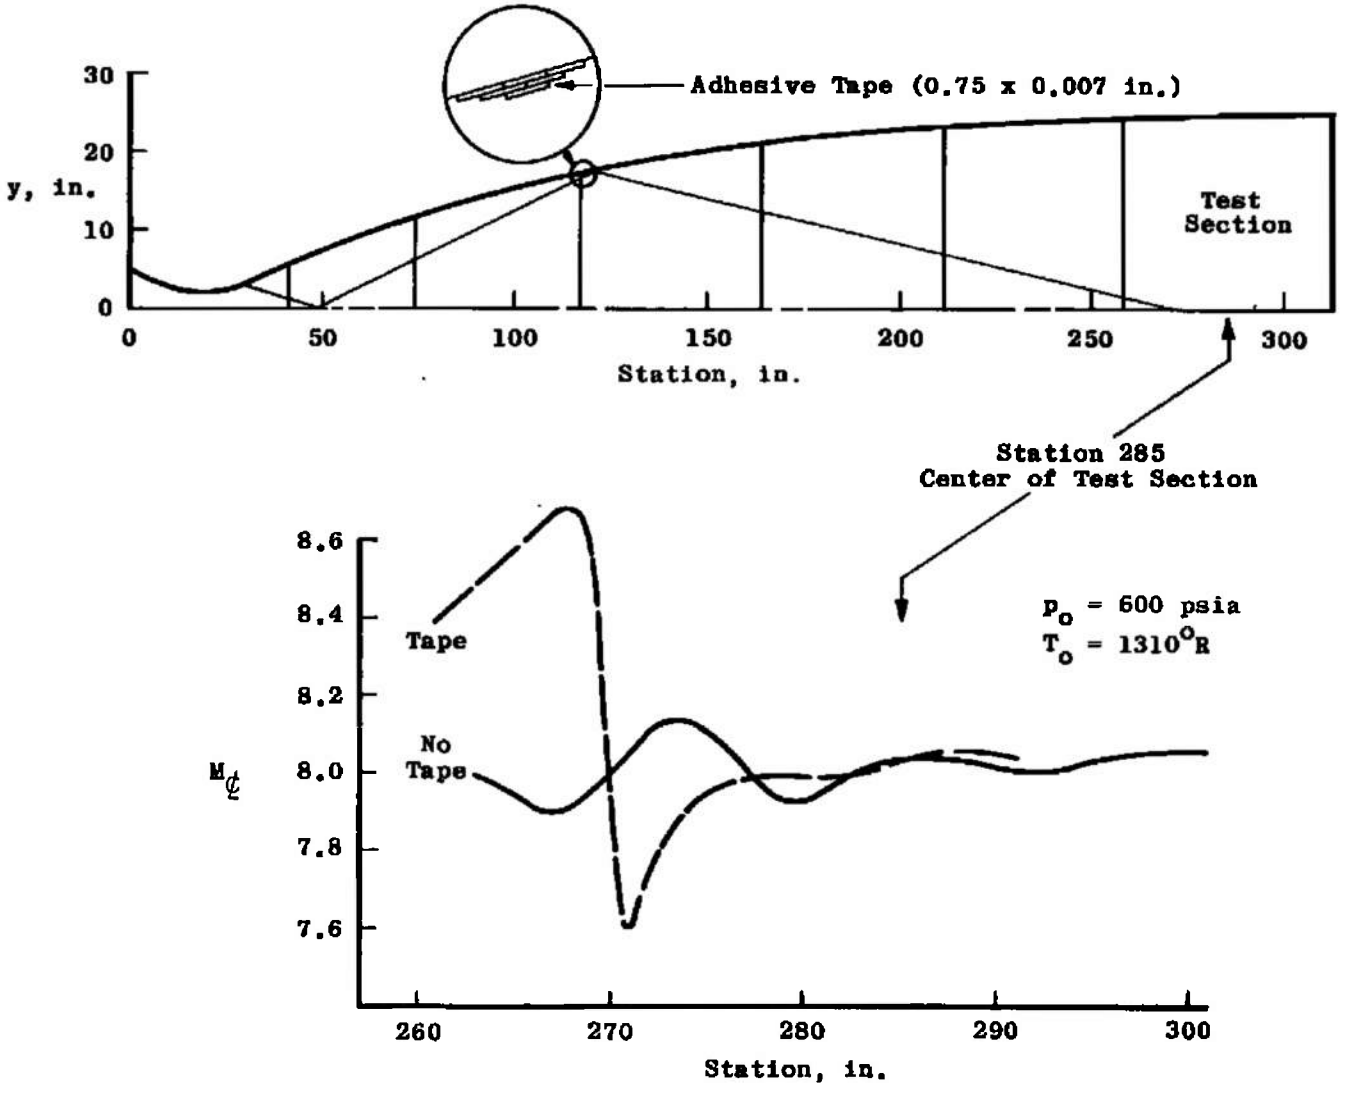

Fig. 3 Test Section Centerline Calibration with an Artificial Disturbance

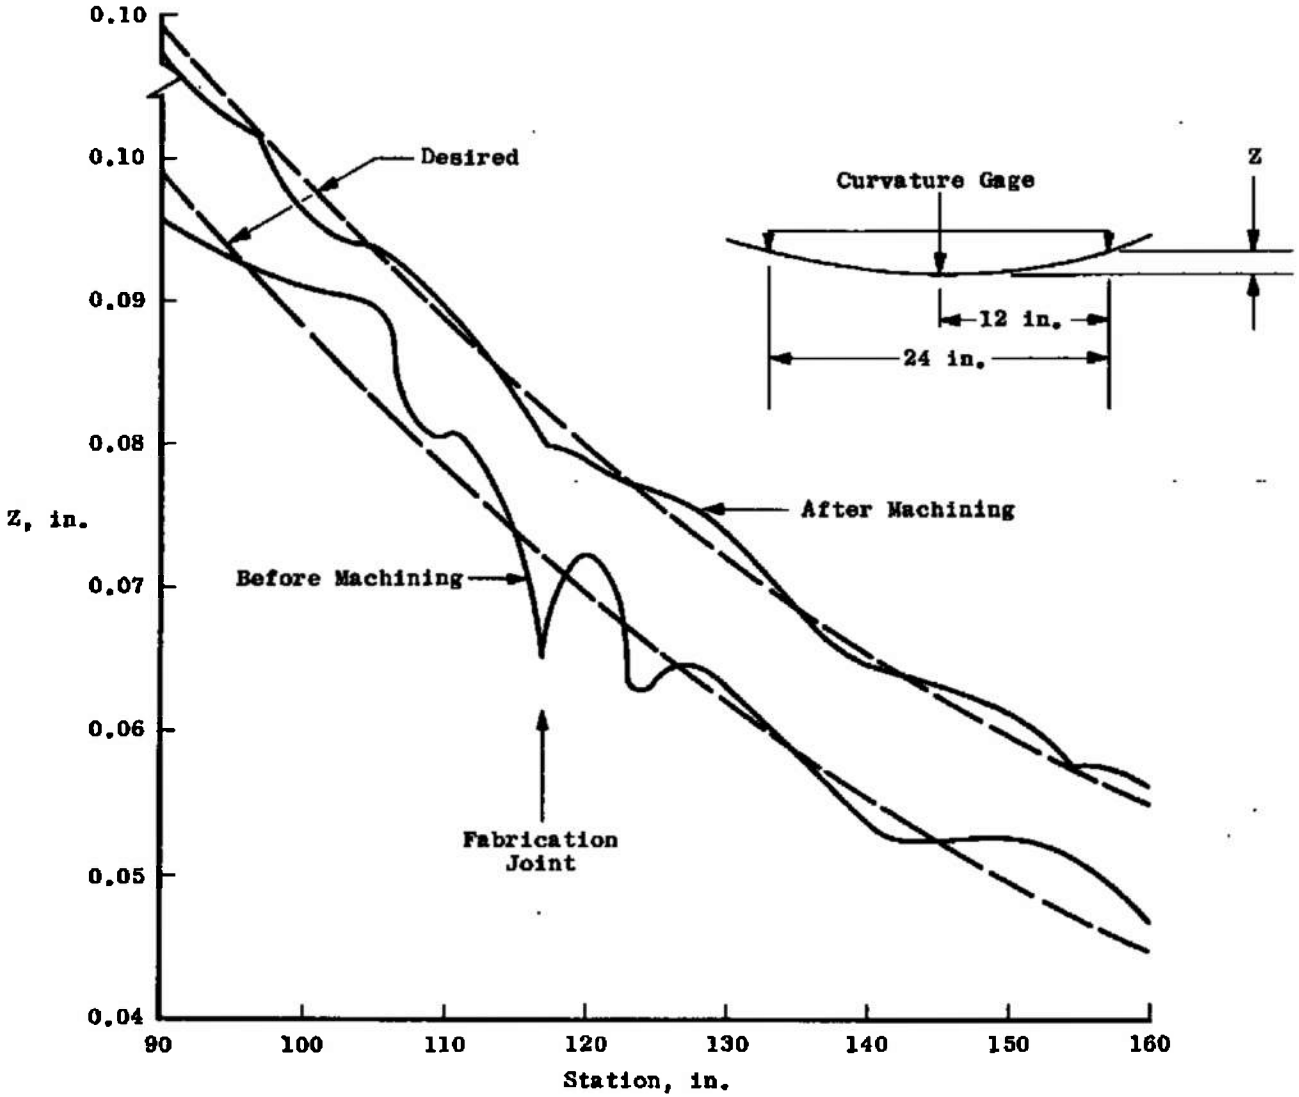

Fig. 4 Relative Smoothness of Nozzle before and after Remachining

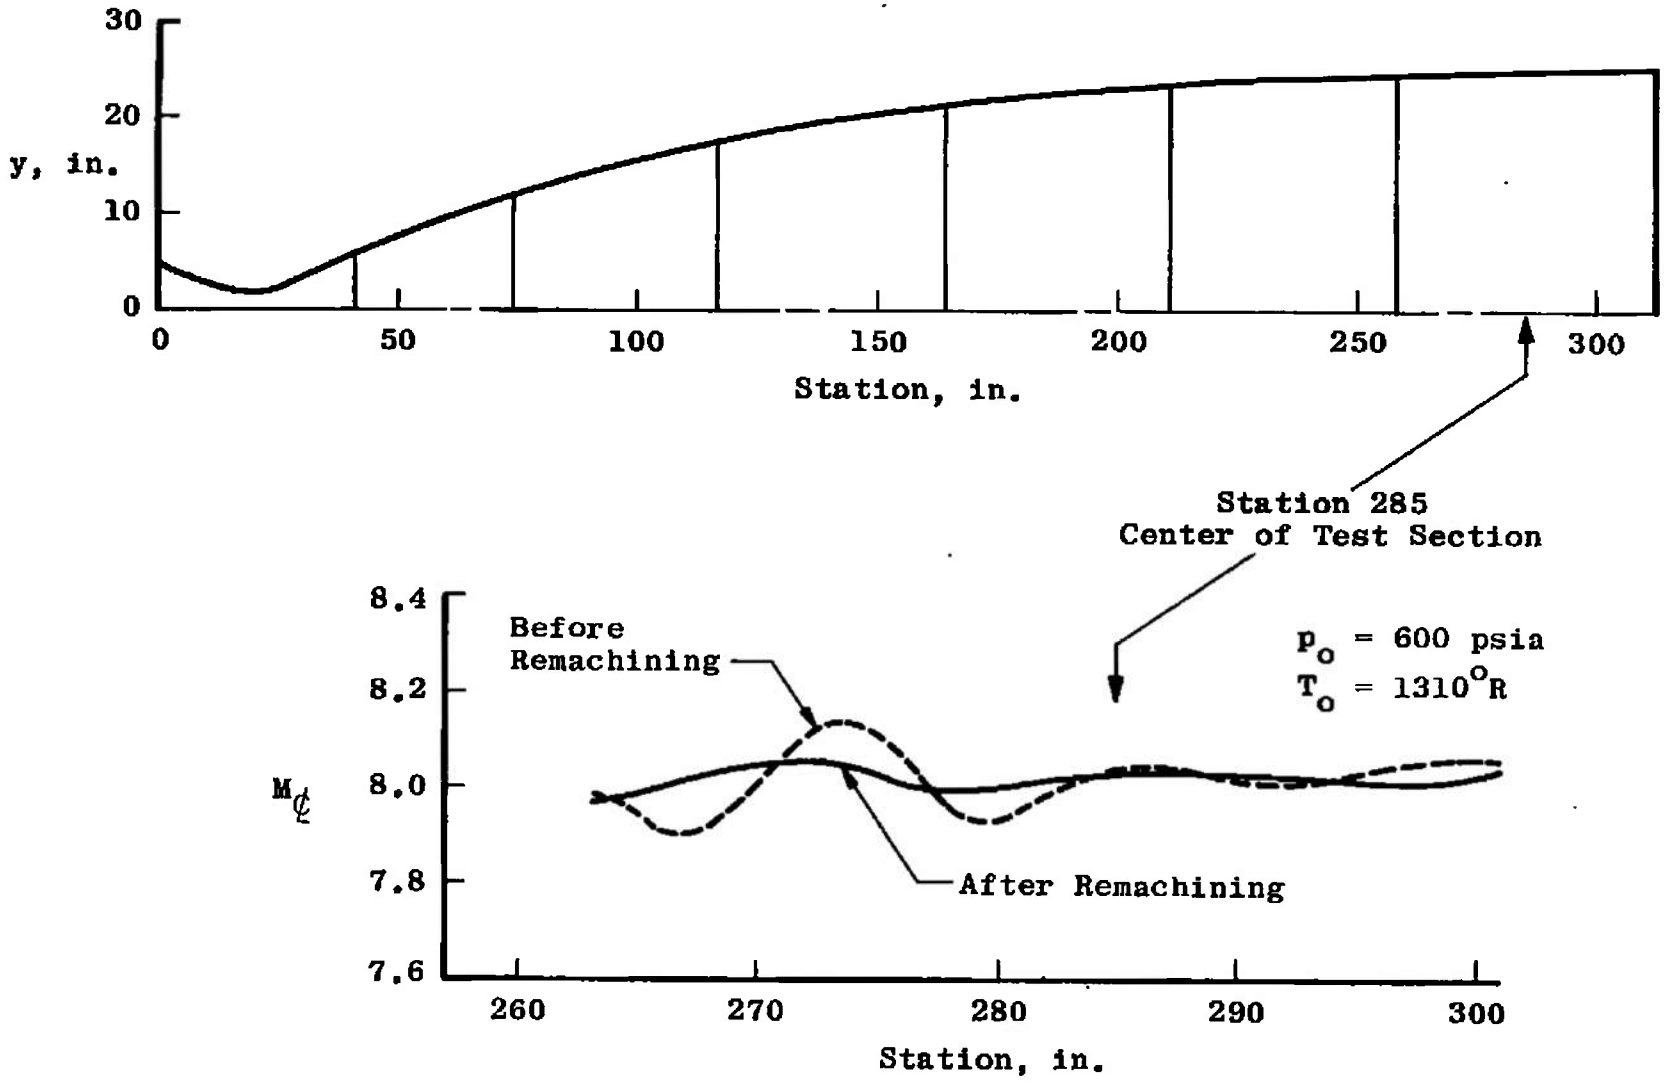

Fig. 5 Test Section Centerline Calibration before and after Remachining

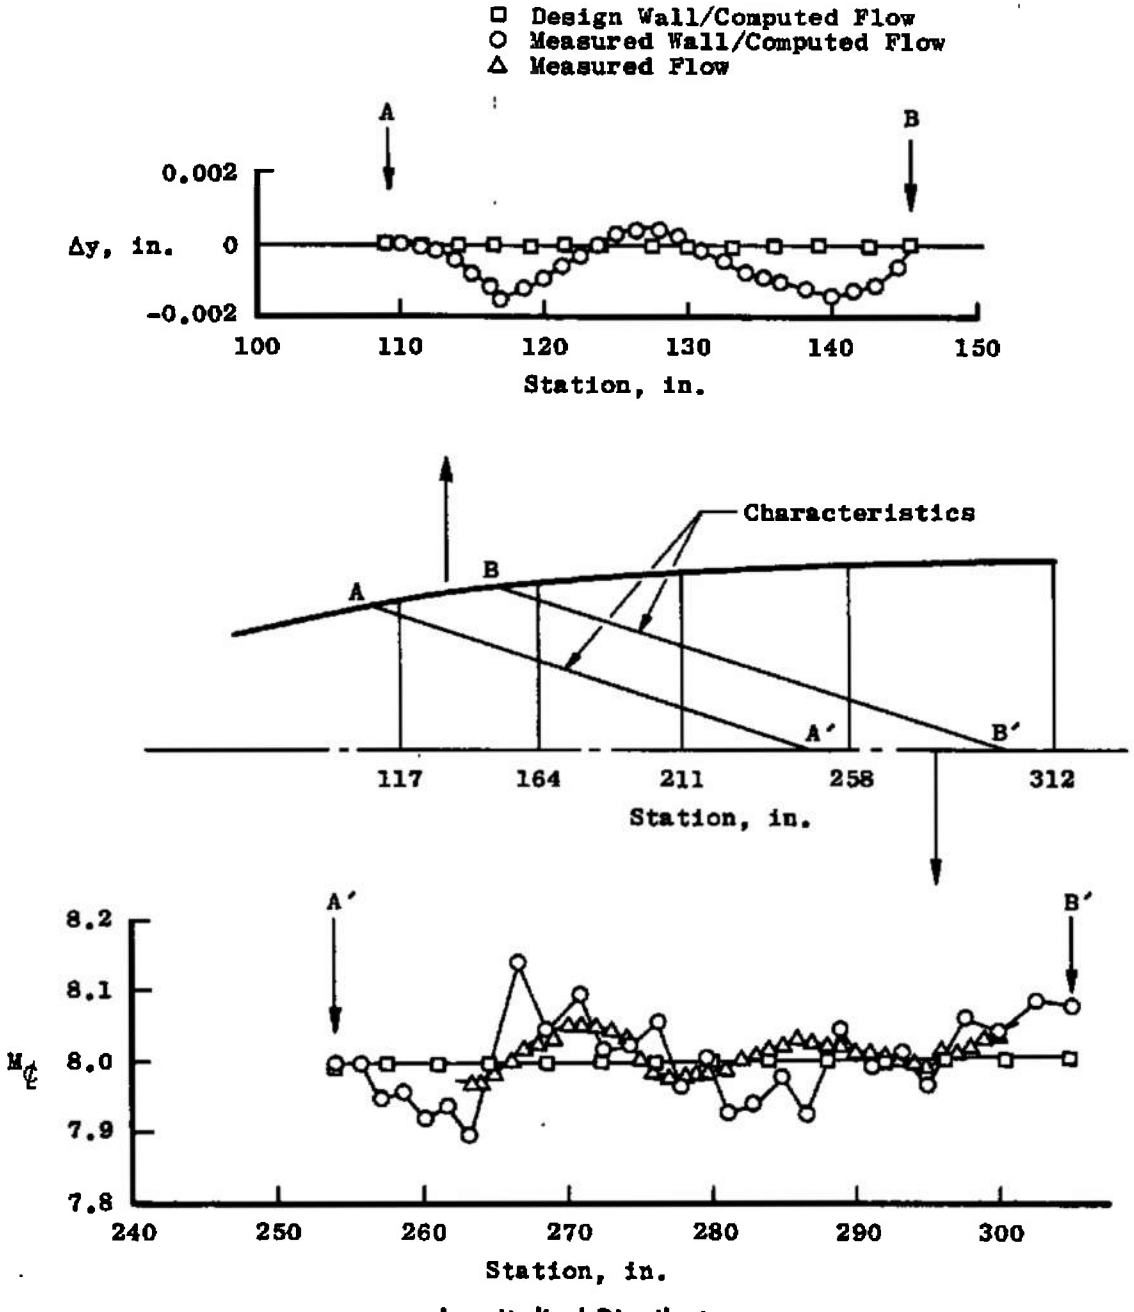

a. Longitudinal Distribution

Fig. 6 Computer-Analysis of Centerline Focusing

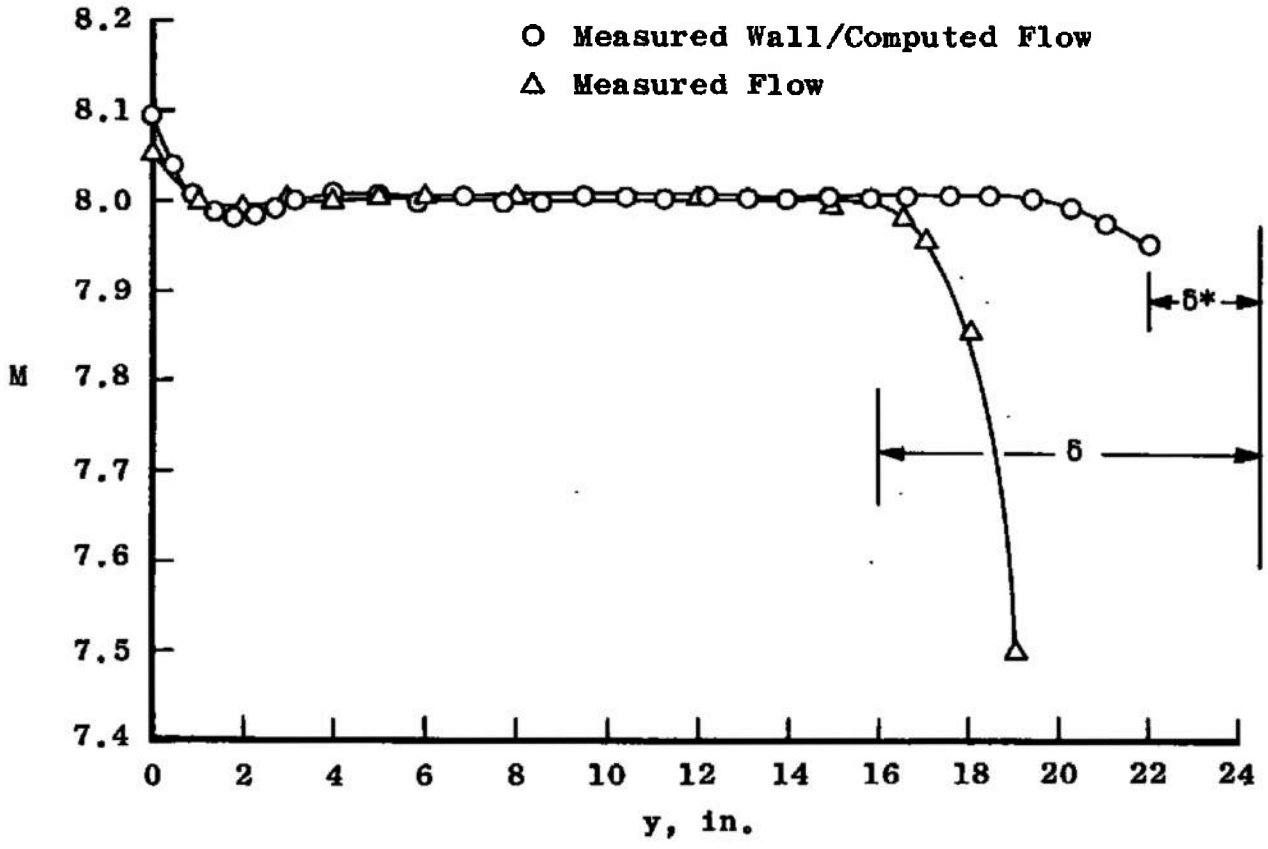

b. Lateral Distribution

Fig. 6 Concluded

TABLE I
COORDINATES OF TUNNEL B (M – 8)

Sta, in.	y, in.	Sta, in.	y, in.	Sta, in.	y, in.	Sta, in.	y, in.
-9.5000	9.7500	46	7.4781	118	17.7526	190	22.3805
-7.9094	8.8030	49	8.1052	121	18.0257	193	22.5030
-5.9094	7.6823	52	8.7089	124	18.2901	196	22.6210
-1.9094	5.6899	55	9.2903	127	18.5460	199	22.7347
1.0906	4.4292	58	9.8501	130	18.7939	202	22.8441
3.0906	3.7074	61	10.3894	133	19.0341	205	22.9495
5.0906	3.0850	64	10.9091	136	19.2668	208	23.0509
7.0906	2.5662	67	11.4101	139	19.4924	211	23.1486
9.0906	2.1548	70	11.8934	142	19.7108	214	23.2425
11.0906	1.8548	73	12.3597	145	19.9225	217	23.3330
13.1906	1.6640	76	12.8101	148	20.1274	220	23.4200
15.1616	1.6047	79	13.2453	151	20.3257	223	23.5037
17.0435	1.6586	82	13.6659	154	20.5177	226	23.5841
18.8449	1.8110	85	14.0724	157	20.7034	229	23.6612
21.0968	2.1332	88	14.4652	160	20.8830	232	23.7352
22.9133	2.4660	91	14.8450	163	21.0567	235	23.8060
25.1865	2.9256	94	15.2121	166	21.2247	238	23.8737
27.0067	3.3104	97	15.5671	169	21.3871	241	23.9384
29.1074	3.7635	100	15.9106	172	21.5440	244	24.0001
31.5162	4.2892	103	16.2435	175	21.6960	247	24.0588
34.2533	4.8910	106	16.5656	178	21.8430	250	24.1147
37.3329	5.5714	109	16.8772	181	21.9848	253	24.1677
40.0906	6.1831	112	17.1787	184	22.1215	256	24.2179
43.0000	6.8275	115	17.4704	187	22.2534	258	24.2500
						312	25.0000

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY *(Corporate author)*
Arnold Engineering Development Center
ARO, Inc., Contract Operator
Arnold Air Force Station, Tennessee

2a. REPORT SECURITY CLASSIFICATION
UNCLASSIFIED

2b. GROUP
N/A

3. REPORT TITLE
FLOW QUALITY IMPROVEMENT AT MACH 8 IN THE VKF 50-INCH HYPERSONIC WIND TUNNEL B

4. DESCRIPTIVE NOTES *(Type of report and inclusive dates)*
N/A

5. AUTHOR(S) *(Last name, first name, initial)*
C. R. Fitch, ARO, Inc.

6. REPORT DATE
May 1966

7a. TOTAL NO. OF PAGES
20

7b. NO. OF REFS
5

8a. CONTRACT OR GRANT NO.
AF40(600)-1200

b. Program Element 65402234

c.

d.

9a. ORIGINATOR'S REPORT NUMBER(S)
AEDC-TR-66-82

9b. OTHER REPORT NO(S) *(Any other numbers that may be assigned this report)*
N/A

10. AVAILABILITY/LIMITATION NOTICES
Distribution of this document is unlimited. Users may obtain copies from DDC.

11. SUPPLEMENTARY NOTES
N/A

12. SPONSORING MILITARY ACTIVITY
Arnold Engineering Development Center, Air Force Systems Command, Arnold Air Force Station, Tenn.

13. ABSTRACT

Flow quality within the 50-in. hypersonic tunnel at a nominal Mach number of 8 is discussed The nozzle and throat were recently remachined to closer tolerances which resulted in improved test section flow quality. Measurements of the contoured nozzle ordinates and Mach number distributions are presented along with results from method of characteristics solutions of design and actual measured wall contours.

DD FORM 1 JAN 64 1473

UNCLASSIFIED

Security Classification

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A ROLE	LINK A WT	LINK B ROLE	LINK B WT	LINK C ROLE	LINK C WT
hypersonic wind tunnels						
flow quality						
Mach number distribution						
contoured nozzle ordinates						
wall contours						
design						
method of characteristics						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization *(corporate author)* issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers *(either by the originator or by the sponsor)*, also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

(1) "Qualified requesters may obtain copies of this report from DDC."

(2) "Foreign announcement and dissemination of this report by DDC is not authorized."

(3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."

(4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."

(5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring *(paying for)* the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as *(TS)*, *(S)*, *(C)*, or *(U)*.

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

UNCLASSIFIED

Security Classification