ESTI FILE COPY

ESD-TR-66-293

MTR-208

ESD RECORD COPY
RETURN TO
SCIENTIFIC & TECHNICAL INFORMATION DIVISION
(ESTI), BUILDING 1211

ESD ACCESSION LIST
ESTI Call No. AL 52810
Copy No. 1 of 1 cys.

ON THE MOTION OF AN ARTIFICIAL EARTH SATELLITE

SEPTEMBER 1966

J. B. Frazer

Prepared for
DEPUTY FOR SURVEILLANCE AND CONTROL SYSTEMS
SPACE DEFENSE SYSTEM PROGRAM OFFICE (496L/474L)
ELECTRONIC SYSTEMS DIVISION
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
L. G. Hanscom Field, Bedford, Massachusetts

Distribution of this document is unlimited.

ESST

Project 4965
Prepared by
THE MITRE CORPORATION
Bedford, Massachusetts
Contract AF19(628)-5165

AD0640315

This document may be reproduced to satisfy official needs of U.S. Government agencies. No other reproduction authorized except with permission of Hq. Electronic Systems Division, ATTN: ESTI.

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Do not return this copy. Retain or destroy.

ESD-TR-66-293

MTR-208

ON THE MOTION OF AN ARTIFICIAL EARTH SATELLITE

SEPTEMBER 1966

J. B. Frazer

Prepared for

DEPUTY FOR SURVEILLANCE AND CONTROL SYSTEMS

SPACE DEFENSE SYSTEM PROGRAM OFFICE (496L/474L)

ELECTRONIC SYSTEMS DIVISION

AIR FORCE SYSTEMS COMMAND

UNITED STATES AIR FORCE

L. G. Hanscom Field, Bedford, Massachusetts

Distribution of this document is unlimited.

Project 4965

Prepared by

THE MITRE CORPORATION

Bedford, Massachusetts

Contract AF19(628)-5165

ABSTRACT

The periodic position and velocity perturbations of an artificial earth satellite are developed to the first order for all J_n, based on the theory by Brouwer as extended by Giacaglia. An explicit formulation is also provided for the subset J_2, J_3, J_4. The use of a position and velocity formulation circumvents the equatorial and circular orbit singularities found in conventional developments. The definition of the mean elements of the theory is modified to reduce the complexity of the position perturbations, as suggested by Merson's Theory, and the resulting changes to the secular terms are developed. In order to facilitate an empirical correction for drag, the observed mean motion is introduced as a mean element in place of the semi-major axis.

REVIEW AND APPROVAL

This Technical Report has been reviewed and is approved.

Thomas O. Wear

THOMAS O. WEAR, Colonel, USAF
Director, 496L/474L System Program Office
Deputy for Surveillance & Control Systems

TABLE OF CONTENTS

		Page
SECTION I	INTRODUCTION	1
SECTION II	PERTURBATIONS IN POSITION AND VELOCITY	14
SECTION III	SHORT PERIOD PERTURBATIONS	17
SECTION IV	LONG PERIOD PERTURBATIONS	26
SECTION V	SECULAR TERMS	38
REFERENCES		52

LIST OF ILLUSTRATIONS

FIGURE 1	POSITION AND VELOCITY IN GEOCENTRIC INERTIAL COORDINATES	3
TABLE I	SHORT PERIOD PERTURBATIONS	20
TABLE II	SHORT PERIOD PERTURBATIONS FOR "SMOOTHED" ELEMENTS	22
TABLE III	GIACAGLIA'S LONG PERIOD PERTURBATIONS	28
TABLE IV	MODIFIED LONG PERIOD PERTURBATIONS	31
TABLE V	LONG PERIOD PERTURBATIONS IN THE COORDINATES	32
TABLE VI	J_2-J_4 LONG PERIOD PERTURBATIONS	39

SECTION I

INTRODUCTION

The motion of a near-earth satellite is, in the first approximation, "Keplerian"; i.e., it conforms to certain empirical laws formulated in the seventeenth century by Kepler. In his Principia, Newton demonstrated that these laws described motion in an inverse-square force field. The force (or negative potential) function for such a field is of the form

$$U = \frac{\mu}{r} \tag{1}$$

where r is the geocentric distance of the satellite and μ is the gravitational constant. The motion is conventionally described by six "orbital elements," a, e, I, M, ω, Ω. Kepler's second law states that the motion occurs along an ellipse with one focus at the primary. The inclination, I, and the argument of the ascending node, Ω, serve to locate the plane containing this ellipse. The eccentricity, e, and the argument of perigee, ω, define the shape of the ellipse and its orientation within the orbital plane. The semi-major axis, a, provides the scale of the ellipse as well as the orbital period; from Kepler's third law the period P is given by

$$P = \frac{2\pi}{\mu^{\frac{1}{2}}} a^{3/2} \tag{2}$$

The location of the satellite within the ellipse is given by the mean anomaly, M, which measures the area swept out by the radius vector since perigee passage. In accordance with Kepler's first law the area

swept out and hence the mean anomaly increases at a uniform rate; then

$$M(t) = M_o + n_o t \tag{3}$$

where n_o is the mean motion, given by

$$n_o = \frac{2\pi}{P} = \mu^{\frac{1}{2}} a^{-3/2} \tag{4}$$

The mean anomaly must be converted to a geometric angle to be of use; the eccentric and true anomalies, E and v, are related to M by Kepler's equation

$$E - e \sin E = M \tag{5}$$

which must be solved by iteration, and by

$$\tan \frac{v}{2} = \left(\frac{1+e}{1-e} \right)^{\frac{1}{2}} \tan \frac{E}{2} \tag{6}$$

Following these computations, the geocentric position and velocity vectors $\underline{r}$ and $\dot{\underline{r}}$ are given by (See Figure 1),

$$\underline{r} = r\,\underline{U} \tag{7}$$

$$\dot{\underline{r}} = \dot{r}\,\underline{U} + r\dot{v}\underline{V} \tag{8}$$

where

$$r = \frac{p}{1+e \cos v} \tag{9}$$

$$\dot{r} = \left(\frac{\mu}{p}\right)^{\frac{1}{2}} e \sin v \tag{10}$$

$$r\dot{v} = \left(\frac{\mu}{p}\right)^{\frac{1}{2}} (1+e \cos v) \tag{11}$$

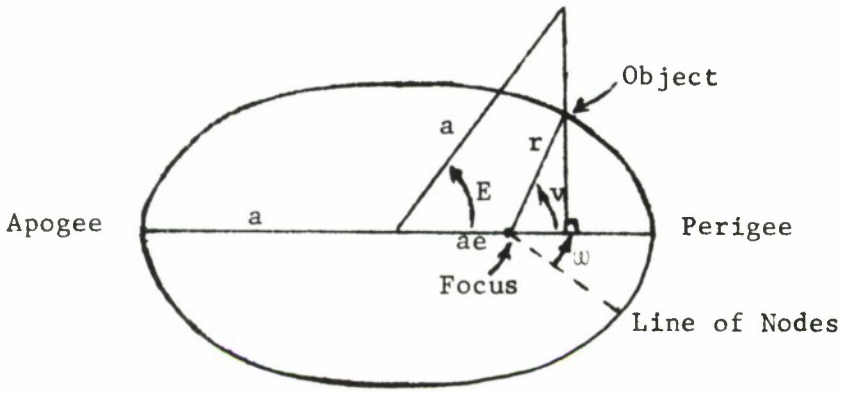

POSITION IN THE ORBITAL PLANE

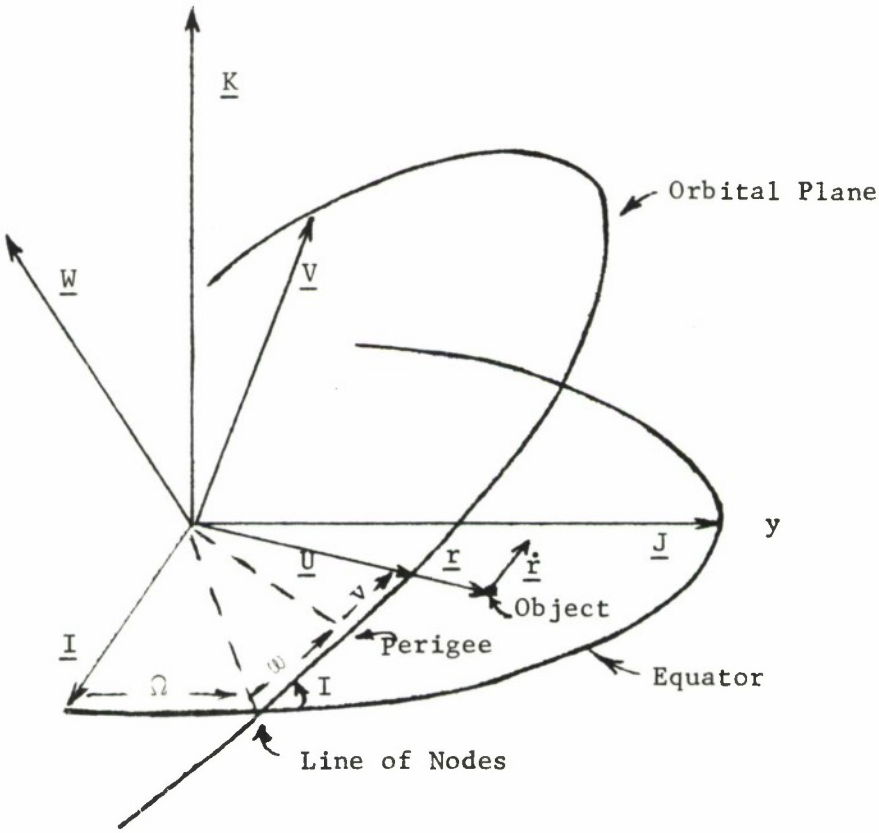

POSITION AND VELOCITY IN GEOCENTRIC INERTIAL COORDINATES

FIGURE 1

$$\underline{U} = \begin{bmatrix} \cos u \cos \Omega - \sin u \sin \Omega \cos I \\ \cos u \sin \Omega + \sin u \cos \Omega \cos I \\ \sin u \sin I \end{bmatrix} \tag{12}$$

$$\underline{V} = \begin{bmatrix} - \sin u \cos \Omega - \cos u \sin \Omega \cos I \\ - \sin u \sin \Omega + \cos u \cos \Omega \cos I \\ \cos u \sin I \end{bmatrix} \tag{13}$$

with

$$p = a\eta^2 \tag{14}$$

$$\eta = (1-e^2)^{\frac{1}{2}} \tag{15}$$

$$u = v+\omega \tag{16}$$

This simplified model cannot adequately represent the motion of a satellite; it must be augmented to include the effects of various "perturbing forces." These forces may be conservative, i.e., gravitational, or may affect the energy of the satellite's orbit, e.g., atmospheric drag and solar radiation pressure. More sophisticated models may be implemented via numeric integration or "special perturbations" techniques, which fall into three major categories:

(a) Integration in cartesian coordinates of accelerations resulting from all forces acting on satellite, to obtain position and velocity (Cowell's method).

(b) Integration in cartesian coordinates of accelerations resulting from perturbing forces only, to obtain deviations in position and velocity from a Keplerian orbit (Encke's method).

(c) Integration of the variations due to perturbing forces in the orbital elements of an "osculating" Keplerian orbit, i.e., the Keplerian orbit defined by the position and velocity of a satellite at each instant (Variation of Parameters).

These methods have a theoretical disadvantage, in that the accumulation of roundoff and truncation errors must eventually result in inadequate precision; it appears that in practice the length of arc is limited by the uncertainty in modeling non-conservative forces, which involve not only a complex and highly variable atmospheric structure, but also the configuration and orientation of the satellite. A more practical problem in some applications is that the integration must be carried from epoch to the most distant observation, regardless of whether useful data exists in the intervening period. In addition, the integrated orbit, whether in terms of coordinates or elements, provides little insight into the effects of the various forces operating on the satellite, so that it is difficult to identify and correct deficiencies in the model. Despite these disadvantages, special perturbations programs are widely employed for precision tracking where the frequency of data mitigates their relative inefficiency, or the cost is justified by the requirements for maximum precision. They are also extensively employed in feasibility studies and similar investigations, to avoid time consuming (and possibly impractical) analytic developments.

It is generally possible to obtain analytic expressions for the effects of the perturbing forces, to any desired precision and for any time span. Such "general perturbations" models are universally employed in routine cataloging systems, where a considerable number of satellites must be tracked with data that is sparsely distributed in time. In addition, general perturbations are usually employed in satellite geodesy. A considerable number of analytic theories have been developed for the conservative perturbing forces, i.e., the departure of the earth's gravity field from an inverse-square law and lunar and solar gravity.

For greater efficiency, semi-analytic theories are often employed for the luni-solar perturbations which are relatively small and of low frequency; the same approach is generally followed for the solar radiation pressure perturbations. Thus, for solar radiation pressure, the analytic development may be carried through a formal integration of the perturbations, but the results are left as a function of the limits of integration. These limits depend on the points at which the satellite enters and leaves the earth's shadow, which vary slowly with time. The evaluation of the perturbations proceeds n revolutions at a time, with the shadow limits reevaluated at each step.

Analytic models of the drag perturbation have been produced for simplified atmospheric models. The theory is complex, particularly when interactions with the earth's oblateness perturbations are considered.

As a result, empirical models are generally employed, with only the long term effects of drag considered. The results are generally satisfactory for high altitude objects, but there appears to be considerable merit in the development of a semi-analytic drag theory.

This paper deals only with perturbations due to the earth's gravity. In geodesy the gravity field is described in terms of a reference ellipsoid, a reasonably tractable figure which approximates the figure of a rotating fluid in equilibrium to about 1 part in 10^6. The actual gravity at any point is shown in terms of a map of the elevation or depression of the "geoid" with respect to this ellipsoid; this "geoid" is an equipotential surface, i.e., a surface everywhere perpendicular to the local vertical. Before artificial satellites were launched the ellipsoid and "geoid" were determined from the reduction of direct gravity measurements and from astronomical determinations of the deviation of the local vertical from the local perpendicular to the ellipsoid. This "geoid" data is not employed in the theory of an artificial satellite, however. An analytic expansion for the potential is required; in spherical polar coordinates the generalized force (or negative potential) function is a series of Legendre polynomials and associated functions:

$$U = \frac{\mu}{r}\left\{1 - \sum_{n=2}^{\infty}\left(\frac{a_e}{r}\right)^n \left(J_n P_n (\sin\beta) + \sum_{m=1}^{n} J_{nm} P_{nm}(\sin\beta)\cos m(\lambda-\lambda_{nm})\right)\right\}$$

$$= \frac{\mu}{r}\left\{1 + \sum_{n=2}^{\infty}\sum_{m=0}^{n}\left(\frac{a_e}{r}\right)^n P_{nm}(\sin\beta)\,(C_{nm}\cos m\lambda + S_{nm}\sin m\lambda)\right\} \qquad (17)$$

where a_e is the equatorial radius and β, λ are the geocentric latitude and longitude of the satellite. The Legendre polynomials and associated functions are defined by

$$P_{nm}(x) = \frac{(1-x^2)^{m/2}}{2^n n!} \frac{d^{n+m}}{dx^{n+m}} (x^2-1)^n = \frac{(1-x^2)^{m/2}}{2^n} \sum_{j=0}^{I(\frac{n-m}{2})} \frac{(-1)^j (2n-2j)!\ x^{n-m-2j}}{j!\ (n-j)!\ (n-m-2j)!} \tag{18}$$

where $I(\frac{n-m}{2})$ is the integer part of $(\frac{n-m}{2})$. The P_n (or P_{no}) harmonics are "zonal," while the P_{nm} harmonics are "tesseral." The largest coefficient is J_2; it is of order 10^{-3}. The remaining coefficients do not exceed the second order, i.e., 10^{-6}. In order to evaluate the effects of the harmonics, it is necessary to substitute orbital parameters for r, β, and λ. In general, a method of successive approximations must be employed, so that a series of perturbations of increasingly higher order arises, e.g.,

first order:	J_2
second order:	J_2^2, J_n, J_{nm}
third order:	J_2^3, $J_2 J_n$, $J_2 J_{nm}$

Most general perturbation theories neglect periodic effects of the second order; the residual perturbations will then be on the order of 15 meters. However, under certain circumstances the perturbations due to higher order terms are amplified and must be included in a first order theory. If the potential function and its derivatives are expressed in terms of conventional orbital parameters, they will be found to have arguments of the form:

$$\left.\begin{matrix}\cos\\ \sin\end{matrix}\right\}\left[(n-2p+q)M + (n-2p)\omega + m(\Omega-\lambda)\right]$$

where n,m are the indices of the harmonic, p ranges from 0 to n (it is the parameter of a power series in sin I and cos I), and q ranges from $-\infty$ to ∞ (it is the parameter of a power series in e, with the lowest power of e being $e^{|q|}$). From a simple first order theory, it will be found that M, ω, and Ω all increase linearly with time, so that when the perturbations are integrated divisors will arise of the form

$$(n-2p+q)n_o + (n-2p)\dot{\omega} + m(\dot{\Omega}-\dot{\lambda})$$

where n_o is the perturbed mean motion. The perturbations are classified in terms of n, m, p, q as follows:

(a) Secular terms $p = (n+q)/2$

$q = 0$

$m = 0$

These terms give rise to a linear increase in the elements M, ω, Ω, and are therefore computed to the second order in a first order theory (so that the theory is valid for about 10-20 days, after which the neglected third order terms exceed the second order). These terms only arise for even order zonal harmonics, i.e., $n = 2, 4, \ldots$; the values of the even zonal harmonics are generally based upon observed secular perturbations.

(b) Long period terms $p = (n+q)/2$

$q \neq 0$

$m = 0$

These terms have a divisor of the form $-q\dot{\omega}$ which is of order 10^{-3}; second order forces therefore integrate into first order perturbations and must be included in a first order theory. There is no J_2 term of this form; if there were, a different type of solution would be required (there is a J_2^2 term of this form which reduces to J_2 on integration). There is a special case for the "critical inclination" $I \approx 63.4^{\circ}$, where $\dot{\omega}$ is of order 10^{-6}, so that a "resonance" occurs. In this case, either a special solution is employed or the long period terms are not integrated, i.e., they are left in the form of secular rates. The long period perturbations for even zonal harmonics are factored by the eccentricity e and can often be ignored; this is not the case for the odd zonals whose values are usually determined by analysis of observed long period variations in eccentricity and inclination.

(c) Short period terms $p \neq (n+q)/2$

These terms have a divisor containing n_o so that the order of the perturbation remains unchanged upon integration. Therefore, only the J_2 terms need be included in a first order theory.

(d) Tesseral harmonic terms $m \neq 0$

There are two cases of interest here. For $p = (n+q)/2$ there are terms with frequencies near some multiple of the siderial rate, since to the zeroth order

$$(n-2p)\dot{\omega} + m(\dot{\Omega}-\dot{\lambda}) \approx -m\dot{\lambda}$$

The integration results in an increase on the order of $n_o/m\dot{\lambda}$ or about $16/m$ for near earth satellites. These terms contribute perturbations on the order of 100 meters, and decrease in importance as n and m increase.

For

$$(n-2p+q)n_o + (n-2p)\dot{\omega} + m(\dot{\Omega}-\dot{\lambda}) \approx 0$$

there is a resonance analagous to that holding near the critical inclination. The resonance will be in general larger for smaller values of $(n-2p)$ and q. The principle resonances thus arise for

$$m \approx n_o \qquad\qquad n \text{ odd}$$

where n_o is expressed in revolutions/day. Obvious cases of potential near resonance are 24 and 12 hour satellites. High order resonances, e.g., (n,m) of $(13,13)$, $(15,13)$, and $(15,14)$ have been reported for certain satellites with magnitudes on the order of 100-150 meters and periods of 2.5-5 days. Obviously, by going to a sufficiently high

order harmonic, a resonance can be found for any near earth satellite. Fortunately, the net effect of these higher order terms is considered to approach the second order.

This paper does not deal with the tesseral harmonic perturbations. It is limited to some minor modifications of the secular terms developed by Brouwer[1] and extended by Giacaglia[2], and to a non-singular development of the long and short period perturbations due to the zonal harmonics. In the Brouwer and Giacaglia papers the perturbations of conventional elements are computed, which leads to singularities for low eccentricity or inclination. Lyddane[3] showed that the problem could be circumvented by either computing the perturbations to "non-singular" elements, e.g., $e \cos M$ and $e \sin M$, or by computing the perturbations in the position and velocity vectors. The former approach is employed in most general perturbations ephemeris generators[4], while the latter approach is employed in this paper. Although Garfinkel[5], Kozai[6], and Merson[7] have computed some of the position perturbations, velocity perturbations have generally been neglected.

The use of position and velocity perturbations has the advantage of revealing the "real" or observable effects of the perturbing forces; Merson[7], for example, has shown that some of the apparent perturbations of the orbital plane affect only the velocity vector and can be ignored in a tracking network based on positional data. In addition, a

position and velocity theory appears to be somewhat more efficient than a "non-singular" elements theory, particularly when only positional data is used for element correction. The position and velocity theory has one disadvantage, in that the frequency of the long period terms becomes comparable to the short period terms, and they must be recomputed for each ephemeris point. (However, they are recomputed for each point in most theories, whether or not the computation is necessary.)

SECTION II

PERTURBATIONS IN POSITION AND VELOCITY

In developing the perturbations it is convenient to use the angular momentum unit vector $\underline{W}$, given by

$$\underline{W} = \underline{U} \times \underline{V} = \begin{bmatrix} \sin \Omega \sin I \\ - \cos \Omega \sin I \\ \cos I \end{bmatrix} \tag{19}$$

The perturbed position and velocity may be computed as

$$\underline{r} = (r + \delta r)\ (\underline{U} + \delta \underline{U}) \tag{20}$$

$$\dot{\underline{r}} = (\dot{r} + \delta \dot{r})\ (\underline{U} + \delta \underline{U}) + (r\dot{v} + \delta r\dot{v})\ (\underline{V} + \delta \underline{V}) \tag{21}$$

or the perturbations alone may be computed as

$$\delta \underline{r} = \delta r\ \underline{U} + r\ \delta \underline{U} \tag{22}$$

$$\delta \dot{\underline{r}} = \delta \dot{r}\ \underline{U} + \delta r\dot{v}\ \underline{V} + \dot{r}\ \delta \underline{U} + r\dot{v}\ \delta \underline{V} \tag{23}$$

ignoring second order terms.

The quantities $\delta \underline{U}$ and $\delta \underline{V}$ may be written as

$$\delta \underline{U} = \underline{V}\ (\delta u + \cos I\ \delta \Omega) + \underline{W}\ (\sin u\ \delta I - \cos u \sin I\ \delta \Omega) \tag{24}$$

$$\delta \underline{V} = -\underline{U}\,(\delta u + \cos I\ \delta \Omega) + \underline{W}\ (\cos u\ \delta I + \sin u \sin I\ \delta \Omega) \tag{25}$$

and hence we have

$$\begin{aligned} \delta \underline{r} = {} & \delta r\ \underline{U} + r\ (\delta u + \cos I\ \delta \Omega)\ \underline{V} \\ & + r\ (\sin u\ \delta I - \cos u \sin I\ \delta \Omega)\ \underline{W} \end{aligned} \tag{26}$$

$$\begin{aligned} \delta \dot{\underline{r}} = {} & \left(\delta \dot{r} - r\dot{v}\ (\delta u + \cos I\ \delta \Omega)\right)\ \underline{U} \\ & + \left(\delta\ r\dot{v} + \dot{r}\ (\delta u + \cos I\ \delta \Omega)\right)\ \underline{V} \\ & + \left(\dot{r}\ (\sin u\ \delta I - \cos u \sin I\ \delta \Omega)\right. \\ & \left. + r\dot{v}\ (\cos u\ \delta I + \sin u \sin I\ \delta \Omega)\right)\ \underline{W} \end{aligned} \tag{27}$$

For δr, $\delta \dot{r}$, and δu we can either use Taylor series expansions in the conventional elements, or the ingenious equations of Izsak[8] with the Brouwer determining function S written in Hill's canonical variables* $\{\dot{r}, G, H \mid r, u, \Omega\}$. The equations are

$$\delta r = r \frac{\delta a}{a} - a \cos v \, \delta e + \frac{a \sin v}{\eta} e \, \delta M \tag{28}$$

$$\delta \dot{r} = - \frac{\dot{r}}{2} \frac{\delta a}{a} + \left(\frac{\mu}{p}\right)^{1/2} \frac{(1+e \cos v)^2}{\eta^2} \sin v \, \delta e + \left(\frac{\mu}{p}\right)^{1/2} \frac{(1+e \cos v)^2}{\eta^3} \cos v \, e \, \delta M \tag{29}$$

$$\delta u = \frac{(2+e \cos v)}{\eta^2} \sin v \, \delta e + \frac{(1+e \cos v)^2}{\eta^3} \delta M + \delta \omega \tag{30}$$

or

$$\delta r = - \frac{\partial S}{\partial \dot{r}} \tag{31}$$

$$\delta \dot{r} = \frac{\partial S}{\partial r} \tag{32}$$

$$\delta u = - \frac{\partial S}{\partial G} \tag{33}$$

The second set of equations appears much simpler, and has been solved for the short period terms by Izsak. They are not so simple, however, when dealing with the long-period terms containing trigonometric functions of ω.

The perturbation in $r\dot{v}$ may be computed from

$$\delta r\dot{v} = r\dot{v} \left(- \frac{1}{2} \frac{\delta a}{a} + \frac{\cos v \, (1+e \cos v) - e}{\eta^2} \delta e - \frac{\sin v \, (1+e \cos v)}{\eta^3} e \, \delta M \right) \tag{34}$$

---

* Brouwer and Giacaglia employ the Delauney canonical variables $\{L, G, H \mid l, g, h\}$, where

$$L = (\mu a)^{\frac{1}{2}} \qquad l = M$$
$$G = L\eta \qquad g = \omega$$
$$H = G \cos I \qquad h = \Omega$$

or

$$\delta r\dot{v} = \delta\left(\frac{G}{r}\right) = r\dot{v}\left(\frac{\delta G}{G} - \frac{\delta r}{r}\right) \tag{35}$$

using intermediate results for δG.

If the Taylor series expansions are employed, it is possible to rewrite Equation (27) using Equations (29), (30), and (34) as

$$\delta\dot{\underline{r}} = \left(\frac{\mu}{p}\right)^{1/2} \times$$

$$\left\{ \left(-\frac{e \sin v}{2}\frac{\delta a}{a} - \frac{(1+e\cos v)\sin v}{\eta^2}\delta e - \frac{(1+e\cos v)^2}{\eta^3}\delta M - (1+e\cos v)(\delta\omega + \cos I\,\delta\Omega) \right) \underline{U} \right.$$

$$+ \left(-\frac{1+e\cos v}{2}\frac{\delta a}{a} + \frac{\cos v + e}{\eta^2}\delta e + e\sin v\,(\delta\omega + \cos I\,\delta\Omega) \right) \underline{V}$$

$$\left. + \left((\cos u + e\cos\omega)\,\delta I + (\sin u + e\sin\omega)\sin I\,\delta\Omega \right) \underline{W} \right\} \tag{36}$$

SECTION III

SHORT PERIOD PERTURBATIONS

Izsak[8] has already computed δr, $\delta \dot{r}$, and δu as

$$\delta r = \frac{J_2 a_e^2}{4p} \left\{ \sin^2 I \cos 2u + (1-3\theta^2) \left(1 + \frac{2\eta}{1+e \cos v} + \frac{e \cos v}{1+\eta} \right) \right\} \tag{37}$$

$$\delta \dot{r} = -\mu^{\frac{1}{2}} \frac{J_2 a_e^2}{4 p^{5/2}} \left\{ 2 \sin^2 I (1+e \cos v)^2 \sin 2u \right.$$

$$\left. + (1-3\theta^2) e \sin v \left(\eta + \frac{(1+e \cos v)^2}{1+\eta} \right) \right\} \tag{38}$$

$$\delta u = -\frac{J_2 a_e^2}{8 p^2} \left\{ 6(1-5\theta^2)(v-M) + 4\left(1-6\theta^2 + \frac{1-3\theta^2}{1+\eta}\right) e \sin v \right.$$

$$+ (1-3\theta^2)(1-\eta) \sin 2v + 2(5\theta^2 - 2) e \sin (2u-v)$$

$$\left. + (7\theta^2 - 1) \sin 2u + 2\theta^2 e \sin (2u+v) \right\} \tag{39}$$

where

J_2 = coefficient of the second zonal harmonic

a_e = earth's equatorial radius

θ = $\cos I$

From Brouwer's theory, with

$$\gamma_2 = \frac{J_2 a_e^2}{2 a^2}$$

we have

$$\frac{\delta G}{G} = 3 \frac{J_2 a_e^2}{4 p^2} \sin^2 I \left\{ \cos 2u + e \cos (2u-v) + \frac{e}{3} \cos (2u+v) \right\} \tag{40}$$

$$\cos I \, \delta\Omega = - \frac{J_2 a_e^2}{4 p^2} \theta^2 \left\{ 6 (v-M + e \sin v) - 3 \sin 2u - 3 e \sin (2u-v) - e \sin (2u+v) \right\} \tag{41}$$

$$\delta I = \frac{J_2 a_e^2}{4 p^2} \sin I \, \theta \left\{ 3 \cos 2u + 3 e \cos (2u-v) + e \cos (2u+v) \right\} \tag{42}$$

Hence

$$\delta u + \cos I \, \delta\Omega = \frac{J_2 a_e^2}{4 p^2} \left\{ (\sin^2 I) \left(\frac{\sin 2u}{2} + 2 e \sin (2u-v) \right) - (1-3\theta^2) \left(3 (v-M) + 2 e \sin v \left(\frac{2+\eta}{1+\eta}\right) + \frac{1-\eta}{2} \sin 2v \right) \right\} \tag{43}$$

$$\sin u \, \delta I - \cos u \sin I \, \delta\Omega = \frac{J_2 a_e^2}{4 p^2} \sin I \, \theta \times \left\{ - 3 \sin u - 4 e \sin \omega + 4 e \cos u \sin v + 6 \cos u (v-M) \right\} \tag{44}$$

$$\cos u \, \delta I + \sin u \sin I \, \delta\Omega = \frac{J_2 a_e^2}{4 p^2} \sin I \, \theta \left\{ 3 \cos u + 4e \cos (u+v) - 6 \sin u (v-M) \right\} \tag{45}$$

$$\delta\, r\dot{v} = \mu^{\frac{1}{2}} \frac{J_2 a_e^2}{4\, p^{5/2}} (1+e \cos v) \times$$

$$\left\{ (\sin^2 I) \left(2 \cos 2u + 2e \cos (2u-v) + e \cos 2u \cos v \right) - (1-3\theta^2) \left(\frac{3}{2} (1+\eta) + e \cos v \left(\frac{2+\eta}{1+\eta}\right) + \frac{1-\eta}{2} \cos 2v \right) \right\} \tag{46}$$

Substituting these terms in Equations (26) and (27) gives, after some simplification, the short period terms in Table I.

In some tracking programs the relationship of the mean semi-major axis and the secularly perturbed mean motion is taken from Kozai's equation 14[6]:

$$\bar{n}^2 \bar{a}^3 = \mu \left(1 + 3 \frac{J_2 a_e^2}{4\, p^2} (1-3\theta^2)\, \eta \right) \tag{47}$$

Since

$$\bar{n} = n_o \left(1 - 3 \frac{J_2 a_e^2}{2\, p^2} (1-3\theta^2) \quad \eta + \ldots \right) \tag{48}$$

this implies

$$\bar{a} = a \left(1 + 3 \frac{J_2 a_e^2}{4\, p^2} (1-3\theta^2) \quad \eta + \ldots \right) \tag{49}$$

where a is the mean semi-major axis of the Brouwer theory, defined by

$$n_o^2 a^3 = \mu \tag{50}$$

TABLE I

SHORT PERIOD PERTURBATIONS

$$\delta \underline{r} = r\,\alpha_1 \Bigg\{ \Bigg[\sin^2 I\,(1+e\cos v)\cos 2u + (1-3\theta^2)\left(2\eta + (1+e\cos v)\left(1 + \frac{e\cos v}{1+\eta}\right)\right)\Bigg]\,\underline{U}$$

$$+ \Bigg[\sin^2 I\left(\frac{\sin 2u}{2} + 2e\sin(2u-v)\right) - (1-3\theta^2)\left(3(v-M) + e\sin v\left(\frac{4+2\eta+e\cos v}{1+\eta}\right)\right)\Bigg]\,\underline{V}$$

$$+ \sin I\theta\left[-3\sin u - 4e\sin\omega + \cos u\left(4e\sin v + 6(v-M)\right)\right]\,\underline{W} \Bigg\}$$

$$\delta \dot{\underline{r}} = -\left(\frac{\mu}{p}\right)^{\frac{1}{2}} \alpha_1 \Bigg\{ \Bigg[\sin^2 I\,(1+e\cos v)\left(\sin 2u\left(\frac{5}{2} + 2e\cos v\right) + 2e\sin(2u-v)\right)$$

$$- (1-3\theta^2)\left(e\sin v\left(-\eta + \left(\frac{3+2\eta}{1+\eta}\right)(1+e\cos v)\right) + 3(1+e\cos v)(v-M)\right)\Bigg]\,\underline{U}$$

$$- \Bigg[\sin^2 I\left(2\cos 2u + \frac{5}{2}e\left(\cos(2u-v) + \cos 2u\cos v\right) + e^2\left(2\cos 2\omega + \cos 2u\cos^2 v\right)\right)$$

$$- (1-3\theta^2)\left(3+e^2 + e\cos v\left(3 + \eta + \frac{1}{1+\eta}\right) + e^2\sin^2 v + 3e\sin v\,(v-M)\right)\Bigg]\,\underline{V}$$

$$- \sin I\theta\left[(3+4e^2\cos^2 v)\cos u + 7e\cos(u+v) - 8e^2\sin v\sin\omega - 6(\sin u + e\sin\omega)(v-M)\right]\,\underline{W} \Bigg\}$$

Where

$$\alpha_1 = \frac{J_2 a_e^2}{4\,p^2}$$

The use of $\bar{a}$ in place of a in the computation of unperturbed $\underline{r}$ and $\dot{\underline{r}}$ requires that a compensating perturbation be applied to $\delta\underline{r}$ and $\delta\dot{\underline{r}}$:

$$\frac{\delta a}{a} = \frac{a-\bar{a}}{a} = -3\,\frac{J_2 a_e^2}{4\,p^2}\,(1-3\theta^2)\;\eta \tag{51}$$

This results in the following changes in Table I:

(a) The term 2η in the $\underline{U}$ component of $\delta\underline{r}$ becomes $-\eta$

(b) The term $-\eta\, e \sin v$ in the $\underline{U}$ component of $\delta\dot{\underline{r}}$ becomes $+\frac{\eta}{2}\, e \sin v$

Merson has developed a theory[7] in which the short period position perturbations are minimized. His formulae (153-157) relate the osculating elements to conditions at the ascending node, to the second order in J_2. By eliminating all first order terms whose argument is a multiple of ω, and terms factored by u, a set of first order pseudo short period terms is obtained. These result in the position perturbations given in Table II. (The first order terms factored by u in Merson's theory are actually the sum of secular terms factored by M and short period terms factored by $(u-M)$. They can therefore be included in the secular term computation, and we have taken this approach.)

Now, if we define ϵ_i to be Brouwer's mean elements updated for secular perturbations, and ϵ_i' to be "smoothed" mean elements updated

TABLE II

SHORT PERIOD PERTURBATIONS FOR "SMOOTHED" ELEMENTS

$$\delta \underline{r} = r\,\alpha_1 \Big\{ (1+e\cos v)\left[\sin^2 I \cos 2u + (1-3\theta^2)(1-e\cos v)\right] \underline{U}$$

$$+ \left[\sin^2 I \left(\frac{\sin 2u}{2} + 2e \sin(2u-v)\right) + (1-3\theta^2)\, e^2 \sin v \cos v\right] \underline{V}$$

$$+ \left[\sin I\, \theta\, (-4e \sin\omega + 4e \cos u \sin v)\right] \underline{W} \Big\}$$

$$\delta \dot{\underline{r}} = -\left(\frac{\mu}{p}\right)^{1/2} \alpha_1 \times$$

$$\Big\{ (1+e\cos v)\left[\sin^2 I \left(\sin 2u \left(\frac{5}{2} + 2e\cos v\right) + 2e \sin(2u-v)\right) - (1-3\theta^2)\, e \sin v\right] \underline{U}$$

$$- \left[\sin^2 I \left(2\cos 2u + \frac{5}{2} e \left(\cos(2u-v) + \cos 2u \cos v\right) + e^2 (2\cos 2\omega + \cos 2u \cos^2 v)\right)\right.$$

$$\left. - (1-3\theta^2)\left(2(1+e\cos v) + e^2 \sin^2 v\right)\right] \underline{V}$$

$$- \sin I\, \theta \left[6\cos u + 7e\cos(u+v) + 3e\cos\omega + 4e^2\left(\cos u \cos^2 v - 2\sin v \sin\omega\right)\right] \underline{W} \Big\}$$

Where

$$\alpha_1 = \frac{J_2 a_e^2}{4\,p^2}$$

for secular terms, then:

$$\underline{r}(\epsilon_i) + \delta\underline{r}_{Brouwer} = \underline{r}(\epsilon_i) + \sum_{i=1}^{6} \frac{\partial \underline{r}}{\partial \epsilon_i} (\epsilon_i' - \epsilon_i) + \delta\underline{r}_{Smoothed} \tag{52}$$

so that we have three simultaneous equations:

$$\sum_{i=1}^{6} \frac{\partial \underline{r}}{\partial \epsilon_i} \Delta\epsilon_i = \delta\underline{r}_{Brouwer} - \delta\underline{r}_{Smoothed} \tag{53}$$

where

$$\Delta\epsilon_i = \epsilon_i' - \epsilon_i$$

Using Equations (26), (28), (30) and Tables I and II,

$$\left(r \frac{\Delta a}{a} - a \cos v \, \Delta e + \frac{a \sin v}{\eta} e\Delta M\right) = r \, \alpha_1 \, (1-3\theta^2) \times$$

$$\left[\frac{1+3\eta+e^2}{2} + \left(\frac{2+\eta}{1+\eta}\right)\left(e \cos v + \frac{e^2}{2} \cos 2v\right)\right]$$

$$r\left(\left(2 \sin v + \frac{e}{2} \sin 2v\right) \frac{\Delta e}{\eta^2} + \frac{(1+e \cos v)^2}{\eta^3} \Delta M + \Delta\omega + \theta\Delta\Omega\right) = - r \, \alpha_1 (1-3\theta^2) \times$$

$$\left[3 \, (v-M) + \left(\frac{2+\eta}{1+\eta}\right)\left(2e \sin v + \frac{e^2}{2} \sin 2v\right)\right]$$

$$r \, (\sin u \, \Delta I - \cos u \sin I \Delta\Omega) = r \, \alpha_1 \sin I\theta \left[6 \cos u \, (v-M) - 3 \sin u\right]$$

(54)

If the $\Delta\epsilon$ are restricted to contain only constants or terms with $(v-M)$ as angular arguments these equations may be solved to yield:

$$\frac{\Delta a}{a} = 2\,\alpha_1\,(1-3\theta^2)\,\eta$$

$$\Delta e = -\,\alpha_1\,(1-3\theta^2)\left(\frac{2+\eta}{1+\eta}\right) e\eta^2$$

$$\Delta I = -\,3\,\alpha_1 \sin I\theta$$

$$\Delta M = 0$$

$$\Delta\omega = -\,3\,\alpha_1\,(1-5\theta^2)\,(v-M)$$

$$\Delta\Omega = -\,6\,\alpha_1\,\theta\,(v-M) \tag{55}$$

The resulting changes in the velocity perturbations may be obtained from an equation similar to Equation (53); the signs of the $\Delta\epsilon_i$ should be changed to yield:

$$\delta\dot{\underline{r}}_{\text{Smoothed}} - \delta\dot{\underline{r}}_{\text{Brouwer}} = -\sum_{i=1}^{6} \frac{\partial\dot{\underline{r}}}{\partial\epsilon_i}\,\Delta\epsilon_i \tag{56}$$

With the aid of Equation (36)

$$\begin{aligned}\delta\dot{\underline{r}}_{\text{Smoothed}} - \delta\dot{\underline{r}}_{\text{Brouwer}} = -\left(\frac{\mu}{p}\right)^{\frac{1}{2}} \alpha_1 \; X \\ \Bigg\{(1-3\theta^2)\left[e\sin v\left(-\eta + \left(\frac{2+\eta}{1+\eta}\right)(1+e\cos v)\right) + 3(1+e\cos v)(v-M)\right]\underline{U} \\ + (1-3\theta^2)\left[-1-e^2-e\cos v\left(\eta+\frac{2+\eta}{1+\eta}\right) - 3e\sin v\,(v-M)\right]\underline{V} \\ - 3\sin I\theta\left[\cos u + e\cos\omega + 2(\sin u + e\sin\omega)(v-M)\right]\underline{W}\Bigg\}\end{aligned} \tag{57}$$

which, when added to $\delta \dot{\underline{r}}$ from Table I, yields the velocity perturbations in Table II.

These position and velocity perturbations represent a useful simplification of the equations in Table I; corresponding modifications to the J_2 and J_2^2 secular terms are derived in Section V.

SECTION IV

LONG PERIOD PERTURBATIONS

The first order long period perturbations for J_n, $n > 2$, have been developed by Giacaglia[2] and Garfinkel and McAllister[9]. Giacaglia's results have been employed since they are more readily truncated; the published paper unfortunately contains a number of errors:

(a) For the even harmonics, the upper index limit for k in $\sum_{kij}$ is incorrect, since values of i within the permitted range do not exist for $k = \frac{p}{2}$. Furthermore, for $k = 0$, i can exceed j; in this case, $\delta_{p+1,\,2j,\,2i}$ vanishes.* Therefore

$$\sum_{kij} = \sum_{k=0}^{\frac{p-2}{2}} \sum_{i=1}^{\min\left\{\begin{matrix} j \\ \frac{p-2k}{2} \end{matrix}\right\}} \sum_{j=1}^{\frac{p-2}{2}}$$

Similarly for the odd harmonics

$$\sum_{kij} = \sum_{k=0}^{\frac{p-1}{2}} \sum_{i=0}^{\min\left\{\begin{matrix} j \\ \frac{p-2k-1}{2} \end{matrix}\right\}} \sum_{j=0}^{\frac{p-3}{2}}$$

where $\frac{p-2j-1}{2}$ was incorrectly given as the upper index limit of i.

---

* These practical problems reflect theoretical errors; i.e., $k = \frac{p}{2}$ terms are secular terms and also appear in the $\sum_{kj}$ portion of the disturbing function.

(b) In equation 21, the term

$$2\,\frac{1-e^2}{e^2}$$

should be

$$-\,2j\,\frac{(1-e^2)}{e^2}$$

(c) Equation 22 must be multiplied by H.

(d) In equation 28, the factor

$$\frac{2j-1}{2i+1}$$

should be

$$\frac{2j+1}{2i+1}$$

(e) In equation 30 the term

$$+\,\frac{p-2k}{\sin^2 I}$$

should have a minus sign, and the factor

$$\frac{\cos\,(2i+1)g}{2i+1}$$

has been omitted.

Also, Giacaglia has the wrong signs for the third through fifth harmonic Brouwer coefficients (k_n, γ_n, and $A_{n.0}$) as functions of J_n. With these corrections, Giacaglia's results may be summarized as

$$\delta\epsilon = S\,\Delta\epsilon \tag{58}$$

where S and $\Delta\epsilon$ for even and odd n are summarized in Table III.

TABLE III

CIACAGLIA'S LONG PERIOD PERTURBATIONS

$\delta\epsilon = S\,\Delta\epsilon$

Where, for Even n

$$S = -\frac{4}{3}(n-1)!\,\frac{J_n a_e^{n-2}}{J_2 p^{n-2}}\,(1-5\theta^2)^{-1}\sum_{k=0}^{\frac{n-2}{2}}\ \sum_{i=1}^{\min\left\{\frac{j}{\frac{n-2k}{2}}\right\}}\ \sum_{j=1}^{\frac{n-2}{2}}\frac{(-1)^{k+i}\,(2n-2k)!\,e^{2j}\,\sin^{n-2k}I}{2^{2(n-k+j)}\,k!(n-k)!\left(\frac{n-2k-2i}{2}\right)!\left(\frac{n-2k+2i}{2}\right)!(n-2j-1)!(j+i)!(j-i)!}$$

$$\Delta a = 0 \qquad \Delta M = 2j\,\frac{\eta^3}{e^2}\,\frac{\sin 2i\omega}{i}$$

$$\Delta e = 2\,\frac{\eta^2}{e}\cos 2i\omega \qquad \Delta\omega = \left[5-2n-10\theta^2\,(1-5\theta^2)^{-1} - 2j\,\frac{\eta^2}{e^2} + \frac{(n-2k)\theta^2}{\sin^2 I}\right]\frac{\sin 2i\omega}{i}$$

$$\Delta I = -2\,\frac{\theta}{\sin I}\cos 2i\omega \qquad \Delta\Omega = \theta\left[10(1-5\theta^2)^{-1} - \frac{n-2k}{\sin^2 I}\right]\frac{\sin 2i\omega}{i}$$

For Odd n

$$S = -\frac{4}{3}(n-1)!\,\frac{J_n a_e^{n-2}}{J_2\,p^{n-2}}\,(1-5\theta^2)^{-1}\sum_{k=0}^{\frac{n-1}{2}}\ \sum_{i=0}^{\min\left\{\frac{j}{\frac{n-2k-1}{2}}\right\}}\ \sum_{j=0}^{\frac{n-3}{2}}\frac{(-1)^{k+i}\,(2n-2k)!\,e^{2j+1}\,\sin^{n-2k}I}{2^{2(n-k+j)}\,k!(n-k)!\left(\frac{n-2k-2i-1}{2}\right)!\left(\frac{n-2k+2i+1}{2}\right)!\,(n-2j-2)!\,(j+i+1)!(j-i)!}$$

$$\Delta a = 0 \qquad \Delta M = -\frac{2j+1}{2i+1}\,\frac{\eta^3}{e^2}\cos(2i+1)\omega$$

$$\Delta e = \frac{\eta^2}{e}\sin(2i+1)\omega \qquad \Delta\omega = -\left[5-2n-10\theta^2\,(1-5\theta^2)^{-1} - (2j+1)\,\frac{\eta^2}{e^2} + \frac{(n-2k)\theta^2}{\sin^2 I}\right]\frac{\cos(2i+1)\omega}{2i+1}$$

$$\Delta I = -\frac{\theta}{\sin I}\sin(2i+1)\omega \qquad \Delta\Omega = -\theta\left[10(1-5\theta^2)^{-1} - \frac{n-2k}{\sin^2 I}\right]\frac{\cos(2i+1)\omega}{2i+1}$$

It is convenient to reduce these equations to a common form. First, note that the summations can be written as

$$\sum_{i=1}^{\frac{n-2}{2}} \sum_{j=i}^{\frac{n-2}{2}} \sum_{k=0}^{\frac{n-2i}{2}} \qquad n \text{ even}$$

$$\sum_{i=0}^{\frac{n-3}{2}} \sum_{j=i}^{\frac{n-3}{2}} \sum_{k=0}^{\frac{n-2i-1}{2}} \qquad n \text{ odd}$$

Now introduce a variable λ

$$\begin{aligned} \lambda &= 2i && n \text{ even} \\ &= 2i+1 && n \text{ odd} \end{aligned} \tag{59}$$

so that

$$\begin{aligned} \lambda &= 2, 4, \ldots, (n-2) && n \text{ even} \\ &= 1, 3, \ldots, (n-2) && n \text{ odd} \end{aligned}$$

Similarly introduce

$$\begin{aligned} \mu &= 2j && n \text{ even} \\ &= 2j+1 && n \text{ odd} \end{aligned} \tag{60}$$

so that

$$\mu = \lambda, \lambda+2, \ldots, (n-2)$$

Also introduce

$$\nu = n-2k$$

with

$$\nu = \lambda, \lambda+2, \ldots, n \tag{61}$$

Note that S is factored by $e \sin I$. Moving this factor from S into the $\Delta\epsilon$, and employing

$$\xi = \pi/2 - \omega \tag{62}$$

we obtain the results in Table IV.

It is now a simple matter to obtain

$$\delta r = -a\eta^2 \sin I \, S \left\{ \cos v \cos \lambda\xi + \frac{\mu}{\lambda} \sin v \sin \lambda\xi \right\} \tag{63}$$

$$\delta \dot{r} = \left(\frac{\mu}{p}\right)^{1/2} (1+e \cos v)^2 \sin I \, S \left\{ \sin v \cos \lambda\xi - \frac{\mu}{\lambda} \cos v \sin \lambda\xi \right\} \tag{64}$$

$$\delta r\dot{v} = \left(\frac{\mu}{p}\right)^{1/2} (1+e \cos v) \sin I \, S$$

$$\times \left\{ (1+e \cos v) \left(\cos v \cos \lambda\xi + \frac{\mu}{\lambda} \sin v \sin \lambda\xi \right) - e \cos \lambda\xi \right\} \tag{65}$$

$$\delta u + \cos I \, \delta\Omega = \sin I \, S \left\{ \left(2 \sin v + e \frac{\sin 2v}{2}\right) \cos \lambda\xi \right.$$

$$\left. - \left(2 \cos v + e \frac{\cos 2v}{2} + \frac{3e}{2}\right) \frac{\mu \sin \lambda\xi}{\lambda} + e\,(2n-5) \frac{\sin \lambda\xi}{\lambda} \right\} \tag{66}$$

$$\sin u \, \delta I - \cos u \sin I \, \delta\Omega = -e\,\theta\, S$$

$$\times \left\{ \sin u \cos \lambda\xi + \cos u \left(\nu - \frac{10 \sin^2 I}{1-5\theta^2} \right) \frac{\sin \lambda\xi}{\lambda} \right\} \tag{67}$$

$$\cos u \, \delta I + \sin u \sin I \, \delta\Omega = -e\,\theta\, S$$

$$\times \left\{ \cos u \cos \lambda\xi + \sin u \left(\frac{10 \sin^2 I}{1-5\theta^2} - \nu \right) \frac{\sin \lambda\xi}{\lambda} \right\} \tag{68}$$

from which, with Equations (26) and (27), the results in Table V are obtained.

TABLE IV

MODIFIED LONG PERIOD PERTURBATIONS

$$\delta\epsilon = S\,\Delta\epsilon$$

Where

$$S = -\frac{8\,(n-1)!}{3\cdot 2^n}\,\frac{J_n\,a_e^{\,n-2}}{J_2\,p^{n-2}}\,(1-5\theta^2)^{-1}\sum_{\lambda,\mu,\nu}\frac{(-1)^{\frac{n-\nu}{2}}\,(n+\nu)!\;e^{\mu-1}\,\sin^{\nu-1}I}{2^{\mu+\nu}\left(\frac{n-\nu}{2}\right)!\left(\frac{n+\nu}{2}\right)!\left(\frac{\nu-\lambda}{2}\right)!\left(\frac{\nu+\lambda}{2}\right)!\,(n-\mu-1)!\left(\frac{\mu-\lambda}{2}\right)!\left(\frac{\mu+\lambda}{2}\right)!}$$

$$\Delta a = 0 \qquad \Delta M = -\frac{\eta^3}{e}\sin I\,\frac{\mu}{\lambda}\sin\lambda\xi$$

$$\Delta e = \eta^2\sin I\cos\lambda\xi \qquad \Delta\omega = -\,e\sin I\left[5-2n-\mu\,\frac{\eta^2}{e^2}-10\theta^2\,(1-5\theta^2)^{-1}+\frac{\nu\theta^2}{\sin^2 I}\right]\frac{\sin\lambda\xi}{\lambda}$$

$$\Delta I = -\,e\theta\cos\lambda\xi \qquad \Delta\Omega = -\,e\sin I\theta\left[10\,(1-5\theta^2)^{-1}-\frac{\nu}{\sin^2 I}\right]\frac{\sin\lambda\xi}{\lambda}$$

With

$$\cos\lambda\xi = (-1)^{\lambda/2}\cos\lambda\omega,\ \lambda \text{ even} \qquad \sin\lambda\xi = -(-1)^{\lambda/2}\sin\lambda\omega,\ \lambda \text{ even}$$

$$= (-1)^{\left(\frac{\lambda-1}{2}\right)}\sin\lambda\omega,\ \lambda \text{ odd} \qquad = (-1)^{\left(\frac{\lambda-1}{2}\right)}\cos\lambda\omega,\ \lambda \text{ odd}$$

$$\lambda = 2,4,\cdots,(n-2),\quad n \text{ even} \qquad \mu = \lambda,\ \lambda+2,\ \cdots,\ (n-2)$$

$$= 1,3,\cdots,(n-2),\quad n \text{ odd} \qquad \nu = \lambda,\ \lambda+2,\ \cdots,\ n$$

TABLE V

LONG PERIOD PERTURBATIONS IN THE COORDINATES

$$\delta \underline{r} = r\,S \Bigg\{ -\sin I\,(1+e\cos v)\left[\cos v\cos\lambda\xi + \sin v\,\frac{\mu\sin\lambda\xi}{\lambda}\right]\underline{U}$$

$$+\sin I\left[\left(2\sin v + \frac{e\sin 2v}{2}\right)\cos\lambda\xi - \left(2\cos v + \frac{e\cos 2v}{2} + \frac{3e}{2}\right)\frac{\mu\sin\lambda\xi}{\lambda} + e\,(2n-5)\,\frac{\sin\lambda\xi}{\lambda}\right]\underline{V}$$

$$-e\,\theta\left[\sin u\cos\lambda\xi - \cos u\left(\frac{10\sin^2 I}{1-5\theta^2} - \nu\right)\frac{\sin\lambda\xi}{\lambda}\right]\underline{W}\Bigg\}$$

$$\delta \dot{\underline{r}} = \left(\frac{\mu}{p}\right)^{\frac{1}{2}} S \Bigg\{ -\sin I\,(1+e\cos v)\left[\sin v\cos\lambda\xi - (\cos v+e)\,\frac{\mu\sin\lambda\xi}{\lambda} + e\,(2n-5)\,\frac{\sin\lambda\xi}{\lambda}\right]\underline{U}$$

$$+\sin I\left[(\cos v+e)\cos\lambda\xi + \sin v\,\eta^2\,\frac{\mu\sin\lambda\xi}{\lambda} + e^2\sin v\,(2n-5)\,\frac{\sin\lambda\xi}{\lambda}\right]\underline{V}$$

$$-e\,\theta\left[(\cos u+e\cos\omega)\cos\lambda\xi + (\sin u+e\sin\omega)\left(\frac{10\sin^2 I}{1-5\theta^2} - \nu\right)\frac{\sin\lambda\xi}{\lambda}\right]\underline{W}\Bigg\}$$

It will be noted that S vanishes for $n=2$. If this were not the case, it would be necessary to modify the basic unperturbed solution, since the resulting terms would have a J_2/J_2 coefficient and could not be treated as a perturbation. However, the magnitude of J_2 is such that the long period solution for J_2 must be carried to one higher approximation than for the other J_n, yielding perturbations with the coefficient J_2^2/J_2 or J_2. As given by Brouwer, these terms are:

$$\delta a = 0 \tag{69}$$

$$\delta e = S_2^2 \eta^2 \sin I \cos 2\omega \tag{70}$$

$$\delta I = -S_2^2 e \theta \cos 2\omega \tag{71}$$

$$\delta M = S_2^2 \frac{\eta^3}{e} \sin I \sin 2\omega \tag{72}$$

$$\delta\omega = - S_2^2 e \sin I \left[\frac{1}{2} + \frac{1}{e^2} - \frac{\theta^2}{\sin^2 I} - \frac{10\theta^2}{(1-5\theta^2)(1-15\theta^2)}\right] \sin 2\omega \tag{73}$$

$$\delta\Omega = - S_2^2 e \sin I\theta \left(\frac{1}{\sin^2 I} + \frac{10}{(1-5\theta^2)(1-15\theta^2)}\right) \sin 2\omega \tag{74}$$

where

$$S_2^2 = \frac{1}{16} \frac{J_2 a_e^2}{p^2} \frac{e \sin I}{(1-5\theta^2)} (1-15\theta^2) \tag{75}$$

The additional perturbations are easily obtained:

$$\delta \underline{r}_2 = r \frac{1}{16} \frac{J_2 a_e^2}{p^2} \frac{e \sin I}{(1-5\theta^2)} (1-15\theta^2) \Bigg\{ - \sin I (1+e \cos v) \cos (2u-v) \; \underline{U}$$

$$+ \sin I \left(2 \sin (2u-v) + \frac{e \sin 2u}{2} \right) \underline{V}$$

$$- e\theta \left(\sin (u-2\omega) - \frac{10 \sin^2 I \cos u \sin 2\omega}{(1-5\theta^2)(1-15\theta^2)} \right) \underline{W} \Bigg\} \tag{76}$$

$$\delta \dot{\underline{r}}_2 = \left(\frac{\mu}{p}\right)^{\frac{1}{2}} \frac{1}{16} \frac{J_2 a_e^2}{p^2} \frac{e \sin I}{(1-5\theta^2)} (1-15\theta^2)$$

$$\times \Bigg\{ - \sin I (1+e \cos v) \left(\sin (2u-v) - \frac{e \sin 2\omega}{2} \right) \underline{U}$$

$$+ \sin I \left(\cos (2u-v) + e \cos 2\omega - \frac{e^2 \sin v \sin 2\omega}{2} \right) \underline{V}$$

$$- e\theta \left(\cos (u-2\omega) + e \cos \omega + \frac{10 \sin^2 I (\sin u + e \sin \omega) \sin 2\omega}{(1-5\theta^2)(1-15\theta^2)} \right) \underline{W} \Bigg\} \tag{77}$$

In most general perturbations formulations it is customary to employ only the J_2^2, J_3, and J_4 long period perturbations. For comparative purposes, these are given explicitly in Table VI. An evaluation yields

<u>For J_3</u>

$$\lambda = \mu = 1 \qquad \nu = 1,3$$

$$S_3 = + \frac{1}{2} \frac{J_3 a_e}{J_2 p} (1-5\theta^2)^{-1} \times \begin{Bmatrix} 4 & \nu = 1 \\ -5 \sin^2 I & \nu = 3 \end{Bmatrix} \tag{78}$$

$$\delta \underline{r}_3 = r \frac{J_3 a_e}{2J_2 p} \left\{ \sin I (1+e \cos v) \sin u \ \underline{U} + \sin I (2+e \cos v) \cos u \ \underline{V} + e\theta \cos v \ \underline{W} \right\} \tag{79}$$

$$\delta \dot{\underline{r}}_3 = \left(\frac{\mu}{p}\right)^{\frac{1}{2}} \frac{J_3 a_e}{2J_2 p} \left\{ - \sin I (1+e \cos v) \cos u \ \underline{U} - \sin I (\sin u + e \sin \omega) \ \underline{V} - e\theta \sin v \ \underline{W} \right\} \tag{80}$$

<u>For J_4</u>

$$\lambda = \mu = 2 \qquad \nu = 2,4$$

$$S_4 = + \frac{5}{16} \frac{J_4 a_e^2}{J_2 p^2} \frac{e \sin I}{(1-5\theta^2)} \times \begin{Bmatrix} 6 & \nu = 2 \\ -7 \sin^2 I & \nu = 4 \end{Bmatrix} \tag{81}$$

$$\delta \underline{r}_4 = r \frac{5}{16} \frac{J_4 a_e^2}{J_2 p^2} \frac{e \sin I}{(1-5\theta^2)} (1-7\theta^2) \left\{ - \sin I (1+e \cos v) \cos (2u-v) \ \underline{U} + \sin I \left(2 \sin (2u-v) + \frac{e \sin 2u}{2} \right) \underline{V} - e\theta \left(\sin (u-2\omega) - \frac{2 \sin^2 I \cos u \sin 2\omega}{(1-5\theta^2)(1-7\theta^2)} \right) \underline{W} \right\} \tag{82}$$

$$\delta \dot{\underline{r}}_4 = \left(\frac{\mu}{p}\right)^{\frac{1}{2}} \frac{5}{16} \frac{J_4 a_e^2}{J_2 p^2} \frac{e \sin I}{(1-5\theta^2)} (1-7\theta^2)$$

$$\times \left\{ -\sin I \, (1+e \cos v) \left(\sin (2u-v) - \frac{e \sin 2\omega}{2} \right) \underline{U} \right.$$

$$+ \sin I \left(\cos (2u-v) + e \cos 2\omega - \frac{e^2 \sin v \sin 2\omega}{2} \right) \underline{V}$$

$$\left. - e\theta \left(\cos (u-2\omega) + e \cos \omega + \frac{2 \sin^2 I \, (\sin u + e \sin \omega) \sin 2\omega}{(1-5\theta^2)(1-7\theta^2)} \right) \underline{W} \right\} \tag{83}$$

From which the equations in Table VI are easily obtained.

TABLE VI

$J_2 - J_4$ LONG PERIOD PERTURBATIONS

$$\delta \underline{r} = r \Bigg\{ \sin I\,(1+e\cos v)\left(\alpha_2 \sin u - \alpha_3 \cos(2u-v)\right) \quad \underline{U}$$

$$+ \sin I \left(\alpha_2 (2+e\cos v)\cos u + \alpha_3 \left(2\sin(2u-v) + \frac{e\sin 2u}{2}\right)\right) \quad \underline{V}$$

$$+ e\theta \left(\alpha_2 \cos v - \alpha_3 \sin(u-2\omega) + \alpha_4 \cos u \sin 2\omega\right) \quad \underline{W} \Bigg\}$$

$$\delta \dot{\underline{r}} = \left(\frac{\mu}{p}\right)^{\frac{1}{2}} \Bigg\{ -\sin I\,(1+e\cos v)\left(\alpha_2 \cos u + \alpha_3 \left(\sin(2u-v) - \frac{e\sin 2\omega}{2}\right)\right) \quad \underline{U}$$

$$- \sin I \left(\alpha_2 (\sin u + e\sin\omega) - \alpha_3 \left(\cos(2u-v) + e\cos 2\omega - \frac{e^2 \sin v \sin 2\omega}{2}\right)\right) \quad \underline{V}$$

$$- e\theta \left(\alpha_2 \sin v + \alpha_3 (\cos(u-2\omega) + e\cos\omega) + \alpha_4 (\sin u + e\sin\omega)\sin 2\omega\right) \quad \underline{W} \Bigg\}$$

Where

$$\alpha_2 = \frac{1}{2}\,\frac{J_3\, a_e}{J_2\, p} \qquad \alpha_3 = \frac{e\sin I}{(1-5\theta^2)}\left[\frac{1}{16}\,\frac{J_2\, a_e^2}{p^2}\,(1-15\theta^2) + \frac{5}{16}\,\frac{J_4\, a_e^2}{J_2\, p^2}\,(1-7\theta^2)\right]$$

$$\alpha_4 = \frac{10}{16}\,\frac{e\sin^3 I}{(1-5\theta^2)^2}\left(\frac{J_2\, a_e^2}{p^2} + \frac{J_4\, a_e^2}{J_2\, p^2}\right)$$

SECTION V

SECULAR TERMS

The results of Brouwer[1] and Giacaglia[2] are given in Table VII, where

$$S = \sum_{\substack{n=2 \\ n \text{ even}}}^{\infty} \frac{(n-1)!}{2^{2n}} \frac{J_n a_e^n}{p^n} \sum_{k=0}^{n/2} \sum_{j=0}^{\frac{n-2}{2}} \frac{(-1)^k (2n-2k)!\, e^{2j} \sin^{n-2k} I}{2^{2(j-k)} k!(n-k)!(\frac{n-2k}{2}!)^2 (j!)^2 (n-2j-1)!} \tag{84}$$

In most practical applications it is the parameter n rather than a which is determined. From the relationship

$$\frac{1}{1+\alpha} = 1 - \alpha + \alpha^2 + \ldots$$

where $(1+\alpha)$ represents the terms factored by n_o in the equation for $\bar{n}$ we obtain to the second order:

$$\begin{aligned} n_o &= \bar{n}\,(1-\alpha + \alpha^2 + \ldots) \\ &= \bar{n} \left\{ 1 + \frac{3}{4} \frac{J_2 a_e^2}{p^2} \eta\,(1-3\theta^2) + \frac{45}{128} \frac{J_4 a_e^4}{p^4} \eta\, e^2 \left[3-30\theta^2 + 35\theta^4 \right] \right. \\ &\qquad \left. - \frac{3}{128} \frac{J_2^2 a_e^4}{p^4} \eta \left[10-8\eta-25e^2 + (-60+48\eta+90e^2)\theta^2 + (130-72\eta-25e^2)\theta^4 \right] \right\} \\ &= \bar{n} \left\{ 1 - S\eta\,(2j \frac{1-e^2}{e^2} - 3) + \left[J_2^2 \text{ term above} \right] \right\} \end{aligned} \tag{85}$$

TABLE VII

SECULAR TERMS ACCORDING TO BROUWER AND GIACAGLIA

$$\dot{M} = \bar{n} = n_o \left\{ 1 - \frac{3}{4} \frac{J_2 a_e^2}{p^2} \eta (1-3\theta^2) - \frac{45}{128} \frac{J_4 a_e^4}{p^4} \eta e^2 \left[3 - 30\theta^2 + 35\theta^4 \right] \right.$$

$$\left. + \frac{3}{128} \frac{J_2^2 a_e^4}{p^4} \eta \left[10 + 16\eta - 25e^2 + (-60 - 96\eta + 90e^2)\theta^2 + (130+144\eta-25e^2)\theta^4 \right] \right\}$$

$$= n_o \left[1 + S\eta \left(2j \frac{1-e^2}{e^2} - 3 \right) + \left(J_2^2 \text{ term above} \right) \right]$$

$$\dot{\omega} = n_o \left\{ - \frac{3}{4} \frac{J_2 a_e^2}{p^2} (1-5\theta^2) - \frac{15}{128} \frac{J_4 a_e^4}{p^4} \left[12+9e^2 - (144+126e^2)\theta^2 + (196+189e^2)\theta^4 \right] \right.$$

$$\left. + \frac{3}{128} \frac{J_2^2 a_e^4}{p^4} \left[-10+24\eta-25e^2 + (-36-192\eta+126e^2)\theta^2 + (430+360\eta-45e^2)\theta^4 \right] \right\}$$

$$= n_o \left(S \left[1 - 2n - 2j \frac{1-e^2}{e^2} + \frac{(n-2k)\theta^2}{\sin^2 I} \right] + \left[J_2^2 \text{ term above} \right] \right)$$

$$\dot{\Omega} = n_o \theta \left\{ - \frac{3}{2} \frac{J_2 a_e^2}{p^2} - \frac{15}{32} \frac{J_4 a_e^4}{p^4} (2+3e^2)(3-7\theta^2) + \frac{3}{32} \frac{J_2^2 a_e^4}{p^4} \left[4+12\eta-9e^2 + (-40-36\eta+5e^2)\theta^2 \right] \right\}$$

$$= - n_o \theta \left[S \left(\frac{n-2k}{\sin^2 I} \right) + \left(J_2^2 \text{ term above} \right) \right]$$

If $\bar{n}$ is substituted for n_o in the equations for $\dot{\omega}$ and $\dot{\Omega}$ in Table VII, the complexity of the J_2^2 terms is reduced; they become:

For $\dot{\omega}$

$$\bar{n}\ \frac{3}{128}\ \frac{J_2^2 a_e^4}{p^4}\left[-10-25e^2 + (-36+126e^2)\theta^2 + (430-45e^2)\theta^4\right] \tag{86}$$

For $\dot{\Omega}$

$$\bar{n}\theta\ \frac{3}{32}\ \frac{J_2^2 a_e^4}{p^4}\left[4-9e^2 + (-40+5e^2)\theta^2\right] \tag{87}$$

[illegible] may be computed from the relationship

$$a = \mu^{1/3}\ n_o^{-2/3} = \mu^{1/3}\ \bar{n}^{-2/3}\ (1+2/3\ \alpha - 1/9\ \alpha^2 \ldots)$$

[illegible] which we obtain

$$a = \mu^{1/3}\ \bar{n}^{-2/3}\left\{1 - 1/2\ \frac{J_2 a_e^2}{p^2}\ \eta\ (1-3\theta^2)\right.$$

$$+ \frac{1}{64}\ \frac{J_2^2 a_e^4}{p^4}\ \eta\left[10+12\eta-25e^2 + (-60-72\eta+90e^2)\theta^2 + (130+108\eta-25e^2)\theta^4\right]$$

$$\left. - \frac{15}{64}\ \frac{J_4 a_e^4}{p^4}\ \eta\ e^2\left[3-30\theta^2 + 35\theta^4\right]\right\}$$

$$= \mu^{1/3}\ \bar{n}^{-2/3}\left\{1+s\eta\left(\frac{4j}{3}\ \frac{1-e^2}{e^2} - 2\right) + \left[J_2^2\ \text{term above}\right]\right\} \tag{88}$$

Note that p, which is a function of a, enters into these equations. If we employ

$$\tilde{p} = \mu^{1/3}\,\bar{n}^{-2/3}\,(1-e^2)$$

$$= p\left(1 + \frac{1}{2}\,\frac{J_2 a_e^{\,2}}{p^2}\,\eta\,(1-3\theta^2) + \ldots\right)$$

in the equations in Table VII five $J_2^2\,\eta$ terms are added to Equations (86), (87), and (88). It is therefore more efficient to compute $\tilde{p}$ from $\bar{n}$ and p^{-2} from

$$p^{-2} = \tilde{p}^{\,-2}\left(1 + \frac{J_2 a_e^{\,2}}{p^2}\,\eta\,(1-3\theta^2) + \ldots\right) \tag{89}$$

for use in the J_2 terms. Either $\tilde{p}$ or p may be used in the J_2^2 terms, since the error in using $\tilde{p}$ is of the third order. If, however, Equation (88) is only carried to the first order, it may be entered with $\tilde{p}$, and p computed from a, so that Equation (89) is not required.

If the Kozai $\bar{a}$ is to be employed as an element, then Equation (88) is replaced by

$$\bar{a} = a\left(1 + \frac{3}{4}\,\frac{J_2 a_e^{\,2}}{p^2}\,\eta\,(1-3\theta^2)\right)$$

$$= \mu^{1/3}\,\bar{n}^{-2/3}\left(1 + \frac{J_2 a_e^{\,2}}{4\,p^2}\,\eta\,(1-3\theta^2)\right) \tag{88a}$$

to the first order. The use of $\bar{n}$ and

$$\bar{p} = \bar{a}\,(1-e^2)$$

in the equations in Table VII would again lead to additional terms in η in Equations (86) and (87). The preferred approach is therefore to correct $\bar{p}$ using

$$p^{-2} = \bar{p}^{-2}\left(1 + \frac{3}{2}\,\frac{J_2 a_e^{\,2}}{p^2}\,\eta\,(1-3\theta^2)\right) \tag{89a}$$

A rather more complicated approach is employed in the GEPERS routine[4] developed for use in the SPACETRACK system. The parameters employed include $\bar{a}$ and $\bar{p}$, with a mean motion parameter $\tilde{n}$ defined by

$$\tilde{n}^2\,\bar{a}^3 = \mu\left(1 + \frac{3}{4}\,\frac{J_2 a_e^{\,2}}{\bar{p}^2}\,\eta\,(1-3\theta^2)\right) \tag{90}$$

which is interpreted to mean

$$\tilde{n} = n_o\left[1 - \frac{3}{4}\,\frac{J_2 a_e^{\,2}}{\bar{p}^2}\,\eta\,(1-3\theta^2)\right]$$

$$= n_o\left[1 - \frac{3}{4}\,\frac{J_2 a_e^{\,2}}{p^2}\,\eta\,(1-3\theta^2)\right.$$

$$\left. + \frac{3}{128}\,\frac{J_2^2 a_e^{\,4}}{p^4}\,\eta\,(48\eta - 288\eta\theta^2 + 432\eta\theta^4)\right]$$

(where either p or $\bar{p}$ may be used in terms of order J_2^2.) If this equation is subtracted from the equation for $\bar{n}$ in Table VII and $\tilde{n}$ is subtracted for n_o in the second order terms we obtain:

$$\bar{n} = \tilde{n} \left\{ 1 + \frac{3}{128} \frac{J_2^2 a_e^4}{\bar{p}^4} \eta \left[10-32\eta-25e^2 + (-60+192\eta+90e^2)\theta^2 + (130-288\eta-25e^2)\theta^4 \right] - \frac{45}{128} \frac{J_4 a_e^4}{\bar{p}^4} \eta\, e^2 \left[3-30\theta^2 + 35\theta^4 \right] \right\} \tag{91}$$

The expressions for $\dot{\omega}$ and $\dot{\Omega}$ in GEPERS employ $\tilde{n}$ and $\bar{p}$ in place of $\bar{n}$ and p; $\tilde{n}$ agrees with $\bar{n}$ to the first order, but the use of $\tilde{p}$ makes it necessary to modify Equations (86) and (87). The results may be obtained from Equation (86a) and are:

<u>For $\dot{\omega}$</u>

$$\tilde{n} \quad \frac{3}{128} \frac{J_2^2 a_e^4}{p^4} \left[-10-48\eta-25e^2 + (-36+384\eta+126e^2)\theta^2 + (430-720\eta-45e^2)\theta^4 \right] \tag{86a}$$

<u>For $\dot{\Omega}$</u>

$$\tilde{n}\theta \frac{3}{32} \frac{J_2^2 a_e^4}{p^4} \left[4-24\eta-9e^2 + (-40+72\eta+5e^2)\theta^2 \right. \tag{87a}$$

Suppose now that we wish to use the smoothed elements $\bar{n}$, a', e', I', ω' and Ω' as defined in Equation (55). If we enter the J_2 terms for $\dot{\omega}$ and $\dot{\Omega}$ in Table VII with

$$p' = a' (1-e'^2)$$

$$\eta' = (1-e'^2)^{1/2}$$

$$\theta' = \cos I'$$

then the J_2^2 terms in Equation (86) and (87) will be changed by

$$\delta\dot{\omega} = \bar{n} \left(- \frac{3}{4} \frac{J_2 a_e^2}{p^2} (1-5\theta^2) \right) \left[- 2 \frac{\delta a}{a} + \frac{4e\ \delta e}{\eta^2} + \frac{10 \sin I\theta\ \delta I}{(1-5\theta^2)} \right] \tag{92}$$

$$\delta\dot{\Omega} = \bar{n}\ \theta \left(- \frac{3}{2} \frac{J_2 a_e^2}{p^2} \right) \left[- 2 \frac{\delta a}{a} + \frac{4e\ \delta e}{1-e^2} - \frac{\sin I\ \delta I}{\theta} \right] \tag{93}$$

where the $\delta\epsilon_i$ are related to the $\Delta\epsilon_i$ of Equation (55) by

$$\delta\epsilon_i = \epsilon_i - \epsilon_i' = - \Delta\epsilon_i$$

The results are

<u>For $\dot{\omega}$</u>

$$\bar{n} \frac{3}{128} \frac{J_2^2 a_e^4}{p^4} \left[-42-57e^2 + (-20+382e^2)\theta^2 + (190-525e^2)\theta^4 \right] \tag{86b}$$

For $\dot{\Omega}$

$$\bar{n}\theta \frac{3}{32} \frac{J_2^2 a_e^4}{p^4} \left[-25e^2 + (-4+53e^2)\theta^2\right] \tag{87b}$$

These terms differ from those given by Merson[7] because he employs u as the argument of the secular terms rather than M (in the form $\bar{n}t$), i.e., his rates apply for a nodal rather than an anomalistic frequency and may be obtained by subtracting $\frac{\dot{\omega}}{\bar{n}}^2$ and $\frac{\dot{\omega}\dot{\Omega}}{\bar{n}}$ from Equations (86b) and (87b).

Now since from Equation (55),

$$\omega' - \omega = -\frac{3}{4} \frac{J_2 a_e^2}{p^2} (1-5\theta^2) \ (v-M) \approx \frac{\dot{\omega}}{n} \ (v-M)$$

$$\Omega' - \Omega = -\frac{3}{2} \frac{J_2 a_e^2}{p^2} \theta \ (v-M) \approx \frac{\dot{\Omega}}{n} \ (v-M)$$

if we define the increase in mean anomaly to be

$$\Delta M = \bar{n} \ \Delta t \tag{94}$$

and we define Δv to be the related quantity

$$\Delta v = \Delta M + (v-M) \tag{95}$$

(note that Δv is not zero at the epoch, unless epoch is defined to be at perigee or apogee)

we have

$$\omega' = \omega_o + \dot{\omega}\,\Delta t + \frac{\dot{\omega}}{\bar{n}}\,(v-M) \tag{96}$$

$$= \omega_o' + \frac{\dot{\omega}}{\bar{n}}\,\Delta v$$

and similarly

$$\Omega' = \Omega_o' + \frac{\dot{\Omega}}{\bar{n}}\,\Delta v \tag{97}$$

where $\frac{\dot{\omega}}{\bar{n}}$ and $\frac{\dot{\Omega}}{\bar{n}}$ are obtained from Table VII as modified by Equations (86b) and (87b). It remains to determine a' (and, thereby p'). Since

$$a' = a\left(1 + \frac{1}{2}\,\frac{J_2 a_e^2}{p^2}\,\eta\,(1-3\theta^2)\right)$$

Equation (88) becomes

$$a' = \mu^{1/3}\,\bar{n}^{-2/3}\left\{1 + \frac{1}{64}\,\frac{J_2^2 a_e^4}{p^4}\,\eta\left[10-4\eta-25e^2 + (-60+24\eta+90e^2)\theta^2 + (130-36\eta-25e^2)\theta^4\right] - \frac{15}{64}\,\frac{J_4 a_e^4}{p^4}\,\eta\,e^2\left[3-30\theta^2 + 35\theta^4\right]\right\}$$

$$= \mu^{1/3}\,\bar{n}^{-2/3}\left\{1 + S\eta\left(\frac{4j}{3}\,\frac{1-e^2}{e^2} - 2\right) + \left[J_2^2 \text{ term above}\right]\right\} \tag{88b}$$

$$(n > 2)$$

Thus, to the first order, a' may be computed from $\bar{n}$ using the Keplerian relationship and no special provisions are required for computing p'.

The non-conservative perturbations are sometimes represented by polynomials in time. If, for example

$$M = M + n\,\Delta t + \frac{\dot{n}}{2}\,\Delta t^2 + \frac{\ddot{n}}{6}\,\Delta t^3 \tag{98}$$

$$\bar{n} = n + \dot{n}\,\Delta t + \frac{\ddot{n}}{2}\,\Delta t^2 \tag{99}$$

then the coefficients for a'

$$a' = a + \dot{a}\,\Delta t + \frac{\ddot{a}}{2}\,\Delta t^2 \tag{100}$$

are easily obtained from Equation (88b) as

$$a = \mu^{1/3}\,n^{-2/3} \tag{101}$$

$$\dot{a} = -\frac{2}{3}\frac{\dot{n}}{n}\,a \tag{102}$$

$$\frac{\ddot{a}}{2} = \left[\frac{5}{9}\left(\frac{\dot{n}}{n}\right)^2 - \frac{1}{3}\frac{\ddot{n}}{n}\right]a \tag{103}$$

A similar polynomial can be employed for e'

$$e' = e + \dot{e}\,\Delta t + \frac{\ddot{e}}{2}\,\Delta t^2 \tag{104}$$

The time dependent terms may be obtained empirically, or from the approximation that perigee height remains constant

$$\frac{d}{dt} a' (1-e') = 0$$

which yields

$$\dot{e} = \frac{1-e}{a} \dot{a} = - \frac{2}{3} \frac{1-e}{n} \dot{n} \tag{105}$$

$$\frac{\ddot{e}}{2} = \frac{1-e}{a} \left(\frac{\ddot{a}}{2} - \frac{\dot{a}^2}{a} \right) = \frac{1-e}{n} \left(\frac{1}{9} \frac{\dot{n}^2}{n} - \frac{1}{3} \ddot{n} \right) \tag{106}$$

The inclination is usually assumed constant, although it may be represented by a similar series. Where these secular perturbations on $\bar{n}$, a', and e' exist, they must be reflected in the motion of node and perigee. The variations in $\bar{n}$ are already incorporated in Equations (96) and (97). It is usually adequate to carry the additional variations due to a', e', and I' to the first order in J_2; the necessary derivatives of $\frac{\dot{\omega}}{\bar{n}}$ and $\frac{\dot{\Omega}}{\bar{n}}$ may be obtained from Equations (92) and (93). . The resulting equations are

$$\begin{pmatrix} \omega' \\ \Omega' \end{pmatrix} = \begin{pmatrix} \omega_o \\ \Omega_o \end{pmatrix} + \begin{pmatrix} \frac{\dot{\omega}}{\bar{n}} \\ \frac{\dot{\Omega}}{\bar{n}} \end{pmatrix} \Delta v \left(1 - 2 \frac{\delta a}{a} + \frac{4e}{1-e^2} \delta e + \begin{pmatrix} \frac{10 \sin I \theta}{1-5\theta^2} \\ - \frac{\sin I}{\theta} \end{pmatrix} \delta I \right) \tag{107}$$

where the δ's represent the change from epoch, or

$$\begin{pmatrix} \omega' \\ \Omega' \end{pmatrix} = \begin{pmatrix} \omega_o \\ \Omega_o \end{pmatrix} + \begin{pmatrix} \frac{\dot{\omega}}{\bar{n}} \\ \frac{\dot{\Omega}}{\bar{n}} \end{pmatrix} \Delta v \ (1+\alpha) \tag{108}$$

where (using Equations (102) and (103))

$$\alpha = \left(\frac{4}{3}\frac{\dot{n}}{n} + \frac{4e}{1-e^2}\dot{e} + \begin{pmatrix} \frac{10 \sin I\theta}{1-5\theta^2} \\ - \frac{\sin I}{\theta} \end{pmatrix} \dot{I} \right) \Delta t$$

$$+ \left(- \frac{10}{9}\left(\frac{\dot{n}}{n}\right)^2 + \frac{2}{3}\frac{\ddot{n}}{n} + \frac{2e}{1-e^2}\ddot{e} + \begin{pmatrix} \frac{10 \sin I\theta}{1-5\theta^2} \\ - \frac{\sin I}{\theta} \end{pmatrix} \frac{\ddot{I}}{2} \right) \Delta t^2 \tag{109}$$

or, for constant perigee height and inclination (see Equations (105) and (106)),

$$\alpha = \frac{4(1-e)}{3(1+e)}\frac{\dot{n}}{n}\Delta t + \left(\frac{-10-6e}{9(1+e)}\left(\frac{\dot{n}}{n}\right)^2 + \frac{2(1-e)}{3(1+e)}\frac{\ddot{n}}{n} \right) \Delta t^2 \tag{109a}$$

In some cases it is desirable to express the secular terms as functions of time rather than as functions of Δv. It is possible

to expand Equations (108), (109) and (109a) using Equation (95), and by separating like powers of Δt to obtain

$$\begin{pmatrix} \omega' \\ \Omega' \end{pmatrix} = \begin{pmatrix} \omega_o \\ \Omega_o \end{pmatrix} + \begin{pmatrix} \dot{\omega} \\ \dot{\Omega} \end{pmatrix} \left(\Delta t + \frac{v-M}{n} \right) + \begin{pmatrix} \frac{\ddot{\omega}}{2} \\ \frac{\ddot{\Omega}}{2} \end{pmatrix} \Delta t^2 + \begin{pmatrix} \frac{\dddot{\omega}}{6} \\ \frac{\dddot{\Omega}}{6} \end{pmatrix} \Delta t^3 + \ldots \tag{110}$$

where

$$\begin{pmatrix} \dot{\omega} \\ \dot{\Omega} \end{pmatrix} = \begin{pmatrix} \frac{\dot{\omega}}{\bar{n}} \\ \frac{\dot{\Omega}}{\bar{n}} \end{pmatrix} \bar{n} \tag{111}$$

$$\begin{pmatrix} \frac{\ddot{\omega}}{2} \\ \frac{\ddot{\Omega}}{2} \end{pmatrix} = \begin{pmatrix} \frac{\dot{\omega}}{\bar{n}} \\ \frac{\dot{\Omega}}{\bar{n}} \end{pmatrix} \left[\frac{11}{6} \dot{n} + \frac{4e}{1-e^2} n\dot{e} + \begin{pmatrix} \frac{10 \sin I\theta}{1-5\theta^2} \\ -\frac{\sin I}{\theta} \end{pmatrix} n\dot{I} \right] \tag{112}$$

$$= \begin{pmatrix} \frac{\dot{\omega}}{\bar{n}} \\ \frac{\dot{\Omega}}{\bar{n}} \end{pmatrix} \left[\frac{11 - 5e}{6(1+e)} \dot{n} \right] \tag{112a}$$

REFERENCES

1. Dirk Brouwer, "Solution of the Problem of Artificial Satellite Theory Without Drag," Astronomical Journal, 64, (1959) 378-397, AFCRC-TN-59-638.

2. Giorgio Giacaglia, "The Influence of High-Order Zonal Harmonics on the Motion of an Artificial Satellite Without Drag," Astronomical Journal, 69, (1946) 303-308. (See "Erratum" Astronomical Journal, 71, (1966) 228.)

3. R. H. Lyddane, "Small Eccentricities or Inclinations in the Brouwer Theory of the Artificial Satellite," Astronomical Journal, 68, (1963), 555-561.

4. See, for example,
Chaffee, Arsenault, and Kuhlman, "General Ephemeris Routine Formulation Document," Aeronutronic Technical Documentary Report, U-2731, ESD-TDR-64-522, August 1964.

5. Boris Garfinkel, "The Orbit of a Satellite of an Oblate Planet", Astronomical Journal, 69,(1959) 353-367; Ballistic Research Laboratories, Report No. 1089.

6. Yoshihide Kozai, "The Motion of a Close Earth Satellite," Astronomical Journal, 64, (1959), 367-377.

7. R. H. Merson, "The Motion of a Satellite in an Axi-symmetric Gravitational Field," Geophysics Journal, (1961), 17-52, Royal Aircraft Establishment Technical Note Space 26.

8. Imre Izsak, "A Note on Perturbation Theory," Astronomical Journal, 68, (1963), 559-561.

9. Garfinkel and McAllister, "The Zonal Harmonic Perturbations of an Artificial Satellite," Astronomical Journal, 69, 1964, 453-459.

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY *(Corporate author)* The MITRE Corporation Bedford, Massachusetts	2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED 2b. GROUP

3. REPORT TITLE

On the Motion of an Artificial Earth Satellite

4. DESCRIPTIVE NOTES *(Type of report and inclusive dates)*

N/A

5. AUTHOR(S) *(Last name, first name, initial)*

Frazer, James B.

6. REPORT DATE September 1966	7a. TOTAL NO. OF PAGES 58	7b. NO. OF REFS 9
8a. CONTRACT OR GRANT NO. AF 19(628)5165 b. PROJECT NO. 4965 c. d.	9a. ORIGINATOR'S REPORT NUMBER(S) ESD-TR-66-293 9b. OTHER REPORT NO(S) *(Any other numbers that may be assigned this report)* MTR-208	

10. AVAILABILITY/LIMITATION NOTICES

Distribution of this document is unlimited.

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY Deputy for Surveillance and Control Systems, Space Defense System Program Office, L.G. Hanscom Field, Bedford, Massachusetts.

13. ABSTRACT

The periodic position and velocity perturbations of an artificial earth satellite are developed to the first order for all J_n, based on the theory by Brouwer as extended by Giacagliz. An explicit formulation is also provided for the subset J_2, J_3, J_4. The use of a position and velocity formulation circumvents the equatorial and circular orbit singularities found in conventional developments. The definition of the mean elements of the theory is modified to reduce the complexity of the position perturbations, as suggested by Merson's Theory, and the resulting changes to the secular terms are developed. In order to facilitate an empirical correction for drag, the observed mean motion is introduced as a mean element in place of the semi-major axis.

DD FORM 1 JAN 64 1473

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A ROLE	LINK A WT	LINK B ROLE	LINK B WT	LINK C ROLE	LINK C WT
SATELLITE ORBITAL MOTION						
GENERAL PERTURBATIONS						
ORBIT DETERMINATIONS						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and addresa of the contractor, subcontractor, grantee, Department of Defense activity or other organization *(corporate author)* isauing the report.

2*a*. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulationa.

2*b*. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forcea Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital lettera. Titles in all casea ahould be unclassified. If a meaningful title cannot be aelected without claasification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, aummary, annual, or final. Give the incluaive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) aa ahown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an abaolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year; or month, year. If more than one date appeara on the report, uae date of publication.

7*a*. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7*b*. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8*a*. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8*b*, 8*c*, & 8*d*. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbera, task number, etc.

9*a*. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. Thia number muat be unique to this report.

9*b*. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers *(either by the originator or by the sponsor)*, also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

(1) "Qualified requesters may obtain copiea of this report from DDC."

(2) "Foreign announcement and disaemination of this report by DDC is not authorized."

(3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."

(4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified usera shall request through _____."

(5) "All diatribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring *(paying for)* the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of claasified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as *(TS)*, *(S)*, *(C)*, or *(U)*.

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional