AMSAR/SA/N-24

ATTRIBUTE ANALYSIS OF THE ARMOR MACHINE GUN CANDIDATES

JAMES B. BEESON

THOMAS N. MAZZA

JULY 1975

TECHNICAL
LIBRARY

US ARMY ARMAMENT COMMAND

SYSTEMS ANALYSIS DIRECTORATE

ROCK ISLAND, ILLINOIS 61201

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS
BEFORE COMPLETING FORM

1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
AMSAR/SA/N-24		

4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED
Attribute Analysis of the Armor Machine Gun Candidates.	Note - Final
	6. PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s)	8. CONTRACT OR GRANT NUMBER(s)
James B. Beeson Thomas N. Mazza	

9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
US Army Armament Command Systems Analysis Directorate Rock Island, IL 61201	

11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE
US Army Armament Command Systems Analysis Directorate Rock Island, IL 61201	July 1975
	13. NUMBER OF PAGES
	27

14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office)	15. SECURITY CLASS. (of this report)
	Unclassified
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Machine Gun	Reliability
Tank Armament	Maintainability
Performance Analysis	
Risk Analysis	
Technical Performance	

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

In May 74, the Army initiated a program to select an interim weapon from the existing world wide "off-the-shelf" hardware to replace the current 7.62mm M219 Coax Machine Gun. Since inception, the M219 has had a history of reliability problems in the field. Alternatives considered were the M219, the product improved M219, the M60E2, and foreign 7.62mm weapons. As part of the evaluation, an attribute analysis was conducted to compare the technical performance, RAM-D and physical characteristics of the candidates. Due to wide variability in test procedures, sample size quality, gathered data, and results available for the

DD FORM 1 JAN 73 **1473** EDITION OF 1 NOV 65 IS OBSOLETE

20. ABSTRACT
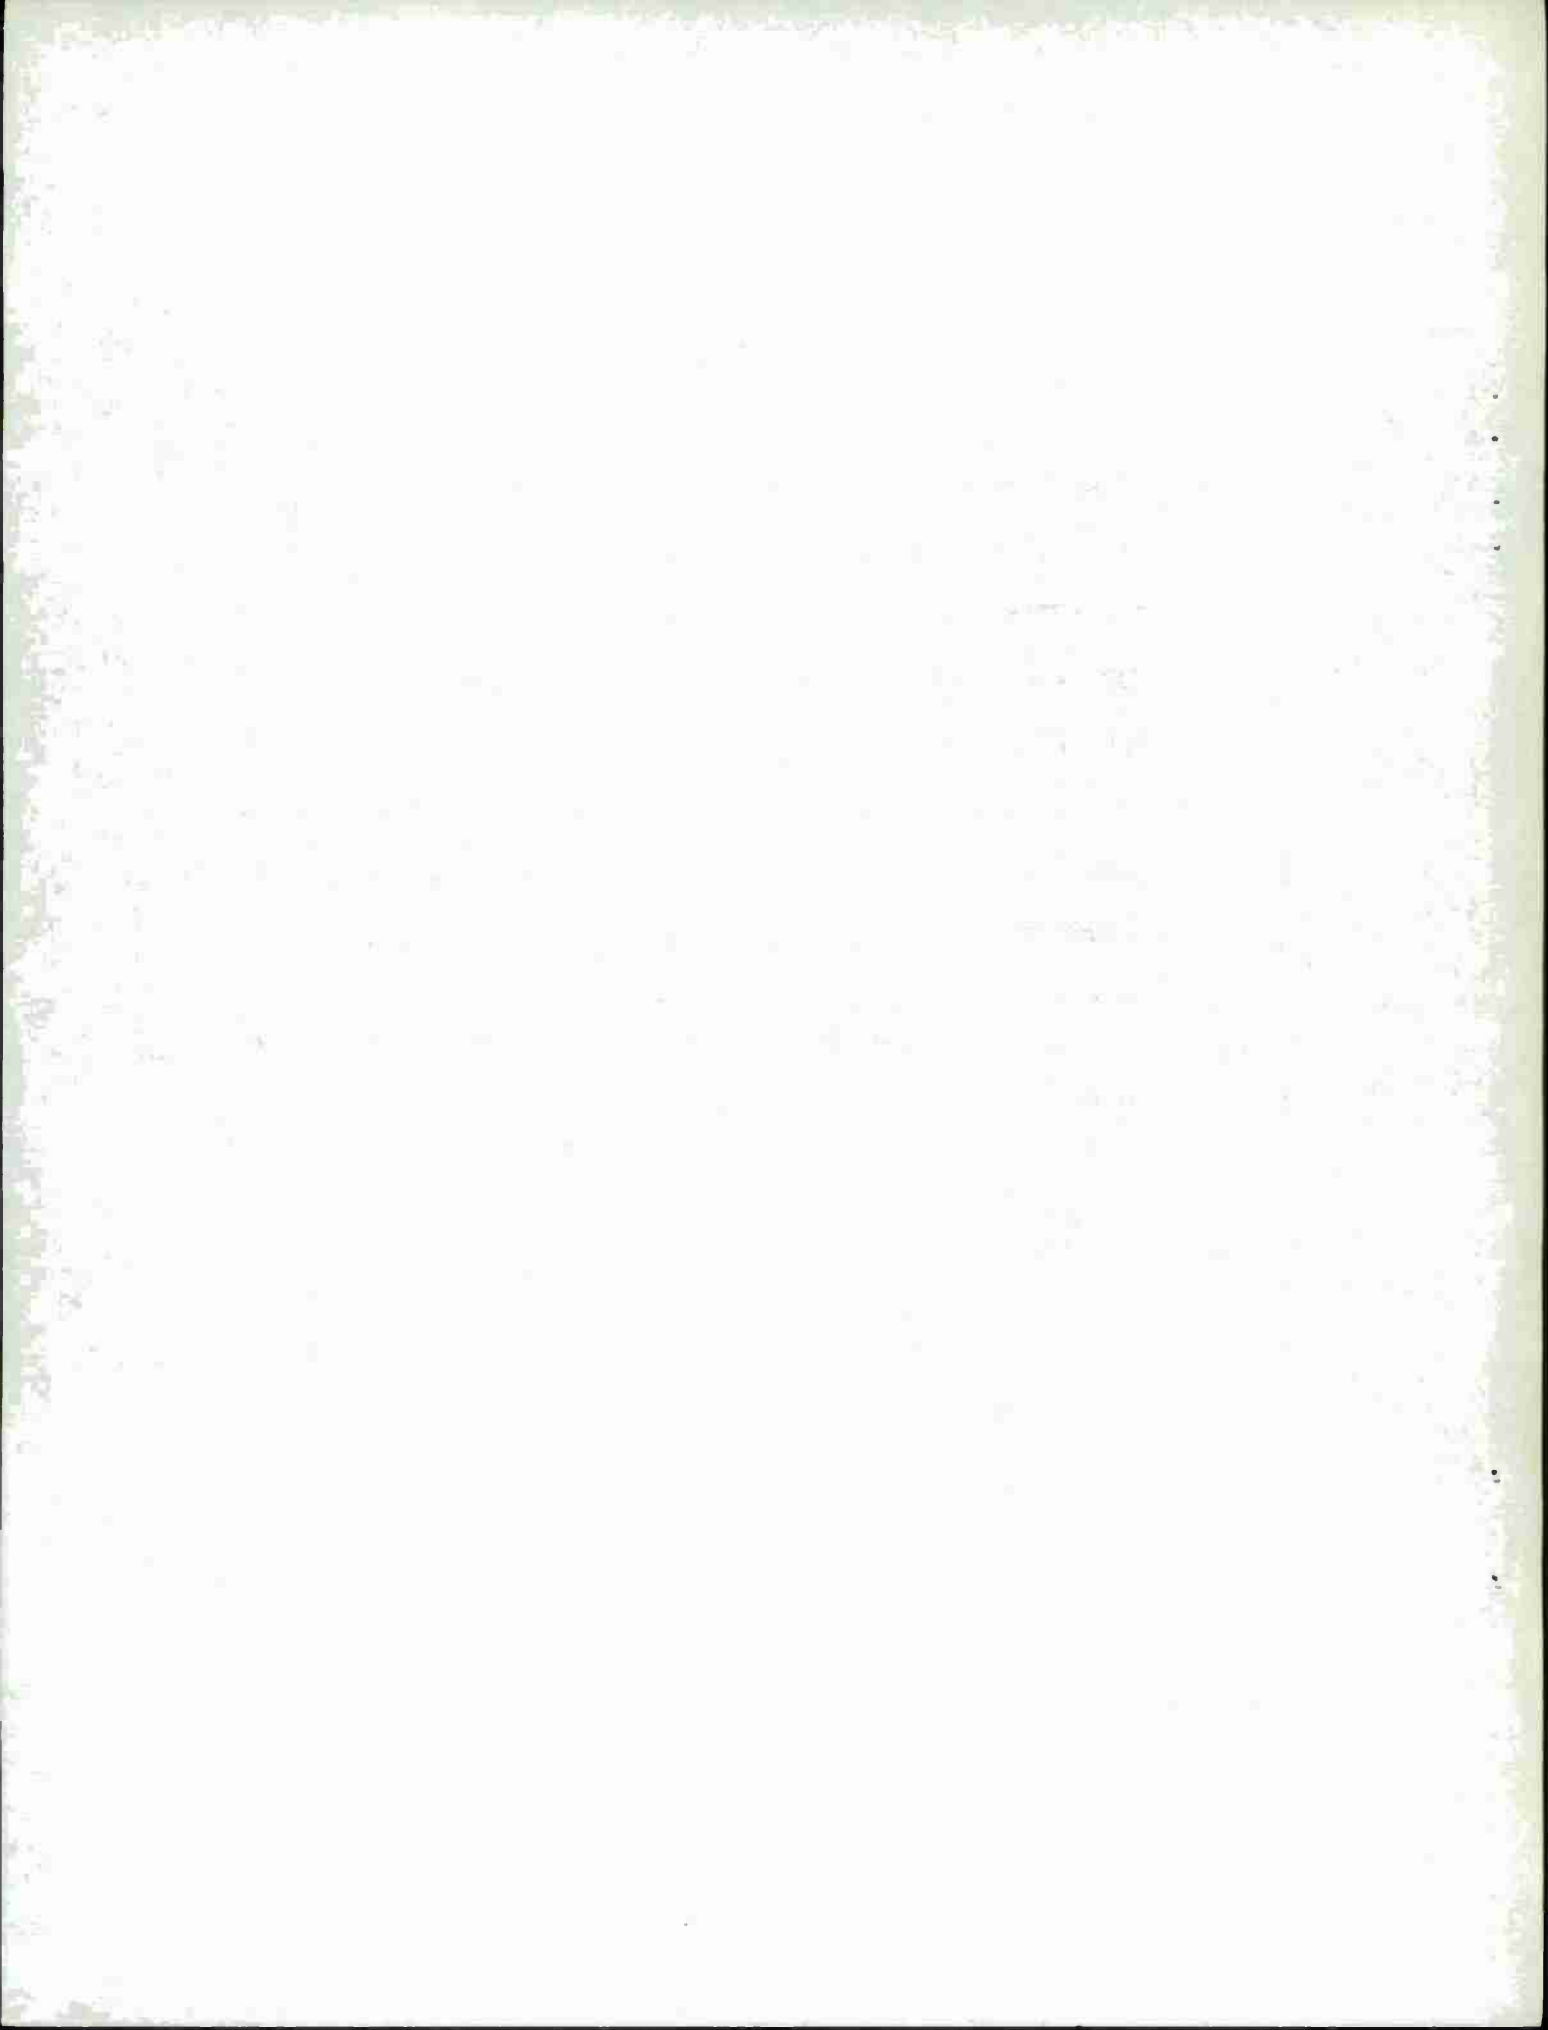
candidate weapons, engineering experts were brought together to achieve a
blend of data and opinion on each candidate weapon. Discussions ensued
until a consensus was reached on ranking and scoring each candidate for 23
attributes. An analysis was then performed to establish a weapon ranking
and dominance of ranking as a function of attribute weights.

TABLE OF CONTENTS

Next page is blank.

OBJECTIVE

The objective of this analysis is to compare the attributes of the Armor Machine Gun candidates.

INTRODUCTION

The current Armor Machine Gun is the US M219, a 7.62mm machine gun, designed to be mounted coaxially with the main tank armament and have applications to other armor vehicles. The operation/maintenance history shows that this weapon system has performance deficiencies which cannot be corrected by minor redesign.

A joint effort was initiated by AMC and TRADOC in May 74 to select a possible replacement for the M219 from the world-wide "off-the-shelf" hardware. The weapon candidates are presented in Table 1, all are 7.62mm systems.

This analysis compared each candidate based on TRADOC proposed attributes and quantitative weighting of these attributes. The following section describes the attributes considered in evaluating the candidate weapon systems.

ATTRIBUTES

The attributes are divided into three major categories, presented in Figure 1 and defined as follows:

1. Technical Performance: Hardware effectiveness and operation in actual field usage.

2. Physical Characteristics: Man-machine interface and weapon compatibility with the vehicle.

3. RAM-D: Reliability, availability, maintainability and durability of the weapon.

These major categories and the attributes which comprise each category are presented in Figures 2 through 4. Relative weights, assigned by TRADOC, indicate the importance of a weapon system having that attribute.

The ability of a weapon system to fulfill an attribute and the importance (weight) of that attribute were used to evaluate the candidate weapon systems. This attribute analysis was based on data collected from prior tests and studies performed on the candidate weapons.

TEST DATA

Recent tests have been conducted on all candidates; however, these tests performed were not directly comparable as to purpose and results. The tests used for data in this analysis are as follows:

5

1. The US candidate weapon systems (M219, M219PT, and M60E2) were tested at Ft Knox with modified armor mounts. The test results are still being evaluated and only limited data was available for this study.

2. The foreign candidates - Canadian C1, FRG MG3, Belgium MAG58, UK L8A1, and the French AAT52 were tested at Rodman Laboratories, Rock Island Arsenal to establish performance characteristics. These test results were still under evaluation and only limited data was available for this study. Armor mounted tests were not conducted.

3. The Soviet PKM candidate was tested at H.P. White Laboratories in accordance with MTP 3-2-045 except for variations noted in the test report[1]. The testing was limited by the availability of only one weapon and quantity and quality of ammunition (i.e., ammunition used was Soviet and Chinese 7.62mm). Armor mounted tests were not conducted.

The test results received from the US and foreign candidate systems were not directly comparable due to differences in testing procedures and conditions as follows:

1. The US candidate weapon systems were tested from armor mounts (modified for the M60E2). The foreign weapon systems were tested from both hard and soft mounts but not from armor mounts.

2. The US candidates were not limited in testing by the availability of weapons or hardware. In testing the foreign candidate systems, only one weapon each was available with limited amount of replacement parts.

3. The purpose of testing the Canadian C1, Belgian MAG58, UK L8A1, FRG MG3, and the French AAT 52 by Rodman Laboratories was to establish performance characteristics instead of determining or solving engineering problems. Therefore, exact causes of malfunctions or stoppages were not always actually determined.

4. The Soviet PKM Machine Gun was tested with Soviet and Chinese 7.62mm ammunition in various degraded and corroded conditions. Weapon modifications to fire US or NATO 7.62mm ammunition was not performed.

In summary, the foreign weapon tests were limited in both sample size and quality of hardware. Direct comparisons based on test results were not possible.

WEAPON/TANK INTERFACE STUDIES

Currently, only the M219 has been employed in an Armor Machine Gun role. The other candidates (the foreign systems and US M60E2) would require weapon modifications of various degrees and replacement of mounts

_____

[1] Machine Gun, 7.62mm X 54R, Model PKM (Soviet) MCN 35764, FSTC-MX-17-25-75, December 1974, H.P. White Laboratory, Bel Air, MD.

TABLE 1. ARMOR MACHINE GUN CANDIDATES

Nomenclature	Nation	Remarks
M219	US	Current Armor Machine Gun
M219PI	US	A product improved version of the M219.
M60E2	US	A modified version of the M60 used in the infantry role.
C1	Canada	A modified M1919A4.
MG3	FRG	-
MAG58	Belgium	-
L8A1	UK	A modified MAG58.
AAT52	French	-
PKM	USSR	Without modification, fires only Soviet and Chinese 7.62mm ammunition.

ARMOR MACHINE GUN
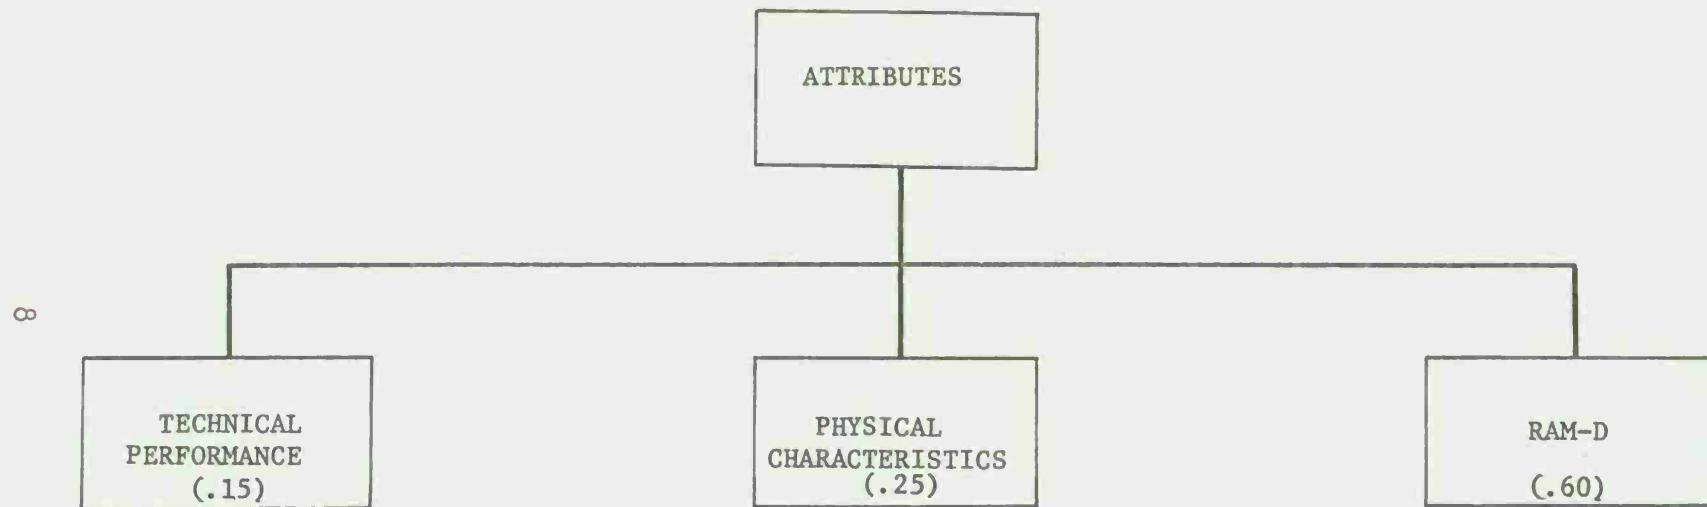
Figure 1. Major Attribute Categories
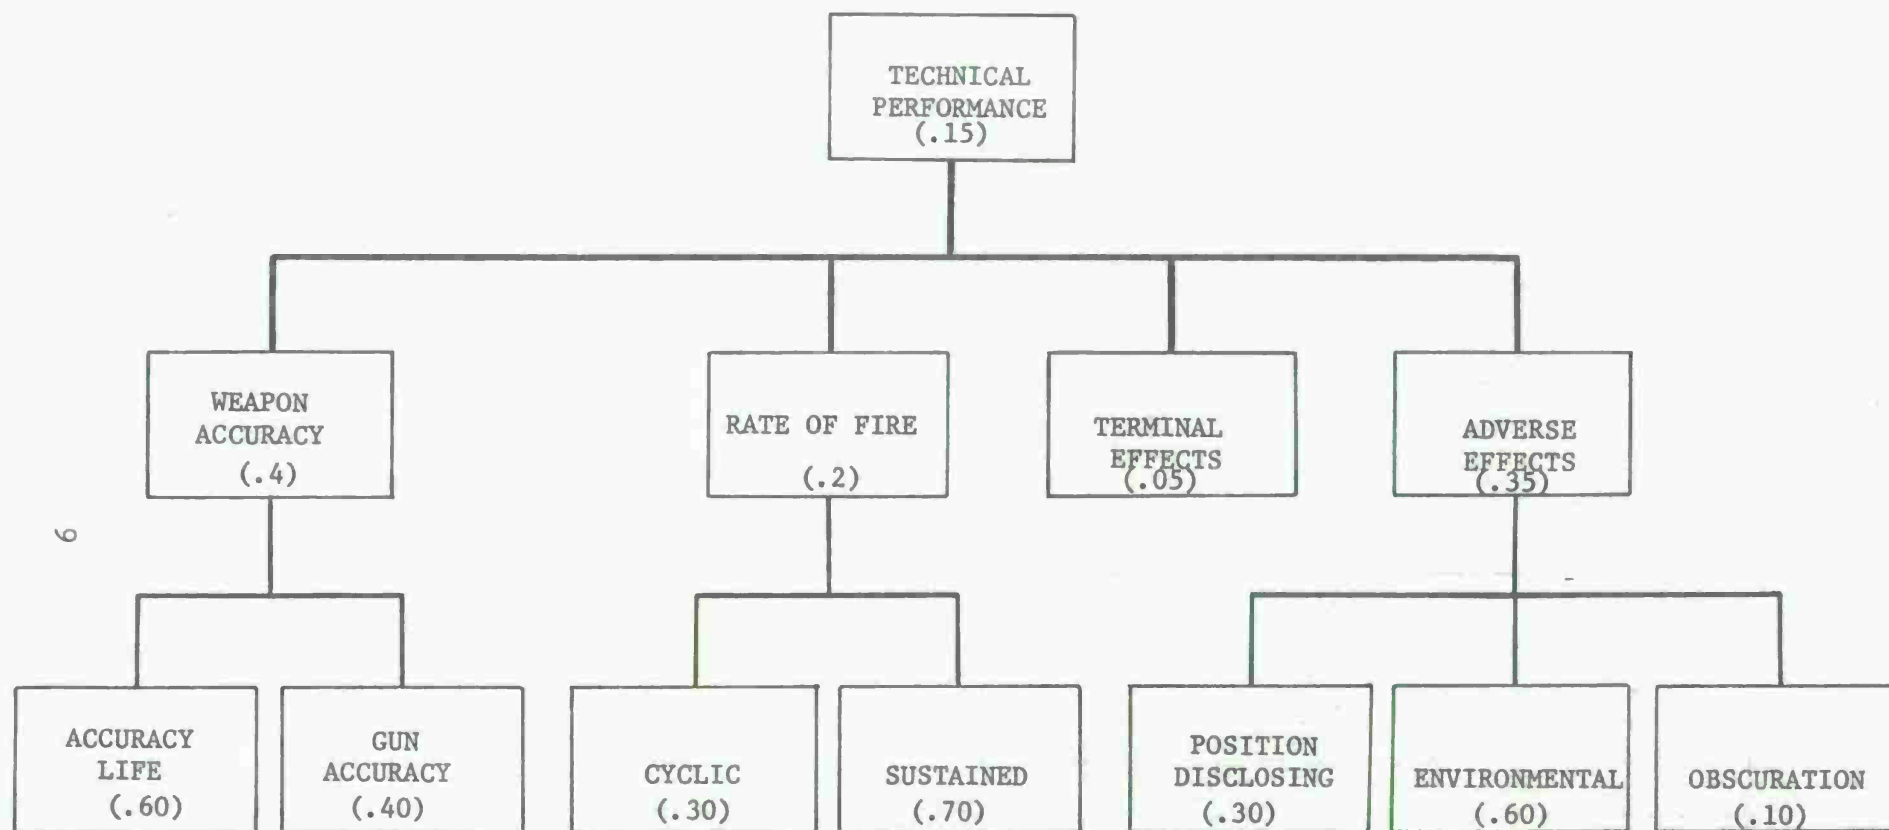
Figure 2.   Technical Performance Attributes

PHYSICAL
CHARACTERISTICS
(.25)

MAN-MACHINE
INTERFACE
(.30)

MECHANICAL
OPERATIONS
(.35)

WEAPON
COMPATIBILITY
(.35)

HFE*

(.40)

SAFETY

(.30)

TRAINING

(.30)

BARREL
CHANGE
(.55)

WEAPON
ASSEMBLY/
DISASSEMBLY
(.45)

AMMO
SENSITIVITY
(.30)

VEHICLE
COMPATIBILITY
(.70)
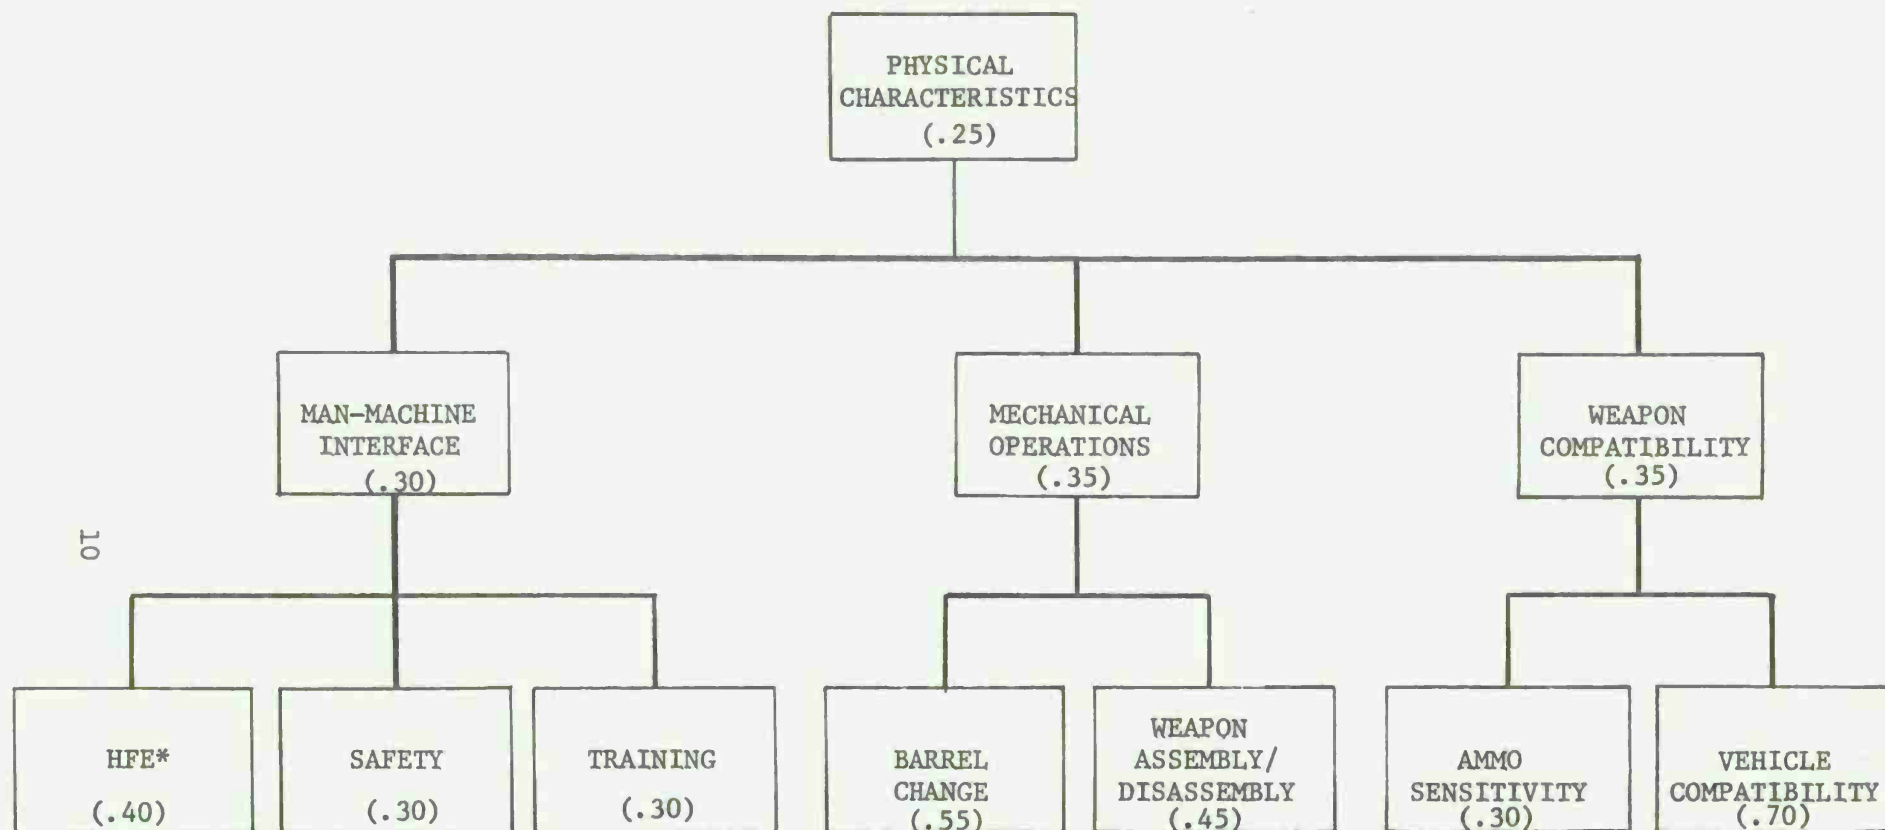
*Human Factor Engineering

Figure 3. Physical Characteristic Attributes
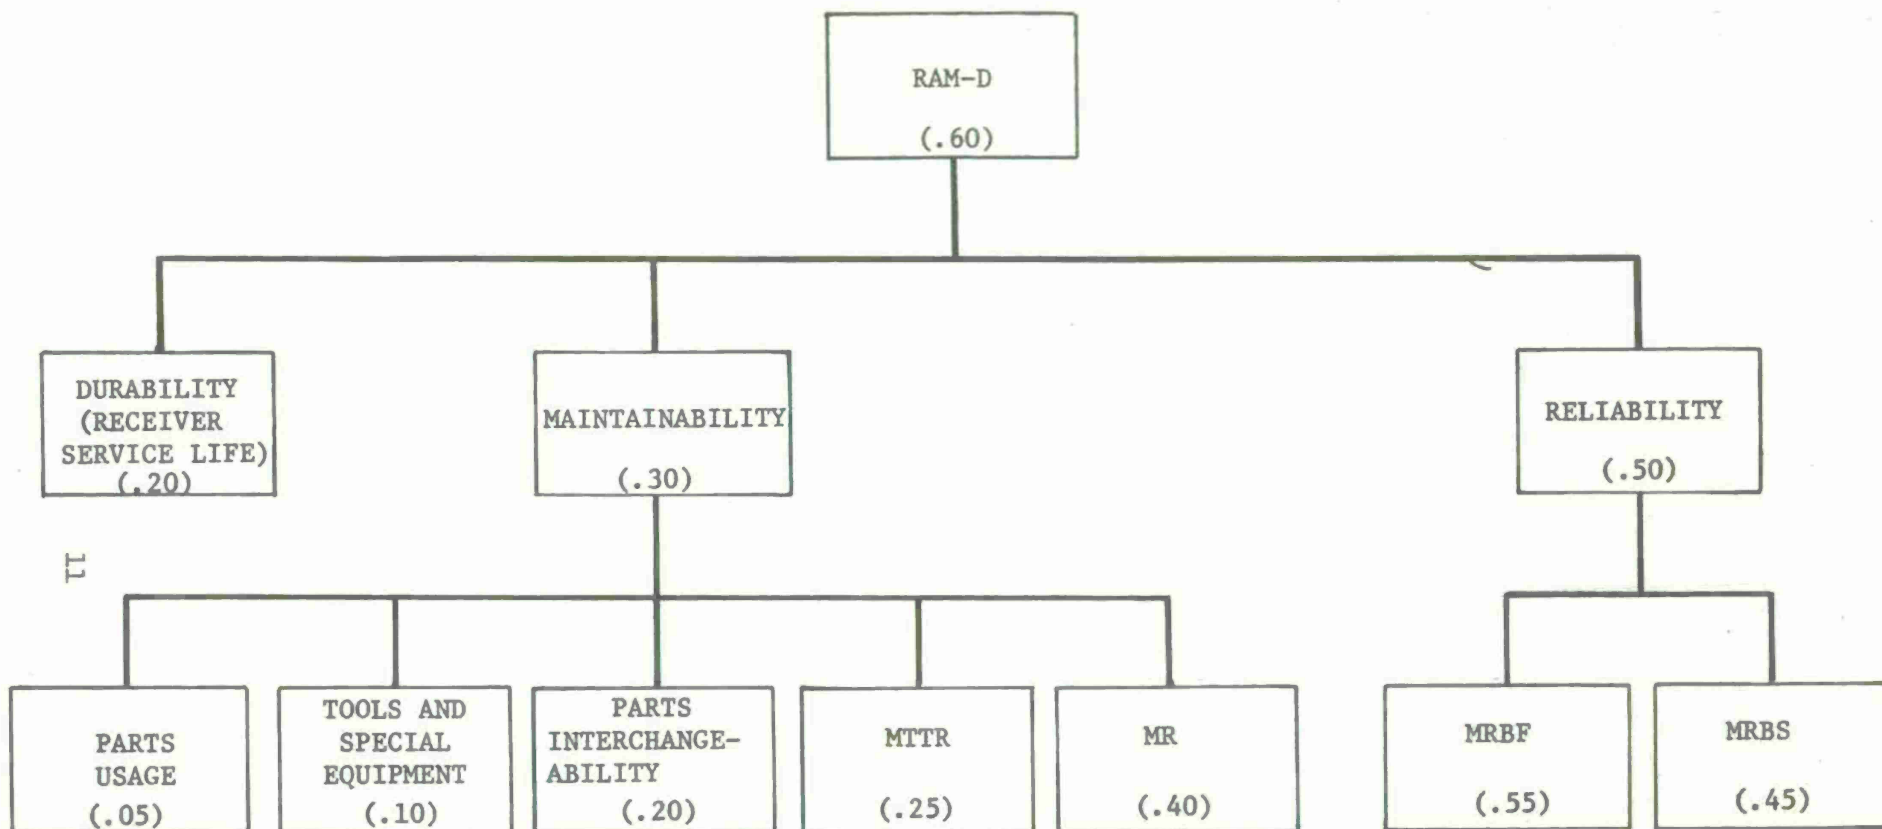
LEGEND

MTTR - Mean-Time-To-Repair
MR   - Maintenance Ratio
MRBF - Mean-Round-Between-Failure
MRBS - Mean-Round-Between-Stoppage

Figure 4.   RAM-D Attributes

or procurement of kits to modify existing armor mounts.

A study performed by Rodman Laboratories in February 1975, to rank the Canadian C1, FRG MG3, UK L8A1, Belgium MAG58, and the French AAT52 as to their degrees of engineering difficulty in adopting them to a co-axial role in the M60A1 and M60A2 tanks and in the M551 AR/AAV[2] indicated that the C1 and the AAT52 presented the least problems (ranked high), and the MG3, MAG58, L8A1 presented the most problems (ranked low). The Soviet PKM and US M60E2, not included in the study, are considered to rank at least as high as the C1 and the AAT52. The Soviet PKM would require weapon modification from a right-hand feed to a left-hand feed (considered a moderate redesign effort). To use the M60E2 would require modifications to the M60A2 Tank Gun Rotor and ejection chute (considered moderate redesign effort).

ANALYSIS

An analysis comparing the attributes of each candidate was conducted utilizing the available test results and the consensus of judgments from engineering experts in their specialized areas.

The analysis was initiated by bringing together knowledgeable experts of the US and foreign weapon systems from Rodman Laboratories. These experts expressed their opinions and feelings about each candidate performance in a particular category. They supported their opinions and judgments by test results and data or drawing on past experience with the weapon system or comparable weapon systems. This discussion ensued until a consensus was reached as to the ranking of the weapons in order from 1 to 9. Ties were allowed (i.e., if two weapons were considered equal for an attribute category, they would both be given the same ranking). The assumptions and criteria used in ranking the candidate weapons for each attribute are presented in Table 2.

After an agreed ranking was achieved, the experts were asked to separate the ranked weapons as to relative performance in each category (i.e., how well did the "best" (ranked 1) weapon perform over the "second best" (ranked 2) and etc.). These scores were scaled from 0 to 10 with the top ranked weapon receiving a value of 10.

RESULTS

The scores are presented in Table 3 for each attribute. The product of each score with its corresponding attribute weight is presented in Table 4; the sum of these weighted scores was used to establish the weapon ranking. The weighted scores clustered into three groups. The high group contained the M60E2 and the MAG58 with scores of 8.3 and 8.1, respectively. The middle group contained the M219, M219PI, PKM, L8A1, AAT52, and the MG3. The scores ranged from 6.8 to 7.6. The low group contained only the C1 with a score of 5.6. The scores and groups are presented in Table 5.

---

[2] DF from SARRI-LS to SARRI-LA-T, Subject: Interim Armor Machine Gun-Tank Interface Study, dated 13 February 1975.

TABLE 2. PERFORMANCE CHARACTERISTICS ASSUMPTIONS & CRITERIA

Category

TECHNICAL PERFORMANCE

Weapon Accuracy

    Accuracy Life . . . . . Based on barrel life data for US candidates
                    and test experience with foreign candidates.

    Gun Accuracy . . . . . Based on accuracy data at 1000 m.

Rate of Fire

    Cyclic . . . . Based on cyclic rate test data.

    Sustained . . . . Rates that would not degrade weapon performance
                    or safety operation, based on cook-off rate.

Adverse Effects

    Position Disclosing . . Judged the same for all weapons.

    Environmental . . . . . Based on available mud, cold, hot, sand and
                    dust test results. The Russian PKM cold tests
                    indicate problems with the splitting cartridge
                    cases. Further tests are needed to determine
                    the actual cause, either the weapon or ammuni-
                    tion.

    Obscuration . . . . . . Judged the same for all weapons.

PHYSICAL CHARACTERISTICS

Man-Machine Interface

    Human Factors . . . . . Based on operator-machine gun interface (i.e.,
    Engineering (HFE)   amount of operator maintenance and control
                    necessary for field use).

    Safety . . . . Based on safety hazards to the operator or
                    maintenance personnel in performing basic
                    tasks (e.g., cleaning, maintenance and oper-
                    ation).

    Training . . . . Based on number of manhours and cost to train
                    personnel to operate or perform maintenance
                    operations.

Table 2 (Cont'd)

Mechanical Operations

    Barrel Change . . . . . Based on test data and assumed ideal tank mounts.

    Weapon Assembly/Dis- . .Based on test data and experience.
    assembly

Weapon Compatibility

    Ammo Sensitivity . . . Based on test data. The Russian PKM is now
    being modified to fire US and NATO rounds
    for testing.

    Vehicle Compatibility . Based on experience and studies conducted in
    machine gun/vehicle interfaces. Also, con-
    sidered were ammo storage and fire control
    systems.

RAM-D

    Durability . . . . . . Based on receiver life test data.

Maintainability

    Parts Usage . . . . . . Based on parts usage data for US candidates
    and limited test experience on foreign weapon
    systems.

    Tools and Special . . . Based on number of tools and special equipment
    Equipment   needed for field and higher maintenance levels.

    Parts Interchange- . . .All weapons were rated the same except for the
    ability   Russian PKM which requires serial numbered parts
    (i.e., limited or non-existence of part inter-
    changeability).

Mean Time To Repair . . . . Based on test data and experience.
(MTTR)

Maintenance Ratio (MR) . . Judged the same for all weapons as no infor-
    mation was available.

Reliability

    Mean Rounds Before . . .Based on test data.
    Failure (MRBF)

    Mean Rounds Before . . Based on test data.
    Stoppage (MRBS)

14

TABLE 3. ATTRIBUTE SCORE FOR CANDIDATE WEAPONS

Performance Category	Weapon								
	M219	M219PI	M60E2	PKM	MAG58	L8A1	C1	AAT52	MG3
ACCURACY LIFE	10.00	10.00	9.70	6.70	4.50	4.50	7.20	4.00	0.00
GUN ACCURACY	9.70	9.40	9.00	9.40	9.40	9.40	10.00	8.50	7.10
CYCLIC RATE	10.00	10.00	9.00	8.10	6.10	6.10	9.00	6.10	7.50
SUSTAINED RATE	10.00	10.00	9.60	7.10	6.10	6.10	7.10	3.90	3.90
TERMINAL EFFECT	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00
POSITION DISC.	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00
ENVIRONMENTAL	10.00	7.00	10.00	7.00	7.00	7.00	10.00	10.00	7.00
OBSCURATION	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00
M.F.F.	10.00	10.00	7.40	7.40	10.00	10.00	6.60	7.40	10.00
SAFETY	8.30	8.30	6.00	6.00	10.00	10.00	2.60	9.10	8.30
TRAINING	6.10	5.80	7.60	6.10	7.60	7.60	6.10	10.00	9.00
BARREL CHANGE	9.20	9.20	6.40	5.00	6.40	6.40	1.00	6.40	10.00
ASM/DISASM	8.20	8.20	10.00	10.00	10.00	10.00	3.70	10.00	10.00
AMMO SENS.	5.70	7.20	10.00	7.20	10.00	5.70	10.00	10.00	10.00
VEHICLE COMPAT	10.00	10.00	7.30	2.30	2.30	2.30	9.40	8.90	6.00
PARTS USAGE	7.90	2.60	9.20	7.90	10.00	4.10	5.10	5.10	2.60
TOOLS/SPEC. EQ.	10.00	9.00	9.00	6.90	9.00	9.00	6.90	10.00	10.00
PART INTRCHG	10.00	10.00	10.00	0.00	10.00	10.00	10.00	10.00	10.00
MTTR	10.00	10.00	10.00	1.90	10.00	10.00	7.90	10.00	10.00
MR	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00	10.00
MRBF	7.70	4.50	6.70	10.00	5.50	5.80	2.00	4.70	4.90
MRBS	1.80	2.10	6.50	4.90	10.00	3.70	0.00	4.00	2.40
DURABILITY	4.80	4.80	10.00	10.00	10.00	10.00	7.40	5.10	10.00

TABLE 4. WEIGHTED ATTRIBUTE SCORE FOR CANDIDATE WEAPONS

Performance Category	Weapon								
	M219	M219PI	M60E2	PKM	MAG58	L8A1	C1	AAT52	MG3
ACCURACY LIFE	0.36	0.36	0.35	0.24	0.16	0.16	0.26	0.14	0.00
GUN ACCURACY	0.23	0.23	0.22	0.23	0.23	0.23	0.24	0.20	0.17
CYCLIC RATE	0.09	0.09	0.08	0.07	0.05	0.05	0.08	0.05	0.07
SUSTAINED RATE	0.21	0.21	0.20	0.15	0.13	0.13	0.15	0.08	0.08
TERMINAL EFFECT	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07
POSITION DISC.	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16
ENVIRONMENTAL	0.31	0.22	0.31	0.22	0.22	0.22	0.31	0.31	0.22
OBSCURATION	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
H.F.F.	0.30	0.30	0.22	0.22	0.30	0.30	0.20	0.22	0.30
SAFETY	0.19	0.19	0.13	0.13	0.22	0.22	0.06	0.20	0.19
TRAINING	0.14	0.13	0.17	0.14	0.17	0.17	0.14	0.22	0.20
BARREL CHANGE	0.44	0.44	0.31	0.24	0.31	0.31	0.05	0.31	0.48
ASM/DISASM	0.32	0.32	0.39	0.39	0.39	0.39	0.15	0.39	0.39
AMMO SENS.	0.15	0.19	0.26	0.19	0.26	0.15	0.26	0.26	0.26
VEHICLE COMPAT	0.61	0.61	0.45	0.14	0.14	0.14	0.58	0.55	0.37
PARTS USAGE	0.07	0.02	0.08	0.07	0.09	0.04	0.05	0.05	0.02
TOOLS/SPEC. EQ.	0.18	0.16	0.16	0.12	0.16	0.16	0.12	0.18	0.18
PART INTERCHG	0.36	0.36	0.36	0.00	0.36	0.36	0.36	0.36	0.36
MTTR	0.45	0.45	0.45	0.09	0.45	0.45	0.36	0.45	0.45
MR	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72
MRBF	1.27	0.74	1.11	1.65	0.91	0.96	0.33	0.78	0.81
MRBS	0.24	0.28	0.88	0.66	1.35	0.50	0.00	0.54	0.32
DURABILITY	0.58	0.58	1.20	1.20	1.20	1.20	0.89	0.61	1.20
TOTAL	7.52	6.89	8.34	7.17	8.12	7.15	5.58	6.93	7.09

TABLE 5. RANKED CANDIDATE WEAPONS

GROUP	RANK	NATION & NOMENCLATURE	ATTRIBUTE VALUE
1	1	US-M60E2	8.34
	2	Belgium-MAG58	8.12
2	3	US-M219	7.52
	4	Soviet-PKM	7.17
	5	UK-L8A1	7.15
	6	FRG-MG3	7.09
	7	French-AAT52	6.93
	8	US-M219PI	6.89
3	9	Canadian C1	5.58

SENSITIVITY ANALYSIS

A sensitivity analysis was conducted on the weights assigned to the three major categories - Technical Performance, Physical Characteristics and RAM-D. Variations of these weights affect the scores and the ranking of the candidate weapons. The scores attained by the candidate weapon in each of the three categories are presented in Table 6. These scores, when multiplied by the respective category weights and summed, produce the weighted performance scores used to establish the weapon ranking.

Analysis of these scores indicates that if each category is assigned a weight above 0.07, then the M60E2, MAG58, and the M219 constitute a dominate set of weapons, i.e., at least one of them will rank higher than the other 6 candidates. For example, the M219 dominates the M219PI unless RAM-D and Technical Performance are assigned weights less than 0.07. Weights below 0.07 were not considered appropriate as these would effectively eliminate the attribute category from having an impact on the decision; therefore, all candidates except for the M219, MAG58, and M60E2 were excluded from further analysis.

Figures 5 and 6 present a mapping of the three candidates (i.e., M60E2, MAG58, and the M219) as a function of weight assignment. Figure 5 presents this information in terms of Physical Characteristics versus RAM-D; whereas, Figure 6 is in terms of Technical Performance versus RAM-D. The procedure used in mapping the dominant domains as a function of weights is presented in Appendix A.

Interpretation of the sensitivity analysis follows:

1. The candidate weapons Soviet PKM, UK L8A1, FRG MG3, French AAT52, US M219PI and Canadian C1 were considered dominated by either the Belgium MAG58, US M60E2 or the US M219 for the three major attribute categories: Technical Performance, Physical Characteristics, and RAM-D.

2. The Belgium MAG58 dominated the M60E2 and M219 for high RAM-D weight assignments.

3. The US M219 dominated the M60E2 and MAG58 for low RAM-D weight assignments.

4. The US M60E2 dominated the MAG58 and M219 for RAM-D weight values between 0.33 and 0.55 and generally dominated both between the high and low extremes for the three categories.

18

TABLE 6. MAJOR CATEGORY ATTRIBUTE SCORES

	CANDIDATE WEAPONS								
CATEGORY	M60E2	MAG58	M219	PKM	L8A1	MG3	AAT52	M219PI	C1
TECHNICAL PERFORMANCE	9.65	7.17	9.95	7.96	7.17	5.51	7.24	9.27	8.86
PHYSICAL CHARACTERISTICS	7.75	7.19	8.61	5.83	6.74	8.77	8.64	8.74	5.69
RAM-D	8.26	8.73	6.45	7.52	7.30	6.78	6.14	5.53	4.71
DOMINATING WEAPONS	NONE	NONE	NONE	M60E2	M60E2 MAG58	M60E2	M219	M219	M60E2 M219
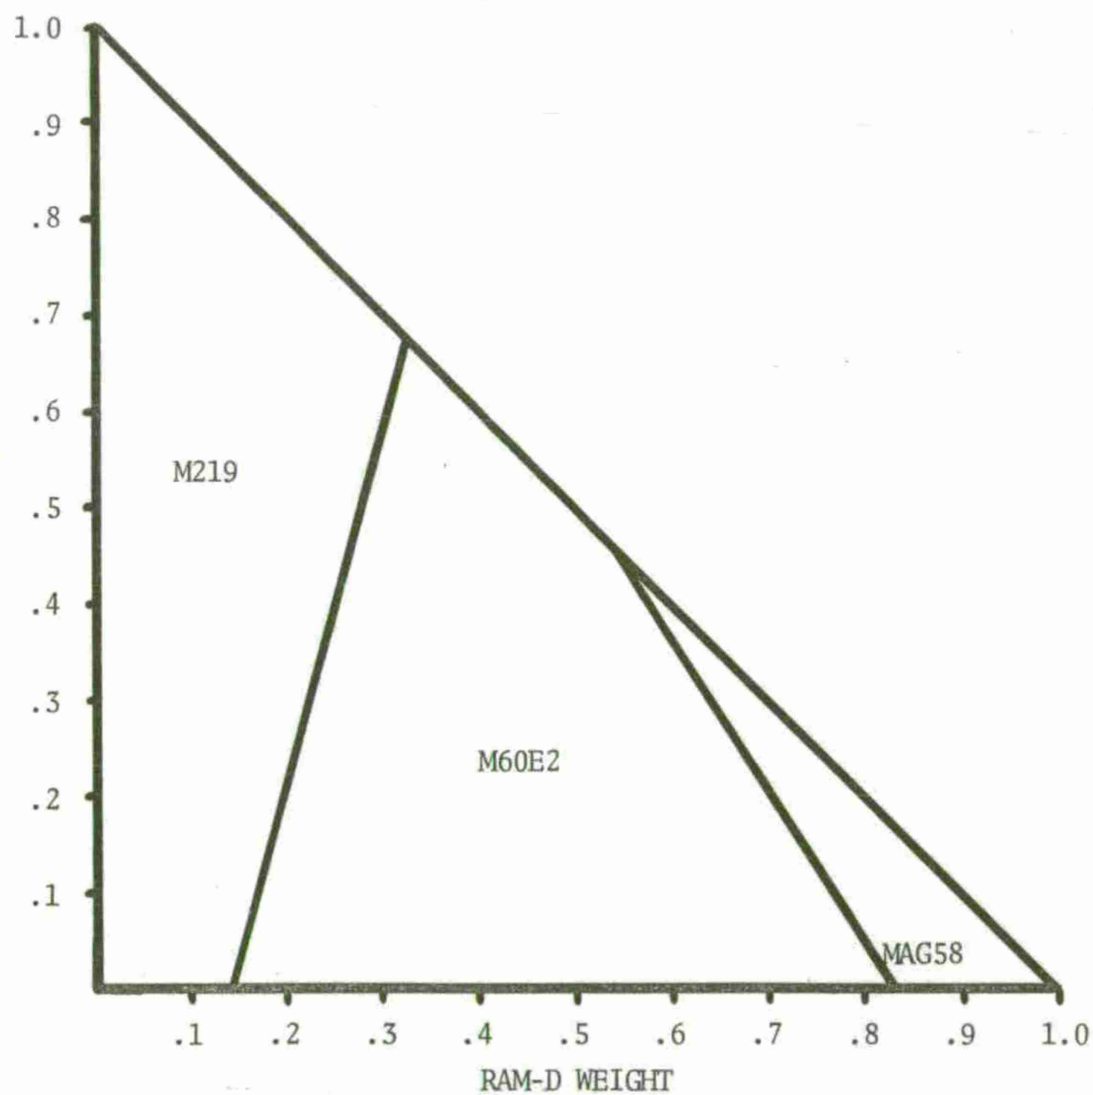
Figure 5. Preferred Candidate for Physical Characteristics
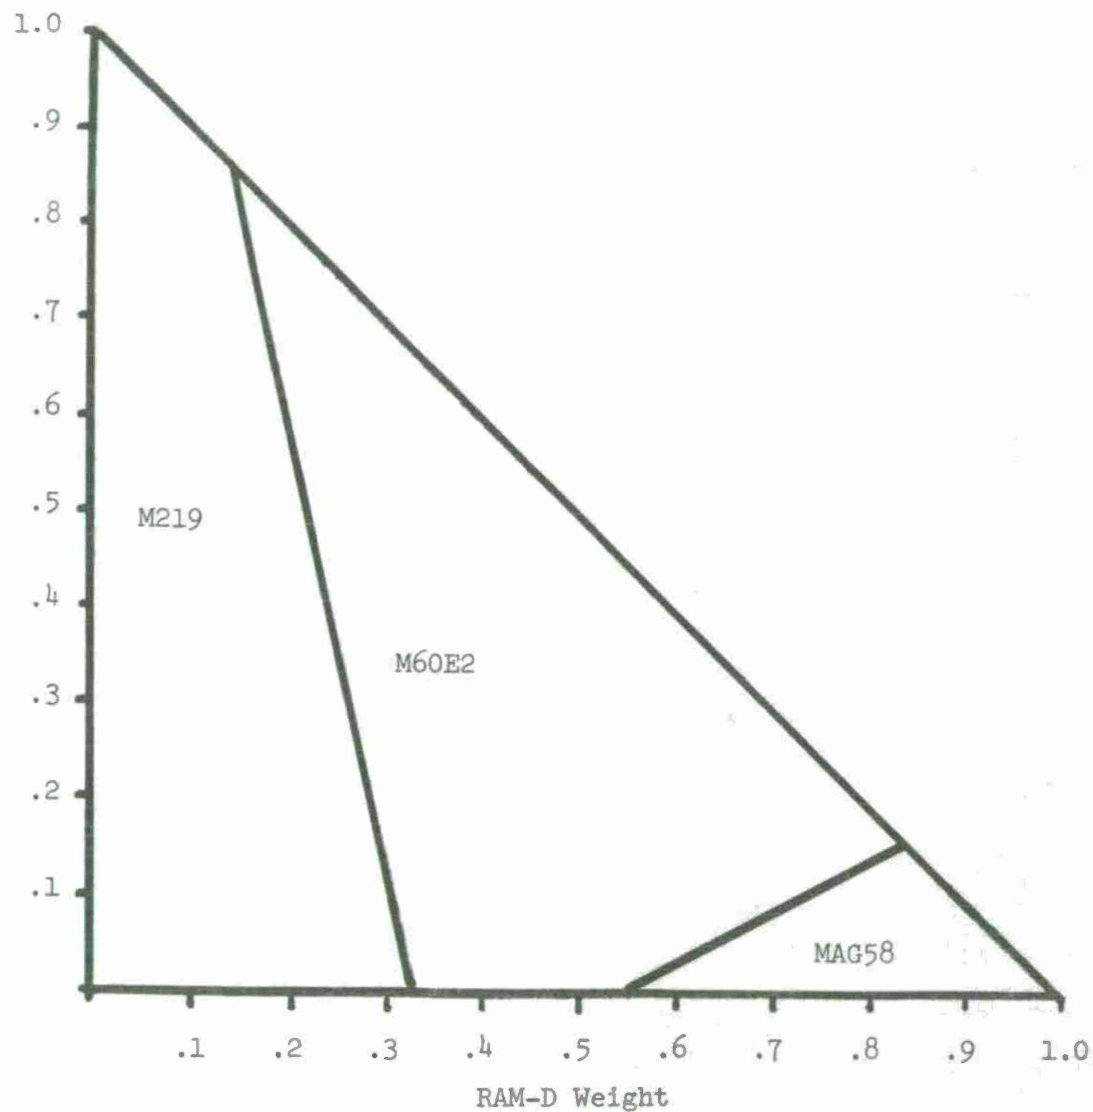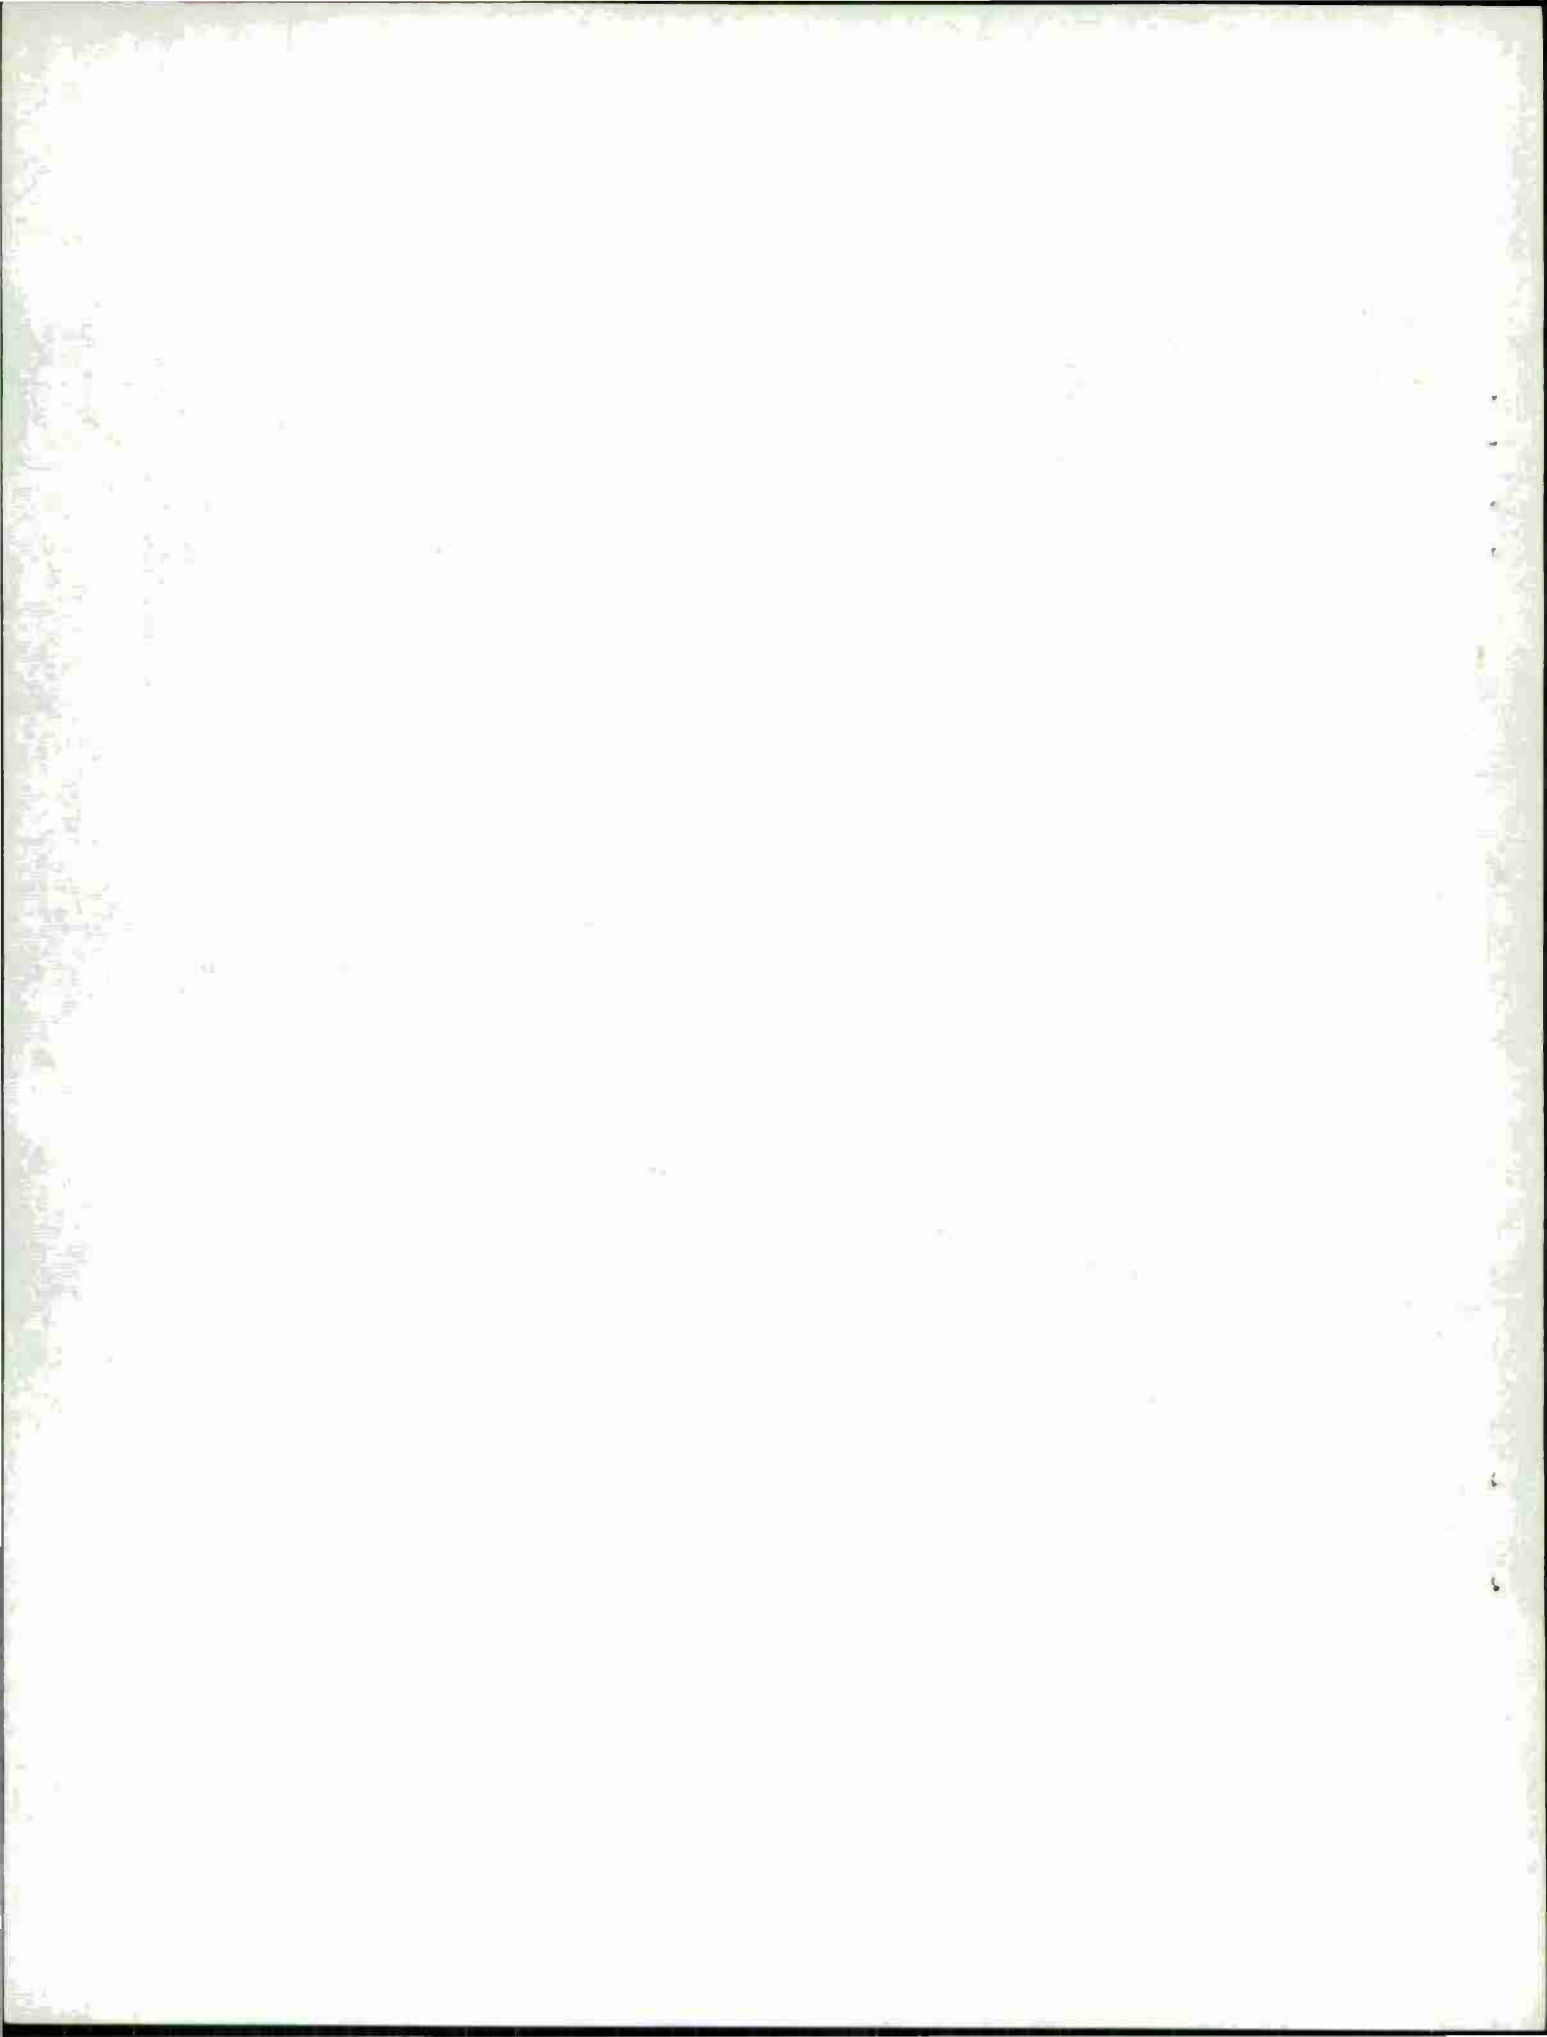And RAM-D Weight Assignments

Figure 6. Preferred Candidate for Technical
Performance and RAM-D Weight Assignments

APPENDIX A. SENSITIVITY ANALYSIS METHODOLOGY

The system used to rank each weapon consisted of adding the weighted scores for each candidate at each level depicted in the dendritic tree shown in Figures 1 through 4. The weapons were ranked in decreasing order, i.e., the weapon with the largest sum-of-weighted scores was ranked number one. This section addresses the question: how sensitive is the ranking to the weights applied to each of the major categories, Technical Performance, Physical Characteristics, and RAM-D?

The M60E2, MAG58, and M219 constitute a dominant set of weapons. That is, at least one of them will be ranked number one for any weights assigned above 0.07. To determine the sensitivity of the ranking among these three candidates let $\vec{\Lambda}$ be a vector of weights assigned to each major category and $\vec{S}_i$ be the score vector for the ith candidate. Then the weighted score for weapon i can be expressed as $WS_i = \vec{\Lambda} \cdot \vec{S}_i$ where

$$\vec{\Lambda} = \begin{bmatrix} \lambda_1 \\ \lambda_2 \\ \lambda_3 \end{bmatrix} \qquad \vec{S} = \begin{bmatrix} S_1, S_2, S_3 \end{bmatrix} = \begin{bmatrix} 9.65 & 7.17 & 9.95 \\ 7.75 & 7.19 & 8.61 \\ 8.26 & 8.73 & 6.45 \end{bmatrix}$$

A feasible $\vec{\Lambda}$ is defined as $\Sigma\lambda_i = 1$ and $\lambda_i > 0$. This states that all weights contribute positively to the ranking. Setting $WS_i = WS_j$ $i,j = 1, 2, 3$ $i \neq j$, we find there exists a set of feasible weights which will result in equal weighted scores. This set of equal scores is defined by a line. On one side of the line one weapon dominates and on the other side the remaining weapon dominates. These lines can be solved for each weapon pair.

The following equations describe the weighted scores for each weapon:

$$9.65\ \lambda_1 + 7.75\ \lambda_2 + 8.26\ \lambda_3 = WS_1 \quad \text{(M60E2)}$$

$$7.17\ \lambda_1 + 7.19\ \lambda_2 + 8.73\ \lambda_3 = WS_2 \quad \text{(MAG58)}$$

$$9.95\ \lambda_1 + 8.61\ \lambda_2 + 6.45\ \lambda_3 = WS_3 \quad \text{(M219)}$$

$$\lambda_1 + \lambda_2 + \lambda_3 = 1$$

Setting $WS_i = WS_j$ $i \neq j$ and solving in terms of λ_1 and λ_3 results in the following equations:

$$\lambda_1 = 1.54 - 4.77\ \lambda_3 \tag{B.1}$$

$$\lambda_1 = 1.04 + 2.73\ \lambda_3 \tag{B.2}$$

$$\lambda_1 = -.292 + .536\ \lambda_3 \tag{B.3}$$

Since $\Sigma\lambda_i = 1$, an assignment of two weights specifies the third. The space of assignable weights can be illustrated graphically with any two of the weights as the primary axes. The Equations (B.1), (B.2), and (B.3) correspond to lines A, B, and C, respectively, in Figure B-1. Line A defines the set of weights where the weighted scores for the M219 and M60E2 are equal. To the right of this line, the M60E2 will dominate and to the left the M219 will dominate. Likewise, line B and C define the set of weights where the M219 vs MAG58 and M60E2 vs MAG58 are equal. Since the M60E2 dominates the MAG58 to the left of line C and also dominates the M219 to the right of line A, the M60E2 dominance region lies between lines A and C as shown in Figure 6. The M60E2 occupies 51% of the feasible space, the M219 occupies 42%, and the MAG58 occupies the remaining 7%.

Since the three lines do not intersect within the feasible region, it can be concluded that no feasible set of weights exist such that all three weapons would be ranked equally.
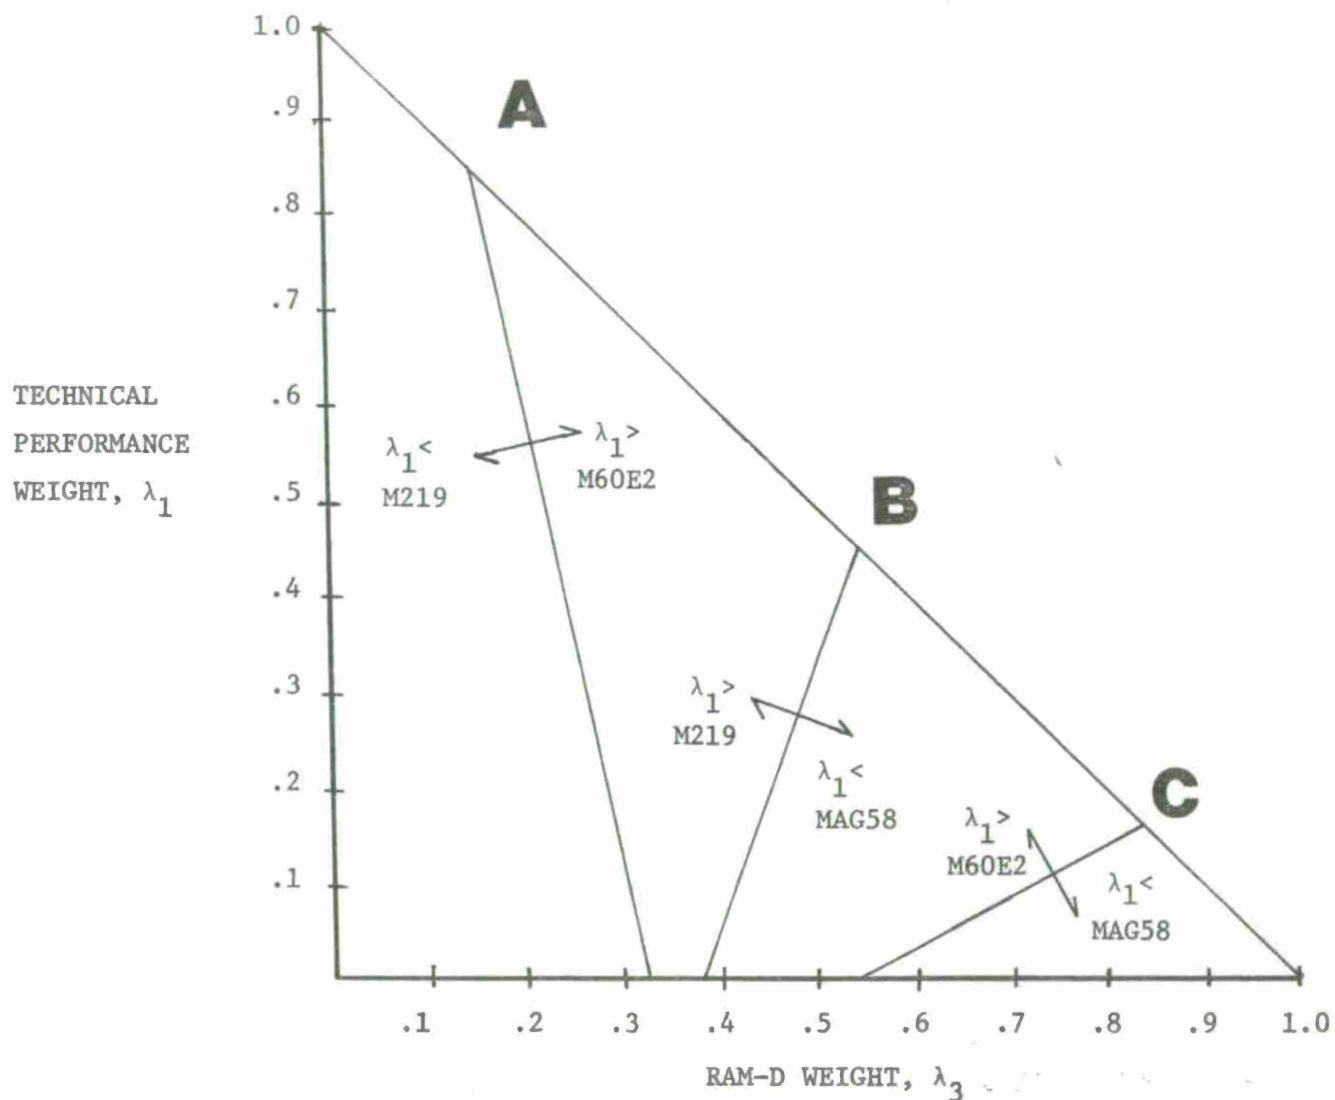
Figure A.1.   Dominance Space of Candidate Weapons:
Analytical Description of Feasible Regions

DISTRIBUTION LIST

No. of Copies

	Commander
	HQ, Department of the Army
1	ATTN: DAMA-WSW
	Washington, DC 20310

Commander
HQ, Department of the Army
1 ATTN: DAMO-RQD
Washington, DC 20310

Commander
US Army Materiel Command
1 ATTN: AMCRD
1   AMCRD-W
1   AMCPA-SA

Commander
US Army Test and Evaluation Command
1 ATTN: AMSTE-BC
Aberdeen Proving Ground, MD 21005

Commander
US Army Training and Doctrine Command
1 ATTN: ATCD-CM
Fort Monroe, VA 23351

Commander
US Army Armament Command
2 ATTN: AMSAR-RDG
12   AMSAR-SAS
1   AMSAR-CPE
2   AMSAR-ASI
1   AMSAR-QAP
1   AMSAR-MAE
1   AMSAR-TDC
Rock Island, IL 61201

1	Commander US Army Infantry School ATTN: ATCH-CD Fort Benning, GA 31905
1	Director US Army Materiel Systems Analysis Activity ATTN: AMXSY-GI Aberdeen Proving Ground, MD 21005
1 1	Commander US Army Logistics Center ATTN: ATCL-OO ATCL-MM Fort Lee, Virginia 23801
1	Commander US Army Maintenance Management Center ATTN: AMXMO-MEV Lexington, KY 40507
1	Commander US Army Logistics Evaluation Agency New Cumberland Army Depot ATTN: DALO-LEI-W New Cumberland, PA 17070
1 1 1	Commander Rock Island Arsenal ATTN: SARRI-LS SARRI-LA SARRI-LPL Rock Island, IL 61201
12	Defense Documentation Center Cameron Station Alexandria, VA 22314

Next page is blank.