

AD-A219 116

MODELING HUMAN SYLLOGISTIC
REASONING IN SOAR

Technical Report AIP - 51

Thad A. Polk & Allen Newell

Department of Computer Science
Carnegie Mellon University
Pittsburgh, Pa. 15213

The Artificial Intelligence and Psychology Project

Departments of
Computer Science and Psychology
Carnegie Mellon University

Learning Research and Development Center
University of Pittsburgh

SDTIC
ELECTE
MAR 14 1990
S E D

2

MODELING HUMAN SYLLOGISTIC REASONING IN SOAR

Technical Report AIP - 51

Thad A. Polk & Allen Newell

Department of Computer Science
Carnegie Mellon University
Pittsburgh, Pa. 15213

June 1988

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



DTIC
ELECTE
MAR 14 1990
S E D

This research was supported by the Computer Sciences Division, Office of Naval Research and DARPA under Contract Number N00014-86-K-0678. Reproduction in whole or in part is permitted for purposes of the United States Government. Approved for public release; distribution unlimited.

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS			
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for public release; Distribution unlimited			
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE						
4. PERFORMING ORGANIZATION REPORT NUMBER(S) AIP-51			5. MONITORING ORGANIZATION REPORT NUMBER(S)			
6a. NAME OF PERFORMING ORGANIZATION Carnegie-Mellon University		6b. OFFICE SYMBOL (if applicable)		7a. NAME OF MONITORING ORGANIZATION Computer Sciences Division Office of Naval Research		
6c. ADDRESS (City, State, and ZIP Code) Department of Psychology Pittsburgh, Pennsylvania 15213			7b. ADDRESS (City, State, and ZIP Code) 800 N. Quincy Street Arlington, Virginia 22217-5000			
8a. NAME OF FUNDING / SPONSORING ORGANIZATION Same as Monitoring Organization		8b. OFFICE SYMBOL (if applicable)		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER N00014-86-K-0678		
8c. ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBERS p4000ub201/7-4-86			
			PROGRAM ELEMENT NO N/A	PROJECT NO N/A	TASK NO N/A	WORK UNIT ACCESSION NO N/A
11. TITLE (Include Security Classification) Modeling Human Syllogistic Reasoning in Soar						
12. PERSONAL AUTHOR(S) Thad A. Polk and Allen Newell						
13a. TYPE OF REPORT Technical		13b. TIME COVERED FROM 86Sept15 to 91Sept14		14. DATE OF REPORT (Year, Month, Day) June, 1988		15. PAGE COUNT 7 pages
16. SUPPLEMENTARY NOTATION						
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)			
FIELD	GROUP	SUB-GROUP	syllogisms; problem spaces; Soar; decision cycle; chunking			
19. ABSTRACT (Continue on reverse if necessary and identify by block number)						
<p>Soar is an architecture for general intelligence, which has been shown to be capable of supporting a wide variety of intelligent behavior involving problem-solving, learning, designing, planning, etc. Soar has also been put forth as a unified theory of human cognition. We provide support for this by presenting a theory of syllogistic reasoning based on Soar and some assumptions about subjects' knowledge and representation. The resulting theory (and system, Syl-Soar/S88) is plausible in its details and accounts for existing data quite well.</p>						
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input type="checkbox"/> UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS				21. ABSTRACT SECURITY CLASSIFICATION		
22a. NAME OF RESPONSIBLE INDIVIDUAL Dr. Alan L. Meyrowitz			22b. TELEPHONE (Include Area Code) (202) 696-4302		22c. OFFICE SYMBOL N00014	

Modeling Human Syllogistic Reasoning in Soar

Thad A. Polk and Allen Newell

Department of Computer Science,
Carnegie Mellon University

Soar is an architecture for general intelligence, which has been shown to be capable of supporting a wide variety of intelligent behavior involving problem-solving, learning, designing, planning, etc. (Laird, Newell & Rosenbloom, 1987, Steier, et. al., 1987). Soar has also been put forth as a unified theory of human cognition (Newell, 1987). We provide support for this by presenting a theory of syllogistic reasoning based on Soar and some assumptions about subjects' knowledge and representation. The resulting theory (and system, Syl-Soar/S88) is plausible in its details and accounts for existing data quite well.

The Task

Syllogisms are reasoning tasks consisting of two premises and a conclusion (Figure 1, left). Each premise relates two sets of objects (x and y) in one of four ways (Figure 1, middle), and they refer to a common set (*bowlers*). A conclusion states a relation between the two sets of objects that are not common (*archers* and *canoeists*) or that no valid conclusion exists. The three terms x, y, z can occur in four different arrangements, called *figures* (Figure 1, right), producing 64 distinct syllogisms.

Premise 1: No archers are bowlers	A: All x are y	P1 xy P1 yx
Premise 2: <u>Some bowlers are canoeists</u>	I: Some x are y	P2 yz P2 zy
Conclusion: Some canoeists are not archers	E: No x are y	P1 xy P1 yx
	O: Some x are not y	P2 zy P2 yz

Figure 1: Syllogism task.

Syllogisms have been much studied (see Johnson-Laird 1983 for review). The essential problem has been to understand why some syllogisms are so hard while others are so easy. However, the area is also useful as a testbed for cognitive theories.

The Soar Theory of Syllogisms

The Soar architecture has the following features:

1. **Problem spaces.** All tasks, routine or difficult, are formulated as search in problem spaces. Behavior is always occurring in some problem space.
2. **Recognition memory.** All long-term knowledge is held in an associative recognition memory, realized as a production system.
3. **Decision cycle.** All available knowledge is accumulated about the acceptability and desirability of problem spaces, states and operators for the current total context, and the best alternative is chosen among those that are acceptable.
4. **Impasse driven subgoals.** Incomplete or conflicting knowledge at a decision cycle

produces an impasse. The architecture creates a subgoal to resolve the impasse. Cascaded impasses create a subgoal hierarchy.

5. **Chunking.** The experience in resolving impasses continually becomes new knowledge in recognition memory, by means of constructed productions (chunks).
6. **Annotated models.** States are represented as annotated models (to model human cognition).

Figure 2 indicates the structure of the system: the collection of problem spaces (triangles) with operators and states. Subspaces arise from impasses, usually reflecting the need to implement operators or satisfy operator preconditions. The task data structures occur in working memory and are continually viewed by the recognition memory, which contains all task-implementation and search-control knowledge. Relevant knowledge accumulates from this memory, permitting steps to be taken in the current space or, upon impasses, creating subgoals to be solved in subspaces, etc. The micromechanics are beneath the level of detail of this paper, but drive the entire system, including learning.

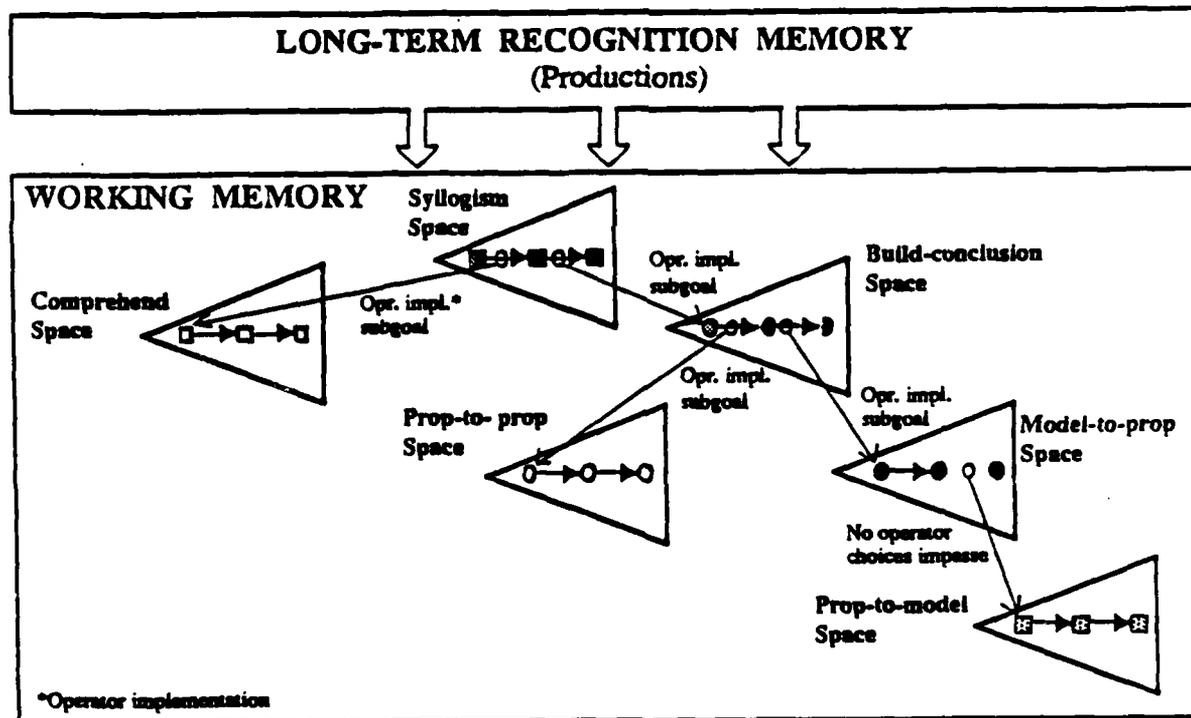


Figure 2: The structure of Soar.

A key assumption, developed strongly by Johnson-Laird (1983), is that humans represent the situations presented in syllogisms as *models*. A *pure model* is a representation that satisfies the *structure correspondence condition*: specified parts and relations of the representation data structure correspond to parts and relations of the situation, without completeness (see also Levesque, 1986). A pure model admits highly efficient *match-like* processing, but is limited in its representational power. An *annotated*

model is a representation that makes principled exceptions to a pure model, which increase its representational power, while preserving essential match-like processing. An *annotation* attaches to a data-structure part, asserting a variant interpretation for the part (e.g., not asserts that the part is *not* to be found in the situation where the correspondence mapping would otherwise locate it). The annotations used for syllogisms are *not*, *optional*, *many*, *target* and *source*. Annotations can quantify, but are local and do not admit unbounded processing. Figure 3 (left) indicates the models that might be built from two premises. The line through the bowling pin indicates a *not* annotation.

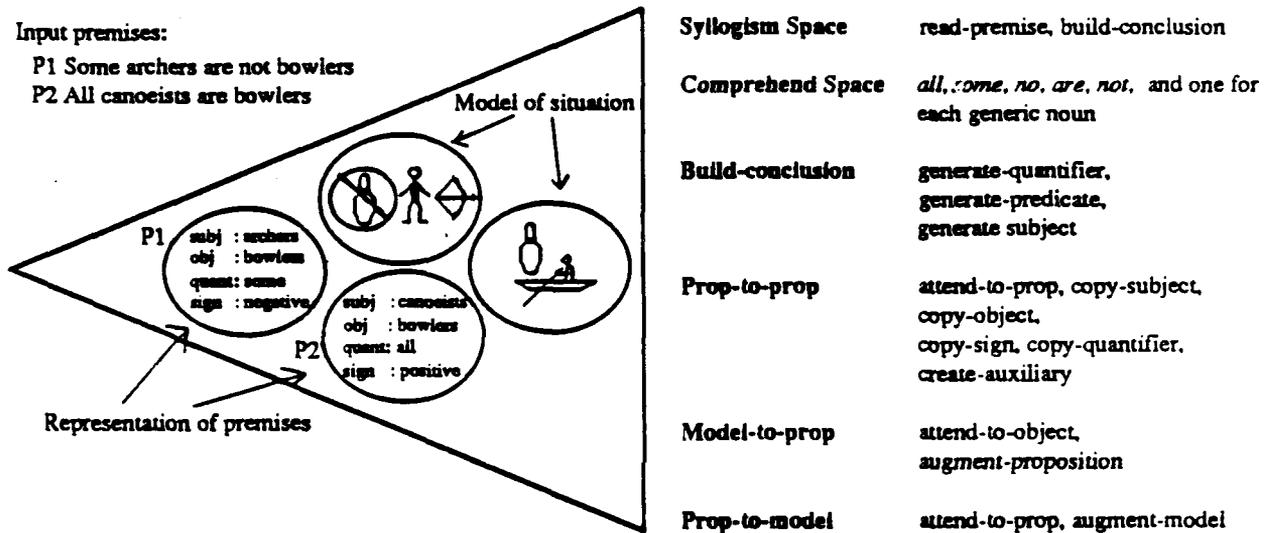


Figure 3: Annotated models, problem spaces and operators for syllogisms

Reasoning occurs by generating models to correspond to situations, inspecting the models for the properties of the situation, and forming new propositions to assert the result. Inspection is a power of the recognition memory (production match). Since models are limited, some situations can be represented only by a disjunctive set of models; reasoning then includes generating sets of models to test conjunctive properties. Reasoning with multiple models occurs in humans and has been central to model-based theories of syllogistic reasoning (Johnson-Laird, 1983, Inder, 1986), but the present theory includes only reasoning with a single model.

Six problem spaces are used in syllogistic reasoning (Figure 3 lists them, with operators, Figure 2 shows how they link together). **Comprehend**, **Syllogism** and **Build-conclusion** form the top-level path between the presented premises and the response. The knowledge to form them comes from the definition of the task, plus general skills in reading and writing. **Comprehend** is an expectation-based scheme that associates both syntactic and semantic knowledge with individual words. It constructs an initial (possibly incomplete) model; it also leaves as a byproduct a model of each premise as a proposition, with parts *subject*, *object* and *sign* (the predicate), and *quantifier*. **Prop-to-prop**, **Model-to-prop**, and **Prop-to-model** have operators required to manipulate models of situations and models of propositions, as well as attention operators to instantiate the manipulations.

The Behavior of the System

Figure 4 illustrates the system's behavior. (1) It starts in Syllogism and applies read-premise, implemented in Comprehend, to the first and then the second premise. (2) This results in an initial model, plus the two internal propositions. This encoding only extracts information about the subject of the premise. (3) Since the overall task is to produce a conclusion, build-conclusion is applied. Its space (Build-conclusion) puts together legal propositions. The task decomposes into discovering the subject, predicate and quantifier of the conclusion. Task knowledge permits determining some parts without other parts being specified. Incomplete or incorrect knowledge leads to composing invalid conclusions.

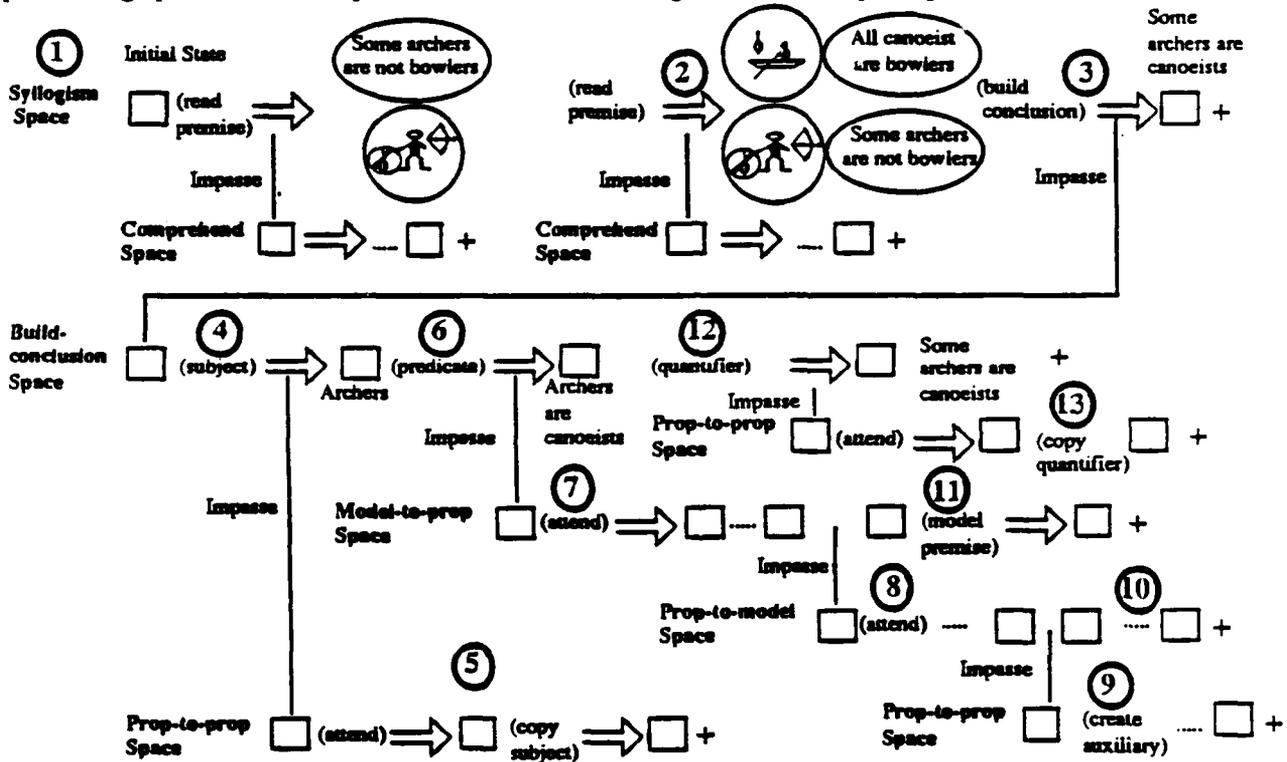


Figure 4: Behavior on *Some archers are not bowlers, All canoeists are bowlers.*

(4) Generating the subject is tried first, which uses Prop-to-prop because the propositions, not the model, distinguish between subjects and objects. (5) Attend-to-prop selects the first proposition and copy-subject creates the subject of the conclusion (*archers*). (6) Next, generate-predicate is selected, which uses Model-to-prop, because the propositions contain no useful information about the predicate. (7) The attend-to-object operator applies, but no others, because the model is incomplete. This leads to augmenting the model, using Prop-to-model. (8) Attend-to-prop selects premises to extract more information, but neither premise yields anything. (9) Create-auxiliary produces a new proposition in Prop-to-prop. It attends to the second premise and applies operators which convert it, creating the new premise *All bowlers are canoeists*. (10) This allows solving in Prop-to-model to resume, by focusing attention on this new proposition and using it to augment the model. (11) The model now suggests a

predicate, so solving is able to continue in **Model-to-prop** to obtain the predicate for the conclusion (*are canoeists*). (12) All that remains in **Build-conclusion** is to generate the quantifier. The model does not represent quantifiers, so **Prop-to-prop** is used again. (13) It attends to the first premise and copies its quantifier (*some*), finally obtaining, *Some archers are canoeists*. This is incorrect, but many humans fail this syllogism as well. Correctness depends on knowledge being available at many local choices.

Human Data and Soar Performance

Figure 5 presents data from (Johnson-Laird & Bara, 1984) by 20 University of Milan students on all 64 syllogisms (with unlimited time) and also the responses by Soar. The four sections of the chart correspond to the four figures (Figure 1, right). Each row corresponds to one of the 9 legal responses. The top number in each cell indicates the number of subjects giving that response to a particular syllogism. *Some archers are not bowlers* and *All canoeists are bowlers* (Figure 4) is abbreviated Oxy, Azy, and occurs in the lower left quadrant, where we see that 8 subjects responded Ixz (*Some archers are canoeists*), 7 responded Oxz (*Some archers are not canoeists*), 3 responded NVC (*no valid conclusion*) and 2 subjects gave illegal responses. Valid responses are shaded (Oxz for 7/20 correct). Only 38% percent of all responses were correct and 7 syllogisms were solved by no one.

Individual humans behave differently from each other and from themselves over time, due to learning and other factors. The data of Figure 5 are a composite, as shown by multiple responses. A family of Soar systems is required to correspond to this human variation. We varied the theory along 3 dimensions: (1) whether auxiliary propositions are created, as in our example (2 choices); (2) how premises augment objects with not annotations (3 choices); and (3) whether premises about *some x* augment objects about *x* (2 choices). The first dimension is one of reasoning power, the other two involve the semantics of interpreting premises. These dimensions form a family of 12 variants.

This small family accounts for 980 out of 1154 (85%) observed legal responses (126/1280 responses were illegal and not recorded) by covering 131 out of the 193 cells (68%) that contain 1 or more responses (all cells with more than 6 subjects are predicted with one exception [Oyx, Ayz = Ixz]). Only one response is predicted that is not given by any subject [Oyx, Ayz = Oxz]. Frequencies were assigned to the different members of the family to produce the fit shown in parentheses in Figure 5 (15/20 subjects were assumed in the family since 23% of responses, many illegal, were unpredicted). No simple measure of fit is available, but the correlation between subjects and systems is .87.

The theory produces the classical effects, such as the *atmosphere effect* (Woodworth & Sells, 1935), the *conversion hypothesis* (Chapman & Chapman, 1959) and the *figural effect* (Johnson-Laird, 1983). Space does not permit showing the analysis, but they need only be traced out in Figure 5. The atmosphere and figural effects arise because the syntactic form of the premises serves as search control in the construction of the conclusion. The conversion effect arises when this search control is insufficient and a new proposition is created.

According to the theory, there are three main sources of difficulty: (1) making unwarranted assumptions about the premises; (2) failing to consider all the implicit ramifications of the premises; and

POLK, NEWELL

		x - y												Premises												y - x											
		AA	AI	AE	AO	IA	II	IE	IO	EA	EI	EE	EO	OA	OI	OE	OO	AA	AI	AE	AO	IA	II	IE	IO	EA	EI	EE	EO	OA	OI	OE	OO				
y - z	Am	19 (15)																9 (6)																			
	Im		13 (13)		4	18 (15)	18 (13)		2				4	4	6	9					3	2	3		1												
	Em			16 (15)				8		16 (10)	13 (8)	11 (10)	4 (8)			4				10 (8)				3 (8)	6	2	1	4									
	Om				15 (13)				13 (13)						9	8	4	15 (8)				9 (6)			7 (6)				1	2	4 (7)						
R	Am																	4																			
	Im		1																4			10 (6)						9	2								
	Em			1				3		2	1	1								2				2		6	2	1			1 (6)						
	Om													1									1							4 (6)							
P	NVC	4 (7)		1 (7)		2 (7)		2 (7)	1 (5)	4 (7)	5 (7)	4 (7)	1 (7)	4 (7)	3 (7)	1 (7)	7 (9)	5 (9)	8 (9)	5 (9)	5 (9)	10 (9)	11 (9)	7 (9)	11 (8)	11 (8)	4 (9)	10 (9)	10 (9)	13 (8)							
	Am																	2																			
	Im					11 (7)	7 (7)							8	3	1	2					4	1														
	Em			4						6 (6)	7 (6)	1 (5)	2			2				6					2	2	4			2							
Z - y	Om							1		1				7 (3)	4 (3)	1 (6)							1	1					1								
	Am	2																15 (13)																			
	Im		10 (7)		4 (3)	4		2 (3)					6 (3)												8	15	14	5			5	1	3	2			
	Em			8 (6)				6 (6)		2	3	1	1			4				12 (10)				11 (8)	12	3	6	2			4						
NVC	Om				4 (3)				5 (3)		1									7 (6)				3 (4)		6		4	14	13		6 (8)					
	Am																																				
	Im																																				
	Em																																				

Figure 5: Data (from Johnson-Laird & Bara, 1984) and Soar predictions in ().

(3) failing to consider all the possible conclusions based on a (possibly correct) model. Syllogisms are difficult to the extent they present opportunities for these processing difficulties (e.g., have implicit ramifications relevant to the conclusions). This predicts that better subjects will extract more information from the premises without making unwarranted assumptions or that they will search for conclusions more extensively.

We designed a family of systems based on 10 parameters, which includes the current 3-parameter family, with the values (mostly binary) of each parameter being independently ordered by validity (so that better values correspond to more powerful and correct ways of building models). When all parameters take on their optimal values, perfect performance should occur. Better solvers should occur within this space with interpretable parameter settings. To test this, we analyzed another set of 20 subjects 58% of whose responses were correct (Johnson-Laird & Steedman, 1978). We implemented a small sub-family (24 variants including the 12) that covered 87% of the responses and 67% of the cells; it did however predict 11 responses not given by any subjects. The parameter settings of the modal system for the new distribution are better (higher in validity ordering) than those of the old distribution's modal system on 3 parameters and the same on the other 7.

POLK, NEWELL

The explanatory power of this theory appears better than existing theories. Their predictions are less accurate in that they predict a large number of responses that were not observed in any subjects and they do not make strong frequency predictions. Most theories only explain highly aggregate data. However, the data used here (Figure 5) is still aggregated over subjects, and nothing has yet been done with timing and protocol data. So ample opportunity remains to challenge and improve the present theory.

This theory has much to recommend it generally. It predicts flexible activity, e.g., going back to the premises to try to extract more information. Its spaces (especially executive ones) are substantially less arbitrary than prior simulations (e.g., *Comprehend* embodies a theory of elementary language comprehension). Although not reported on here, the present theory involves a theory of learning, which is an essential part of any general account of human cognitive behavior. These attributes and others arise primarily from this theory of syllogism being embedded in Soar as a unified theory of cognition.

Acknowledgements

We thank the members of the Soar project for support and criticism, especially Rick Lewis who is working on *Comprehend*; also Norma Pribadi for making the beautiful figures and Phil Johnson-Laird for comments on this theory. This research was supported by the Information Sciences Division of the Office of Naval Research under Contract N00014-86-K-0678 and also by the NSF under the Engineering Research Center Program, Contract CDR-8522616. The views expressed in this paper are those of the authors and do not necessarily reflect those of the supporting agencies. Reproduction in whole or in part is permitted for any purpose of the United States government. Approved for public release; distribution unlimited.

References

- Chapman, I. J., & Chapman, J. P. (1959). Atmosphere effects re-examined. *Journal of Experimental Psychology*, 58, 220-226.
- Inder, R. (1986). Modeling syllogistic reasoning using simple mental models. In Cohn, A. G., & Thomas, J. R. (Eds.), *Artificial Intelligence and its Applications*. New York: Wiley.
- Johnson-Laird, P. (1983). *Mental Models*. Cambridge, MA: Harvard.
- Johnson-Laird, P. N., & Bara, B. G. (1984). Syllogistic inference. *Cognition*, 16, 1-61.
- Johnson-Laird, P. N., & Steedman, M. (1978). The psychology of syllogisms. *Cognitive Psychology*, 10, 64-99.
- Laird, J. E., Newell, A., & Rosenbloom, P. S. (1987). Soar: An architecture for general intelligence. *Artificial Intelligence*, 33, 1-64.
- Levesque, H. J. (1986). Making believers out of computers. *Artificial Intelligence*, 30, 81-108.
- Newell, A. (1987). Unified Theories of Cognition. The William James Lectures. Harvard University, Spring 1987. (Available in videocassette from Harvard Psychology Department).
- Steier, D. E., Laird, J. E., Newell, A., Rosenbloom, P. S., Flynn, R. A., Golding, A., Polk, T. A., Shivers, O. G., Unruh, A., & Yost, G. R. (1987). Varieties of Learning in Soar: 1987. In *Proceedings of the Fourth International Workshop on Machine Learning*. Los Altos, CA: Morgan Kaufman.
- Woodworth, R. S., & Sells, S. B. (1935). An atmosphere effect in formal syllogistic reasoning. *Journal of Experimental Psychology*, 18, 451-460.