

**REPORT DOCUMENTATION PAGE**

AFRL-SR-AR-TR-04-

0104

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that this information is being collected by the Department of Defense, which is not authorized to share this information with any other agency. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE (DD-MM-YYYY)		2. REPORT TYPE Final Report		3. DATES COVERED (From - To) Jan 1, 02 - Dec 31, 02	
4. TITLE AND SUBTITLE Dynamic Spectrum Allocation Algorithms.				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER F49620-02-1-0103	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Dr. Kirk Pruhs Bala Kalyanasundaram				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Pittsburgh 350 Thackeray Hall Pittsburgh, PA 15260				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Department of the Air Force Air Force Office of Scientific Research 4015 Wilson Blvd. Arlington, VA 22203-1954				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Distribution Statement A: Approved for public release. Distribution unlimited					
13. SUPPLEMENTARY NOTES DODAAD CODE: 1DQV3 AFOSR Program Manager: Dr. Neal Glassman					
14. ABSTRACT In our previous funding, we reported the following. The standard online scheduling method to avoid fragmentation is called First Fit, which roughly speaking tries to schedule every task as early in time and as low in the spectrum as possible. We find that for the input distributions that we tested, First Fit does not perform appreciably better than random placement. We then considered offline algorithms that schedule the jobs in some predefined order. We also give some theoretical evidence of the difficulty of producing good schedules in the online setting [2]. More precisely, we showed that if one is given a sequence of tasks that can be fit into a spectrum of size B, there is no online algorithm that can fit these tasks into spectrum of size c*B, for any constant c. In the offline setting, we have found that, among the simple heuristic algorithms, the best are those that in some sense try to schedule the jobs from earliest in time to latest in time. We call it Timeline. On the inputs we tested these algorithms were consistently able to schedule 5% to 10% more jobs than Random. While a 5% to 10% improvement may seem modest, one needs to ask oneself about the benefit of being able to schedule a few more tests per day relative to the cost of the system required to produce such a schedule.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			Dr. Kirk Pruhs
					19b. TELEPHONE NUMBER (Include area code) 412-624-8854

20040225 166

# Dynamic Spectrum Allocation Algorithms:

## Final Report for AFOSR grant F49620-02-1-0103

Bala Kalyanasundaram  
Georgetown University

### Introduction

The fundamental problem that we considered in this research is the management of frequency assignment to tasks involving flight-testing and training. Combinatorially, this problem can be stated easily. Each task has a bandwidth requirement for specific a duration called length. Thus each task can be thought of as a rectangle, with the vertical height of the rectangle being the bandwidth requirement. The scheduling space is a larger rectangle space, with height equal to the total frequency spectrum available and length equal to the time period to be scheduled (e.g. a day). In order to avoid interference, two tasks must be placed in such a way that they do not overlap in this space.

In the offline setting, the scheduler is given all the tasks at one time. For example, the scheduler is given all the requests for tests on a particular day a week away and must produce a schedule for that day. In the online setting, the scheduler is given tasks one by one, and must either schedule, or reject the tasks, as they arrive. The online setting models the case that some requests arrive a 2 weeks ahead of time, and some arrive 1 week ahead of time, etc. Depending upon the model, we have to notify each request, either at the time of arrival or at a later deadline, whether we can accommodate it or not.

One can evaluate the performance of the scheduler in a number of different ways. For instance, we can maximize the number of scheduled tasks. In the case of tasks with assigned priorities, we can maximize the sum of the priorities of scheduled tasks. In our tests to date, we have assumed that the scheduler's goal is to maximize the number of scheduled tasks.

Finding the optimal frequency schedule is a known computationally infeasible problem. Thus for instances of even moderate size, one needs to fall back to computing near optimal schedules.

The general goal of any good scheduling strategy is to avoid fragmentation of the scheduling space. Roughly speaking, fragmentation happens when the unused space is divided into lots of small regions (as opposed to a few larger regions).

Fragmented space is less useful since future moderate sized requests cannot fit into the small regions, and thus may be rejected.

In our previous funding, we reported the following. The standard online scheduling method to avoid fragmentation is called First Fit, which roughly speaking tries to schedule every task as early in time and as low in the spectrum as possible. We find that for the input distributions that we tested, First Fit does not perform appreciably better than random placement. We then considered offline algorithms that consider the jobs in some predefined order. We also give some theoretical evidence of the difficulty of producing good schedules in the online setting [2]. More precisely, we showed that if one is given a sequence of tasks that can be fit into a spectrum of size  $B$ , there is no online algorithm that can fit these tasks into spectrum of size  $c \cdot B$ , for any constant  $c$ . In the offline setting, we have found that, among the simple heuristic algorithms, the best are those that in some sense try to schedule the jobs from earliest in time to latest in time. We call it Timeline. On the inputs we tested these algorithms were consistently able to schedule 5% to 10% more jobs than Random. While a 5% to 10% improvement may seem modest, one needs to ask oneself about the benefit of being able to schedule a few more tests per day relative to the cost of the system required to produce such a schedule.

During the current grant period, we considered two things. Our first goal was to provide a simple algorithm for integration into IFDS 2 software that was scheduled to replace IFDS 1. The main purpose of this algorithm is to provide immediate relief. After accomplishing this, we undertook the task of finding techniques to significantly improve effect usage of frequency spectrum. What follows is our preliminary report on our ongoing investigation.

Let us consider a simple task. Suppose, the task arrives on 1<sup>st</sup> August 2003 and requests a bandwidth of 25 KHz centered around 125 MHz for duration of 3 hours starting from 9am on 20<sup>th</sup> August 2003. Without any additional information, we consider this task to be rigid. What does it mean to be rigid? The frequency assignment algorithm must either reserve (without future modification) a bandwidth of 25Khz centered around 125 MHz from 9am to 12 noon on 20<sup>th</sup> August 2003 or reject the task on 1<sup>st</sup> August 2003. After having assigned bandwidth for a collection of rigid tasks, an algorithm has no means to alter the schedule for future tasks to improve the overall efficiency. So, when future tasks are unpredictable and all tasks are rigid, the problem of managing frequency assignment is {lem easy}, and the resulting solution is not efficient. This is not acceptable.

The goal of our research is to consider various relaxation of the rigidity of tasks and suggest efficient management algorithm for frequency assignment. There are many ways to relax the rigidity of a task. Observe that there are six numerical information that user provides with each task. We can relax a task by taking any one of this numerical value and change it to an interval where any

value in the interval is acceptable to the user. The length of each interval provides a measure of relaxation for the rigidity. Based on this approach, there are many different ways to relax the rigidity of tasks. The two fundamental questions are:

1. Which combination provides a good solution for the problem at hand?
2. How much should we relax based on our measure?

## **64 Schemes**

Since there are six data that a user provides for a task, there are 64 possible ways to relax the rigidity of the task. Ideally, we can allow each task to specify any one of the 64 possible ways to relax the rigidity. Can we expect to find a good solution for this case?

We suspect that the answer is probably no. In order to minimize the effect of fragmentation, a good scheduler tries to maintain some structural property. But when inputs arrive with different relaxation, the structural property collapses. However, if every input maintains the same type of relaxation, the scheduler can maintain some structural property.

Even though our problem is two dimensional in nature (time and bandwidth), it bears some similarity to real-time scheduling problems where tasks have arrival-time, length and deadline. In those cases, grouping similar sized jobs together minimizes the effect of fragmentation. This is true for our problem too. But when different tasks specify different relaxation, it is hard for a scheduler to maintain grouping. In such situation, the scheduler can only provide means to find a possible schedule for the given task. However, this will not optimize the use of the frequency spectrum. What can a scheduler do if it cannot maintain grouping of similar sized tasks? The answer lies not only in choice of combination of relaxation but also how much we relax a task.

## **Proportional Relaxation**

In traditional real-time scheduling literature, laxity of a job is defined to be the length of the interval in which the job can be started so that it can be completed before its deadline. Many results [4,5] in the literature of real-time scheduling showed time and again that good scheduling strategy exists if laxity of a job is proportional to its length. For a 10 second job the scheduler expects a laxity of 1 second while for a 10 hour job the scheduler expects a laxity of 1 hour.

We extend this to our two-dimensional problem in the following way. A typical rigid task is a rectangle in the two dimensional space where x-axis is time and y-axis is frequency. The two important relaxation are laxity in time (i.e., interval in starting time) and analogous laxity in frequency (i.e., interval in the central frequency). These two intervals along with the duration and requested bandwidth define bigger rectangle within which the rigid task rectangle must fit.

How big should the outer rectangle be?

Applying the insight from the one-dimensional case, it appears that the right relaxation is to define the outer rectangle to be a fixed percentage larger in both x and y-axis. Laxity alone is of no use provided we allow the algorithm to rearrange already committed requests within their tolerance.

With this proposition in mind, we considered the online version of our problem where we are presented with one task at a time. We are currently evaluating a class of algorithms called *Bookshelf Algorithm*. We describe below one instance of the algorithm.

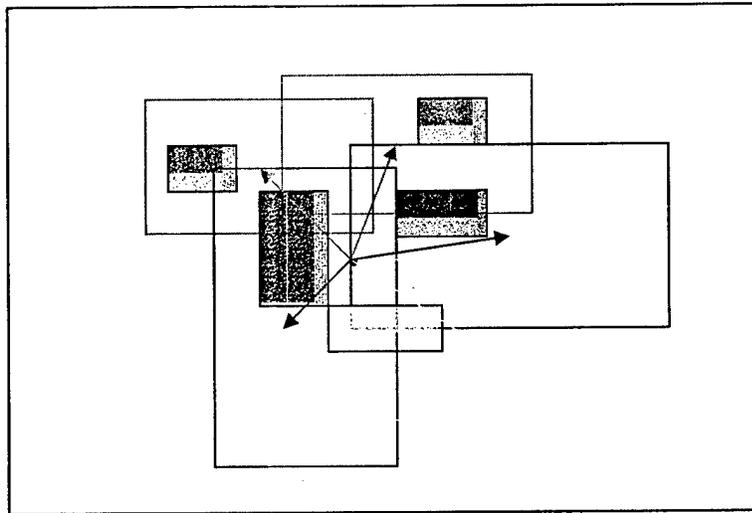


Figure 1. The force vector.

**Bookshelf Algorithm:** We now describe what the algorithm does when a new request consisting of a pair of rectangles (outer and inner) arrives. The algorithm assumes that there already exists a schedule of previously accepted requests. We use the notation  $(r_i, R_i)$  to denote the centers of inner and outer-rectangles of the  $i$ th scheduled request.

1. For each legal placement of the inner-rectangle within the boundary of the outer-rectangle do the following steps 2 – 5 until the request is accepted. Let  $r$  be the center of the placement.
2. For each accepted requests  $(r_i, R_i)$ , construct the force vector  $rr_i$ . The force vector has both amplitude and direction. (See figure 1.)



0%	2.9	6.95	8.79	11.05	12.38	15.30	16.00	16.90	18.10	18.90
10%	1.3	4.15	8.32	10.79	12.70	14.80	16.90	18.60	19.50	21.30
20%	1.9	6.6	10.35	13.05	15.30	16.80	18.90	20.60	22.40	23.00
30%	2.1	7.75	11.05	13.00	16.30	18.60	19.60	21.60	23.30	23.90
40%	3.2	7.15	10.59	15.60	15.90	19.10	21.90	22.00	23.90	25.10
50%	2.8	6.45	12.21	14.70	17.30	19.30	21.10	22.00	25.10	25.60
60%	2.6	8.4	11.43	14.00	17.90	19.00	21.50	22.20	24.60	24.60
70%	2.4	8.5	11.26	15.30	17.40	19.80	21.10	23.10	24.60	24.90
80%	2.4	9.15	10.89	15.50	18.30	18.90	21.60	24.10	24.2	25.50
90%	2.9	7.95	11.56	16.10	18.40	18.70	22.30	24.40	25.30	25.90

Table 2. Effect of Laxity when multiple options are available.

### References:

- 1.A. Barnoy, R. Bar-Yehuda, A. Freund, J. Naor, and B. Schieber, "A unified approach to approximating resource allocation and scheduling", ACM Symposium on Theory of Computing, 2000.
- 2.B. Kalyanasundaram, and K. Pruhs, "Dynamic spectrum allocation: the impotency of duration notification", special issue of *Journal of Scheduling* devoted to approximation algorithms, **3(5)**, 289 - 296, 2000.
- 3.S. Leonardi, A. Marchetti-Spaccamela and A. Vitaletti, "Approximation algorithms for bandwidth and storage allocation problems under real time constraints", Conference on Foundations of Software Technology and Theoretical Computer Science (FSTTCS), 2000.